



340

Long Reach Hydraulic Excavator

Not all configurations shown available in all regions. Consult your Cat® dealer for details.

Technical Specifications

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	3
Standards	3
Sound Performance	3
Air Conditioning System	3
Operating Weights and Ground Pressures	4
Major Component Weights	4
Dimensions	5
Working Ranges and Forces	6
LRE Boom Lift Capacities	7
Bucket Specifications and Compatibility:	
Europe	15
North America	17
Attachments Offering Guide:	
Europe	18
North America	18
Standard and Optional Equipment	19
Cab Options	21
Dealer Installed Kits and Attachments	22
340 Long Reach Environmental Declaration	23

340 Long Reach Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C9.3B	
Net Power		
ISO 9249	258.3 kW	346 hp
ISO 9249 (DIN)	351 hp (metric)	
Engine Power		
ISO 14396	259 kW	347 hp
ISO 14396 (DIN)	352 hp (metric)	
Bore	115 mm	5 in
Stroke	149 mm	6 in
Displacement	9.3 L	568 in ³

- Meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator.
- Engine speed at 1,900 rpm
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels
 Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.
- *Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).
- **Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.

Swing Mechanism

Swing Torque	143 kN·m	105,471 lbf·ft
--------------	----------	----------------

Weights

Operating Weight	43 800 kg	96,500 lb
------------------	-----------	-----------

- Heavy Duty High Wide undercarriage, LRE boom, LRE7.1B1 (23'4") stick, General Duty (GD) 0.95 m³ (1.24 yd³) bucket, 850 mm (33") triple grouser shoes, and 10.35 mt (22,800 lb) counterweight.

Track

Optional Track Shoes Width	850 mm	33 in
Optional Track Shoes Width	700 mm	28 in
Optional Track Shoes Width	600 mm	24 in
Number of Shoes (each side)	49	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Maximum Gradeability	35°/70%	
Maximum Travel Speed	4.7 km/h	2.9 mph
Maximum Drawbar Pull	298 kN	67,000 lbf

Hydraulic System

Main System – Maximum Flow – Implement	560 L/min (280 × 2 pumps)	148 gal/min (74 × 2 pumps)
Maximum Pressure – Equipment – Implement	35 000 kPa	5,076 psi
Maximum Pressure – Equipment – Lift Mode	38 000 kPa	5,511 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	29 400 kPa	4,264 psi
Boom Cylinder – Bore	150 mm	6 in
Boom Cylinder – Stroke	1440 mm	57 in
Stick Cylinder – Bore	170 mm	7 in
Stick Cylinder – Stroke	1738 mm	68 in
B1 Bucket Cylinder – Bore	120 mm	5 in
B1 Bucket Cylinder – Stroke	1104 mm	43 in

340 Long Reach Hydraulic Excavator Specifications

Service Refill Capacities

Fuel Tank Capacity	600 L	158.5 gal
Cooling System	40 L	10.5 gal
Engine Oil (with filter)	32 L	8.5 gal
Swing Drive	18 L	4.8 gal
Final Drive (each)	8 L	2.1 gal
Hydraulic System (including tank)	373 L	98.5 gal
Hydraulic Tank (including suction pipe)	161 L	42.5 gal
Diesel Exhaust Fluid (DEF) Tank	80 L	21.1 gal

Standards

Brakes	ISO 10265:2008
Cab/Operator Protective Guards (OPG) (optional)	ISO 10262:1998
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008

Sound Performance

ISO 6395:2008 (external)	106 dB(A)
ISO 6396:2008 (inside cab)	73 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.00 kg of refrigerant, which has a CO₂ equivalent of 1.430 metric tonne.

340 Long Reach Hydraulic Excavator Specifications

Operating Weights and Ground Pressures

	850 mm (33") Triple Grouser Shoes		700 mm (28") Triple Grouser Shoes		600 mm (24") HD Triple Grouser Shoes		600 mm (24") Double Grouser Shoes	
	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure
	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
Base Frame with SD Track Rollers and Carrier Rollers								
10.35 mt (22,800 lb) Counterweight + Heavy Duty High Wide Undercarriage Base Machine								
Long Reach Boom + LRE7.1 m B1 (23'4") Stick + 0.95 m ³ (1.24 yd ³) GD Bucket	43 800 (96,500)	57.5 (8.3)	42 900 (94,600)	68.5 (9.9)	43 200 (95,300)	80.5 (11.7)	43 300 (95,500)	80.7 (11.7)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.


Major Component Weights

	kg	lb
Base machine with 10.35 mt (22,800 lb) counterweight, HD swing frame, two boom cylinders, and SD track rollers and carrier rollers for Heavy Duty High Wide undercarriage.	30 100	66,360
Track Shoes:		
850 mm (33") Width, 13 mm (0.51") Thick, Triple Grouser Track Shoes	5300	11,690
700 mm (28") Width, 11 mm (0.43") Thick, Triple Grouser Track Shoes	4450	9,800
600 mm (24") Width, 15.5 mm (0.61") Thick, HD Triple Grouser Track Shoes	4750	10,470
600 mm (24") Width, 15.5 mm (0.61") Thick, Double Grouser Track Shoes	4850	10,700
Two Boom Cylinders	710	1,570
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	550	1,210
Counterweight:		
10.35 mt (22,800 lb) Counterweight	10 350	22,820
Swing Frame:		
HD Swing Frame	3280	7,220
HD High Wide Undercarriage:		
Base Frame with SD Track Rollers and HD Carrier Rollers	10 160	22,400
Boom (including lines, pins, stick cylinder):		
LRE Boom 10.6 m (34'9")	4480	9,880
Stick (including lines, pins, bucket cylinder, bucket linkage):		
LRE Stick LRE7.1B1 (23'4")	2500	5,510
Bucket (without linkage):		
0.95 m ³ (1.24 yd ³) GD	830	1,820

340 Long Reach Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

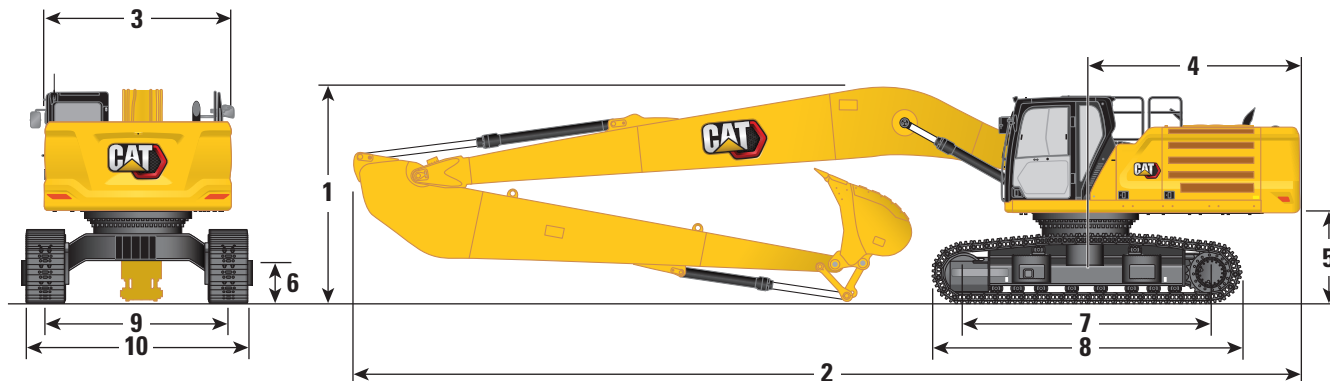

Boom Option

LRE Boom
10.6 m (34'9")

Stick Option

LRE Stick
LRE7.1B1 (23'4")

1 Machine Height:

Cab Height	3400 mm	11'2"
OPG Height	3540 mm	11'7"
Handrail Height	3390 mm	11'1"
With Boom/Stick/Bucket Installed (with auxiliary lines)	3670 mm	12'0"
With Boom/Stick Installed (with auxiliary lines)	3670 mm	12'0"
With Boom Installed (with auxiliary lines)	3340 mm	10'11"

2 Machine Length:

With Boom/Stick/Bucket Installed (with auxiliary lines)	15 310 mm	50'3"
With Boom/Stick Installed (with auxiliary lines)	15 310 mm	50'3"
With Boom Installed (with auxiliary lines)	14 180 mm	46'6"

3 Upperframe Width without Walkways

2970 mm 9'9"

4 Tail Swing Radius

3530 mm 11'7"

5 Counterweight Clearance

1470 mm 4'10"

6 Ground Clearance

720 mm 2'4"

7 Length to Center of Rollers

4040 mm 13'3"

8 Track Length

5030 mm 16'6"

9 Track Gauge

2930 mm 9'7"

10 Track Width:

850 mm (33") Shoes	3780 mm	12'5"
700 mm (28") Shoes	3630 mm	11'11"
600 mm (24") Shoes	3530 mm	11'7"

Undercarriage Width (with steps):

850 mm (33") Shoes	3780 mm	12'5"
700 mm (28") Shoes	3670 mm	12'0"
600 mm (24") Shoes	3670 mm	12'0"

Bucket Type


GD

Bucket Capacity	0.95 m ³	1.24 yd ³
Bucket Tip Radius	1563 mm	5'2"

340 Long Reach Hydraulic Excavator Specifications

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

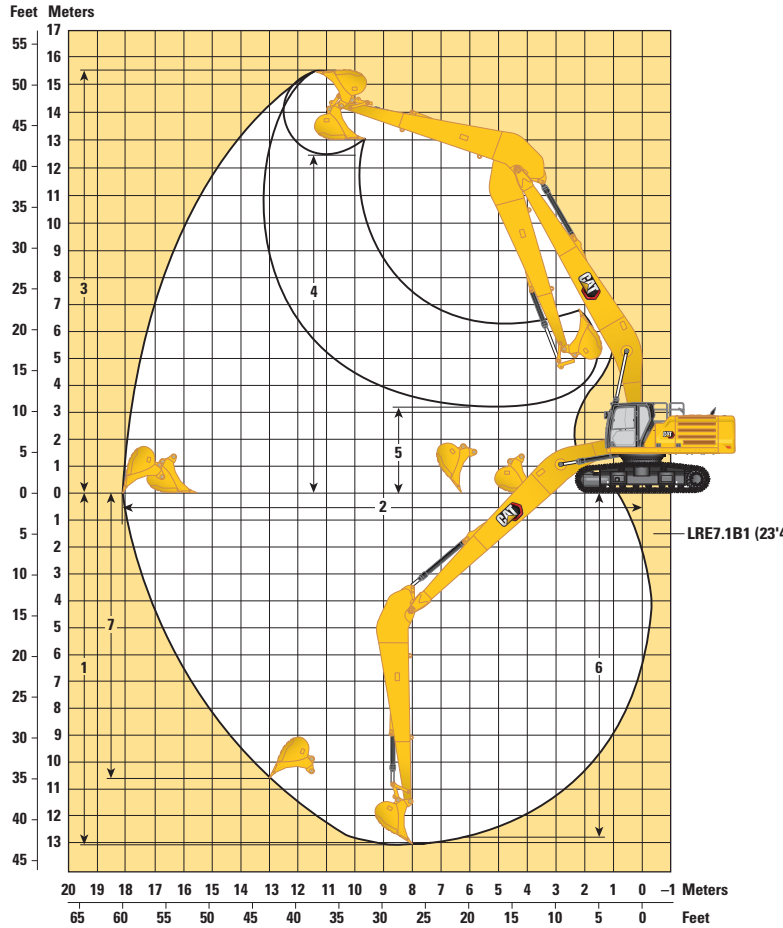

Boom Option

**LRE Boom
10.6 m (34'9")**




Stick Option

**LRE Stick
LRE7.1B1 (23'4")**

1 Maximum Digging Depth	13 050 mm	42'10"
2 Maximum Reach at Ground Line	18 080 mm	59'4"
3 Maximum Cutting Height	15 620 mm	51'3"
4 Maximum Loading Height	12 770 mm	41'11"
5 Minimum Loading Height	3210 mm	10'6"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	12 960 mm	42'6"
7 Maximum Vertical Wall Digging Depth	10 660 mm	35'0"
Bucket Digging Force (ISO)	141 kN	31,590 lbf
Stick Digging Force (ISO)	92 kN	20,750 lbf
Bucket Digging Force (ISO) – Auto Dig Boost	153 kN	34,290 lbf
Stick Digging Force (ISO) – Auto Dig Boost	100 kN	22,530 lbf
Bucket Type	GD	
Bucket Capacity	0.95 m ³	1.24 yd ³
Bucket Tip Radius	1563 mm	5'2"

340 Long Reach Hydraulic Excavator Specifications

LRE Boom Lift Capacities – Counterweight: 10.35 mt (22,800 lb) – without Bucket, Heavy Lift: On



Reach mm ft/inch	kg lb	1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/inch						
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb					
13 500 mm 45'0"														*2750 *6,100	*2750 *6,100	12 260 39'06"				
12 000 mm 40'0"														*2650 *5,850	*2650 *5,850	13 500 43'09"				
10 500 mm 35'0"														*2600 *5,750	*2600 *5,750	14 470 47'01"				
9000 mm 30'0"														*2600 *5,700	*2600 *5,700	15 230 49'08"				
7500 mm 25'0"														*2600 *5,750	*2600 *5,750	15 810 51'08"				
6000 mm 20'0"												*5350 *11,600	*5350 *11,600	*2700 *5,850	*2700 *5,850	16 230 53'01"				
4500 mm 15'0"						*12 100 *25,900	*12 100 *25,900	*8750 *18,850	*8750 *18,850	*7000 *15,050	*7000 *15,050	*5850 *12,650	*5850 *12,650	*2750 *6,050	2750 6,050	16 500 54'01"				
3000 mm 10'0"						*7700 *18,600	*7700 *18,600	*10 050 *21,650	*10 050 *21,650	*7750 *16,700	*7750 *16,700	*6350 *13,750	*6350 *13,750	*2900 *6,300	2600 5,750	16 640 54'06"				
1500 mm 5'0"						*5200 *12,050	*5200 *12,050	*11 000 *23,750	*11 000 *23,750	*8400 *18,100	*8400 *18,100	*6800 *14,700	6650 14,300	*3050 *6,700	2550 5,600	16 630 54'06"				
0 0						*5400 *12,300	*5400 *12,300	*10 800 *24,850	10 500 22,600	*8850 *19,100	7850 16,950	*7150 *15,400	6200 13,400	*3250 *7,200	2550 5,550	16 490 54'01"				
-1500 mm -5'0"						*4400 *9,750	*4400 *9,750	*6400 *14,400	*10 550 *24,150	10 100 21,750	*9050 *19,500	7500 16,150	*7350 *15,850	5900 12,750	*3550 *7,850	2550 5,600	16 210 53'01"			
-3000 mm -10'0"						*5850 *13,100	*5850 *13,100	*7700 *17,300	*7700 *17,300	*11 350 *24,550	9950 21,450	*9000 *19,450	7300 15,750	*7350 *15,900	5750 12,350	*3700 *8,200	2600 5,750	15 780 51'08"		
-4500 mm -15'0"						*6550 *14,600	*6550 *14,600	*7350 *16,450	*7350 *16,450	*9200 *20,700	*9200 *20,700	*10 850 *23,550	9950 21,450	*8750 *18,950	7250 15,600	*7250 *15,600	5650 12,150	*3750 *8,250	2750 6,100	15 190 49'08"
-6000 mm -20'0"						*8950 *20,000	*8950 *20,000	*10 950 *24,650	*10 950 *24,650	*10 150 *21,950	10 100 21,700	*8300 *17,900	7300 15,650	*6900 *14,900	5650 12,150	*3800 *8,350	3000 6,600	14 420 47'01"		
-7500 mm -25'0"						*10 650 *23,900	*10 650 *23,900	*11 300 *24,350	*11 300 *24,350	*9200 *19,750	*9200 *19,750	*7600 *16,350	7400 15,950	*6400 *13,700	5700 12,300	*3800 *8,300	3350 7,450	13 430 43'09"		
-9000 mm -30'0"						*9450 *20,200	*9450 *20,200	*7850 *16,800	*7850 *16,800	*6600 *14,100	*6600 *14,100	*5600 *11,850	*5600 *11,850	*3700 *8,100	*3700 *8,100	12 190 39'06"				
-10 500 mm -35'0"						*6100 *12,850	*6100 *12,850	*5250 *11,550	*5250 *11,550	*4400 *9,700	*4400 *9,700	*3450 *7,600	*3450 *7,600	*3450 *7,600	*3450 *7,600	10 580 34'00"				



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

340 Long Reach Hydraulic Excavator Specifications

LRE Boom Lift Capacities – Counterweight: 10.35 mt (22,800 lb) – without Bucket, Heavy Lift: On (continued)



		10 500 mm/35'0"		12 000 mm/40'0"		13 500 mm/45'0"		15 000 mm/50'0"		16 500 mm/55'0"		mm ft/inch		
13 500 mm 45'0"	kg lb			*3100	*3100							*2750 *6,100	*2750 *6,100	12 260 39'06"
12 000 mm 40'0"	kg lb			*3850 *8,400	*3850 *8,400							*2650 *5,850	*2650 *5,850	13 500 43'09"
10 500 mm 35'0"	kg lb			*3850 *8,450	*3850 *8,450	*3700 *7,600	*3700 *7,600					*2600 *5,750	*2600 *5,750	14 470 47'01"
9000 mm 30'0"	kg lb			*3950 *8,600	*3950 *8,600	*3750 *8,150	*3750 *8,150	*2950	*2950			*2600 *5,700	*2600 *5,700	15 230 49'08"
7500 mm 25'0"	kg lb	*4450 *9,650	*4450 *9,650	*4100 *8,950	*4100 *8,950	*3850 *8,350	*3850 *8,350	*3650 *7,600	3550 7,500			*2600 *5,750	*2600 *5,750	15 810 51'08"
6000 mm 20'0"	kg lb	*4750 *10,300	*4750 *10,300	*4300 *9,350	*4300 *9,350	*3950 *8,600	*3950 *8,600	*3700 *8,050	3450 7,300			*2700 *5,850	*2700 *5,850	16 230 53'01"
4500 mm 15'0"	kg lb	*5100 *11,000	*5100 *11,000	*4550 *9,850	*4550 *9,850	*4150 *8,950	4000 8,600	*3800 *8,250	3300 7,100			*2750 *6,050	2750 6,050	16 500 54'01"
3000 mm 10'0"	kg lb	*5450 *11,750	*5450 *11,750	*4800 *10,350	4650 10,000	*4300 *9,250	3850 8,200	*3900 *8,450	3200 6,800	*3200	2650	*2900 *6,300	2600 5,750	16 640 54'06"
1500 mm 5'0"	kg lb	*5750 *12,400	5350 11,500	*5000 *10,800	4400 9,450	*4450 *9,600	3650 7,850	*4000 *8,650	3050 6,550	*3400	2600	*3050 *6,700	2550 5,600	16 630 54'06"
0 0	kg lb	*6000 *12,950	5050 10,850	*5150 *11,150	4200 8,950	*4550 *9,800	3500 7,500	*4050 *8,750	2950 6,350			*3250 *7,200	2550 5,550	16 490 54'01"
-1500 mm -5'0"	kg lb	*6150 *13,250	4800 10,350	*5250 *11,400	4000 8,600	*4600 *9,950	3400 7,250	*4050 *8,750	2900 6,150			*3550 *7,850	2550 5,600	16 210 53'01"
-3000 mm -10'0"	kg lb	*6200 *13,350	4650 10,000	*5300 *11,400	3900 8,350	*4600 *9,900	3300 7,050	*4000 *8,600	2800 6,050			*3700 *8,200	2600 5,750	15 780 51'08"
-4500 mm -15'0"	kg lb	*6100 *13,150	4600 9,850	*5200 *11,200	3800 8,200	*4500 *9,650	3250 6,950	*3850	2800			*3750 *8,250	2750 6,100	15 190 49'08"
-6000 mm -20'0"	kg lb	*5850 *12,550	4550 9,850	*4950 *10,650	3800 8,200	*4250 *9,000	3250 7,000					*3800 *8,350	3000 6,600	14 420 47'01"
-7500 mm -25'0"	kg lb	*5400 *11,550	4650 10,000	*4550 *9,650	3850 8,350							*3800 *8,300	3350 7,450	13 430 43'09"
-9000 mm -30'0"	kg lb	*4700 *9,850	*4700 *9,850	*3800	*3800							*3700 *8,100	*3700 *8,100	12 190 39'06"
-10 500 mm -35'0"	kg lb	*3500	*3500									*3450 *7,450	*3450 *7,450	10 580 34'00"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Long Reach Hydraulic Excavator Specifications

LRE Boom Lift Capacities – Counterweight: 10.35 mt (22,800 lb) – without Bucket, Heavy Lift: On



Reach mm ft/inch	kg lb	1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/inch						
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb					
13 500 mm 45'0"														*2750 *6,100	*2750 *6,100	12 260 39'06"				
12 000 mm 40'0"														*2650 *5,850	*2650 *5,850	13 500 43'09"				
10 500 mm 35'0"														*2600 *5,750	*2600 *5,750	14 470 47'01"				
9000 mm 30'0"														*2600 *5,700	*2600 *5,700	15 230 49'08"				
7500 mm 25'0"														*2600 *5,750	*2600 *5,750	15 810 51'08"				
6000 mm 20'0"												*5350 *11,600	*5350 *11,600	*2700 *5,850	*2700 *5,850	16 230 53'01"				
4500 mm 15'0"						*12 100 *25,900	*12 100 *25,900	*8750 *18,850	*8750 *18,850	*7000 *15,050	*7000 *15,050	*5850 *12,650	*5850 *12,650	*2750 *6,050	2700 5,900	16 500 54'01"				
3000 mm 10'0"						*7700 *18,600	*7700 *18,600	*10 050 *21,650	*10 050 *21,650	*7750 *16,700	*7750 *16,700	*6350 *13,750	*6350 *13,750	*2900 *6,300	2550 5,600	16 640 54'06"				
1500 mm 5'0"						*5200 *12,050	*5200 *12,050	*11 000 *23,750	11 000 *23,750	*8400 *18,100	8250 *17,850	*6800 *14,700	6500 *14,000	*3050 *6,700	2500 5,450	16 630 54'06"				
0 0						*5400 *12,300	*5400 *12,300	*10 800 *24,850	10 250 22,100	*8850 *19,100	7700 16,600	*7150 *15,400	6100 13,100	*3250 *7,200	2450 5,400	16 490 54'01"				
-1500 mm -5'0"						*4400 *9,750	*4400 *9,750	*6400 *14,400	*6400 *14,400	*10 550 *24,150	9900 21,300	*9050 *19,500	7350 15,800	*7350 *15,850	5800 12,450	*3550 *7,850	2500 5,450	16 210 53'01"		
-3000 mm -10'0"						*5850 *13,100	*5850 *13,100	*7700 *17,300	*7700 *17,300	*11 350 *24,550	9750 20,950	*9000 *19,450	7150 15,350	*7350 *15,900	5600 12,050	*3700 *8,200	2550 5,600	15 780 51'08"		
-4500 mm -15'0"						*6550 *14,600	*6550 *14,600	*7350 *16,450	*7350 *16,450	*9200 *20,700	*9200 *20,700	*10 850 *23,550	9750 20,950	*8750 *18,950	7050 15,200	*7250 *15,600	5500 11,850	*3750 *8,250	2700 5,950	15 190 49'08"
-6000 mm -20'0"						*8950 *20,000	*8950 *20,000	*10 950 *24,650	*10 950 *24,650	*10 150 *21,950	9850 21,200	*8300 *17,900	7100 15,300	*6900 *14,900	5500 11,850	*3800 *8,350	2900 6,450	14 420 47'01"		
-7500 mm -25'0"						*10 650 *23,900	*10 650 *23,900	*11 300 *24,350	*11 300 *24,350	*9200 *19,750	*9200 *19,750	*7600 *16,350	7250 15,600	*6400 *13,700	5600 12,050	*3800 *8,300	3300 7,300	13 430 43'09"		
-9000 mm -30'0"						*9450 *20,200	*9450 *20,200	*7850 *16,800	*7850 *16,800	*6600 *14,100	*6600 *14,100	*5600 *11,850	*5600 *11,850	*3700 *8,100	*3700 *8,100	12 190 39'06"				
-10 500 mm -35'0"						*6100 *12,850	*6100 *12,850	*5250 *11,850	*5250 *11,850	*4400 *9,950	*4400 *9,950	*3450 *7,450	*3450 *7,450	*3450 *7,450	*3450 *7,450	10 580 34'00"				



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

340 Long Reach Hydraulic Excavator Specifications

LRE Boom Lift Capacities – Counterweight: 10.35 mt (22,800 lb) – without Bucket, Heavy Lift: On (continued)



Boom Length	Unit	10 500 mm/35'0"		12 000 mm/40'0"		13 500 mm/45'0"		15 000 mm/50'0"		16 500 mm/55'0"		mm ft/inch		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	
13 500 mm 45'0"	kg lb			*3100 *3100								*2750 *6,100	*2750 *6,100	12 260 39'06"
12 000 mm 40'0"	kg lb			*3850 *8,400	*3850 *8,400							*2650 *5,850	*2650 *5,850	13 500 43'09"
10 500 mm 35'0"	kg lb			*3850 *8,450	*3850 *8,450	*3700 *7,600	*3700 *7,600					*2600 *5,750	*2600 *5,750	14 470 47'01"
9000 mm 30'0"	kg lb			*3950 *8,600	*3950 *8,600	*3750 *8,150	*3750 *8,150	*2950 *2950				*2600 *5,700	*2600 *5,700	15 230 49'08"
7500 mm 25'0"	kg lb	*4450 *9,650	*4450 *9,650	*4100 *8,950	*4100 *8,950	*3850 *8,350	*3850 *8,350	*3650 *7,600	3450 7,350			*2600 *5,750	*2600 *5,750	15 810 51'08"
6000 mm 20'0"	kg lb	*4750 *10,300	*4750 *10,300	*4300 *9,350	*4300 *9,350	*3950 *8,600	*3950 *8,600	*3700 *8,050	3350 7,150			*2700 *5,850	*2700 *5,850	16 230 53'01"
4500 mm 15'0"	kg lb	*5100 *11,000	*5100 *11,000	*4550 *9,850	*4550 *9,850	*4150 *8,950	3950 8,450	*3800 *8,250	3250 6,900			*2750 *6,050	2700 5,900	16 500 54'01"
3000 mm 10'0"	kg lb	*5450 *11,750	*5450 *11,750	*4800 *10,350	4550 9,750	*4300 *9,250	3750 8,050	*3900 *8,450	3100 6,650	*3200 2600		*2900 *6,300	2550 5,600	16 640 54'06"
1500 mm 5'0"	kg lb	*5750 *12,400	5250 11,250	*5000 *10,800	4300 9,250	*4450 *9,600	3550 7,650	*4000 *8,650	3000 6,400	*3400 2500		*3050 *6,700	2500 5,450	16 630 54'06"
0 mm 0"	kg lb	*6000 *12,950	4950 10,600	*5150 *11,150	4100 8,750	*4550 *9,800	3400 7,300	*4050 *8,750	2900 6,150			*3250 *7,200	2450 5,400	16 490 54'01"
-1500 mm -5'0"	kg lb	*6150 *13,250	4700 10,100	*5250 *11,400	3900 8,400	*4600 *9,950	3300 7,050	*4050 *8,750	2800 6,000			*3550 *7,850	2500 5,450	16 210 53'01"
-3000 mm -10'0"	kg lb	*6200 *13,350	4550 9,800	*5300 *11,400	3800 8,150	*4600 *9,900	3200 6,850	*4000 *8,600	2750 5,900			*3700 *8,200	2550 5,600	15 780 51'08"
-4500 mm -15'0"	kg lb	*6100 *13,150	4450 9,600	*5200 *11,200	3700 8,000	*4500 *9,650	3150 6,800	*3850 *8,250	2750 2750			*3750 *8,250	2700 5,950	15 190 49'08"
-6000 mm -20'0"	kg lb	*5850 *12,550	4450 9,600	*4950 *10,650	3700 8,000	*4250 *9,000	3150 6,850					*3800 *8,350	2900 6,450	14 420 47'01"
-7500 mm -25'0"	kg lb	*5400 *11,550	4500 9,750	*4550 *9,650	3800 8,150							*3800 *8,300	3300 7,300	13 430 43'09"
-9000 mm -30'0"	kg lb	*4700 *9,850	*4650 *9,850	*3800 *3800	*3800 *3800							*3700 *8,100	*3700 *8,100	12 190 39'06"
-10 500 mm -35'0"	kg lb	*3500 *3500	*3500 *3500									*3450 *7,450	*3450 *7,450	10 580 34'00"



ISO 10567:2007




* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.



Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Long Reach Hydraulic Excavator Specifications

LRE Boom Lift Capacities – Counterweight: 10.35 mt (22,800 lb) – without Bucket, Heavy Lift: On



LRE7.1B1



Reach mm ft/inch	kg lb	1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/inch						
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb					
13 500 mm 45'0"														*2750 *6,100	*2750 *6,100	12 260 39'06"				
12 000 mm 40'0"														*2650 *5,850	*2650 *5,850	13 500 43'09"				
10 500 mm 35'0"														*2600 *5,750	*2600 *5,750	14 470 47'01"				
9000 mm 30'0"														*2600 *5,700	*2600 *5,700	15 230 49'08"				
7500 mm 25'0"														*2600 *5,750	*2600 *5,750	15 810 51'08"				
6000 mm 20'0"												*5350 *11,600	*5350 *11,600	*2700 *5,850	*2700 *5,850	16 230 53'01"				
4500 mm 15'0"						*12 100 *25,900	*12 100 *25,900	*8750 *18,850	*8750 *18,850	*7000 *15,050	*7000 *15,050	*5850 *12,650	*5850 *12,650	*2750 *6,050	2700 5,950	16 500 54'01"				
3000 mm 10'0"						*7700 *18,600	*7700 *18,600	*10 050 *21,650	*10 050 *21,650	*7750 *16,700	*7750 *16,700	*6350 *13,750	*6350 *13,750	*2900 *6,300	2600 5,650	16 640 54'06"				
1500 mm 5'0"						*5200 *12,050	*5200 *12,050	*11 000 *23,750	*11 000 *23,750	*8400 *18,100	8350 17,950	*6800 *14,700	6550 14,100	*3050 *6,700	2500 5,500	16 630 54'06"				
0 0						*5400 *12,300	*5400 *12,300	*10 800 *24,850	10 350 22,300	*8850 *19,100	7750 16,750	*7150 *15,400	6150 13,200	*3250 *7,200	2500 5,450	16 490 54'01"				
-1500 mm -5'0"						*4400 *9,750	*4400 *9,750	*6400 *14,400	*6400 *14,400	*10 550 *24,150	9950 21,450	*9050 *19,500	7400 15,950	*7350 *15,850	5850 12,550	*3550 *7,850	2500 5,500	16 210 53'01"		
-3000 mm -10'0"						*5850 *13,100	*5850 *13,100	*7700 *17,300	*7700 *17,300	*11 350 *24,550	9800 21,150	*9000 *19,450	7200 15,500	*7350 *15,900	5650 12,150	*3700 *8,200	2600 5,650	15 780 51'08"		
-4500 mm -15'0"						*6550 *14,600	*6550 *14,600	*7350 *16,450	*7350 *16,450	*9200 *20,700	*9200 *20,700	*10 850 *23,550	9800 21,150	*8750 *18,950	7150 15,350	*7250 *15,600	5550 11,950	*3750 *8,250	2700 6,000	15 190 49'08"
-6000 mm -20'0"						*8950 *20,000	*8950 *20,000	*10 950 *24,650	*10 950 *24,650	*10 150 *21,950	9950 21,400	*8300 *17,900	7150 15,450	*6900 *14,900	5550 11,950	*3800 *8,350	2950 6,500	14 420 47'01"		
-7500 mm -25'0"						*10 650 *23,900	*10 650 *23,900	*11 300 *24,350	*11 300 *24,350	*9200 *19,750	*9200 *19,750	*7600 *16,350	7300 15,700	*6400 *13,700	5650 12,150	*3800 *8,300	3300 7,350	13 430 43'09"		
-9000 mm -30'0"						*9450 *20,200	*9450 *20,200	*7850 *16,800	*7850 *16,800	*7850 *16,800	*6600 *14,100	*6600 *14,100	*5600 *11,850	*5600 *11,850	*3700 *8,100	*3700 *8,100	12 190 39'06"			
-10 500 mm -35'0"						*6100 *12,850	*6100 *12,850	*6100 *12,850	*6100 *12,850	*5250 *10,950	*5250 *10,950	*4400 *9,050	*4400 *9,050	*3450 *7,450	*3450 *7,450	10 580 34'00"				



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

340 Long Reach Hydraulic Excavator Specifications

LRE Boom Lift Capacities – Counterweight: 10.35 mt (22,800 lb) – without Bucket, Heavy Lift: On (continued)



Reach mm ft/inch	kg lb	10 500 mm/35'0"		12 000 mm/40'0"		13 500 mm/45'0"		15 000 mm/50'0"		16 500 mm/55'0"		mm ft/inch		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm ft/inch
13 500 mm 45'0"				*3100	*3100							*2750 *6,100	*2750 *6,100	12 260 39'06"
12 000 mm 40'0"				*3850 *8,400	*3850 *8,400							*2650 *5,850	*2650 *5,850	13 500 43'09"
10 500 mm 35'0"				*3850 *8,450	*3850 *8,450	*3700 *7,600	*3700 *7,600					*2600 *5,750	*2600 *5,750	14 470 47'01"
9000 mm 30'0"				*3950 *8,600	*3950 *8,600	*3750 *8,150	*3750 *8,150	*2950	*2950			*2600 *5,700	*2600 *5,700	15 230 49'08"
7500 mm 25'0"		*4450 *9,650	*4450 *9,650	*4100 *8,950	*4100 *8,950	*3850 *8,350	*3850 *8,350	*3650 *7,600	3500 7,400			*2600 *5,750	*2600 *5,750	15 810 51'08"
6000 mm 20'0"		*4750 *10,300	*4750 *10,300	*4300 *9,350	*4300 *9,350	*3950 *8,600	*3950 *8,600	*3700 *8,050	3400 7,200			*2700 *5,850	*2700 *5,850	16 230 53'01"
4500 mm 15'0"		*5100 *11,000	*5100 *11,000	*4550 *9,850	*4550 *9,850	*4150 *8,950	3950 8,500	*3800 *8,250	3250 6,950			*2750 *6,050	2700 5,950	16 500 54'01"
3000 mm 10'0"		*5450 *11,750	*5450 *11,750	*4800 *10,350	4600 9,850	*4300 *9,250	3800 8,100	*3900 *8,450	3150 6,700	*3200	2600	*2900 *6,300	2600 5,650	16 640 54'06"
1500 mm 5'0"		*5750 *12,400	5300 11,350	*5000 *10,800	4350 9,300	*4450 *9,600	3600 7,700	*4000 *8,650	3000 6,450	*3400	2550	*3050 *6,700	2500 5,500	16 630 54'06"
0 0		*6000 *12,950	5000 10,700	*5150 *11,150	4100 8,850	*4550 *9,800	3450 7,400	*4050 *8,750	2900 6,250			*3250 *7,200	2500 5,450	16 490 54'01"
-1500 mm -5'0"		*6150 *13,250	4750 10,200	*5250 *11,400	3950 8,450	*4600 *9,950	3300 7,100	*4050 *8,750	2850 6,050			*3550 *7,850	2500 5,500	16 210 53'01"
-3000 mm -10'0"		*6200 *13,350	4600 9,850	*5300 *11,400	3800 8,200	*4600 *9,900	3250 6,950	*4000 *8,600	2750 5,950			*3700 *8,200	2600 5,650	15 780 51'08"
-4500 mm -15'0"		*6100 *13,150	4500 9,700	*5200 *11,200	3750 8,050	*4500 *9,650	3200 6,850	*3850	2750			*3750 *8,250	2700 6,000	15 190 49'08"
-6000 mm -20'0"		*5850 *12,550	4500 9,650	*4950 *10,650	3750 8,050	*4250 *9,000	3200 6,900					*3800 *8,350	2950 6,500	14 420 47'01"
-7500 mm -25'0"		*5400 *11,550	4550 9,800	*4550 *9,650	3800 8,200							*3800 *8,300	3300 7,350	13 430 43'09"
-9000 mm -30'0"		*4700 *9,850	*4700 *9,850	*3800	*3800							*3700 *8,100	*3700 *8,100	12 190 39'06"
-10 500 mm -35'0"		*3500	*3500									*3450 *7,450	*3450 *7,450	10 580 34'00"



ISO 10567:2007




* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.



Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Long Reach Hydraulic Excavator Specifications

LRE Boom Lift Capacities – Counterweight: 10.35 mt (22,800 lb) – without Bucket, Heavy Lift: On



LRE7.1B1



Reach mm ft/inch	Unit	1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/inch		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb
13 500 mm 45'0"	kg lb													*2750 *6,100	*2750 *6,100	12 260 39'06"
12 000 mm 40'0"	kg lb													*2650 *5,850	*2650 *5,850	13 500 43'09"
10 500 mm 35'0"	kg lb													*2600 *5,750	*2600 *5,750	14 470 47'01"
9000 mm 30'0"	kg lb													*2600 *5,700	*2600 *5,700	15 230 49'08"
7500 mm 25'0"	kg lb													*2600 *5,750	*2600 *5,750	15 810 51'08"
6000 mm 20'0"	kg lb												*5350 *11,600	*5350 *11,600	*2700 *5,850	16 230 53'01"
4500 mm 15'0"	kg lb					*12 100 *25,900	*12 100 *25,900	*8750 *18,850	*8750 *18,850	*7000 *15,050	*7000 *15,050	*5850 *12,650	*5850 *12,650	*2750 *6,050	2700 5,950	16 500 54'01"
3000 mm 10'0"	kg lb					*7700 *18,600	*7700 *18,600	*10 050 *21,650	*10 050 *21,650	*7750 *16,700	*7750 *16,700	*6350 *13,750	*6350 *13,750	*2900 *6,300	2600 5,700	16 640 54'06"
1500 mm 5'0"	kg lb					*5200 *12,050	*5200 *12,050	*11 000 *23,750	*11 000 *23,750	*8400 *18,100	8350 18,000	*6800 *14,700	6550 14,150	*3050 *6,700	2500 5,500	16 630 54'06"
0 0	kg lb					*5400 *12,300	*5400 *12,300	*10 800 *24,850	*10 800 *22,350	*8850 *19,100	7800 16,800	*7150 *15,400	6150 13,250	*3250 *7,200	2500 5,450	16 490 54'01"
-1500 mm -5'0"	kg lb			*4400 *9,750	*4400 *9,750	*6400 *14,400	*6400 *14,400	*10 550 *24,150	10 000 21,500	*9050 *19,500	7400 16,000	*7350 *15,850	5850 12,600	*3550 *7,850	2500 5,500	16 210 53'01"
-3000 mm -10'0"	kg lb	*11,700 *11,700	*11,700 *11,700	*5850 *13,100	*5850 *13,100	*7700 *17,300	*7700 *17,300	*11 350 *24,550	9850 21,200	*9000 *19,450	7200 15,550	*7350 *15,900	5650 12,200	*3700 *8,200	2600 5,700	15 780 51'08"
-4500 mm -15'0"	kg lb	*6550 *14,600	*6550 *14,600	*7350 *16,450	*7350 *16,450	*9200 *20,700	*9200 *20,700	*10 850 *23,550	9850 21,200	*8750 *18,950	7150 15,400	*7250 *15,600	5550 12,000	*3750 *8,250	2750 6,000	15 190 49'08"
-6000 mm -20'0"	kg lb			*8950 *20,000	*8950 *20,000	*10 950 *24,650	*10 950 *24,650	*10 150 *21,950	9950 21,450	*8300 *17,900	7200 15,450	*6900 *14,900	5550 12,000	*3800 *8,350	2950 6,550	14 420 47'01"
-7500 mm -25'0"	kg lb			*10 650 *23,900	*10 650 *23,900	*11 300 *24,350	*11 300 *24,350	*9200 *19,750	*9200 *19,750	*7600 *16,350	7300 15,750	*6400 *13,700	5650 12,150	*3800 *8,300	3300 7,350	13 430 43'09"
-9000 mm -30'0"	kg lb					*9450 *20,200	*9450 *20,200	*7850 *16,800	*7850 *16,800	*6600 *14,100	*6600 *14,100	*5600 *11,850	*5600 *11,850	*3700 *8,100	*3700 *8,100	12 190 39'06"
-10 500 mm -35'0"	kg lb							*6100 *12,850	*6100 *12,850	*5250 *10,950	*5250 *10,950	*4400 *9,050	*4400 *9,050	*3450 *7,450	*3450 *7,450	10 580 34'00"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

340 Long Reach Hydraulic Excavator Specifications

LRE Boom Lift Capacities – Counterweight: 10.35 mt (22,800 lb) – without Bucket, Heavy Lift: On (continued)



Reach mm ft/inch	10 500 mm/35'0"		12 000 mm/40'0"		13 500 mm/45'0"		15 000 mm/50'0"		16 500 mm/55'0"		mm ft/inch		
	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm ft/inch	
13 500 mm 45'0"			*3100	*3100							*2750 *6,100	*2750 *6,100	12 260 39'06"
12 000 mm 40'0"			*3850 *8,400	*3850 *8,400							*2650 *5,850	*2650 *5,850	13 500 43'09"
10 500 mm 35'0"			*3850 *8,450	*3850 *8,450	*3700 *7,600	*3700 *7,600					*2600 *5,750	*2600 *5,750	14 470 47'01"
9000 mm 30'0"			*3950 *8,600	*3950 *8,600	*3750 *8,150	*3750 *8,150	*2950	*2950			*2600 *5,700	*2600 *5,700	15 230 49'08"
7500 mm 25'0"	*4450 *9,650	*4450 *9,650	*4100 *8,950	*4100 *8,950	*3850 *8,350	*3850 *8,350	*3650 *7,600	3500 7,450			*2600 *5,750	*2600 *5,750	15 810 51'08"
6000 mm 20'0"	*4750 *10,300	*4750 *10,300	*4300 *9,350	*4300 *9,350	*3950 *8,600	*3950 *8,600	*3700 *8,050	3400 7,250			*2700 *5,850	*2700 *5,850	16 230 53'01"
4500 mm 15'0"	*5100 *11,000	*5100 *11,000	*4550 *9,850	*4550 *9,850	*4150 *8,950	4000 8,500	*3800 *8,250	3300 7,000			*2750 *6,050	2700 5,950	16 500 54'01"
3000 mm 10'0"	*5450 *11,750	*5450 *11,750	*4800 *10,350	4600 9,850	*4300 *9,250	3800 8,100	*3900 *8,450	3150 6,750	*3200	2650	*2900 *6,300	2600 5,700	16 640 54'06"
1500 mm 5'0"	*5750 *12,400	5300 11,400	*5000 *10,800	4350 9,350	*4450 *9,600	3600 7,750	*4000 *8,650	3050 6,450	*3400	2550	*3050 *6,700	2500 5,500	16 630 54'06"
0 0	*6000 *12,950	5000 10,750	*5150 *11,150	4150 8,850	*4550 *9,800	3450 7,400	*4050 *8,750	2900 6,250			*3250 *7,200	2500 5,450	16 490 54'01"
-1500 mm -5'0"	*6150 *13,250	4750 10,250	*5250 *11,400	3950 8,500	*4600 *9,950	3350 7,150	*4050 *8,750	2850 6,050			*3550 *7,850	2500 5,500	16 210 53'01"
-3000 mm -10'0"	*6200 *13,350	4600 9,900	*5300 *11,400	3850 8,250	*4600 *9,900	3250 6,950	*4000 *8,600	2800 5,950			*3700 *8,200	2600 5,700	15 780 51'08"
-4500 mm -15'0"	*6100 *13,150	4500 9,700	*5200 *11,200	3750 8,100	*4500 *9,650	3200 6,900	*3850	2750			*3750 *8,250	2750 6,000	15 190 49'08"
-6000 mm -20'0"	*5850 *12,550	4500 9,700	*4950 *10,650	3750 8,100	*4250 *9,000	3200 6,900					*3800 *8,350	2950 6,550	14 420 47'01"
-7500 mm -25'0"	*5400 *11,550	4550 9,850	*4550 *9,650	3800 8,250							*3800 *8,300	3300 7,350	13 430 43'09"
-9000 mm -30'0"	*4700 *9,850	*4700 *9,850	*3800	*3800							*3700 *8,100	*3700 *8,100	12 190 39'06"
-10 500 mm -35'0"	*3500	*3500									*3450 *7,450	*3450 *7,450	10 580 34'00"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Long Reach Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Europe

	Linkage	Width		Capacity		Weight		Fill	LRE
		mm	in	m ³	yd ³	kg	lb	%	
Pin-On (No Quick Coupler)									
General Duty	B	600	24	0.46	0.61	555	1,223	100	●
	B	750	30	0.64	0.84	626	1,380	100	●
	B	1050	42	1.00	1.31	737	1,624	100	⊙
Heavy Duty	B	1050	42	1.00	1.31	855	1,885	100	○
Ditch Cleaning	B	1800	71	0.86	1.12	590	1,301	100	⊙
	B	2100	83	1.06	1.39	657	1,447	100	⊖
Ditch Cleaning – Tilt	B	2000	79	1.23	1.61	1096	2,416	100	◇
								kg	2196
								lb	4,841
With Cat Pin Grabber Coupler									
General Duty	B	600	24	0.46	0.61	555	1,223	100	●
	B	750	30	0.64	0.84	626	1,380	100	⊙
	B	1050	42	1.00	1.31	737	1,624	100	◇
Heavy Duty	B	1050	42	1.00	1.31	855	1,885	100	◇
Ditch Cleaning	B	1800	71	0.86	1.12	590	1,301	100	○
	B	2100	83	1.06	1.39	657	1,447	100	◇
Ditch Cleaning – Tilt	B	2000	79	1.23	1.61	1096	2,416	100	X
								kg	1774
								lb	3,912

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

340 Long Reach Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Europe (continued)

	Linkage	Width		Capacity		Weight		Fill	LRE
		mm	in	m ³	yd ³	kg	lb	%	
With CW-40 Quick Coupler									
General Duty	B CW40	900	35	0.81	1.06	664	1,463	100	⊖
General Duty LE	B CW40	650	26	0.70	0.92	567	1,249	100	⊙
	B CW40	800	31	0.68	0.89	614	1,353	100	⊙
	B CW40	1000	39	0.92	1.21	719	1,586	100	○
Ditch Cleaning	B CW40	2100	83	1.29	1.69	792	1,746	100	◇
	B CW40	1800	72	1.50	1.96	827	1,823	100	X
Ditch Cleaning – Tilt	B CW40	2000	79	1.23	1.61	1161	2,560	100	X
Maximum load with coupler (payload + bucket)								kg	1946
								lb	4,290
With CW-40S Quick Coupler									
General Duty	B	750	30	0.64	0.84	592	1,450	100	●
	B	900	36	0.81	1.06	661	1,444	100	⊖
Ditch Cleaning	B	2000	78	1.22	1.60	715	1,576	100	◇
	B	2200	87	1.36	1.78	769	1,695	100	◇
Ditch Cleaning – Tilt	B	2000	79	1.23	1.61	1142	2,518	100	X
Maximum load with coupler (payload + bucket)								kg	1965
								lb	4,332

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

340 Long Reach Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – North America

	Linkage	Width		Capacity		Weight		Fill	LRE
		mm	in	m ³	yd ³	kg	lb	%	
Pin-On (No Quick Coupler)									
General Duty Capacity	B	600	24	0.55	0.72	620	1,366	100	●
	B	750	30	0.75	0.98	717	1,580	100	◎
	B	900	36	0.95	1.24	793	1,747	100	⊖
	B	600	24	0.55	0.72	617	1,360	100	●
	B	750	30	0.75	0.98	715	1,576	100	◎
	B	900	36	0.95	1.24	791	1,743	100	⊖
Heavy Duty	B	600	24	0.46	0.60	647	1,426	100	●
	B	750	30	0.64	0.84	752	1,658	100	●
	B	900	36	0.81	1.06	835	1,841	100	⊖
	B	1050	42	1.00	1.31	892	1,967	100	○
	B	1200	48	1.19	1.56	985	2,171	100	◇
	B	1350	54	1.38	1.80	1069	2,357	100	X
Ditch Cleaning	B	1500	60	1.01	1.32	651	1,436	100	⊖
Ditch Cleaning – Tilt	B	1800	72	0.90	1.18	1105	2,436	100	○
	B	2000	79	1.11	1.61	1161	2,560	100	◇
								kg	2196
Maximum load with pin-on (payload + bucket)								lb	4,841
With Cat Pin Grabber Coupler									
General Duty Capacity	B	600	24	0.55	0.72	620	1,366	100	●
	B	750	30	0.75	0.98	717	1,580	100	○
	B	900	36	0.95	1.24	793	1,747	100	◇
	B	600	24	0.55	0.72	617	1,360	100	●
	B	750	30	0.75	0.98	715	1,576	100	○
	B	900	36	0.95	1.24	791	1,743	100	◇
Heavy Duty	B	600	24	0.46	0.61	647	1,426	100	●
	B	750	30	0.64	0.84	752	1,658	100	●
	B	900	36	0.81	1.06	835	1,841	100	⊖
	B	1050	42	1.00	1.31	892	1,967	100	○
	B	1350	54	1.38	1.80	1069	2,357	100	X
Ditch Cleaning	B	1500	60	1.01	1.32	651	1,436	100	◇
Ditch Cleaning – Tilt	B	1800	72	0.90	1.18	1105	2,436	100	X
	B	2000	79	1.11	1.61	1161	2,560	100	X
								kg	1774
Maximum load with coupler (payload + bucket)								lb	3,912

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ◎ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

340 Long Reach Hydraulic Excavator Specifications

Attachments Offering Guide – Europe

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

PIN-ON ATTACHMENTS

Undercarriage		HD High Wide
Counterweight		10.35 mt (22,800 lb)
Boom Type		LRE
Stick Length		LRE
Demolition and Sorting Grapples	G318	✓
	G318 WH-800	✓

S70 DEDICATED COUPLER ATTACHMENTS

Undercarriage		HD High Wide
Counterweight		10.35 mt (22,800 lb)
Boom Type		LRE
Stick Length		LRE
Demolition and Sorting Grapples	G318 WH-800	✓*

Attachments Offering Guide – North America

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

PIN-ON ATTACHMENTS

Undercarriage		HD High Wide
Counterweight		10.35 mt (22,800 lb)
Boom Type		LRE
Stick Length		LRE
Demolition and Sorting Grapples	G318	✓
	G318 WH-800	✓
Mulchers	HM4015	✓
	HM4815	✓

CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		HD High Wide
Counterweight		10.35 mt (22,800 lb)
Boom Type		LRE
Stick Length		LRE
Mulchers	HM4015	✓*
	HM4815	✓

340 Long Reach Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOMS, STICKS AND LINKAGES			SAFETY AND SECURITY		
10.6 m (34'9") LRE boom	✓		Cat Command (remote control)		✓
7.1 m (23'4") LRE stick	✓		2D E-Fence:	✓	
Bucket linkage, B1 family with lifting eye, Cat Grade		✓	– E-ceiling		
ELECTRICAL SYSTEM			– E-floor		
Maintenance-free 1,000 CCA batteries	✓		– E-swing		
Centralized electrical disconnect switch	✓		– E-wall		
LED chassis light	✓		– E-cab avoidance		
1,800 lumen LED premium surround lights	✓		Auto hammer stop	✓	
ENGINE			Caterpillar One Key security system	✓	
Cold start block heater		✓	Lockable external tool/storage box	✓	
Three selectable modes: Power, Smart, Eco	✓		Lockable door, fuel, and hydraulic tank locks	✓	
Automatic engine speed control	✓		Lockable fuel drain compartment	✓	
Up to 3300 m (10,830 ft) altitude capability	✓		Service platform with anti-skid plate and recessed bolts	✓	
52° C (126° F) high-ambient cooling	✓		Right Hand (RH) handrail and handhold	✓	
Hydraulic reversing fan		✓	Standard visibility mirror package	✓	
–18° C (0° F) cold start capability	✓		Signaling/warning horn	✓	
–32° C (–25° F) cold start capability		✓	Travel alarm – North America standard; Europe optional	✓	✓
Double element air filter with integrated pre-cleaner	✓		Swing alarm		✓
HYDRAULIC SYSTEM			Ground-level secondary engine shutoff switch	✓	
SmartBoom™ – Europe only		✓	Lockable disconnect switch	✓	
Boom and stick regeneration circuit	✓		Boom lowering check valve – Europe standard; North America optional	✓	✓
Electronic main control valve	✓		Stick lowering check valve – Europe standard; North America optional	✓	✓
Heavy lift mode	✓		Rear and right-hand-sideview cameras	✓	
Automatic hydraulic oil warmup	✓		360° visibility		✓
Reverse swing damping valve	✓		SERVICE AND MAINTENANCE		
Automatic swing parking brake	✓		Integrated vehicle health management system	✓	
High performance hydraulic return filter	✓		Grouped location for engine oil and fuel filters	✓	
Two speed travel	✓		Scheduled Oil Sampling (S·O·S SM) ports	✓	
Combined two-way auxiliary circuit with direct return filter		✓	QuickEvac™ maintenance ready		✓
Medium-pressure auxiliary circuit		✓	Electric refueling pump with auto shutoff – Europe only		✓
Cooling circuit		✓			
Quick coupler circuit for Cat Pin Grabber and CW Dedicated		✓			

(continued on next page)

340 Long Reach Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
CAT TECHNOLOGY			UNDERCARRIAGE AND STRUCTURES		
VisionLink®	✓*		HD High Wide undercarriage	✓	
VisionLink Productivity		✓	Towing eye on base frame	✓	
Remote Flash	✓		Full-length track guiding guards		✓
Remote Troubleshoot	✓		Segmented two-piece track guiding guards		✓
Cat Grade Connectivity		✓	Swivel guard		✓
Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓		Bottom guard	✓	
Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓		Travel motor guard	✓	
Cat Grade 2D	✓		Grease lubricated track	✓	
Cat Grade 2D with Attachment Ready Option (ARO)		✓	HD swing frame	✓	
Cat Grade 3D single GNSS		✓	10.35 mt (22,800 lb) counterweight	✓	
Cat Grade 3D dual GNSS		✓	850 mm (33") triple grouser track shoes		✓
Laser catcher		✓	700 mm (28") triple grouser track shoes		✓
Cat Assist:	✓		600 mm (24") HD triple grouser track shoes		✓
– Grade Assist			600 mm (24") double grouser track shoes		✓
– Boom Assist					
– Bucket Assist					
– Swing Assist					
– Lift Assist					
Cat Payload	✓				
– Static weigh					
– Semiautomatic calibration					
– Payload/cycle information					
– USB reporting capability					
Work tool recognition (PL161)	✓				
Work tool tracking (PL161)	✓				

*Connect subscription only. Additional subscriptions are available. Contact your Cat dealer for availability.

340 Long Reach Cab Options

	Deluxe	Premium*
Sound suppressed cab	●	●
Two-piece front windshield 70/30, tempered	●	○
One-piece front windshield, tempered	X	○
High-resolution 254 mm (10") LCD touchscreen monitor	●	●
Automatic bi-level air conditioner	●	●
Jog dial and shortcut keys for monitor control	●	●
Keyless push-to-start engine control	●	●
Height-adjustable console	●	●
Heated seat with air-adjustable suspension	●	X
Heated and cooled seat with automatic adjustable suspension	X	●
Tilt-up left-side console	●	●
Cat Stick Steer	●	●
51 mm (2") orange seat belt	●	●
Bluetooth® integrated radio (including USB, auxiliary port and microphone)	●	●
2 × 12V DC outlets	●	●
Document storage	●	●
Rear head storage net and lunchbox storage net	●	●
Cup and bottle holders	●	●
Upper radial wiper 70/30 with washer	●	X
Parallel wiper with 70/30 with washer	X	○
Parallel wiper one-piece with washer	X	○
Polycarbonate skylight hatch, openable windshield	●	○
Fixed glass hatch, one-piece windshield	X	○
LED cab lights, 1,800 lumens	●	●
LED dome light	●	●
Roller front sunscreen	●	●
Roller rear sunscreen	○	●
Rear window emergency exit	●	●
Washable floor mat	●	●
Beacon ready	●	●
Auxiliary relay	●	●

● Standard

○ Optional

X Not available

* Europe only

340 Long Reach Dealer Installed Kits and Attachments

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Lower radial wiper
- Rain protector for front windshield and cab light cover
- Slider, sun visor
- 70/30 front windshield with laminated upper P5A glass
- Dual exit rear window kit
- Seat with 4 point seat belt capability
- 76 mm (3") retractable seat belt
- Seat belt indicator
- Armrest kit

GUARDS

- Operator Protective Guards (not compatible with cab light cover, rain protector)
- Full mesh net guard
- Lower mesh net guard
- Side rubber bumper guard
- Vandalism guard

PERFORMANCE AND PRODUCTIVITY

- Left-hand (two-way) electrically controlled pedal for tool control system
- Right-hand (two-way) electrically controlled pedal for tool control system
- Submarine kit
- Power clam kit

MAINTENANCE AND IMPROVEMENT

- Joysticks with horizontal sliders
- Delayed engine shutdown kit

SAFETY AND SECURITY

- Remote control kit
- Bluetooth key fob

340 Long Reach Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

Engine

- The Cat® C9.3B engine meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuelsRefer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.
**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).*
***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.0 kg (2.2 lb) of refrigerant which has a CO₂ equivalent of 1.430 metric tonnes (1.576 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound Performance

ISO 6395:2008 (external) – 106 dB(A)

ISO 6396:2008 (inside cab) – 73 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Smart mode matches machine power to digging requirements automatically
 - Eco mode minimizes fuel consumption for light applications
 - One-touch low idle with automatic engine speed control
 - Available Cat technologies improve operator efficiency by up to 45%
 - Cut costs with extended maintenance intervals

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2023 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. VisionLink is a trademark of Caterpillar Inc., registered in the United States and in other countries.

AEXQ3346-02 (11-2023)
Replaces AEXQ3346-01
Build Number: 08C
(Europe, N Am)

