

# 395

## HYDRAULIC EXCAVATOR



---

**Net Power – ISO 9249**  
**Operating Weight**  
**Maximum Digging Depth**

**404 kW (542 hp)**  
**94 000 kg (207,400 lb)**  
**9670 mm (31.9 ft)**

**CAT**<sup>®</sup>

# 395

## HYDRAULIC EXCAVATOR

The Cat® 395 gets every job done every time. A 10% higher digging force eases bucket penetration to reduce digging cycle time in the most demanding applications. With up to a 15% higher payload and the ability to carry the SD 6.5 m<sup>3</sup> bucket, this mass excavator can load a 70-ton off-road truck in 5-6 passes. For deep trenching work, the 395 digs down deep with maximum digging depths from 7190 mm (23'7") up to 11 710 (38'5"). The 395 is built for extreme durability with 2× reinforced booms, sticks, upper and lower frames. Reduced hydraulic oil capacity, improved filters with longer service intervals, and an integrated auto-lube-ready system save you up to 20% in maintenance costs. Equipped with the latest technology and data, the 395 helps you make informed and smart decisions to improve efficiency, increase productivity, and enhance safety.



### UP TO 10% MORE PRODUCTIVE

Move more material faster with greater power and bigger buckets.

### UP TO 2X MORE STRUCTURAL DURABILITY

Do more demanding work with reinforced booms, sticks, and upper and lower frames.

### UP TO 20% LESS MAINTENANCE COST

Save money and time using less oil and better filters with extended service intervals.

# LATEST FEATURES



- Cab Monitor Improvements
  1. Continuously improved user interface allows intuitive navigation, minimizing performance interruption with the easy-to-use touchscreen menu.
  2. Identify apps quickly with a grid list view, abbreviated app names, and categorized menu options.
  3. A notification center keeps important information visible to the operator and displays messages without shrinking the camera view.
  4. Color-coded notifications set critical messages apart from the rest.
  5. Use the in-monitor QR code to learn about machine and technology features through a full suite of “how-to” videos.
- Operator Coaching – Empower Operators. Exceed Targets.
  1. Operator Coaching is an in-cab system that recognizes specific opportunities for operators to be more productive and prevent unnecessary machine wear and tear.
  2. After detecting inefficient or restricted actions, the system alerts the operator and provides insight into the inefficiency and steps to improve.
  3. Paired with a VisionLink® Productivity subscription, this information and other Operator Coaching insights can be viewed anywhere.
- Standard integrated vehicle health management system alerts operators with service guidance and parts needed to enhance uptime.

***Not all features are available in all regions. Please check with your local Cat dealer for specific offering availability in your area. Build Number: 07D***



# HIGH PERFORMANCE



- The 395 is up to 10% more productive than the 390F it replaces.
- Work up to 3000 m (9,840 ft) above sea level without de-rating.
- Match the excavator to the job with three operating modes: Power, Smart, and ECO.
- The engine meets U.S. EPA Tier 4 Final, EU Stage V, Korea Stage V and Japan 2014 emission standards with an aftertreatment system that requires no operator input or downtime.
- VisionLink provides actionable data insights for all assets – regardless of fleet size or equipment manufacturer. Review equipment data from your desktop or mobile device to maximize uptime and optimize assets.
- Three levels of fuel filtration protect the engine from dirty diesel fuel.
- Grease sealed between track pins and bushings reduces travel noise and prevents debris from entering to increase undercarriage life.
- The center track guiding guard helps align the excavator track when traveling and working on slopes.
- The sloped track frame prevents mud and debris accumulation, helping reduce the risk of track damage.
- Swing torque increase of 10% makes cycle times faster than the previous series.
- Multifunctioning is smoother and more efficient with the hydrostatic swing circuit.
- Auxiliary hydraulic options allow you to use a wide range of Cat attachments.
- Enhanced heavy lift mode increases system pressure to help you easily pick and place heavy material.
- Booms, sticks, and frames are up to two times more durable than the previous series, giving you years of reliable performance in the harshest environments.
- Advansys™ bucket tips increase penetration and improve cycle times. Tip changes can be done quickly with a simple lug wrench instead of a hammer or special tool, improving safety and uptime.
- Auto warm-up speeds up hydraulic oil warming in cold temperatures and helps prolong the life of components.
- Don't let the temperature stop you from working. This excavator has a high-ambient capability of 52° C (125° F) and a standard cold start capability of -18° C (-0.4° F).

# EFFICIENCY THROUGH TECHNOLOGY


- Boost productivity up to 45% versus traditional grading with standard Cat Grade with 2D system – includes indicate-only and laser capability.
- Operator Coaching is an in-cab system that recognizes specific opportunities for operators to be more productive and prevent unnecessary machine wear and tear.
- Automatically stop excavator swing at operator-defined set points in truck loading and trenching applications with Swing Assist.
- Cat® Payload helps you achieve precise load targets to improve operating efficiency. Pick up a load of material – with a bucket and thumb combination or grapple and clamshell attachments – and get a real-time weight estimate without swinging.
- Combine Payload with VisionLink® and remotely manage your production targets.
- Want a 3D system to improve your digging results? Caterpillar single antenna global navigation satellite system (GNSS) makes it easy by giving you visual and auditory guidance to grade. Plus, you can create and edit designs on the touchscreen monitor while on the job. If your application calls for a dual antenna system, it's easy to upgrade.
- Upgrade to our dual antenna GNSS for maximum grading efficiency. The system lets you create and edit designs on the touchscreen monitor while you're on the job, or you can have the plan design sent to the excavator to make your work easier. You also benefit from avoidance zones, cut and fill mapping, lane guidance, augmented reality, and advanced positioning capability.
- Standard Grade Assist helps you stay on grade –and effortlessly – with single-lever digging.
- All Cat Grade systems are compatible with radios and base stations from Trimble, Topcon, and Leica. Already invested in a grade infrastructure? You can install Trimble, Topcon, and Leica grade systems onto the machine.
- Dig with guidance to grade depth, slope, and horizontal distance. You can set up four different depth and slope targets to help save time and money.



# TAKE THE GUESSWORK OUT OF MANAGING YOUR EQUIPMENT

- VisionLink provides actionable data insights for all assets – regardless of fleet size or equipment manufacturer.\* Review equipment data from your desktop or mobile device to maximize uptime and optimize assets. Dashboards provide information such as hours, miles, location, idle time, and fuel utilization. Make informed decisions that lower costs, simplify maintenance, and improve safety and security on your jobsite.
- VisionLink Productivity gathers and summarizes machine telematics and jobsite data from all your equipment – regardless of the manufacture.\* View actionable information such as idle time, fuel burn, location, payload, load counts, total cycles, and more to improve machine efficiency, productivity, and utilization. Access data anywhere via a mobile, tablet, or desktop device – on or off the jobsite.
- Cat® Inspect is a mobile application that allows you to easily perform digital preventative maintenance (PM) checks, inspections, and daily walkarounds. Inspections can easily be integrated with other Cat data systems like VisionLink so you can keep a close eye on your fleet.
- Remote Troubleshoot is a mobile application that allows your Cat dealer to perform diagnostic testing on your connected machine remotely to help resolve issues quickly and with less downtime.
- Remote Flash is a mobile application that allows you to update onboard software without a technician being present, allowing you to initiate software updates when convenient, increasing your overall operating efficiency.
- The Cat PL161 attachment locator allows you to track attachments across all worksites, reduce the number of lost attachments, and plan for attachment maintenance and replacement. The work tool recognition feature automatically adjusts machine settings based on the selected tool.

**\* Data field availability can vary by equipment manufacturer.**

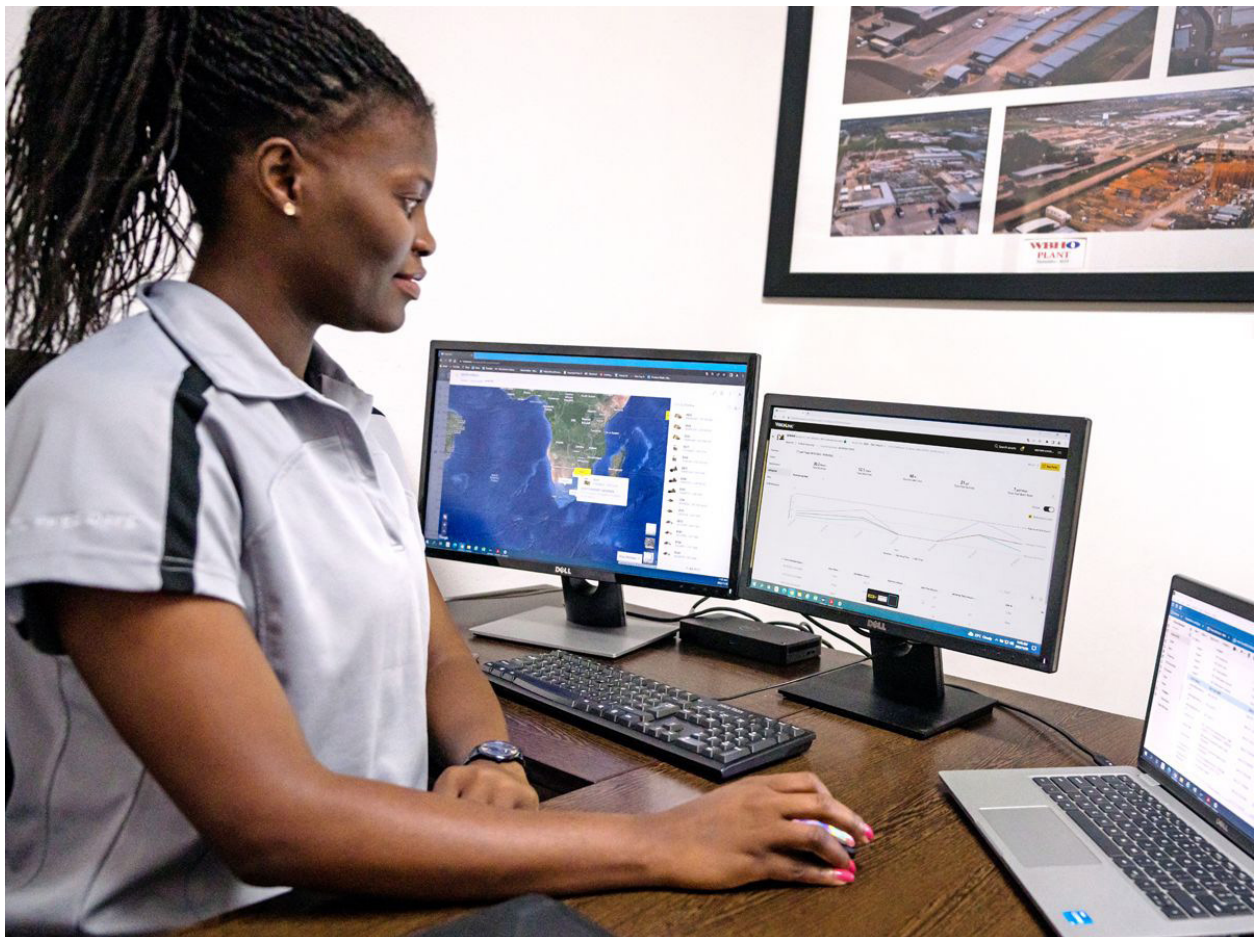

# LESS MAINTENANCE



- Expect up to 20% less maintenance cost than the 390F due to reduced hydraulic oil capacity and extended and synchronized service intervals.
- Boost productivity with proactive service reminders. The Integrated Vehicle Health Management system alerts the operator with step-by-step service guidance and parts needed so you don't experience unnecessary downtime.
- Check engine oil level quickly and safely with the engine oil dipstick on ground level.
- Track your excavator's filter life and maintenance intervals via the in-cab monitor.
- The latest hydraulic oil filter provides improved filtration performance, anti-drain valves to keep oil clean when the filter is replaced, and longer life with a 3,000-hour replacement interval – 50% longer than previous filter designs.
- The excavator is auto-lube ready with built-in mounting points; an available auto-lube retrofit kit provides additional hardware to mount a grease pump and line guards.
- Using Cat genuine oil and filters and doing typical Scheduled Oil Sampling (S-O-S<sup>SM</sup>) monitoring will double the current service interval to 1,000 hours, giving you greater uptime to do more work.
- S-O-S ports with extended sampling intervals are on ground level, simplifying maintenance and allowing for quick easy extraction of samples for fluid analysis.
- The high-efficiency hydraulic fan has an automatic reverse function to keep cores free from debris, eliminating the need for any operator interaction.
- The advanced air intake filter with pre-cleaner has double the dust holding capacity of the previous air intake filter.
- The latest engine air cleaners with an integrated pre-cleaner have twice the life of radial seal air cleaners.

# WORK IN COMFORT

- Two cab options – Deluxe, and Premium – let you choose the level of comfort you need.
- Stay warm with the Deluxe heated seat; stay warm and cool with the Premium heated and ventilated seat.
- Standard automatic climate control keeps you at the right temperature throughout your shift.
- Get in and out of the cab more easily using the tip-up left console.
- Control the excavator comfortably with easy-to-reach controls located in front of you.
- Stow your gear with plenty of in-cab storage beneath and behind the seat, overhead, and in the consoles.
- Use the standard radio's USB ports and Bluetooth® technology to connect personal devices and make hands-free calls.





# SAFETY



- Keep your excavator secure with Operator ID. Use your PIN code on the monitor to enable the push button starting feature.
- Enhance operator safety by adding Cat Command to your fleet. The remote-control system keeps you away from potential hazards. The non-line-of-site kit has a Wi-Fi radio, cameras, and a microphone to work anywhere.
- Standard 2D E-Fence is integrated right out of the factory, preventing the excavator from moving outside operator-defined set points; the system works with thumb and bucket combinations, hammer, grapple, and clamshell attachments.
- A travel direction indicator helps operators know which way to activate the travel levers.
- Access 100% of daily maintenance points from ground level – no need for you to climb on top of the excavator.
- A ground-level shutoff switch stops all fuel to the engine when activated and shuts down the machine.
- The right-hand service platform design provides easy, safe, and quick access to the upper service platform; the service platform steps use serrated steps and an anti-skid punch plate to prevent slipping. The handrails comply with ISO 2867 requirements.
- Lift Assist helps you avoid tipping by letting you know if your load is within the excavator's safe working range limits.
- The standard Rollover Protective Structure (ROPS) meets ISO 12117-2 2008 requirements.
- Enjoy great visibility into the trench, in each swing direction, and behind you with the help of smaller cab pillars, larger windows, and a flat engine hood design.
- Enhance jobsite safety. Add a swing alarm to alert people when rotating from the trench to the stockpile.
- Rear and right-hand-sideview cameras are standard. Upgrade to 360° visibility, and you'll easily visualize objects and personnel around the excavator in a single view.
- See all around the machine with the premium 360° lighting package and its 1800 lm lights on the chassis, cab, boom, sides, and rear.

# SIMPLE TO OPERATE

- Start the engine with a push button; use a Bluetooth key fob or the unique Operator ID function.
- Automatic hydraulic oil warmup gets you to work faster in cold temperatures and helps prolong the life of components.
- Make operating easier with the touch of a joystick button. Additional auxiliary relays allow you to power on or turn off a CB radio, beacon light, and even a dust suppression watering system without taking your hands off the joysticks.
- Make moving the excavator much easier with Cat® Stick Steer. Push a button and use one hand to travel and turn instead of both hands or feet on levers or pedals.
- Program each joystick button, including power mode, response, and pattern, using Operator ID; the machine will remember what you set each time you go to work.
- Program up to four depth and slope offsets so you can easily get to grade without a grade checker – saving time and enhancing safety on the jobsite.
- Not sure how a function works or how to maintain the excavator? Always have the operator's manual at your fingertips on the touchscreen monitor.
- Use the in-monitor QR code to learn about machine and technology features through a full suite of "how-to" videos.
- Navigate quickly on the standard high-resolution 254 mm (10 in) touchscreen monitor or with jog dial control.
- A second 254 mm (10 in) monitor is available for the Cat Grade and Cat Grade with 3D.
- The Cat PL161 attachment locator is a Bluetooth device designed to let users know where their attachments are across all worksites, reduce the number of lost attachments, and plan for attachment maintenance and replacement. The PL161 integrates easily into VisionLink for full fleet management of machines and attachments from one smartphone or tablet dashboard to view location and tracking details.
- Save more time and energy with the available work tool recognition feature. A simple shake of the attached tool confirms its identity and ensures all the attachment settings (pressure, flow, and dimensions) are correct so you can work quickly and efficiently.



- The Cat® C18 engine meets U.S. EPA Tier 4 Final, EU Stage V, Korea Stage V and Japan 2014 emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels\*\* up to: 20% biodiesel FAME (fatty acid methyl ester)\* or 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels. Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.
- Cat Grade technologies combine advanced guidance with optional automated machine control, helping you reach grading targets while reducing fuel burn and greenhouse gas emissions by improving efficiency, jobsite productivity, and accuracy.
- Auto Engine Speed Control reduces unnecessary fuel burn and greenhouse gas emissions by allowing the engine to automatically go into idle mode when the machine is not working.
- Cat Payload for excavators provides on-the-go material weighing, which helps reduce fuel burn by improving loading efficiency, jobsite productivity and eliminating trips to the scale.
- Cat 2D E-fence keeps the front linkage within a predefined work area to avoid hazards such as traffic – not only helping keep personnel safe but also helping you avoid repairs, downtime, and costly jobsite fines.
- Extended maintenance intervals reduce downtime and decrease the amount of fluid and filters that are replaced over the machine’s life.
- Cat VisionLink displays the CO<sub>2</sub> emissions for monitored assets, calculated by fuel type for the Runtime Fuel Burned each day in a selected date range.
- Remote Flash minimizes downtime and maintenance time while keeping your asset running at maximum efficiency. Alerts for machine updates are sent virtually from your Cat dealer, and updates can be deployed without a dealer technician needing to be onsite.
- Remote Troubleshoot decreases maintenance time and keeps your machine running with maximum efficiency by allowing your Cat dealer to virtually test the machine while working. Once a problem is identified, a technician can fix it the first time, saving time and money.

**\*Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).**

**\*\*Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.**



# INCREASE YOUR PRODUCTIVITY AND PROFIT WITH CAT ATTACHMENTS

You can easily expand the performance of your machine by utilizing any of the variety of Cat attachments. Each Cat attachment is designed to fit the weight and horsepower of Cat excavators for improved performance, safety, and stability.

## BUCKETS



## HYDRAULIC HAMMERS



## PREVENT HAMMER WEAR AND TEAR

Protect your hammer from overworking. Auto hammer stop warns you after 15 seconds of continuous firing and then automatically shuts it off after 30 seconds – all to prevent wear and tear on the attachment and excavator.

## QUICK COUPLERS



## MULTI-PROCESSORS



## SHEARS




## MORE THAN MACHINES

When you buy Cat equipment, you're getting so much more than the machine. You're also getting the support of a best-in-class dealer network backed by a range of flexible solutions, technology, tools, and more. It's all about support that's built around your success.

- Customer Value Agreements (CVA)
- Quality parts and precision components
- Cost-saving service and repair options
- Financing solutions
- Rental and used equipment

## ATTACHMENT TRACKING MADE EASY

The Cat PL161 Attachment Locator is a Bluetooth device that makes finding your attachments and other gear quick and easy. The excavator's on-board Bluetooth reader or the Cat app on your phone will locate the device automatically.

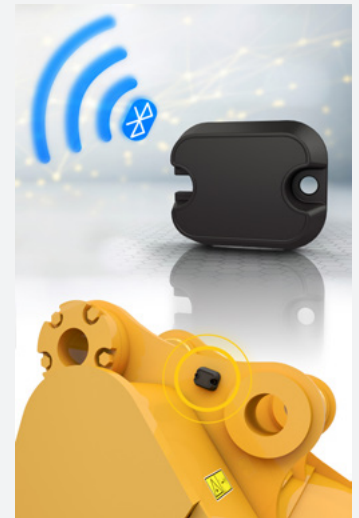

Save more time and energy with the available work tool recognition feature. A simple shake of the attached tool confirms its identity; it also ensures all the attachment settings are correct so you can get to work quickly and efficiently.

# TECHNICAL SPECIFICATIONS

## Engine

Net Power – ISO 9249	404 kW	542 hp
Net Power – ISO 9249 (DIN)	550 hp (metric)	
Engine Model	Cat C18	
Engine Power – ISO 14396	405 kW	543 hp
Engine Power – ISO 14396 (DIN)	551 hp (metric)	
Bore	145 mm	6 in
Stroke	183 mm	7 in
Displacement	18.1 L	1,105 in <sup>3</sup>
Biodiesel Capability	B20 <sup>1</sup>	
Emissions	Meets U.S. EPA Tier 4 Final, EU Stage V, Korea Stage V, and Japan 2014 emission standards.	

Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator with engine speed at 1,700 rpm. Advertised power is tested per the specified standard in effect at time of manufacture.

<sup>1</sup>Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels\*\* up to: 20% biodiesel FAME (fatty acid methyl ester)\* or 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels. Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

\*Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).

\*\*Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.

## Hydraulic System

Main System – Maximum Flow – Implement	1064 L/min	281 gal/min
Maximum Pressure – Equipment	37 000 kPa	5,366 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	31 000 kPa	4,496 psi

## Swing Mechanism

Swing Speed	6.26 r/min	
Maximum Swing Torque	362 kN·m	267,333 ft·lbf

## Weights

Operating Weight	94 000 kg	207,400 lb
------------------	-----------	------------

Long Variable Gauge undercarriage, GP boom, R4.4HB2 (14'5") stick, SD 5.2 m<sup>3</sup> (6.8 yd<sup>3</sup>) bucket, 900 mm (35") double grouser shoes and counterweight with removal device.

## Service Refill Capacities

Fuel Tank Capacity	1220 L	322 gal
Cooling System	71 L	19 gal
Engine Oil	67 L	18 gal
Swing Drive	24 L	6 gal
Final Drive – Each	20 L	5 gal
Hydraulic System – Including Tank	740 L	196 gal
Hydraulic Tank	372 L	98 gal
Diesel Exhaust Fluid (DEF) Tank	80 L	21 gal

## Dimensions

Boom	GP 8.4 m (25'7")	
Stick	R4.4 m (14'5")	
Bucket	SD 5.2 m <sup>3</sup> (6.8 yd <sup>3</sup> )	
Shipping Height – Top of Cab	3670 mm	12 ft
Handrail Height	3750 mm	12.4 ft
Shipping Length	15 090 mm	49.6 ft
Tail Swing Radius	4840 mm	15.11 ft
Counterweight Clearance	1640 mm	5.5 ft
Ground Clearance	830 mm	2.9 ft
Track Length	6350 mm	20.1 ft
Track Length to Center of Rollers	5120 mm	16.1 ft
Track Gauge	3510 mm	11.6 ft
Transport Width	3880 mm	12.9 ft

Track gauge undercarriage extended with 900 mm (35") shoes; transport width undercarriage retracted with 900 mm (35") shoes and no steps.

## Working Ranges & Forces

Boom	GP 8.4 m (25'7")	
Stick	R4.4 m (14'5")	
Bucket	SD 5.2 m <sup>3</sup> (6.8 yd <sup>3</sup> )	
Maximum Digging Depth	9670 mm	31.9 ft
Maximum Reach at Ground Level	14 710 mm	48.3 ft
Maximum Cutting Height	13 540 mm	44.5 ft
Maximum Loading Height	9250 mm	30.4 ft
Minimum Loading Height	3030 mm	9.11 ft
Maximum Depth Cut for 2440 mm (8 ft) Level Bottom	9560 mm	31.4 ft
Maximum Vertical Wall Digging Depth	6770 mm	22.3 ft
Bucket Digging Force – ISO	383 kN	86,100 ft·lbf
Stick Digging Force – ISO	305 kN	68,540 ft·lbf

## Sustainability

Recyclability	98%
---------------	-----

## Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.00 kg (2.2 lb) of refrigerant, which has a CO<sub>2</sub> equivalent of 1.430 metric tonnes (1.576 tons).

# STANDARD & OPTIONAL EQUIPMENT

NOTE: Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional
<b>CAB</b>		
High-resolution 254 mm (10") LCD touchscreen monitor	✓	
Heated seat with air-adjustable suspension (Deluxe only)	✓	
Heated and cooled seat with auto adjustable suspension (Premium only)	✓	
Sound suppressed cab with viscous mounts	✓	
Automatic bi-level air conditioner	✓	
Jog dial and shortcut keys for monitor control	✓	
Keyless push-to-start engine control	✓	
Height-adjustable console, infinite with no tool	✓	
Tilt-up left-side console	✓	
51 mm (2") orange seat belt	✓	
Bluetooth integrated radio (including USB, auxiliary port and microphone)	✓	
2 × 12V DC outlets	✓	
Cup and storage compartments	✓	
Openable two-piece front window (Deluxe standard)	✓	
Upper radial wiper with washer (Deluxe cab only)	✓	
Parallel wiper with washer (Premium only)	✓	
Openable polycarbonate skylight hatch (Deluxe standard)	✓	
LED dome light	✓	
Floor welcome light	✓	
Roller front sunscreen	✓	
Roller rear sunscreen (Premium standard)	✓	
Rear window emergency exit	✓	
Washable floor mat	✓	
Beacon Ready	✓	
Cat Stick Steer		✓
Auxiliary relay		✓
Additional high-resolution LCD touch screen monitor for Cat Grade Advanced 2D and 3D		✓
Roller rear sunscreen (Deluxe)		✓
Radial lower wiper		✓
Joystick with horizontal sliders		✓
LH/RH electrical pedal for tool control		✓
Dual exit rear window kit		✓
Front windshield laminated glass (P5A glass, EU demolition regulation)		✓
Cab/Operator Protective Guards (OPG) (not compatible with cab light cover, rain protector)		✓
Mesh guard full front (not compatible with cab light, cover, rain protector)		✓
Mesh guard lower half front		✓
Rain protector for front windshield plus cab light cover		✓

	Standard	Optional
<b>UNDERCARRIAGE AND STRUCTURES</b>		
Long variable gauge undercarriage	✓	
Swivel guard	✓	
Grease lubricated track	✓	
Standard counterweight	✓	
HD bottom guard	✓	
HD travel motor guard	✓	
Long variable gauge	✓	
Standard counterweight	✓	
Towing eye on base frame	✓	
Counterweight with removal device		✓
650 mm (26") HD double grouser track shoes		✓
750 mm (30") HD double grouser track shoes		✓
900 mm (35") HD double grouser track shoes		✓
Three-piece segmented track guiding guards		✓
Two-piece segmented track guiding guards		✓
<b>CAT TECHNOLOGY</b>		
VisionLink	✓	
Remote Flash	✓	
Remote Troubleshoot	✓	
Operator Coaching	✓	
Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓	
Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓	
Cat Grade 2D	✓	
Cat Assist (Grade, Boom, Bucket, Swing, Lift)	✓	
Cat Payload (Static Weigh, Semiautomatic Calibration, Payload/Cycle Information, USB Reporting Capability)	✓	
Work tool recognition (Requires PL161 attachment locator on work tool and Bluetooth receiver on machine)	✓	
Work tool tracking (Requires PL161 attachment locator on work tool and Bluetooth receiver on machine)	✓	
VisionLink Productivity		✓
Cat Grade Connectivity		✓
Cat Grade 2D with Attachment Ready Option (ARO)		✓
Cat Grade 3D single GNSS		✓
Cat Grade dual GNSS		✓
GNSS antennae		✓
Laser catcher		✓
Cat Tilt Rotator (TRS) Integration		✓
<b>ELECTRICAL SYSTEM</b>		
Maintenance-free 1,400 CCA batteries (×2)	✓	
Centralized electrical disconnect switch	✓	
Chassis light	✓	
Exterior lights (integrated into storage box)	✓	
1800 lumen LED premium surround lights		✓
LED boom and cab lights		✓

# STANDARD & OPTIONAL EQUIPMENT

NOTE: Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional
<b>HYDRAULIC SYSTEM</b>		
Boom and stick regeneration circuit	✓	
Electronic main control valve	✓	
Dedicated closed loop swing circuit	✓	
Anti-reaction valve	✓	
Auto hydraulic oil warmup	✓	
Auto swing parking brake	✓	
High performance hydraulic return filter	✓	
Two speed travel	✓	
Bio hydraulic oil capability	✓	
Hydraulic efficiency monitoring		✓
Advanced tool control		✓
Medium-pressure auxiliary circuit		✓
Quick coupler circuit		✓
Smart Boom		✓
<b>SAFETY AND SECURITY</b>		
Caterpillar One Key security system	✓	
Lockable fuel drain compartment	✓	
Lockable external tool/storage box	✓	
Lockable door, fuel, and hydraulic tank locks	✓	
Lockable disconnect switch	✓	
Service platform with anti-skid plate and recessed bolts	✓	
Right hand handrail and hand hold (ISO 2867:2011 compliant)	✓	
Visibility mirror package	✓	
Signaling/warning horn	✓	
Ground-level secondary engine shutoff switch	✓	
Rearview and right-hand-sideview cameras	✓	
Walkway	✓	
Travel alarm	✓	
2D E-Fence (E-ceiling, E-floor, E-swing, E-wall, E-cab avoidance)	✓	
Cat Command remote control		✓
Swing alarm		✓
360° visibility		✓
Boom lowering check valve		✓
Stick lowering check valve		✓
Inspection lighting		✓
Cat Detect people detection		✓
Swing alarm		✓
360° visibility		✓
Boom lowering check valve		✓
Stick lowering check valve		✓
Inspection lighting		✓
Tilt-up walkway		✓
Bluetooth key fob		✓
76mm (3") retractable seat belt		✓

	Standard	Optional
<b>BOOMS AND STICKS</b>		
7.25 m (23'9") Mass boom		✓
5.5 m (18'1") HD Reach stick		✓
8.4 m (27'7") GP boom		✓
10 m (32'10") Reach boom		✓
2.92 m (9'7") Mass stick		✓
2.92 m (9'7") GP stick		✓
3.4 m (11'2") Mass stick		✓
3.4 m (11'2") GP stick		✓
3.7 m (12'2") GP stick		✓
4.4 m (14'5") HD Reach stick		✓
Bucket linkage, HB2 type without lifting eye, Autolube ready		✓
Bucket linkage, HB2 type without lifting eye, Autolube ready		✓
Bucket linkage, JC type with lifting eye, Autolube ready		✓
Bucket linkage, JC type without lifting eye, Autolube ready		✓
<b>ENGINE</b>		
Three selectable modes: Power, Smart, and Eco	✓	
Auto engine speed control	✓	
Up to 4500 m (14,760 ft) altitude capability	✓	
52° C (126° F) high-ambient cooling capacity	✓	
-18° C (-0.4° F) cold start capability	✓	
Hydraulic reverse fan	✓	
Double element air filter with integrated pre-cleaner	✓	
3 vertical side-by-side cooling system	✓	
Remote disable	✓	
95 Amp alternator	✓	
-32° C (-25° F) cold start capability		✓
Cold start block heaters		✓
<b>SERVICE AND MAINTENANCE</b>		
Integrated vehicle health management system	✓	
Auto lube ready	✓	
Grouped location of engine oil and fuel filters	✓	
S-O-S ports	✓	
QuickEvac maintenance ready	✓	
Reversing cooling fan	✓	
Electric refueling pump with auto shutoff		✓
Fast-fill fuel system		✓
QuickEvac maintenance ready		✓

For more complete information on Cat products, dealer services and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com).

© 2024 Caterpillar. All Rights Reserved.

VisionLink is a trademark of Caterpillar Inc., registered in the United States and in other countries.

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, SmartBoom, S·O·S, Product Link, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.  
[www.cat.com](http://www.cat.com) [www.caterpillar.com](http://www.caterpillar.com)

AEXQ2935-04  
Replaces AEXQ2935-03  
Build Number: 07D  
(Chile, Europe, Aus-NZ,  
N Am, S Korea, Turkey)

