



950

Wheel Loader

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine – U.S. EPA Tier 4 Final/EU Stage V	2
Operating Specifications	2
Buckets	2
Weight	2
Engine – U.S. EPA Tier 3 Equivalent/EU Stage IIIA Equivalent	2
Transmission	2
Air Conditioning System	3
Hydraulic System	3
Sound	3
Service Refill Capacities	3
Brakes	3
Axles	3
Cab	3
Dimensions	4
Tire Options	5
Bucket Fill Factors and Selection Guide	7
Operating Specifications – Buckets	11
Fork/Material Handling Arm Specifications	33
Standard and Optional Equipment	68
950 Environmental Declaration	69
950 Waste & Scrap Handler Configuration	70
Key Features and Benefits	70
Tire Options	72
950 Forestry Machine Configuration	85
Key Features and Benefits	85
Tire Options	87
Operating Specifications – Buckets	88
950 Corrosion Resistant Configuration	124
Key Features and Benefits	124

950 Wheel Loader Specifications

Engine – U.S. EPA Tier 4 Final/EU Stage V

Engine Model	Cat® C7.1	
Meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.		
Engine Power @ 2,100 rpm ISO 14396:2002	186 kW 253 hp (metric)	249 hp
Gross Power @ 2,100 rpm SAE J1995:2014	188 kW 257 hp (metric)	253 hp
Net Power @ 2,100 rpm ISO 9249:2007, SAE J1349:2011	172 kW 235 hp (metric)	231 hp
Engine Torque (1,300 rpm) ISO 14396:2002	1231 N·m	908 lbf-ft
Gross Torque (1,300 rpm) SAE J1995:2014	1242 N·m	916 lbf-ft
Net Torque (1,300 rpm) ISO 9249:2007, SAE J1349:2011	1170 N·m	863 lbf-ft
Displacement	7.01 L	

- Advertised power is tested per the specified standard in effect at the time of manufacture.
 - The net power advertised is the power available at the flywheel when the engine is equipped with fan, alternator, air cleaner, and aftertreatment.
 - Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:
 - 20% biodiesel FAME (fatty acid methyl ester)*
 - 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels
- Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

* Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.

** Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.

Operating Specifications

Static Tipping Load – Full 40° Turn		
With Tire Deflection	11 201 kg	24,694 lb
No Tire Deflection	11 961 kg	26,369 lb
Breakout Force	181 kN	40,690 lbf

- For a machine configuration as defined under “Weight.”
- Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

Buckets

Bucket Capacities	2.5-9.9 m ³	3.3-13.0 yd ³
-------------------	------------------------	--------------------------

Weight

Operating Weight	19 260 kg	42,461 lb
------------------	-----------	-----------

- Weight based on a machine configuration with parallel lift Z-bar linkage, Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, standard counterweight, ride control, cold start, roading fenders, Product Link™, front manual differential/open rear axles, powertrain guard, secondary steering, sound suppression, and a 3.1 m³ (4.1 yd³) general purpose bucket with bolt-on cutting edges (BOCE).

Engine – U.S. EPA Tier 3 Equivalent/EU Stage IIIA Equivalent

Engine Model	Cat C7.1	
Meets Brazil MAR-1 and UN ECE R96 Stage IIIA emission standards, equivalent to U.S. EPA Tier 3 and EU Stage IIIA.		
Engine Power @ 2,100 rpm ISO 14396:2002	186 kW 253 hp (metric)	249 hp
Gross Power @ 2,100 rpm SAE J1995:2014	191 kW 260 hp (metric)	256 hp
Net Power @ 2,100 rpm ISO 9249:2007, SAE J1349:2011	172 kW 235 hp (metric)	231 hp
Engine Torque (1,400 rpm) ISO 14396:2002	1236 N·m	912 lbf-ft
Gross Torque (1,400 rpm) SAE J1995:2014	1257 N·m	927 lbf-ft
Net Torque (1,300 rpm) ISO 9249:2007, SAE J1349:2011	1170 N·m	863 lbf-ft
Displacement	7.01 L	

- Advertised power is tested per the specified standard in effect at the time of manufacture.
- The net power advertised is the power available at the flywheel when the engine is equipped with fan, alternator, air cleaner, and muffler.
- Cat engines are compatible with diesel fuel blended with the following lower-carbon intensity fuels** up to:
 - 100% biodiesel FAME (fatty acid methyl ester)*
 - 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

* Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.

** Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.

Transmission

Forward 1	6.9 km/h	4.3 mph
Forward 2	12.0 km/h	7.5 mph
Forward 3	19.3 km/h	12.0 mph
Forward 4	25.7 km/h	16.0 mph
Forward 5	39.5 km/h	24.5 mph
Reverse 1	6.9 km/h	4.3 mph
Reverse 2	12.0 km/h	7.5 mph
Reverse 3	25.7 km/h	16.0 mph
Reverse 4	N/A	N/A

- Maximum travel speed in standard vehicle with empty bucket and standard L3 tires with 787 mm (31 in) roll radius.

950 Wheel Loader Specifications

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.6 kg (3.5 lb) of refrigerant which has a CO₂ equivalent 2.288 metric tonnes (2.522 tons).

Hydraulic System

Implement Pump Type	Variable Displacement Piston, Load Sensing	
Implement System:		
Maximum Pump Output (2,340 rpm)	322 L/min	85 gal/min
Maximum Operating Pressure	29 300 kPa	4,250 psi
Optional 3 rd Function Maximum Flow at Work Tool	240 L/min	63 gal/min
Optional 3 rd Function Maximum Pressure at Work Tool	20 684 kPa	3,000 psi
Optional 4 th Function Maximum Flow at Work Tool	240 L/min	63 gal/min
Optional 4 th Function Maximum Pressure at Work Tool	20 684 kPa	3,000 psi
Hydraulic Cycle Time with Rated Payload:		
Raise from Carry Position	5.1 sec	
Dump at Maximum Raise	1.5 sec	
Lower, Empty, Float Down	2.5 sec	
Total	9.1 sec	

Sound

Operator Sound Pressure Level (ISO 6396:2008)	70 dB(A)
Exterior Sound Power Level (ISO 6395:2008)	107 dB(A)
Operator Sound Pressure Level (ISO 6396:2008)*	69 dB(A)
Exterior Sound Power Level (ISO 6395:2008)**	104 dB(A)

*Including countries that adopt the EU and UK directives.
 **European Union Directive 2000/14/EC and UK Noise Regulation 2001 No. 1701.

Service Refill Capacities

Fuel Tank	259.5 L	68.6 gal
Diesel Exhaust Fluid (DEF) Tank (Tier 4 only)	15 L	4.0 gal
Cooling System (Tier 4)	54 L	14.3 gal
Cooling System (Tier 3)	54 L	14.3 gal
Crankcase	21 L	5.5 gal
Transmission	43 L	11.4 gal
Differentials and Final Drives – Front	43 L	11.4 gal
Differentials and Final Drives – Rear	43 L	11.4 gal
Hydraulic Tank	97 L	25.6 gal

Brakes

Brakes	Brakes meet ISO 3450:2011 standards
--------	-------------------------------------

Axles

Front	Fixed
Rear	Oscillating ±13 degrees


Cab

Rollover Protective Structure/Falling Objects Protective Structure (ROPS/FOPS)	ROPS/FOPS meet ISO 3471:2008 and ISO 3449:2005 Level II standards
--	---

950 Wheel Loader Specifications

Dimensions

All dimensions are approximate.

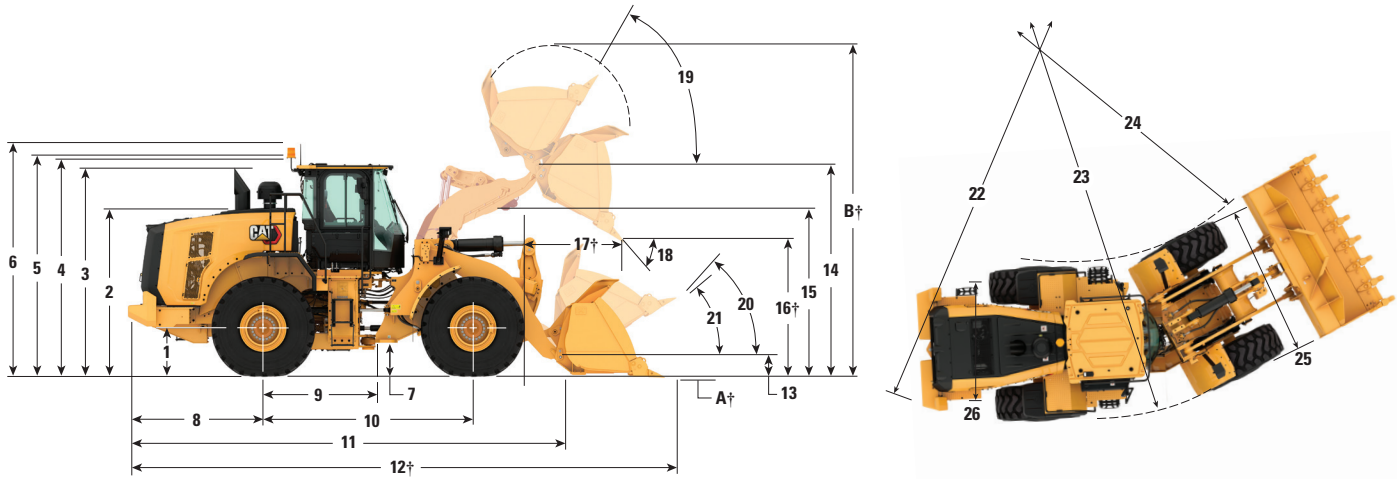

	Standard Lift		High Lift	
1 Height to Axle Centerline	734 mm	2'4"	734 mm	2'4"
2 Height to Top of Hood	2695 mm	8'10"	2695 mm	8'10"
3 Height to Top of Exhaust Pipe	3408 mm	11'2"	3408 mm	11'2"
4 Height to Top of ROPS	3456 mm	11'4"	3456 mm	11'4"
5 Height to Top of Product Link Antenna	3463 mm	11'4"	3463 mm	11'4"
6 Height to Top of Warning Beacon	3736 mm	12'3"	3735 mm	12'3"
7 Ground Clearance	354 mm	1'1"	354 mm	1'1"
8 Centerline of Rear Axle to Edge of Counterweight	2063 mm	6'9"	2077 mm	6'9"
9 Centerline of Rear Axle to Hitch	1675 mm	5'5"	1675 mm	5'5"
10 Wheelbase	3350 mm	10'11"	3350 mm	10'11"
11 Overall Length (without bucket)	7024 mm	23'1"	7490 mm	24'7"
12 Shipping Length (with bucket level on ground)*†	8314 mm	27'4"	8795 mm	28'11"
13 Hinge Pin Height at Carry Height	623 mm	2'0"	775 mm	2'6"
14 Hinge Pin Height at Maximum Lift	4009 mm	13'1"	4514 mm	14'9"
15 Lift Arm Clearance at Maximum Lift	3255 mm	10'8"	3615 mm	11'10"
16 Dump Clearance at Maximum Lift and 45° Discharge*†	2864 mm	9'4"	3370 mm	11'0"
17 Reach at Maximum Lift and 45° Discharge*†	1436 mm	4'8"	1471 mm	4'9"
18 Dump Angle at Maximum Lift and Dump (on stops)*	51 degrees		48 degrees	
19 Rack Back at Maximum Lift*	59 degrees		56 degrees	
20 Rack Back at Carry Height*	49 degrees		49 degrees	
21 Rack Back at Ground*	39 degrees		43 degrees	
22 Clearance Circle (dia) to Counterweight	12 050 mm	39'7"	12 044 mm	39'7"
23 Clearance Circle (dia) to Outside of Tires	12 028 mm	39'6"	12 028 mm	39'6"
24 Clearance Circle (dia) to Inside of Tires	6380 mm	25'0"	6380 mm	25'0"
25 Width over Tires (unloaded)	2800 mm	9'3"	2800 mm	9'3"
Width over Tires (loaded)	2824 mm	9'4"	2824 mm	9'4"
26 Tread Width	2140 mm	7'0"	2140 mm	7'0"

All height and tire related dimensions are with Bridgestone 23.5R25 VJT L3 radial tires (see Tire Options chart for other tires). "Width over Tires" dimensions are over the bulge and include growth.

•All dimensions are approximate and based on machine equipped with 3.1 m³ (4.1 yd³) general purpose pin-on bucket with BOCE (see Operating Specifications for other buckets).

†Dimensions are listed in Operating Specifications charts.

950 Wheel Loader Specifications

Tire Options

Tire Brand	Bridgestone	Michelin	Michelin	Michelin	Michelin
Tire Size	23.5R25	23.5R25	23.5R25	750/65R25	23.5R25
Tread Type	L-3	L-5	L-5	L-3	L-2
Tread Pattern	VJT	XHA2	XLD D2	XLD	XTLA
Width over Tires – Maximum (empty)*	2800 mm 9'3"	2816 mm 9'3"	2819 mm 9'4"	2934 mm 9'8"	2814 mm 9'3"
Width over Tires – Maximum (loaded)*	2824 mm 9'4"	2828 mm 9'4"	2834 mm 9'4"	2968 mm 9'9"	2820 mm 9'4"
Change in Vertical Dimensions (average of front and rear)		10 mm 0.4"	40 mm 1.6"	12 mm 0.5"	13 mm 0.5"
Change in Horizontal Reach		-6 mm -0.2"	-31 mm -1.2"	5 mm 0.2"	-7 mm -0.3"
Change in Clearance Circle to Outside of Tires		4 mm 0.2"	11 mm 0.4"	144 mm 5.7"	-4 mm -0.1"
Change in Clearance Circle to Inside of Tires		-4 mm -0.2"	-11 mm -0.4"	-144 mm -5.7"	4 mm 0.1"
Change in Operating Weight (without ballast)		-156 kg -344 lb	500 kg 1,103 lb	633 kg 1,395 lb	-192 kg -423 lb
Change in Static Tipping Load – Straight		-104 kg -229 lb	333 kg 733 lb	421 kg 928 lb	-128 kg -282 lb
Change in Static Tipping Load – Articulated		-90 kg -200 lb	290 kg 639 lb	367 kg 809 lb	-112 kg -248 lb
Rear Axle Oscillation Angle	±13 degrees	±13 degrees	±8 degrees	±8 degrees	±13 degrees
Maximum Single-Wheel Rise and Fall	481 mm 1'7"	481 mm 1'7"	298 mm 1'0"	298 mm 1'0"	481 mm 1'7"

*Width over tire bulge and includes tire growth.

Tire Brand	Michelin	Bridgestone	Bridgestone	Bridgestone	Bridgestone
Tire Size	23.5R25	23.5R25	23.5R25	23.5R25	23.5R25
Tread Type	L-2	L-2	L-2	L-5	L-3
Tread Pattern	XSNO	VUT	VSW	VSDL	VL2
Width over Tires – Maximum (empty)*	2833 mm 9'4"	2827 mm 9'4"	2805 mm 9'3"	2787 mm 9'2"	2770 mm 9'2"
Width over Tires – Maximum (loaded)*	2841 mm 9'4"	2820 mm 9'4"	2823 mm 9'4"	2804 mm 9'3"	2790 mm 9'2"
Change in Vertical Dimensions (average of front and rear)	9 mm 0.4"	0 mm 0"	10 mm 0.4"	65 mm 2.6"	19 mm 0.8"
Change in Horizontal Reach	-5 mm -0.2"	0 mm 0"	2 mm 0.1"	-36 mm -1.4"	-4 mm -0.1"
Change in Clearance Circle to Outside of Tires	18 mm 0.7"	-3 mm -0.1"	-1 mm 0"	-20 mm -0.8"	-34 mm -1.3"
Change in Clearance Circle to Inside of Tires	-18 mm -0.7"	3 mm 0.1"	1 mm 0"	20 mm 0.8"	34 mm 1.3"
Change in Operating Weight (without ballast)	-144 kg -318 lb	-120 kg -265 lb	-60 kg -132 lb	700 kg 1,544 lb	-268 kg -591 lb
Change in Static Tipping Load – Straight	-96 kg -211 lb	-80 kg -176 lb	-40 kg -88 lb	466 kg 1,026 lb	-178 kg -393 lb
Change in Static Tipping Load – Articulated	-84 kg -186 lb	-70 kg -153 lb	-35 kg -77 lb	406 kg 895 lb	-155 kg -343 lb
Rear Axle Oscillation Angle	±13 degrees	±13 degrees	±8 degrees	±8 degrees	±13 degrees
Maximum Single-Wheel Rise and Fall	481 mm 1'7"	481 mm 1'7"	298 mm 1'0"	298 mm 1'0"	481 mm 1'7"

*Width over tire bulge and includes tire growth.

950 Wheel Loader Specifications

Tire Options

Tire Brand	Bridgestone	Firestone	Maxam	Maxam	Maxam
Tire Size	750/65R25	23.5-25	23.5R25	23.5R25	23.5R25
Tread Type	L-3	L-5	L-2	L-2	L-3
Tread Pattern	VTS	SDT LD	MS202	MS203	MS302
Width over Tires – Maximum (empty)*	2930 mm 9'8"	2776 mm 9'2"	2810 mm 9'3"	2811 mm 9'3"	2820 mm 9'4"
Width over Tires – Maximum (loaded)*	2951 mm 9'9"	2799 mm 9'3"	2828 mm 9'4"	2823 mm 9'4"	2828 mm 9'4"
Change in Vertical Dimensions (average of front and rear)	19 mm 0.7"	62 mm 2.4"	11 mm 0.4"	-2 mm -0.1"	14 mm 0.5"
Change in Horizontal Reach	-4 mm -0.2"	-44 mm -1.7"	-7 mm -0.3"	-2 mm -0.1"	-15 mm -0.6"
Change in Clearance Circle to Outside of Tires	128 mm 5"	-24 mm -1"	5 mm 0.2"	0 mm 0"	4 mm 0.2"
Change in Clearance Circle to Inside of Tires	-128 mm -5"	24 mm 1"	-5 mm -0.2"	0 mm 0"	-4 mm -0.2"
Change in Operating Weight (without ballast)	737 kg 1,625 lb	500 kg 1,103 lb	-32 kg -71 lb	-188 kg -415 lb	0 kg 0 lb
Change in Static Tipping Load – Straight	490 kg 1,080 lb	333 kg 733 lb	-21 kg -47 lb	-125 kg -276 lb	0 kg 0 lb
Change in Static Tipping Load – Articulated	427 kg 942 lb	290 kg 639 lb	-19 kg -41 lb	-109 kg -240 lb	0 kg 0 lb
Rear Axle Oscillation Angle	±8 degrees	±8 degrees	±13 degrees	±13 degrees	±13 degrees
Maximum Single-Wheel Rise and Fall	298 mm 1'0"	298 mm 1'0"	481 mm 1'7"	481 mm 1'7"	481 mm 1'7"

*Width over tire bulge and includes tire growth.

Tire Brand	Maxam	Triangle	Triangle	Brawler	Brawler
Tire Size	23.5R25	23.5R25	23.5R25	23.5X25	23.5X25
Tread Type	L-5	L-3	L-4		
Tread Pattern	MS503	TL612	TB516	Smooth	Traction
Width over Tires – Maximum (empty)*	2780 mm 9'2"	2781 mm 9'2"	2785 mm 9'2"	2140 mm 7'1"	2140 mm 7'1"
Width over Tires – Maximum (loaded)*	2803 mm 9'3"	2809 mm 9'3"	2799 mm 9'3"	2140 mm 7'1"	2140 mm 7'1"
Change in Vertical Dimensions (average of front and rear)	58 mm 2.3"	1 mm 0"	43 mm 1.7"	65 mm 2.5"	65 mm 2.5"
Change in Horizontal Reach	-33 mm -1.3"	-8 mm -0.3"	-13 mm -0.5"	-15 mm -0.6"	-15 mm -0.6"
Change in Clearance Circle to Outside of Tires	-21 mm -0.8"	-15 mm -0.6"	-25 mm -1"	-684 mm -26.9"	-684 mm -26.9"
Change in Clearance Circle to Inside of Tires	21 mm 0.8"	15 mm 0.6"	25 mm 1"	684 mm 26.9"	684 mm 26.9"
Change in Operating Weight (without ballast)	472 kg 1,041 lb	-548 kg -1,208 lb	-452 kg -997 lb		
Change in Static Tipping Load – Straight	314 kg 692 lb	-366 kg -806 lb	-302 kg -665 lb		
Change in Static Tipping Load – Articulated	274 kg 604 lb	-319 kg -703 lb	-263 kg -580 lb		
Rear Axle Oscillation Angle	±8 degrees	±13 degrees	±13 degrees	±8 degrees	±8 degrees
Maximum Single-Wheel Rise and Fall	298 mm 1'0"	481 mm 1'7"	481 mm 1'7"	298 mm 1'0"	298 mm 1'0"

*Width over tire bulge and includes tire growth.

950 Wheel Loader Specifications


Bucket Fill Factors and Selection Guide

The bucket size must be chosen based on the density of the material and on the expected fill factor. The Cat Performance Series Buckets with longer floor, larger bucket opening, increased repository angle, rounded side boards and integrated spill guard demonstrate fill factors significantly higher than previous generation or non-Cat buckets. The actual volume handled by the machine is thus often larger than the rated capacity.

Loose Material		Fill Factor (%)*	Material Density
Earth/Clay		115	1.5-1.7
Sand and Gravel		115	1.5-1.7
Aggregate:	25-76 mm (1 to 3 in)	110	1.6-1.7
	19 mm (0.75 in) and smaller	105	1.8
Rock:	76 mm (3 in) and larger	100	1.6

*As a % of ISO 7546:1983 rated capacity.

Note: Fill Factors achieved will also depend on whether the product is washed or not washed.

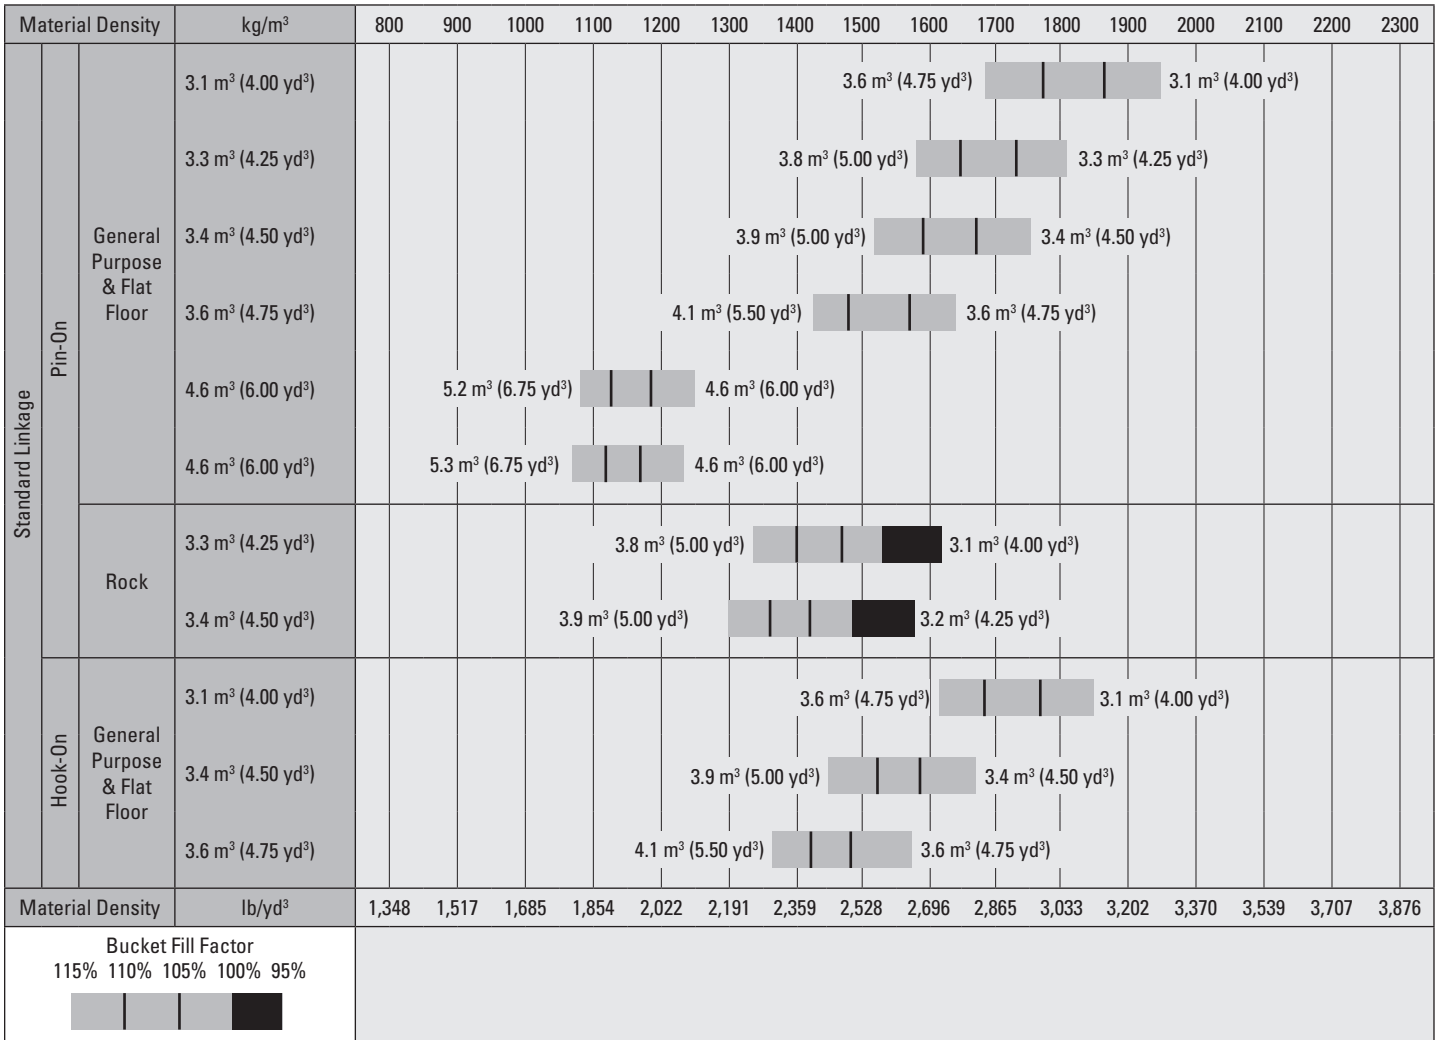

Note: All buckets are showing Bolt-On Edges.

950 Wheel Loader Specifications


Bucket Fill Factors and Selection Guide

The bucket size must be chosen based on the density of the material and on the expected fill factor. The Cat Performance Series Buckets with longer floor, larger bucket opening, increased repository angle, rounded side boards and integrated spill guard demonstrate fill factors significantly higher than previous generation or non-Cat buckets. The actual volume handled by the machine is thus often larger than the rated capacity.

Loose Material		Fill Factor (%)*	Material Density
Earth/Clay		115	1.5-1.7
Sand and Gravel		115	1.5-1.7
Aggregate:	25-76 mm (1 to 3 in)	110	1.6-1.7
	19 mm (0.75 in) and smaller	105	1.8
Rock:	76 mm (3 in) and larger	100	1.6

*As a % of ISO 7546:1983 rated capacity.

Note: Fill Factors achieved will also depend on whether the product is washed or not washed.

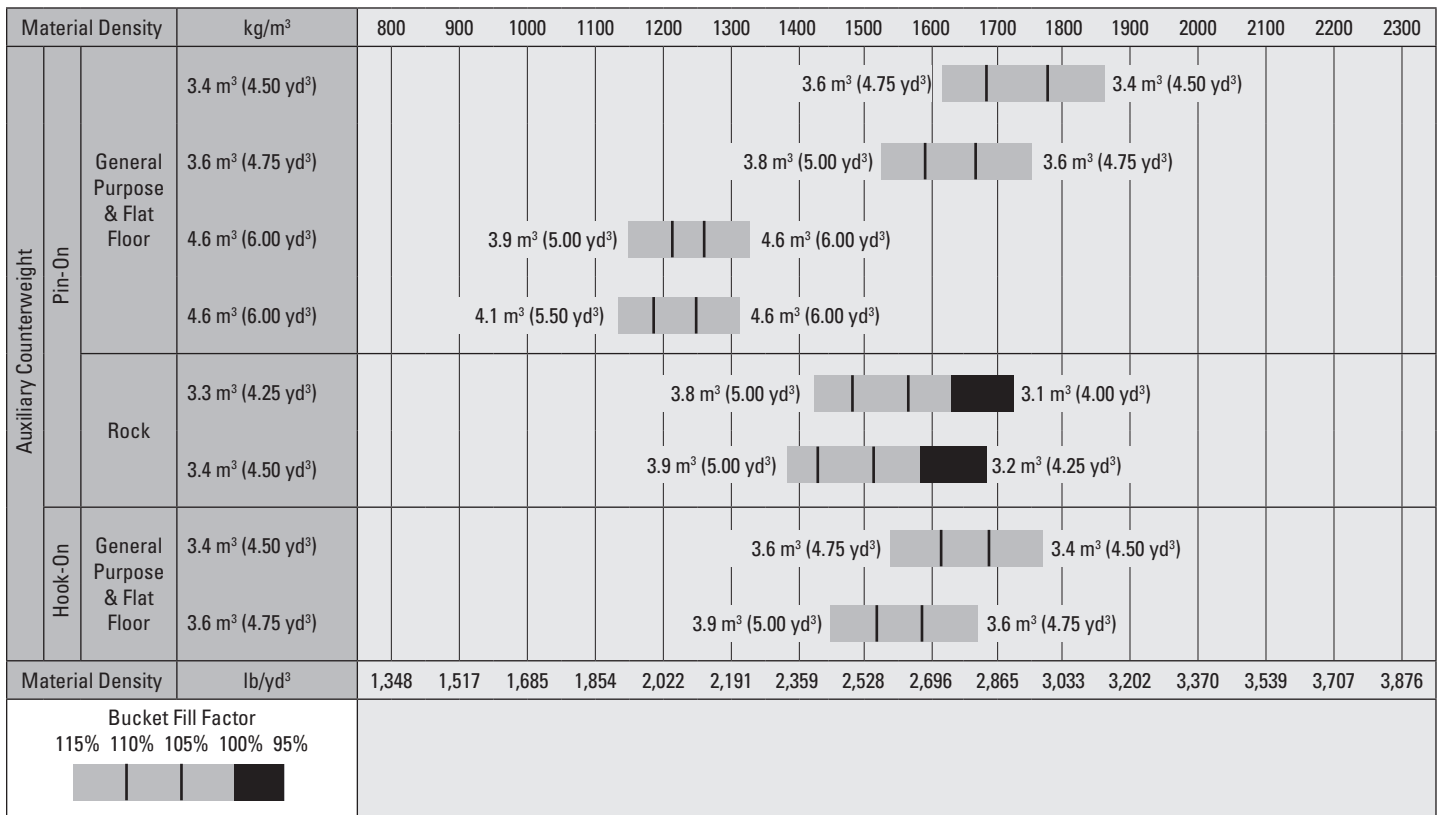

Note: All buckets are showing Bolt-On Edges.

950 Wheel Loader Specifications


Bucket Fill Factors and Selection Guide

The bucket size must be chosen based on the density of the material and on the expected fill factor. The Cat Performance Series Buckets with longer floor, larger bucket opening, increased repository angle, rounded side boards and integrated spill guard demonstrate fill factors significantly higher than previous generation or non-Cat buckets. The actual volume handled by the machine is thus often larger than the rated capacity.

Loose Material		Fill Factor (%)*	Material Density
Earth/Clay		115	1.5-1.7
Sand and Gravel		115	1.5-1.7
Aggregate:	25-76 mm (1 to 3 in)	110	1.6-1.7
	19 mm (0.75 in) and smaller	105	1.8
Rock:	76 mm (3 in) and larger	100	1.6

*As a % of ISO 7546:1983 rated capacity.

Note: Fill Factors achieved will also depend on whether the product is washed or not washed.

Material Density		kg/m ³	100	200	300	400	500	600	700	800	900	1000	1100	1200
Standard Linkage	Pin-On	9.2 m ³ (12.00 yd ³)					10.6 m ³ (13.75 yd ³)	9.2 m ³ (12.00 yd ³)						
		9.9 m ³ (13.00 yd ³)					11.4 m ³ (15.00 yd ³)	9.9 m ³ (13.00 yd ³)						
	Hook-On	9.2 m ³ (12.00 yd ³)					10.6 m ³ (13.75 yd ³)	9.2 m ³ (12.00 yd ³)						
		9.9 m ³ (13.00 yd ³)					11.4 m ³ (15.00 yd ³)	9.9 m ³ (13.00 yd ³)						
High Lift Linkage	Pin-On	9.2 m ³ (12.00 yd ³)					10.6 m ³ (13.75 yd ³)	9.2 m ³ (12.00 yd ³)						
		9.9 m ³ (13.00 yd ³)					11.4 m ³ (15.00 yd ³)	9.9 m ³ (13.00 yd ³)						
	Hook-On	9.2 m ³ (12.00 yd ³)					10.6 m ³ (13.75 yd ³)	9.2 m ³ (12.00 yd ³)						
		9.9 m ³ (13.00 yd ³)					11.4 m ³ (15.00 yd ³)	9.9 m ³ (13.00 yd ³)						
Auxiliary Counterweight	Pin-On	9.2 m ³ (12.00 yd ³)					10.6 m ³ (13.75 yd ³)	9.2 m ³ (12.00 yd ³)						
		9.9 m ³ (13.00 yd ³)					11.4 m ³ (15.00 yd ³)	9.9 m ³ (13.00 yd ³)						
	Hook-On	9.2 m ³ (12.00 yd ³)					10.6 m ³ (13.75 yd ³)	9.2 m ³ (12.00 yd ³)						
		9.9 m ³ (13.00 yd ³)					11.4 m ³ (15.00 yd ³)	9.9 m ³ (13.00 yd ³)						
Material Density	lb/yd ³	169	337	506	674	843	1,011	1,180	1,348	1,517	1,685	1,854	2,022	
Bucket Fill Factor														
115% 110% 105% 100% 95%														
														

Note: All buckets are showing Bolt-On Edges.

950 Wheel Loader Specifications

Operating Specifications – Buckets

Linkage		Standard Linkage							
Bucket Type		General Purpose – Pin-On							
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments
Capacity – Rated	m ³	3.10	3.10	3.30	3.30	3.40	3.40	3.60	3.60
	yd ³	4.00	4.00	4.25	4.25	4.50	4.50	4.75	4.75
Capacity – Rated at 110% Fill Factor	m ³	3.40	3.40	3.60	3.60	3.70	3.70	4.00	4.00
	yd ³	4.50	4.50	4.75	4.75	4.75	4.75	5.25	5.25
Width	mm	2927	2994	2927	2994	2927	2994	2927	2994
	ft/in	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2864	2746	2826	2707	2807	2688	2781	2661
	ft/in	9'4"	9'0"	9'3"	8'10"	9'2"	8'9"	9'1"	8'8"
17 † Reach at Maximum Lift and 45° Discharge	mm	1435	1546	1464	1574	1479	1588	1501	1610
	ft/in	4'8"	5'0"	4'9"	5'1"	4'10"	5'2"	4'11"	5'3"
Reach at Level Lift Arm and Bucket Level	mm	2694	2855	2743	2904	2767	2928	2802	2963
	ft/in	8'10"	9'4"	9'0"	9'6"	9'0"	9'7"	9'2"	9'8"
A † Digging Depth	mm	102	102	102	102	102	102	102	102
	in	4"	4"	4"	4"	4"	4"	4"	4"
12 † Overall Length	mm	8314	8487	8363	8536	8387	8560	8422	8595
	ft/in	27'4"	27'11"	27'6"	28'1"	27'7"	28'1"	27'8"	28'3"
B † Overall Height with Bucket at Maximum Lift	mm	5513	5513	5559	5559	5585	5585	5618	5618
	ft/in	18' 2"	18' 2"	18'3"	18'3"	18'4"	18'4"	18'6"	18'6"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6735	6821	6750	6836	6757	6844	6768	6854
	ft/in	22'2"	22'5"	22'2"	22'6"	22'3"	22'6"	22'3"	22'6"
Static Tipping Load, Straight (With tire deflection)	kg	12 991	12 850	12 869	12 728	12 826	12 684	12 755	12 612
	lb	28,640	28,330	28,372	28,060	28,276	27,963	28,120	27,805
Static Tipping Load, Straight (No tire deflection)	kg	13 743	13 601	13 624	13 481	13 581	13 438	13 512	13 368
	lb	30,300	29,986	30,036	29,720	29,943	29,626	29,790	29,471
Static Tipping Load, Articulated (With tire deflection)	kg	11 200	11 059	11 084	10 942	11 042	10 900	10 975	10 832
	lb	24,693	24,383	24,436	24,124	24,344	24,031	24,195	23,881
Static Tipping Load, Articulated (No tire deflection)	kg	11 960	11 818	11 846	11 702	11 805	11 661	11 739	11 595
	lb	26,368	26,054	26,116	25,800	26,026	25,709	25,881	25,563
Breakout Force (§)	kN	181	179	173	172	170	169	165	164
	lbf	40,689	40,400	39,063	38,777	38,316	38,030	37,271	36,987
Operating Weight*	kg	19 261	19 369	19 330	19 438	19 354	19 462	19 390	19 498
	lb	42,462	42,700	42,615	42,853	42,668	42,906	42,748	42,986

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Standard Linkage					
Bucket Type		General Purpose – Hook-On – Fusion™					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments
Capacity – Rated	m ³	3.10	3.10	3.40	3.40	3.60	3.60
	yd ³	4.00	4.00	4.50	4.50	4.75	4.75
Capacity – Rated at 110% Fill Factor	m ³	3.40	3.40	3.70	3.70	4.00	4.00
	yd ³	4.50	4.50	4.75	4.75	5.25	5.25
Width	mm	2927	2994	2927	2994	2927	2994
	ft/in	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2825	2706	2767	2648	2741	2621
	ft/in	9'3"	8'10"	9'0"	8'8"	8'11"	8'7"
17 † Reach at Maximum Lift and 45° Discharge	mm	1481	1591	1524	1633	1545	1654
	ft/in	4'10"	5'2"	5'0"	5'4"	5'0"	5'5"
Reach at Level Lift Arm and Bucket Level	mm	2754	2915	2827	2988	2862	3023
	ft/in	9'0"	9'6"	9'3"	9'9"	9'4"	9'11"
A † Digging Depth	mm	102	102	102	102	102	102
	in	4"	4"	4"	4"	4"	4"
12 † Overall Length	mm	8374	8547	8447	8620	8482	8655
	ft/in	27'6"	28'1"	27'9"	28'4"	27'10"	28'5"
B † Overall Height with Bucket at Maximum Lift	mm	5546	5546	5618	5618	5652	5652
	ft/in	18'3"	18'3"	18'6"	18'6"	18'7"	18'7"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6749	6836	6772	6859	6783	6870
	ft/in	22'2"	22'6"	22'3"	22'7"	22'4"	22'7"
Static Tipping Load, Straight (With tire deflection)	kg	12 402	12 262	12 268	12 127	12 202	12 060
	lb	27,342	27,033	27,048	26,736	26,902	26,589
Static Tipping Load, Straight (No tire deflection)	kg	13 143	13 001	13 013	12 870	12 949	12 805
	lb	28,976	28,663	28,689	28,373	28,547	28,230
Static Tipping Load, Articulated (With tire deflection)	kg	10 638	10 498	10 511	10 370	10 449	10 307
	lb	23,454	23,144	23,174	22,862	23,036	22,723
Static Tipping Load, Articulated (No tire deflection)	kg	11 387	11 245	11 263	11 120	11 203	11 059
	lb	25,105	24,792	24,832	24,517	24,698	24,381
Breakout Force (§)	kN	172	171	162	161	158	157
	lbf	38,737	38,451	36,582	36,299	35,623	35,340
Operating Weight*	kg	19 730	19 838	19 800	19 908	19 834	19 942
	lb	43,498	43,736	43,652	43,890	43,727	43,965

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Standard Linkage							Flat Floor – Pin-On – Light Material
Bucket Type	Edge Type	Flat Floor – Pin-On							
		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	
Capacity – Rated	m ³	3.30	3.30	3.40	3.40	3.60	3.60	4.60	
	yd ³	4.25	4.25	4.50	4.50	4.75	4.75	6.00	
Capacity – Rated at 110% Fill Factor	m ³	3.60	3.60	3.70	3.70	4.00	4.00	5.00	
	yd ³	4.75	4.75	4.75	4.75	5.25	5.25	6.50	
Width	mm	2927	2994	2927	2994	2927	2994	3338	
	ft/in	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"	10'11"	
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2777	2652	2749	2624	2717	2592	2622	
	ft/in	9'1"	8'8"	9'0"	8'7"	8'11"	8'6"	8'7"	
17 † Reach at Maximum Lift and 45° Discharge	mm	1384	1486	1412	1514	1444	1546	1553	
	ft/in	4'6"	4'10"	4'7"	4'11"	4'8"	5'0"	5'1"	
Reach at Level Lift Arm and Bucket Level	mm	2737	2898	2777	2938	2822	2983	2967	
	ft/in	8'11"	9'6"	9'1"	9'7"	9'3"	9'9"	9'8"	
A † Digging Depth	mm	102	102	102	102	102	102	92	
	in	4"	4"	4"	4"	4"	4"	3.6"	
12 † Overall Length	mm	8357	8530	8397	8570	8442	8615	8580	
	ft/in	27'6"	28'0"	27'7"	28'2"	27'9"	28'4"	28'2"	
B † Overall Height with Bucket at Maximum Lift	mm	5515	5515	5554	5554	5602	5602	5502	
	ft/in	18'2"	18'2"	18'3"	18'3"	18'5"	18'5"	18'1"	
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6748	6834	6760	6847	6774	6861	6999	
	ft/in	22'2"	22'6"	22'3"	22'6"	22'3"	22'7"	23'0"	
Static Tipping Load, Straight (With tire deflection)	kg	12 751	12 611	12 672	12 531	12 584	12 442	12 269	
	lb	28,112	27,803	27,938	27,627	27,743	27,431	27,048	
Static Tipping Load, Straight (No tire deflection)	kg	13 486	13 344	13 408	13 266	13 322	13 179	12 988	
	lb	29,732	29,420	29,561	29,247	29,371	29,055	28,635	
Static Tipping Load, Articulated (With tire deflection)	kg	10 984	10 844	10 909	10 768	10 825	10 684	10 542	
	lb	24,217	23,908	24,051	23,741	23,866	23,554	23,242	
Static Tipping Load, Articulated (No tire deflection)	kg	11 727	11 585	11 653	11 511	11 572	11 428	11 271	
	lb	25,854	25,542	25,692	25,378	25,511	25,196	24,848	
Breakout Force (§)	kN	174	173	169	167	163	162	147	
	lbf	39,241	38,955	38,002	37,717	36,690	36,407	33,132	
Operating Weight*	kg	19 316	19 424	19 356	19 464	19 400	19 508	19 480	
	lb	42,584	42,822	42,672	42,910	42,769	43,007	42,945	

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets *(continued)*

Linkage		Standard Linkage			
Bucket Type		Flat Floor – Hook-On – Fusion			
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments
Capacity – Rated	m ³	3.40	3.40	3.60	3.60
	yd ³	4.50	4.50	4.75	4.75
Capacity – Rated at 110% Fill Factor	m ³	3.70	3.70	4.00	4.00
	yd ³	4.75	4.75	5.25	5.25
Width	mm	2927	2994	2927	2994
	ft/in	9'7"	9'9"	9'7"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2707	2581	2675	2549
	ft/in	8'10"	8'5"	8'9"	8'4"
17 † Reach at Maximum Lift and 45° Discharge	mm	1455	1557	1486	1589
	ft/in	4'9"	5'1"	4'10"	5'2"
Reach at Level Lift Arm and Bucket Level	mm	2837	2998	2882	3043
	ft/in	9'3"	9'10"	9'5"	9'11"
A † Digging Depth	mm	102	102	102	102
	in	4"	4"	4"	4"
12 † Overall Length	mm	8457	8630	8502	8675
	ft/in	27'9"	28'4"	27'11"	28'6"
B † Overall Height with Bucket at Maximum Lift	mm	5588	5588	5631	5631
	ft/in	18'4"	18'4"	18'6"	18'6"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6775	6862	6789	6877
	ft/in	22'3"	22'7"	22'4"	22'7"
Static Tipping Load, Straight (With tire deflection)	kg	12 124	11 983	12 041	11 900
	lb	26,729	26,419	26,546	26,235
Static Tipping Load, Straight (No tire deflection)	kg	12 850	12 708	12 768	12 626
	lb	28,330	28,017	28,150	27,835
Static Tipping Load, Articulated (With tire deflection)	kg	10 386	10 246	10 308	10 167
	lb	22,898	22,589	22,726	22,415
Static Tipping Load, Articulated (No tire deflection)	kg	11 121	10 979	11 044	10 901
	lb	24,518	24,205	24,349	24,034
Breakout Force (§)	kN	161	160	156	154
	lbf	36,293	36,010	35,090	34,809
Operating Weight*	kg	19 803	19 911	19 843	19 951
	lb	43,657	43,895	43,745	43,983

*Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

***Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Standard Linkage			
Bucket Type		Multi-Purpose – Pin-On		Multi-Purpose – Hook-On – Fusion	
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments
Capacity – Rated	m ³	2.90	2.90	2.90	2.90
	yd ³	3.75	3.75	3.75	3.75
Capacity – Rated at 110% Fill Factor	m ³	3.20	3.20	3.20	3.20
	yd ³	4.25	4.25	4.25	4.25
Width	mm	2943	3020	3007	3000
	ft/in	9'7"	9'10"	9'10"	9'10"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	3003	2877	2964	2854
	ft/in	9'10"	9'5"	9'8"	9'4"
17 † Reach at Maximum Lift and 45° Discharge	mm	1448	1574	1537	1657
	ft/in	4'9"	5'1"	5'0"	5'5"
Reach at Level Lift Arm and Bucket Level	mm	2590	2766	2685	2846
	ft/in	8'5"	9'0"	8'9"	9'4"
A † Digging Depth	mm	103	103	82	82
	in	4"	4"	3.2"	3.2"
12 † Overall Length	mm	8211	8407	8290	8465
	ft/in	27'0"	27'7"	27'3"	27'10"
B † Overall Height with Bucket at Maximum Lift	mm	5321	5321	5393	5393
	ft/in	17'6"	17'6"	17'9"	17'9"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6712	6811	6756	6810
	ft/in	22'1"	22'5"	22'2"	22'5"
Static Tipping Load, Straight (With tire deflection)	kg	12,596	12,423	11,895	11,766
	lb	27,771	27,389	26,224	25,940
Static Tipping Load, Straight (No tire deflection)	kg	13,334	13,159	12,629	12,498
	lb	29,397	29,010	27,842	27,554
Static Tipping Load, Articulated (With tire deflection)	kg	10,820	10,647	10,148	10,019
	lb	23,855	23,473	22,373	22,088
Static Tipping Load, Articulated (No tire deflection)	kg	11,565	11,390	10,890	10,759
	lb	25,497	25,111	24,009	23,721
Breakout Force (§)	kN	196	194	180	178
	lbf	44,133	43,733	40,511	40,222
Operating Weight*	kg	19,605	19,740	20,160	20,260
	lb	43,221	43,518	44,445	44,664

*Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

***Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets *(continued)*

Linkage		Standard Linkage			
Bucket Type		High Dump – Pin-On			
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	5.10	6.10	7.60	9.20
	yd ³	6.75	8.00	10.00	12.00
Capacity – Rated at 110% Fill Factor	m ³	5.60	6.70	8.40	10.10
	yd ³	7.25	8.75	11.00	13.25
Width	mm	3029	2910	3350	3350
	ft/in	9'11"	9'6"	10'11"	10'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2451	2325	2254	2112
	ft/in	8'0"	7'7"	7'4"	6'11"
17 † Reach at Maximum Lift and 45° Discharge	mm	1721	1742	1908	2049
	ft/in	5'7"	5'8"	6'3"	6'8"
Reach at Level Lift Arm and Bucket Level	mm	3207	3311	3478	3678
	ft/in	10'6"	10'10"	11'4"	12'0"
A † Digging Depth	mm	94	168	72	72
	in	3.7"	6.6"	2.8"	2.8"
12 † Overall Length	mm	8821	8978	9098	9298
	ft/in	29'0"	29'6"	29'11"	30'7"
B † Overall Height with Bucket at Maximum Lift	mm	6066	6074	6049	6250
	ft/in	19'11"	20'0"	19'11"	20'7"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6938	6947	7171	7239
	ft/in	22'10"	22'10"	23'7"	23'9"
Static Tipping Load, Straight (With tire deflection)	kg	11 226	10 289	10 698	10 371
	lb	24,749	22,684	23,585	22,866
Static Tipping Load, Straight (No tire deflection)	kg	11 958	11 007	11 463	11 140
	lb	26,365	24,267	25,272	24,561
Static Tipping Load, Articulated (With tire deflection)	kg	9544	8640	9009	8700
	lb	21,041	19,048	19,861	19,180
Static Tipping Load, Articulated (No tire deflection)	kg	10 285	9366	9781	9476
	lb	22,675	20,649	21,564	20,892
Breakout Force (§)	kN	123	114	108	96
	lbf	27,694	25,628	24,436	21,789
Operating Weight*	kg	20 108	20 870	20 669	20 842
	lb	44,329	46,009	45,566	45,948

*Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

***Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Standard Linkage		
Bucket Type		High Dump – Hook-On – Fusion		
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	6.10	7.60	9.20
	yd ³	8.00	10.00	12.00
Capacity – Rated at 110% Fill Factor	m ³	6.70	8.40	10.10
	yd ³	8.75	11.00	13.25
Width	mm	3037	3350	3350
	ft/in	9'11"	10'11"	10'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2279	2208	2066
	ft/in	7'5"	7'2"	6'9"
17 † Reach at Maximum Lift and 45° Discharge	mm	1882	1954	2095
	ft/in	6'2"	6'4"	6'10"
Reach at Level Lift Arm and Bucket Level	mm	3442	3543	3743
	ft/in	11'3"	11'7"	12'3"
A † Digging Depth	mm	102	72	72
	in	4"	2.8"	2.8"
12 † Overall Length	mm	9062	9163	9363
	ft/in	29'9"	30'1"	30'9"
B † Overall Height with Bucket at Maximum Lift	mm	6023	6089	6290
	ft/in	19'10"	20'0"	20'8"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7022	7193	7262
	ft/in	23'1"	23'8"	23'10"
Static Tipping Load, Straight (With tire deflection)	kg	9956	10 058	9740
	lb	21,949	22,174	21,474
Static Tipping Load, Straight (No tire deflection)	kg	10 651	10 806	10 492
	lb	23,481	23,824	23,131
Static Tipping Load, Articulated (With tire deflection)	kg	8348	8394	8094
	lb	18,406	18,506	17,845
Static Tipping Load, Articulated (No tire deflection)	kg	9054	9151	8853
	lb	19,960	20,174	19,519
Breakout Force (§)	kN	105	104	93
	lbf	23,767	23,412	20,922
Operating Weight*	kg	21 017	21 236	21 408
	lb	46,333	46,816	47,195

*Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

***Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Standard Linkage			
Bucket Type		Woodchip – Pin-On		Woodchip – Hook-On – Fusion	
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	9.20	9.90	9.20	9.90
	yd ³	12.00	13.00	12.00	13.00
Capacity – Rated at 110% Fill Factor	m ³	10.10	10.90	10.10	10.90
	yd ³	13.25	14.25	13.25	14.25
Width	mm	3330	3330	3330	3330
	ft/in	10'11"	10'11"	10'11"	10'11"
16† Dump Clearance at Maximum Lift and 45° Discharge	mm	2237	2162	2143	2139
	ft/in	7'4"	7'1"	7'0"	7'0"
17† Reach at Maximum Lift and 45° Discharge	mm	1932	2007	2025	2029
	ft/in	6'4"	6'7"	6'7"	6'7"
Reach at Level Lift Arm and Bucket Level	mm	3507	3613	3639	3645
	ft/in	11'6"	11'10"	11'11"	11'11"
A† Digging Depth	mm	97	97	97	97
	in	3.8"	3.8"	3.8"	3.8"
12† Overall Length	mm	9123	9229	9255	9261
	ft/in	30'0"	30'4"	30'5"	30'5"
B† Overall Height with Bucket at Maximum Lift	mm	6240	6332	6298	6349
	ft/in	20'6"	20'10"	20'8"	20'10"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7170	7206	7215	7217
	ft/in	23'7"	23'8"	23'9"	23'9"
Static Tipping Load, Straight (With tire deflection)	kg	11 462	11 386	10 199	10 249
	lb	25,269	25,102	22,485	22,595
Static Tipping Load, Straight (No tire deflection)	kg	12 254	12 187	10 894	10 952
	lb	27,016	26,869	24,017	24,147
Static Tipping Load, Articulated (With tire deflection)	kg	9761	9678	8614	8658
	lb	21,519	21,337	18,991	19,089
Static Tipping Load, Articulated (No tire deflection)	kg	10 560	10 487	9320	9372
	lb	23,281	23,119	20,547	20,663
Breakout Force (§)	kN	104	98	97	96
	lbf	23,478	22,134	21,897	21,762
Operating Weight*	kg	19 942	20 034	20 577	20 538
	lb	43,964	44,166	45,363	45,277

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Standard Linkage			
Bucket Type		Rock, Spade – Pin-On***	Rock, Spade – Pin-On – Abrasion***	Side Dump – Pin-On	Side Dump – Hook-On – Fusion
Edge Type		Teeth and Segments	Teeth and Segments	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	3.40	3.30	2.90	2.90
	yd ³	4.50	4.25	3.75	3.75
Capacity – Rated at 110% Fill Factor	m ³	3.70	3.60	3.20	3.20
	yd ³	4.75	4.75	4.25	4.25
Width	mm	2995	2937	3220	3220
	ft/in	9'9"	9'7"	10'6"	10'6"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2643	2809	2727	2727
	ft/in	8'8"	9'2"	8'11"	8'11"
17 † Reach at Maximum Lift and 45° Discharge	mm	1695	1506	1428	1427
	ft/in	5'6"	4'11"	4'8"	4'8"
Reach at Level Lift Arm and Bucket Level	mm	3070	2819	2804	2803
	ft/in	10'0"	9'2"	9'2"	9'2"
A † Digging Depth	mm	39	36	107	107
	in	1.5"	1.4"	4.2"	4.2"
12 † Overall Length	mm	8691	8439	8428	8427
	ft/in	28'7"	27'9"	27'8"	27'8"
B † Overall Height with Bucket at Maximum Lift	mm	5641	5641	5516	5508
	ft/in	18'7"	18'7"	18'2"	18'1"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6898	6792	6884	6898
	ft/in	22'8"	22'4"	22'8"	22'8"
Static Tipping Load, Straight (With tire deflection)	kg	12 991	13 198	11 720	11 436
	lb	28,641	29,096	25,838	25,212
Static Tipping Load, Straight (No tire deflection)	kg	13 786	13 995	12 450	12 164
	lb	30,394	30,854	27,449	26,819
Static Tipping Load, Articulated (With tire deflection)	kg	11 143	11 350	10 006	9722
	lb	24,566	25,022	22,059	21,434
Static Tipping Load, Articulated (No tire deflection)	kg	11 945	12 154	10 746	10 460
	lb	26,335	26,796	23,691	23,060
Breakout Force (§)	kN	155	179	160	162
	lbf	35,003	40,312	36,024	36,584
Operating Weight*	kg	20 343	20 188	19 943	20 399
	lb	44,848	44,507	43,966	44,971

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		High Lift Linkage							
Bucket Type		General Purpose – Pin-On							
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments
Capacity – Rated	m ³	3.10	3.10	3.30	3.30	3.40	3.40	3.60	3.60
	yd ³	4.00	4.00	4.25	4.25	4.50	4.50	4.75	4.75
Capacity – Rated at 110% Fill Factor	m ³	3.40	3.40	3.60	3.60	3.70	3.70	4.00	4.00
	yd ³	4.50	4.50	4.75	4.75	4.75	4.75	5.25	5.25
Width	mm	2927	2994	2927	2994	2927	2994	2927	2994
	ft/in	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	3369	3251	3331	3212	3313	3193	3286	3167
	ft/in	11'0"	10'8"	10'11"	10'6"	10'10"	10'5"	10'9"	10'4"
17 † Reach at Maximum Lift and 45° Discharge	mm	1471	1581	1499	1609	1514	1624	1536	1645
	ft/in	4'9"	5'2"	4'11"	5'3"	4'11"	5'3"	5'0"	5'4"
Reach at Level Lift Arm and Bucket Level	mm	3069	3230	3118	3279	3142	3303	3177	3338
	ft/in	10'0"	10'7"	10'2"	10'9"	10'3"	10'10"	10'5"	10'11"
A † Digging Depth	mm	106	106	106	106	106	106	106	106
	in	4.1"	4.1"	4.1"	4.1"	4.1"	4.1"	4.1"	4.1"
12 † Overall Length	mm	8795	8966	8844	9015	8868	9039	8903	9074
	ft/in	28'11"	29'5"	29'1"	29'7"	29'2"	29'8"	29'3"	29'10"
B † Overall Height with Bucket at Maximum Lift	mm	6018	6018	6064	6064	6090	6090	6124	6124
	ft/in	19'9"	19'9"	19'11"	19'11"	20'0"	20'0"	20'2"	20'2"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6937	7027	6953	7043	6960	7051	6972	7063
	ft/in	22'10"	23'1"	22'10"	23'2"	22'11"	23'2"	22'11"	23'3"
Static Tipping Load, Straight (With tire deflection)	kg	11 512	11 376	11 399	11 262	11 358	11 220	11 292	11 154
	lb	25,381	25,080	25,131	24,828	25,041	24,737	24,895	24,591
Static Tipping Load, Straight (No tire deflection)	kg	12 099	11 961	11 987	11 849	11 947	11 808	11 882	11 743
	lb	26,674	26,371	26,427	26,122	26,339	26,033	26,196	25,889
Static Tipping Load, Articulated (With tire deflection)	kg	9851	9714	9742	9605	9702	9565	9640	9501
	lb	21,718	21,417	21,478	21,175	21,391	21,087	21,253	20,948
Static Tipping Load, Articulated (No tire deflection)	kg	10 455	10 317	10 347	10 209	10 309	10 170	10 247	10 108
	lb	23,049	22,746	22,812	22,507	22,727	22,421	22,592	22,285
Breakout Force (§)	kN	172	171	165	164	162	160	157	156
	lbf	38,686	38,433	37,134	36,882	36,421	36,169	35,424	35,172
Operating Weight*	kg	19 921	20 029	19 991	20 099	20 015	20 123	20 051	20 159
	lb	43,918	44,156	44,071	44,309	44,124	44,362	44,204	44,442

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		High Lift Linkage					
Bucket Type		General Purpose – Hook-On – Fusion					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments
Capacity – Rated	m ³	3.10	3.10	3.40	3.40	3.60	3.60
	yd ³	4.00	4.00	4.50	4.50	4.75	4.75
Capacity – Rated at 110% Fill Factor	m ³	3.40	3.40	3.70	3.70	4.00	4.00
	yd ³	4.50	4.50	4.75	4.75	5.25	5.25
Width	mm	2927	2994	2927	2994	2927	2994
	ft/in	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	3330	3212	3273	3154	3246	3127
	ft/in	10'11"	10'6"	10'8"	10'4"	10'7"	10'3"
17 † Reach at Maximum Lift and 45° Discharge	mm	1516	1627	1559	1669	1581	1690
	ft/in	4'11"	5'4"	5'1"	5'5"	5'2"	5'6"
Reach at Level Lift Arm and Bucket Level	mm	3129	3290	3202	3363	3237	3398
	ft/in	10'3"	10'9"	10'6"	11'0"	10'7"	11'1"
A † Digging Depth	mm	106	106	106	106	106	106
	in	4.1"	4.1"	4.1"	4.1"	4.1"	4.1"
12 † Overall Length	mm	8855	9026	8928	9099	8963	9134
	ft/in	29'1"	29'8"	29'4"	29'11"	29'5"	30'0"
B † Overall Height with Bucket at Maximum Lift	mm	6051	6051	6123	6123	6157	6157
	ft/in	19'11"	19'11"	20'2"	20'2"	20'3"	20'3"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6946	7037	6970	7061	6981	7073
	ft/in	22'10"	23'2"	22'11"	23'2"	22'11"	23'3"
Static Tipping Load, Straight (With tire deflection)	kg	10 956	10 820	10 832	10 694	10 770	10 633
	lb	24,154	23,854	23,880	23,578	23,745	23,441
Static Tipping Load, Straight (No tire deflection)	kg	11 535	11 398	11 414	11 275	11 354	11 215
	lb	25,431	25,129	25,163	24,858	25,031	24,725
Static Tipping Load, Articulated (With tire deflection)	kg	9317	9180	9198	9061	9140	9002
	lb	20,540	20,240	20,279	19,976	20,151	19,847
Static Tipping Load, Articulated (No tire deflection)	kg	9913	9776	9798	9659	9741	9602
	lb	21,856	21,554	21,601	21,296	21,475	21,169
Breakout Force (§)	kN	163	162	154	153	150	149
	lbf	36,824	36,572	34,767	34,516	33,852	33,600
Operating Weight*	kg	20 391	20 499	20 461	20 569	20 495	20 603
	lb	44,954	45,192	45,108	45,346	45,183	45,421

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		High Lift Linkage						
Bucket Type	Edge Type	Flat Floor – Pin-On						Flat Floor – Pin-On – Light Material
		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	
Capacity – Rated	m ³	3.30	3.30	3.40	3.40	3.60	3.60	4.60
	yd ³	4.25	4.25	4.50	4.50	4.75	4.75	6.00
Capacity – Rated at 110% Fill Factor	m ³	3.60	3.60	3.70	3.70	4.00	4.00	5.00
	yd ³	4.75	4.75	4.75	4.75	5.25	5.25	6.50
Width	mm	2927	2994	2927	2994	2927	2994	3338
	ft/in	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"	10'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	3283	3157	3255	3129	3223	3097	3127
	ft/in	10'9"	10'4"	10'8"	10'3"	10'6"	10'1"	10'3"
17 † Reach at Maximum Lift and 45° Discharge	mm	1419	1522	1448	1550	1479	1582	1589
	ft/in	4'7"	4'11"	4'9"	5'1"	4'10"	5'2"	5'2"
Reach at Level Lift Arm and Bucket Level	mm	3112	3273	3152	3313	3197	3358	3342
	ft/in	10'2"	10'8"	10'4"	10'10"	10'5"	11'0"	10'11"
A † Digging Depth	mm	106	106	106	106	106	106	96
	in	4.1"	4.1"	4.1"	4.1"	4.1"	4.1"	3.8"
12 † Overall Length	mm	8838	9009	8878	9049	8923	9094	9062
	ft/in	29'0"	29'7"	29'2"	29'9"	29'4"	29'11"	29'9"
B † Overall Height with Bucket at Maximum Lift	mm	6020	6020	6059	6059	6108	6108	6007
	ft/in	19'9"	19'9"	19'11"	19'11"	20'1"	20'1"	19'9"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6951	7042	6964	7055	6978	7070	7198
	ft/in	22'10"	23'2"	22'11"	23'2"	22'11"	23'3"	23'8"
Static Tipping Load, Straight (With tire deflection)	kg	11 313	11 177	11 240	11 103	11 158	11 021	10 893
	lb	24,942	24,643	24,781	24,480	24,600	24,298	24,015
Static Tipping Load, Straight (No tire deflection)	kg	11 888	11 751	11 816	11 679	11 736	11 598	11 459
	lb	26,209	25,908	26,051	25,747	25,874	25,569	25,263
Static Tipping Load, Articulated (With tire deflection)	kg	9671	9535	9601	9464	9523	9386	9284
	lb	21,321	21,021	21,167	20,866	20,996	20,693	20,468
Static Tipping Load, Articulated (No tire deflection)	kg	10 263	10 126	10 195	10 057	10 119	9980	9868
	lb	22,627	22,325	22,476	22,173	22,308	22,003	21,755
Breakout Force (§)	kN	165	164	160	159	155	154	140
	lbf	37,304	37,051	36,121	35,869	34,869	34,618	31,463
Operating Weight*	kg	19 976	20 084	20 016	20 124	20 060	20 168	20 140
	lb	44,040	44,278	44,128	44,366	44,225	44,463	44,401

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		High Lift Linkage			
Bucket Type		Flat Floor – Hook-On – Fusion			
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments
Capacity – Rated	m ³	3.40	3.40	3.60	3.60
	yd ³	4.50	4.50	4.75	4.75
Capacity – Rated at 110% Fill Factor	m ³	3.70	3.70	4.00	4.00
	yd ³	4.75	4.75	5.25	5.25
Width	mm	2927	2994	2927	2994
	ft/in	9'7"	9'9"	9'7"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	3212	3087	3180	3055
	ft/in	10'6"	10'1"	10'5"	10'0"
17 † Reach at Maximum Lift and 45° Discharge	mm	1490	1592	1522	1624
	ft/in	4'10"	5'2"	4'11"	5'3"
Reach at Level Lift Arm and Bucket Level	mm	3212	3373	3257	3418
	ft/in	10'6"	11'0"	10'8"	11'2"
A † Digging Depth	mm	106	106	106	106
	in	4.1"	4.1"	4.1"	4.1"
12 † Overall Length	mm	8938	9109	8983	9154
	ft/in	29'4"	29'11"	29'6"	30'1"
B † Overall Height with Bucket at Maximum Lift	mm	6094	6094	6137	6137
	ft/in	20'0"	20'0"	20'2"	20'2"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6973	7065	6988	7080
	ft/in	22'11"	23'3"	23'0"	23'3"
Static Tipping Load, Straight (With tire deflection)	kg	10 721	10 584	10 644	10 507
	lb	23,635	23,335	23,467	23,165
Static Tipping Load, Straight (No tire deflection)	kg	11 290	11 153	11 215	11 077
	lb	24,891	24,589	24,725	24,421
Static Tipping Load, Articulated (With tire deflection)	kg	9103	8966	9030	8893
	lb	20,069	19,768	19,909	19,607
Static Tipping Load, Articulated (No tire deflection)	kg	9690	9553	9619	9481
	lb	21,364	21,062	21,207	20,903
Breakout Force (§)	kN	153	152	148	147
	lbf	34,491	34,239	33,343	33,092
Operating Weight*	kg	20 463	20 571	20 503	20 611
	lb	45,113	45,351	45,201	45,439

*Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

***Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		High Lift Linkage			
Bucket Type		High Dump – Pin-On			
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	5.10	6.10	7.60	9.20
	yd ³	6.75	8.00	10.00	12.00
Capacity – Rated at 110% Fill Factor	m ³	5.60	6.70	8.40	10.10
	yd ³	7.25	8.75	11.00	13.25
Width	mm	3029	2910	3350	3350
	ft/in	9'11"	9'6"	10'11"	10'11"
16† Dump Clearance at Maximum Lift and 45° Discharge	mm	2956	2830	2759	2617
	ft/in	9'8"	9'3"	9'0"	8'7"
17† Reach at Maximum Lift and 45° Discharge	mm	1757	1778	1943	2085
	ft/in	5'9"	5'10"	6'4"	6'10"
Reach at Level Lift Arm and Bucket Level	mm	3582	3686	3853	4053
	ft/in	11'9"	12'1"	12'7"	13'3"
A† Digging Depth	mm	99	173	76	76
	in	3.9"	6.8"	3"	3"
12† Overall Length	mm	9303	9452	9579	9779
	ft/in	30'7"	31'1"	31'6"	32'1"
B† Overall Height with Bucket at Maximum Lift	mm	6571	6580	6554	6755
	ft/in	21'7"	21'8"	21'7"	22'2"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7146	7165	7380	7450
	ft/in	23'6"	23'7"	24'3"	24'6"
Static Tipping Load, Straight (With tire deflection)	kg	9911	9014	9362	9058
	lb	21,851	19,874	20,640	19,970
Static Tipping Load, Straight (No tire deflection)	kg	10487	9581	9961	9660
	lb	23,121	21,123	21,960	21,297
Static Tipping Load, Articulated (With tire deflection)	kg	8342	7474	7788	7500
	lb	18,391	16,477	17,171	16,535
Static Tipping Load, Articulated (No tire deflection)	kg	8936	8057	8405	8120
	lb	19,702	17,764	18,531	17,902
Breakout Force (§)	kN	116	108	102	91
	lbf	26,251	24,376	23,126	20,601
Operating Weight*	kg	20 768	21 530	21 329	21 502
	lb	45,785	47,465	47,022	47,404

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		High Lift Linkage		
Bucket Type		High Dump – Hook-On – Fusion		
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	6.10	7.60	9.20
	yd ³	8.00	10.00	12.00
Capacity – Rated at 110% Fill Factor	m ³	6.70	8.40	10.10
	yd ³	8.75	11.00	13.25
Width	mm	3037	3350	3350
	ft/in	9'11"	10'11"	10'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2784	2713	2572
	ft/in	9'1"	8'10"	8'5"
17 † Reach at Maximum Lift and 45° Discharge	mm	1918	1989	2131
	ft/in	6'3"	6'6"	6'11"
Reach at Level Lift Arm and Bucket Level	mm	3817	3918	4118
	ft/in	12'6"	12'10"	13'6"
A † Digging Depth	mm	106	76	76
	in	4.1"	3"	3"
12 † Overall Length	mm	9543	9644	9844
	ft/in	31'4"	31'8"	32'4"
B † Overall Height with Bucket at Maximum Lift	mm	6529	6594	6795
	ft/in	21'6"	21'8"	22'4"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7224	7392	7462
	ft/in	23'9"	24'3"	24'6"
Static Tipping Load, Straight (With tire deflection)	kg	8730	8749	8453
	lb	19,246	19,288	18,636
Static Tipping Load, Straight (No tire deflection)	kg	9282	9336	9043
	lb	20,463	20,584	19,937
Static Tipping Load, Articulated (With tire deflection)	kg	7223	7197	6916
	lb	15,924	15,866	15,248
Static Tipping Load, Articulated (No tire deflection)	kg	7794	7802	7524
	lb	17,183	17,202	16,589
Breakout Force (§)	kN	100	98	87
	lbf	22,500	22,144	19,768
Operating Weight*	kg	21 677	21 896	22 068
	lb	47,789	48,272	48,651

*Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

***Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		High Lift Linkage			
Bucket Type		Woodchip – Pin-On		Woodchip – Hook-On – Fusion	
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	9.20	9.90	9.20	9.90
	yd ³	12.00	13.00	12.00	13.00
Capacity – Rated at 110% Fill Factor	m ³	10.10	10.90	10.10	10.90
	yd ³	13.25	14.25	13.25	14.25
Width	mm	3330	3330	3330	3330
	ft/in	10'11"	10'11"	10'11"	10'11"
16† Dump Clearance at Maximum Lift and 45° Discharge	mm	2742	2667	2649	2644
	ft/in	8'11"	8'9"	8'8"	8'8"
17† Reach at Maximum Lift and 45° Discharge	mm	1967	2042	2061	2065
	ft/in	6'5"	6'8"	6'9"	6'9"
Reach at Level Lift Arm and Bucket Level	mm	3882	3988	4014	4020
	ft/in	12'8"	13'1"	13'2"	13'2"
A† Digging Depth	mm	101	101	101	101
	in	4"	4"	4"	4"
12† Overall Length	mm	9605	9711	9737	9743
	ft/in	31'7"	31'11"	32'0"	32'0"
B† Overall Height with Bucket at Maximum Lift	mm	6746	6838	6803	6855
	ft/in	22'2"	22'6"	22'4"	22'6"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7378	7415	7414	7416
	ft/in	24'3"	24'4"	24'4"	24'4"
Static Tipping Load, Straight (With tire deflection)	kg	10 105	10 020	9003	9046
	lb	22,279	22,091	19,849	19,943
Static Tipping Load, Straight (No tire deflection)	kg	10 723	10 644	9556	9604
	lb	23,640	23,467	21,067	21,174
Static Tipping Load, Articulated (With tire deflection)	kg	8523	8433	7516	7554
	lb	18,791	18,593	16,570	16,654
Static Tipping Load, Articulated (No tire deflection)	kg	9158	9075	8088	8132
	lb	20,192	20,007	17,831	17,928
Breakout Force (§)	kN	98	93	92	91
	lbf	22,244	20,960	20,736	20,604
Operating Weight*	kg	20 602	20 694	21 237	21 198
	lb	45,420	45,622	46,819	46,733

*Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

***Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Auxiliary Counterweight							
Bucket Type		General Purpose – Pin-On							
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments
Capacity – Rated	m ³	3.10	3.10	3.30	3.30	3.40	3.40	3.60	3.60
	yd ³	4.00	4.00	4.25	4.25	4.50	4.50	4.75	4.75
Capacity – Rated at 110% Fill Factor	m ³	3.40	3.40	3.60	3.60	3.70	3.70	4.00	4.00
	yd ³	4.50	4.50	4.75	4.75	4.75	4.75	5.25	5.25
Width	mm	2927	2994	2927	2994	2927	2994	2927	2994
	ft/in	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2864	2746	2826	2707	2807	2688	2781	2661
	ft/in	9'4"	9'0"	9'3"	8'10"	9'2"	8'9"	9'1"	8'8"
17 † Reach at Maximum Lift and 45° Discharge	mm	1435	1546	1464	1574	1479	1588	1501	1610
	ft/in	4'8"	5'0"	4'9"	5'1"	4'10"	5'2"	4'11"	5'3"
Reach at Level Lift Arm and Bucket Level	mm	2694	2855	2743	2904	2767	2928	2802	2963
	ft/in	8'10"	9'4"	9'0"	9'6"	9'0"	9'7"	9'2"	9'8"
A † Digging Depth	mm	102	102	102	102	102	102	102	102
	in	4"	4"	4"	4"	4"	4"	4"	4"
12 † Overall Length	mm	8343	8516	8392	8565	8416	8589	8451	8624
	ft/in	27'5"	28'0"	27'7"	28'2"	27'8"	28'3"	27'9"	28'4"
B † Overall Height with Bucket at Maximum Lift	mm	5513	5513	5559	5559	5585	5585	5618	5618
	ft/in	18'2"	18'2"	18'3"	18'3"	18'4"	18'4"	18'6"	18'6"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6735	6821	6750	6836	6757	6844	6768	6854
	ft/in	22'2"	22'5"	22'2"	22'6"	22'3"	22'6"	22'3"	22'6"
Static Tipping Load, Straight (With tire deflection)	kg	13 823	13 682	13 698	13 557	13 654	13 512	13 581	13 438
	lb	30,474	30,164	30,200	29,888	30,102	29,789	29,941	29,626
Static Tipping Load, Straight (No tire deflection)	kg	14 637	14 495	14 515	14 371	14 471	14 328	14 400	14 256
	lb	32,269	31,956	32,000	31,684	31,905	31,588	31,748	31,429
Static Tipping Load, Articulated (With tire deflection)	kg	11 889	11 748	11 770	11 628	11 727	11 585	11 658	11 515
	lb	26,211	25,901	25,949	25,637	25,855	25,542	25,702	25,388
Static Tipping Load, Articulated (No tire deflection)	kg	12 713	12 571	12 596	12 453	12 555	12 411	12 488	12 343
	lb	28,028	27,714	27,771	27,455	27,680	27,363	27,531	27,213
Breakout Force (§)	kN	181	179	173	172	170	169	165	164
	lbf	40,689	40,400	39,063	38,777	38,316	38,030	37,271	36,987
Operating Weight*	kg	19 671	19 779	19 740	19 848	19 764	19 872	19 800	19 908
	lb	43,366	43,604	43,519	43,757	43,572	43,810	43,652	43,890

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Auxiliary Counterweight					
Bucket Type		General Purpose – Hook-On – Fusion					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments
Capacity – Rated	m ³	3.10	3.10	3.40	3.40	3.60	3.60
	yd ³	4.00	4.00	4.50	4.50	4.75	4.75
Capacity – Rated at 110% Fill Factor	m ³	3.40	3.40	3.70	3.70	4.00	4.00
	yd ³	4.50	4.50	4.75	4.75	5.25	5.25
Width	mm	2927	2994	2927	2994	2927	2994
	ft/in	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"
16† Dump Clearance at Maximum Lift and 45° Discharge	mm	2825	2706	2767	2648	2741	2621
	ft/in	9'3"	8'10"	9'0"	8'8"	8'11"	8'7"
17† Reach at Maximum Lift and 45° Discharge	mm	1481	1591	1524	1633	1545	1654
	ft/in	4'10"	5'2"	5'0"	5'4"	5'0"	5'5"
Reach at Level Lift Arm and Bucket Level	mm	2754	2915	2827	2988	2862	3023
	ft/in	9'0"	9'6"	9'3"	9'9"	9'4"	9'11"
A† Digging Depth	mm	102	102	102	102	102	102
	in	4"	4"	4"	4"	4"	4"
12† Overall Length	mm	8403	8576	8476	8649	8511	8684
	ft/in	27'7"	28'2"	27'10"	28'5"	28'0"	28'6"
B† Overall Height with Bucket at Maximum Lift	mm	5546	5546	5618	5618	5652	5652
	ft/in	18'3"	18'3"	18'6"	18'6"	18'7"	18'7"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6749	6836	6772	6859	6783	6870
	ft/in	22'2"	22'6"	22'3"	22'7"	22'4"	22'7"
Static Tipping Load, Straight (With tire deflection)	kg	13 221	13 081	13 084	12 942	13 016	12 874
	lb	29,147	28,838	28,845	28,533	28,696	28,382
Static Tipping Load, Straight (No tire deflection)	kg	14 023	13 881	13 889	13 746	13 823	13 679
	lb	30,915	30,602	30,621	30,305	30,476	30,159
Static Tipping Load, Articulated (With tire deflection)	kg	11 316	11 176	11 186	11 044	11 122	10 979
	lb	24,948	24,639	24,661	24,349	24,520	24,206
Static Tipping Load, Articulated (No tire deflection)	kg	12 128	11 987	12 002	11 859	11 940	11 796
	lb	26,739	26,426	26,461	26,145	26,323	26,006
Breakout Force (§)	kN	172	171	162	161	158	157
	lbf	38,737	38,451	36,582	36,299	35,623	35,340
Operating Weight*	kg	20 140	20 248	20 210	20 318	20 244	20 352
	lb	44,402	44,640	44,556	44,794	44,631	44,869

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Auxiliary Counterweight						Flat Floor – Pin-On – Light Material
Bucket Type		Flat Floor – Pin-On						Flat Floor – Pin-On – Light Material
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges
Capacity – Rated	m ³	3.30	3.30	3.40	3.40	3.60	3.60	4.60
	yd ³	4.25	4.25	4.50	4.50	4.75	4.75	6.00
Capacity – Rated at 110% Fill Factor	m ³	3.60	3.60	3.70	3.70	4.00	4.00	5.00
	yd ³	4.75	4.75	4.75	4.75	5.25	5.25	6.50
Width	mm	2927	2994	2927	2994	2927	2994	3338
	ft/in	9'7"	9'9"	9'7"	9'9"	9'7"	9'9"	10'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2777	2652	2749	2624	2717	2592	2622
	ft/in	9'1"	8'8"	9'0"	8'7"	8'11"	8'6"	8'7"
17 † Reach at Maximum Lift and 45° Discharge	mm	1384	1486	1412	1514	1444	1546	1553
	ft/in	4'6"	4'10"	4'7"	4'11"	4'8"	5'0"	5'1"
Reach at Level Lift Arm and Bucket Level	mm	2737	2898	2777	2938	2822	2983	2967
	ft/in	8'11"	9'6"	9'1"	9'7"	9'3"	9'9"	9'8"
A † Digging Depth	mm	102	102	102	102	102	102	92
	in	4"	4"	4"	4"	4"	4"	3.6"
12 † Overall Length	mm	8386	8559	8426	8599	8471	8644	8609
	ft/in	27'7"	28'1"	27'8"	28'3"	27'10"	28'5"	28'3"
B † Overall Height with Bucket at Maximum Lift	mm	5515	5515	5554	5554	5602	5602	5502
	ft/in	18'2"	18'2"	18'3"	18'3"	18'5"	18'5"	18'1"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6748	6834	6760	6847	6774	6861	6999
	ft/in	22'2"	22'6"	22'3"	22'6"	22'3"	22'7"	23'0"
Static Tipping Load, Straight (With tire deflection)	kg	13 573	13 432	13 491	13 350	13 400	13 259	13 070
	lb	29,923	29,614	29,743	29,433	29,543	29,231	28,816
Static Tipping Load, Straight (No tire deflection)	kg	14 367	14 226	14 288	14 145	14 199	14 056	13 849
	lb	31,675	31,363	31,500	31,186	31,304	30,988	30,533
Static Tipping Load, Articulated (With tire deflection)	kg	11 664	11 524	11 587	11 446	11 501	11 359	11 205
	lb	25,715	25,406	25,545	25,235	25,356	25,044	24,704
Static Tipping Load, Articulated (No tire deflection)	kg	12 469	12 328	12 394	12 252	12 311	12 167	11 996
	lb	27,491	27,179	27,326	27,012	27,141	26,825	26,447
Breakout Force (§)	kN	174	173	169	167	163	162	147
	lbf	39,241	38,955	38,002	37,717	36,690	36,407	33,132
Operating Weight*	kg	19 726	19 834	19 766	19 874	19 810	19 918	19 890
	lb	43,487	43,725	43,576	43,814	43,673	43,911	43,849

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Auxiliary Counterweight			
Bucket Type		Flat Floor – Hook-On – Fusion			
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Bolt-On Cutting Edges	Teeth and Segments
Capacity – Rated	m ³	3.40	3.40	3.60	3.60
	yd ³	4.50	4.50	4.75	4.75
Capacity – Rated at 110% Fill Factor	m ³	3.70	3.70	4.00	4.00
	yd ³	4.75	4.75	5.25	5.25
Width	mm	2927	2994	2927	2994
	ft/in	9'7"	9'9"	9'7"	9'9"
16† Dump Clearance at Maximum Lift and 45° Discharge	mm	2707	2581	2675	2549
	ft/in	8'10"	8'5"	8'9"	8'4"
17† Reach at Maximum Lift and 45° Discharge	mm	1455	1557	1486	1589
	ft/in	4'9"	5'1"	4'10"	5'2"
Reach at Level Lift Arm and Bucket Level	mm	2837	2998	2882	3043
	ft/in	9'3"	9'10"	9'5"	9'11"
A† Digging Depth	mm	102	102	102	102
	in	4"	4"	4"	4"
12† Overall Length	mm	8486	8659	8531	8704
	ft/in	27'11"	28'5"	28'0"	28'7"
B† Overall Height with Bucket at Maximum Lift	mm	5588	5588	5631	5631
	ft/in	18'4"	18'4"	18'6"	18'6"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6775	6862	6789	6877
	ft/in	22'3"	22'7"	22'4"	22'7"
Static Tipping Load, Straight (With tire deflection)	kg	12 930	12 790	12 845	12 704
	lb	28,507	28,198	28,318	28,008
Static Tipping Load, Straight (No tire deflection)	kg	13 716	13 574	13 632	13 489
	lb	30,239	29,927	30,054	29,740
Static Tipping Load, Articulated (With tire deflection)	kg	11 054	10 914	10 973	10 832
	lb	24,370	24,061	24,192	23,881
Static Tipping Load, Articulated (No tire deflection)	kg	11 851	11 709	11 772	11 629
	lb	26,128	25,815	25,954	25,639
Breakout Force (§)	kN	161	160	156	154
	lbf	36,293	36,010	35,090	34,809
Operating Weight*	kg	20 213	20 321	20 253	20 361
	lb	44,561	44,799	44,649	44,887

*Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

***Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Auxiliary Counterweight			
Bucket Type		High Dump – Pin-On			
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	5.10	6.10	7.60	9.20
	yd ³	6.75	8.00	10.00	12.00
Capacity – Rated at 110% Fill Factor	m ³	5.60	6.70	8.40	10.10
	yd ³	7.25	8.75	11.00	13.25
Width	mm	3029	2910	3350	3350
	ft/in	9'11"	9'6"	10'11"	10'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2451	2325	2208	2066
	ft/in	8'0"	7'7"	7'2"	6'9"
17 † Reach at Maximum Lift and 45° Discharge	mm	1721	1742	1954	2095
	ft/in	5'7"	5'8"	6'4"	6'10"
Reach at Level Lift Arm and Bucket Level	mm	3207	3311	3543	3743
	ft/in	10'6"	10'10"	11'7"	12'3"
A † Digging Depth	mm	94	168	72	72
	in	3.7"	6.6"	2.8"	2.8"
12 † Overall Length	mm	8850	9007	9192	9392
	ft/in	29'1"	29'7"	30'2"	30'10"
B † Overall Height with Bucket at Maximum Lift	mm	6066	6074	6089	6290
	ft/in	19'11"	20'0"	20'0"	20'8"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6938	6947	7193	7262
	ft/in	22'10"	22'10"	23'8"	23'10"
Static Tipping Load, Straight (With tire deflection)	kg	12 003	11 050	10 824	10 497
	lb	26,463	24,362	23,863	23,143
Static Tipping Load, Straight (No tire deflection)	kg	12 797	11 829	11 636	11 313
	lb	28,213	26,080	25,652	24,941
Static Tipping Load, Articulated (With tire deflection)	kg	10 186	9269	9026	8718
	lb	22,457	20,435	19,901	19,221
Static Tipping Load, Articulated (No tire deflection)	kg	10 992	10 059	9850	9545
	lb	24,233	22,177	21,715	21,044
Breakout Force (§)	kN	123	114	104	93
	lbf	27,694	25,628	23,412	20,922
Operating Weight*	kg	20 518	21 280	21 646	21 818
	lb	45,233	46,913	47,720	48,099

*Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

***Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Operating Specifications – Buckets (continued)

Linkage		Auxiliary Counterweight			
Bucket Type		Rock, Spade – Pin-On***	Rock, Spade – Pin-On – Abrasion***	Side Dump – Pin-On	Side Dump – Hook-On – Fusion
Edge Type		Teeth and Segments	Teeth and Segments	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	3.40	3.30	2.90	2.90
	yd ³	4.50	4.25	3.75	3.75
Capacity – Rated at 110% Fill Factor	m ³	3.70	3.60	3.20	3.20
	yd ³	4.75	4.75	4.25	4.25
Width	mm	2995	2937	3220	3220
	ft/in	9'9"	9'7"	10'6"	10'6"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2643	2809	2727	2727
	ft/in	8'8"	9'2"	8'11"	8'11"
17 † Reach at Maximum Lift and 45° Discharge	mm	1695	1506	1428	1427
	ft/in	5'6"	4'11"	4'8"	4'8"
Reach at Level Lift Arm and Bucket Level	mm	3070	2819	2804	2803
	ft/in	10'0"	9'2"	9'2"	9'2"
A † Digging Depth	mm	39	36	107	107
	in	1.5"	1.4"	4.2"	4.2"
12 † Overall Length	mm	8720	8468	8457	8456
	ft/in	28'8"	27'10"	27'9"	27'9"
B † Overall Height with Bucket at Maximum Lift	mm	5641	5641	5516	5508
	ft/in	18'7"	18'7"	18'2"	18'1"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6898	6792	6884	6898
	ft/in	22'8"	22'4"	22'8"	22'8"
Static Tipping Load, Straight (With tire deflection)	kg	13 821	14 028	12 514	12 230
	lb	30,471	30,926	27,589	26,963
Static Tipping Load, Straight (No tire deflection)	kg	14 679	14 888	13 304	13 018
	lb	32,363	32,823	29,332	28,701
Static Tipping Load, Articulated (With tire deflection)	kg	11 829	12 036	10 662	10 379
	lb	26,079	26,536	23,507	22,882
Static Tipping Load, Articulated (No tire deflection)	kg	12 698	12 907	11 465	11 180
	lb	27,995	28,455	25,277	24,647
Breakout Force (§)	kN	155	179	160	162
	lbf	35,003	40,312	36,024	36,584
Operating Weight*	kg	20 753	20 598	20 353	20 809
	lb	45,752	45,411	44,870	45,875

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, counterweight, ride control, cold start, roading fenders, Product Link™, manual diff lock/open axles (front and rear), powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

*** Rock bucket specifications are given on Bridgestone 23.5R25 VSDL L5 radial tires.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	9625
		lbs	21213
	Static Tipping Load - Articulated (Forks Level)	kg	8341
		lbs	18383
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4170
		lbs	9191
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5004
		lbs	11030
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6673
		lbs	14706
3	Maximum Overall Length	mm	8980
		in	353.5
4	Reach with Forks at Ground Level	mm	1258
		in	49.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-160
		in	-6.3
6	Reach with Arms Horizontal and Forks Level	mm	1752
		in	69.0
7	Reach with Fork at Maximum Height	mm	1037
		in	40.8
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1772
		in	69.7
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3707
		in	145.9
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4482
		in	176.4
11	Clearance at Full Lift and Max Dump	mm	2327
		in	91.6
12	Max Discharge Angle from Horizontal	deg	47
13	Overall Carriage Width	mm	2217
		in	87.3
14	Overall Carriage Height	mm	840
		in	33.1
15	Outside Tine Width (max spread)	mm	2070
		in	81.5
16	Outside Tine Width (min spread)	mm	470
		in	18.5
	Tine Width (single tine)	mm	150.0
		in	5.9
	Tine Thickness	mm	65.0
		in	2.6
	Tine Capacity	kg	6300
		lbs	13885
	Operating Weight	kg	18950
		lbs	41766

*Negative values indicate below grade


950 STD Pallet Fork, FUSION

87" Carriage 60" Tine
530-1861 548-3265

*Build 14A
*Parallel Z-Bar Linkage
*Standard Lift Configuration

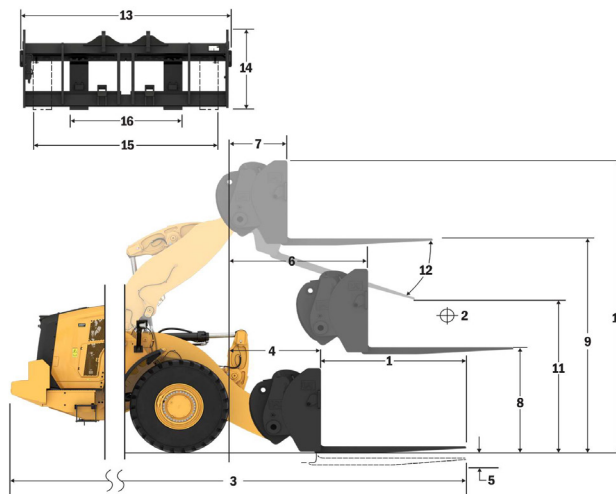

Capacity (kg)
(Calculated Load at CG Point)

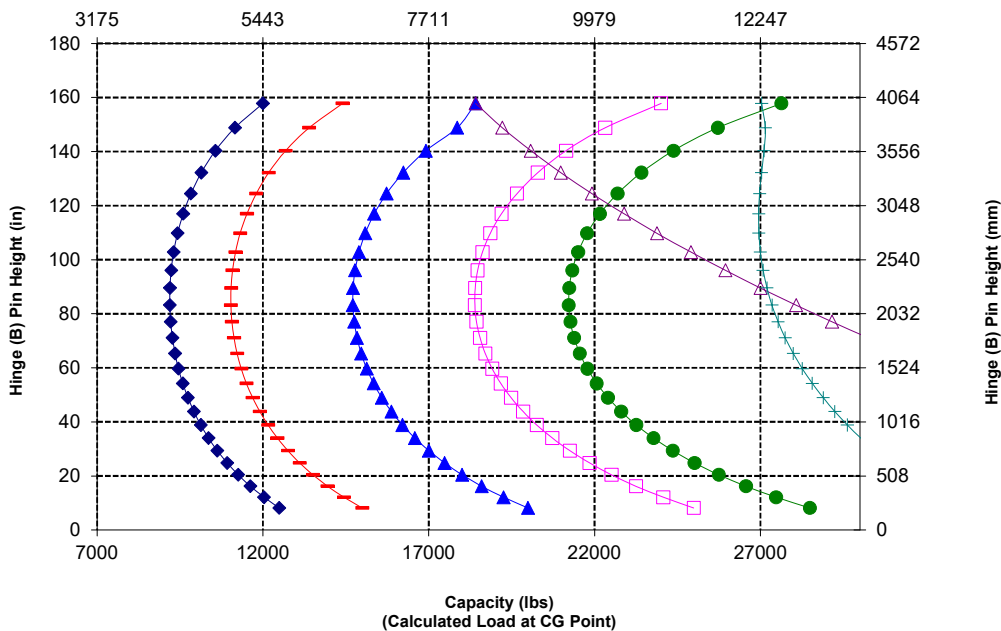

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJTL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1830
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	9158
		lbs	20184
	Static Tipping Load - Articulated (Forks Level)	kg	7930
		lbs	17477
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3965
		lbs	8739
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4758
		lbs	10486
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6344
		lbs	13982
3	Maximum Overall Length	mm	9286
		in	365.6
4	Reach with Forks at Ground Level	mm	1258
		in	49.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-160
		in	-6.3
6	Reach with Arms Horizontal and Forks Level	mm	1752
		in	69.0
7	Reach with Fork at Maximum Height	mm	1037
		in	40.8
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1772
		in	69.7
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3707
		in	145.9
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4482
		in	176.4
11	Clearance at Full Lift and Max Dump	mm	2105
		in	82.9
12	Max Discharge Angle from Horizontal	deg	47
13	Overall Carriage Width	mm	2217
		in	87.3
14	Overall Carriage Height	mm	840
		in	33.1
15	Outside Tine Width (max spread)	mm	2070
		in	81.5
16	Outside Tine Width (min spread)	mm	470
		in	18.5
	Tine Width (single tine)	mm	150.0
		in	5.9
	Tine Thickness	mm	65.0
		in	2.6
	Tine Capacity	kg	5246
		lbs	11562
	Operating Weight	kg	18997
		lbs	41870

*Negative values indicate below grade


950 STD Pallet Fork, FUSION

87" Carriage 72" Tine
530-1861 530-1869

*Build 14A
*Parallel Z-Bar Linkage
*Standard Lift Configuration

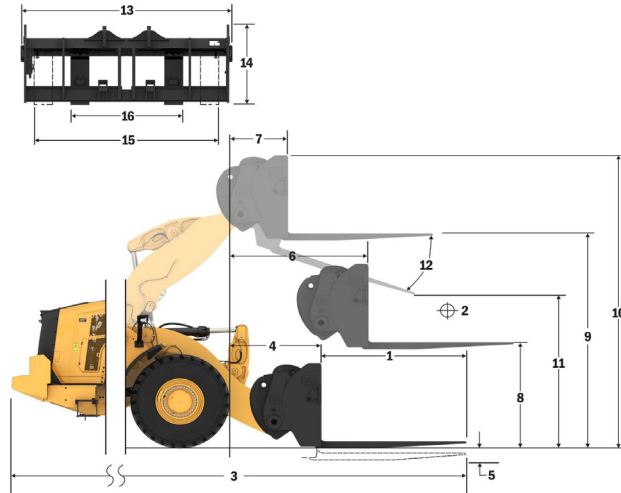

Capacity (kg)
(Calculated Load at CG Point)

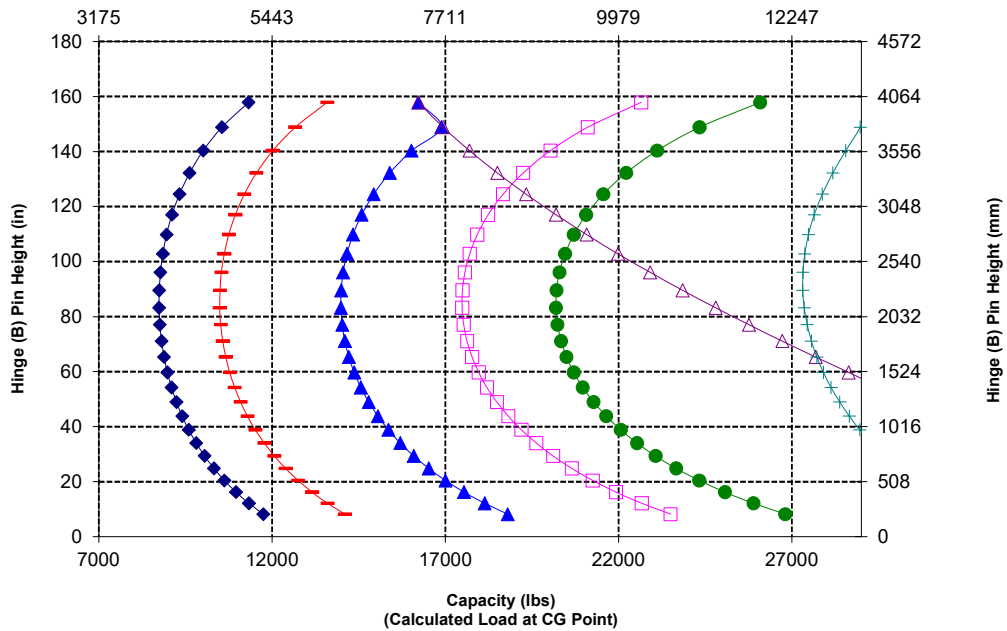

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	9356
		lbs	20620
	Static Tipping Load - Articulated (Forks Level)	kg	8068
		lbs	17782
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4034
		lbs	8891
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4841
		lbs	10669
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6454
		lbs	14226
3	Maximum Overall Length	mm	8935
		in	351.8
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	2272
		in	89.5
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	17800
		lbs	39231
	Operating Weight	kg	19325
		lbs	42593

*Negative values indicate below grade


950 STD Construction Fork, FUSION

96" Carriage 60" Tine
520-7957 520-7980

*Build 14A
*Parallel Z-Bar Linkage
*Standard Lift Configuration

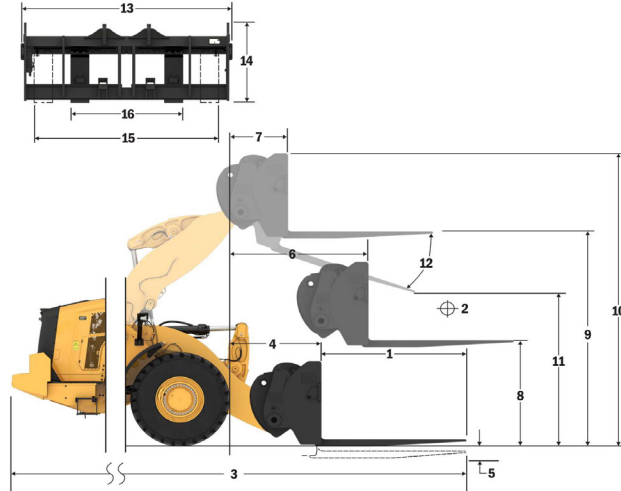

Capacity (kg)
(Calculated Load at CG Point)

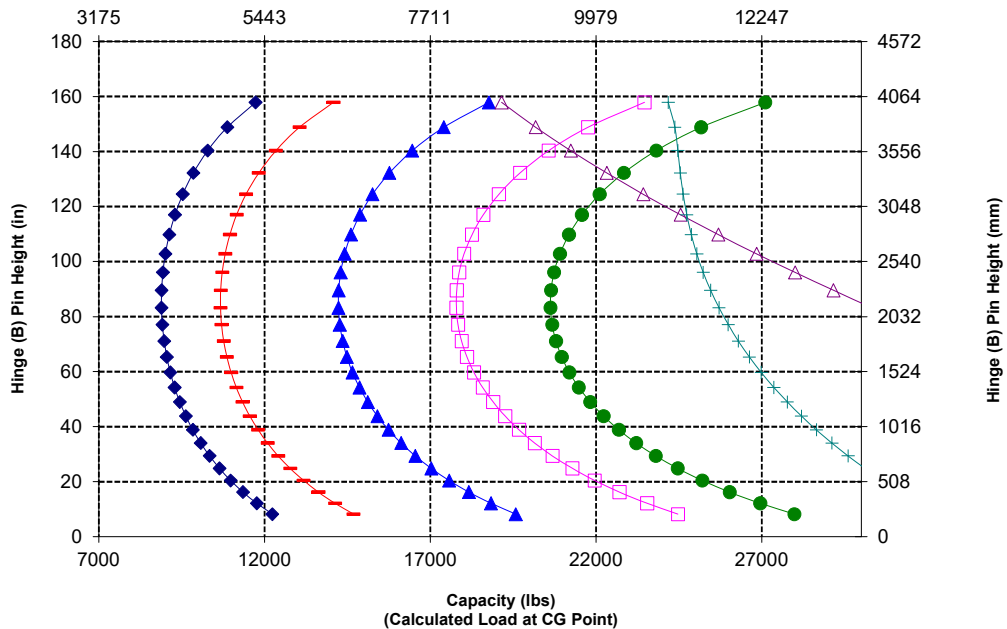

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1829
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	8883
		lbs	19579
	Static Tipping Load - Articulated (Forks Level)	kg	7652
		lbs	16864
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3826
		lbs	8432
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4591
		lbs	10118
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6121
		lbs	13491
3	Maximum Overall Length	mm	9240
		in	363.8
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	2029
		in	79.9
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	14800
		lbs	32619
	Operating Weight	kg	19386
		lbs	42727

*Negative values indicate below grade


950 STD Construction Fork, FUSION

96" Carriage 72" Tine
520-7957 520-7979

*Build 14A
*Parallel Z-Bar Linkage
*Standard Lift Configuration

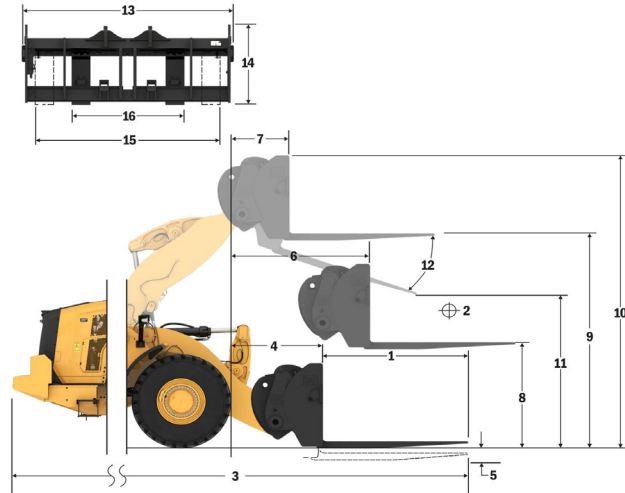

Capacity (kg)
(Calculated Load at CG Point)

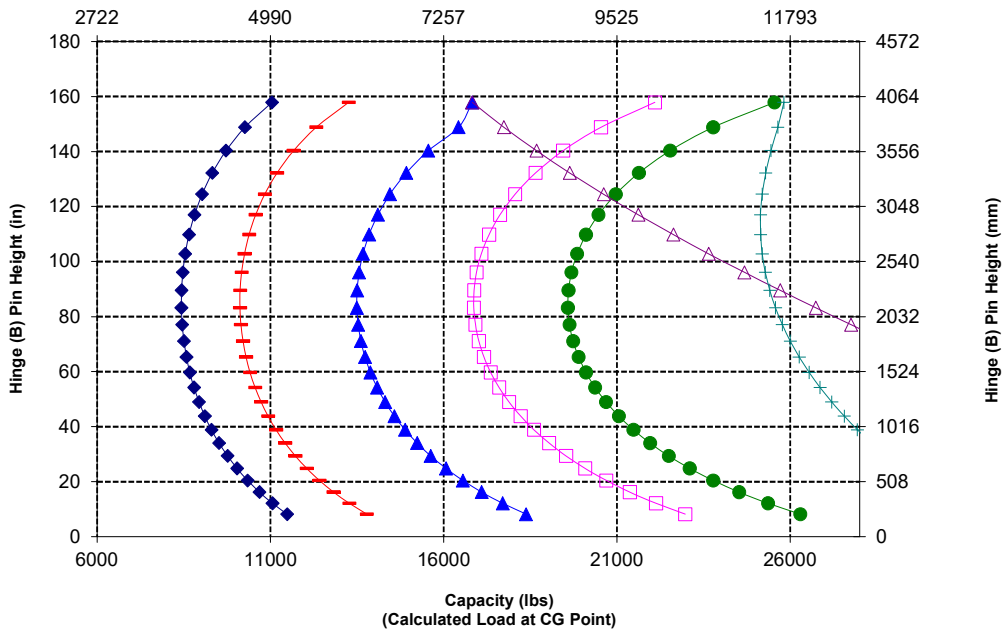

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJTL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	2134
		in	84.0
2	Load Center	mm	1067
		in	42.0
	Static Tipping Load - Straight (Forks Level)	kg	8443
		lbs	18609
	Static Tipping Load - Articulated (Forks Level)	kg	7263
		lbs	16008
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3631
		lbs	8004
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4358
		lbs	9605
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5810
		lbs	12806
3	Maximum Overall Length	mm	9545
		in	375.8
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	1786
		in	70.3
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	12700
		lbs	27991
	Operating Weight	kg	19449
		lbs	42866

*Negative values indicate below grade


950 STD Construction Fork, FUSION

96" Carriage 84" Tine
520-7957 520-7986

*Build 14A
*Parallel Z-Bar Linkage
*Standard Lift Configuration

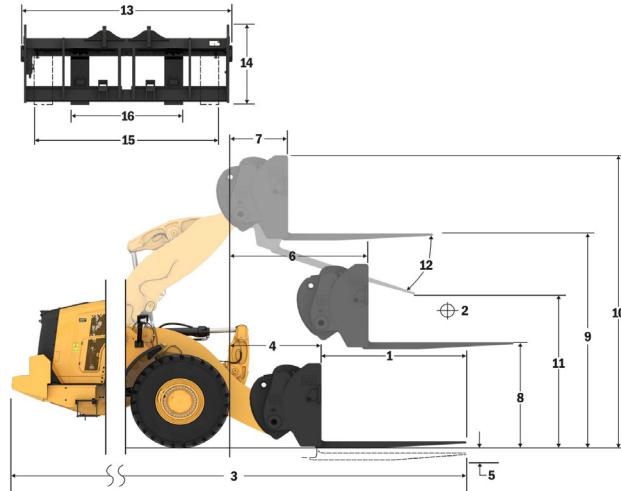

Capacity (kg)
(Calculated Load at CG Point)

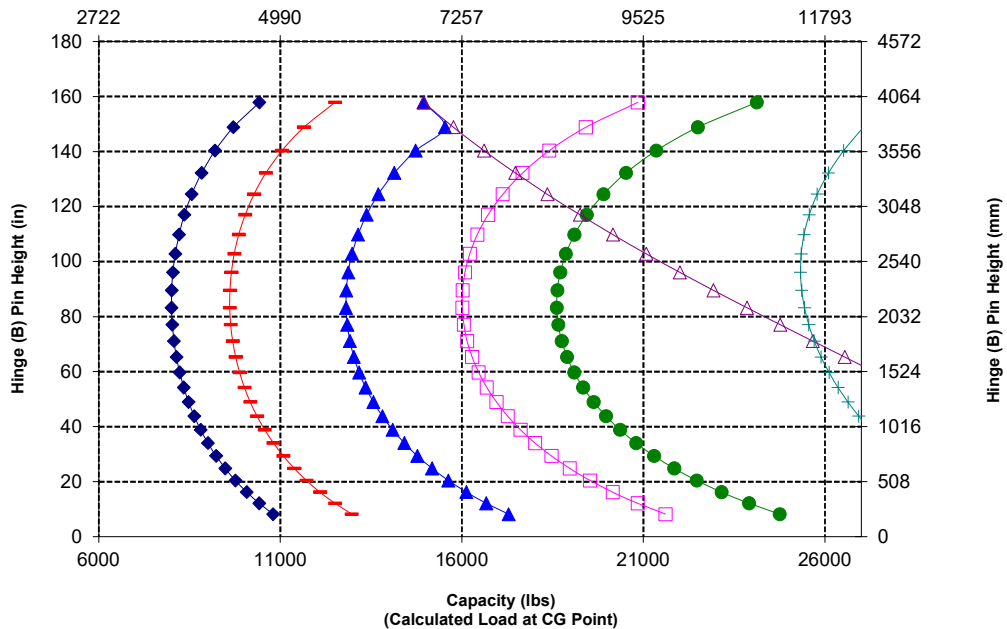

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	8036
		lbs	17712
	Static Tipping Load - Articulated (Forks Level)	kg	6903
		lbs	15214
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3452
		lbs	7607
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4142
		lbs	9129
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5522
		lbs	12171
3	Maximum Overall Length	mm	9849
		in	387.7
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	1544
		in	60.8
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	11300
		lbs	24905
	Operating Weight	kg	19511
		lbs	43003

*Negative values indicate below grade


950 STD Construction Fork, FUSION

96" Carriage 96" Tine
520-7957 520-7981

*Build 14A
*Parallel Z-Bar Linkage
*Standard Lift Configuration

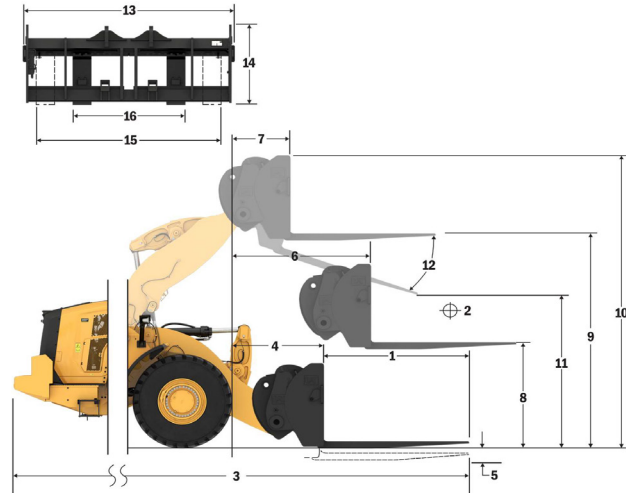

Capacity (kg)
(Calculated Load at CG Point)

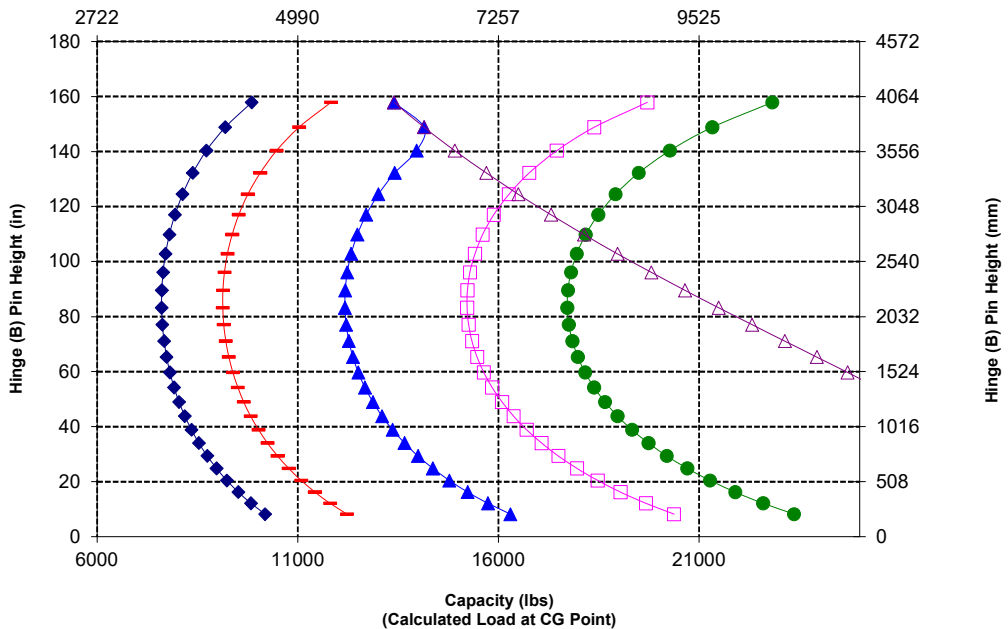

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJTL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	9321
		lbs	20543
	Static Tipping Load - Articulated (Forks Level)	kg	8033
		lbs	17705
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4017
		lbs	8852
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4820
		lbs	10623
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6426
		lbs	14164
3	Maximum Overall Length	mm	8935
		in	351.8
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	2272
		in	89.5
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	17800
		lbs	39231
	Operating Weight	kg	19374
		lbs	42701

*Negative values indicate below grade


950 STD Construction Fork, FUSION

108" Carriage 60" Tine
520-7968 520-7980

*Build 14A
*Parallel Z-Bar Linkage
*Standard Lift Configuration

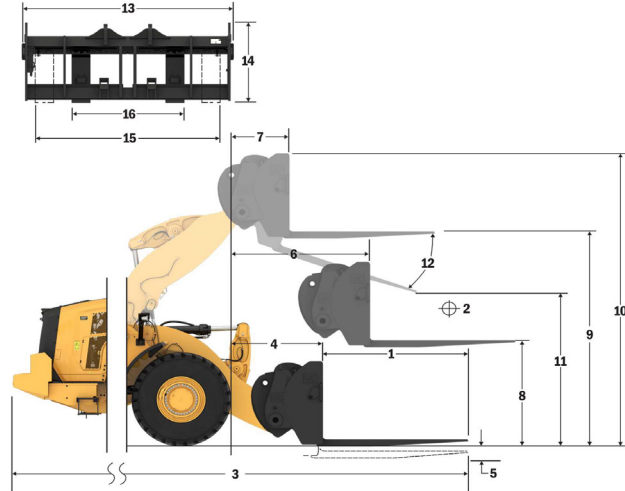

Capacity (kg)
(Calculated Load at CG Point)

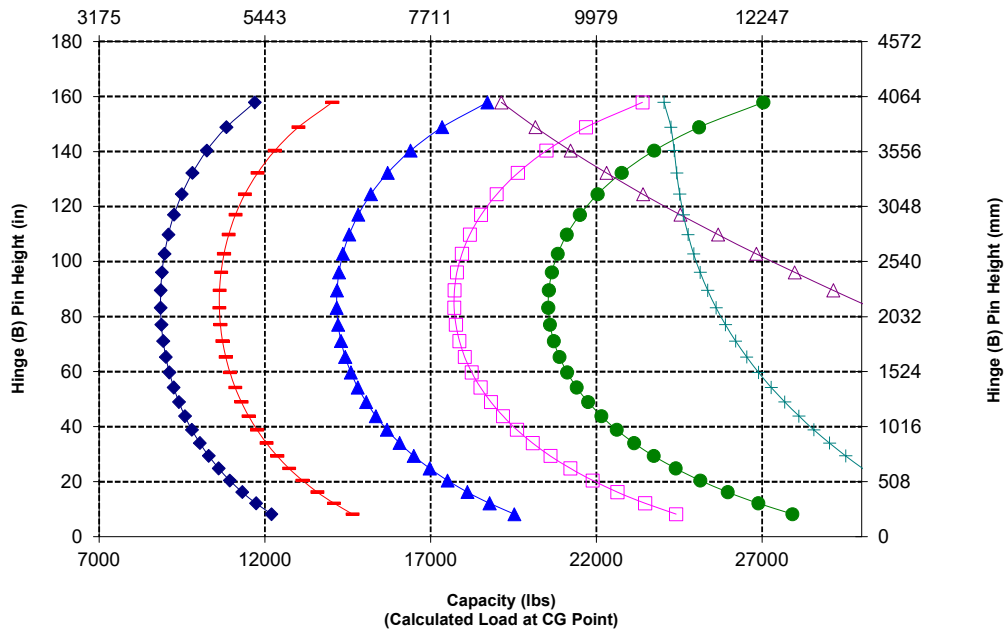

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1829
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	8849
		lbs	19502
	Static Tipping Load - Articulated (Forks Level)	kg	7617
		lbs	16788
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3808
		lbs	8394
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4570
		lbs	10073
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6094
		lbs	13430
3	Maximum Overall Length	mm	9240
		in	363.8
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	2029
		in	79.9
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	14800
		lbs	32619
	Operating Weight	kg	19436
		lbs	42838

*Negative values indicate below grade


950 STD Construction Fork, FUSION

108" Carriage 72" Tine
520-7968 520-7979

*Build 14A
*Parallel Z-Bar Linkage
*Standard Lift Configuration

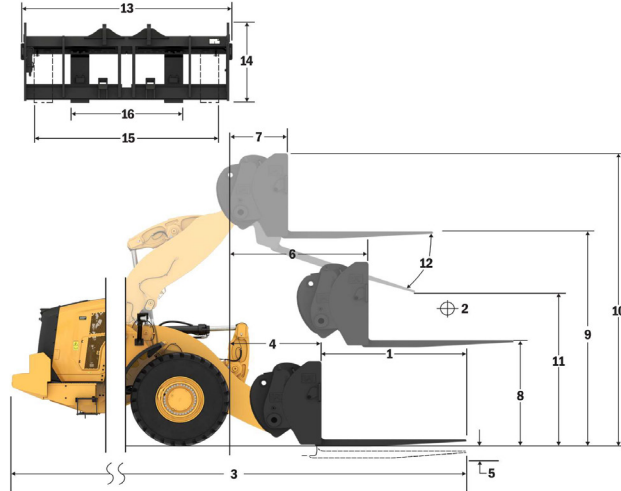

Capacity (kg)
(Calculated Load at CG Point)

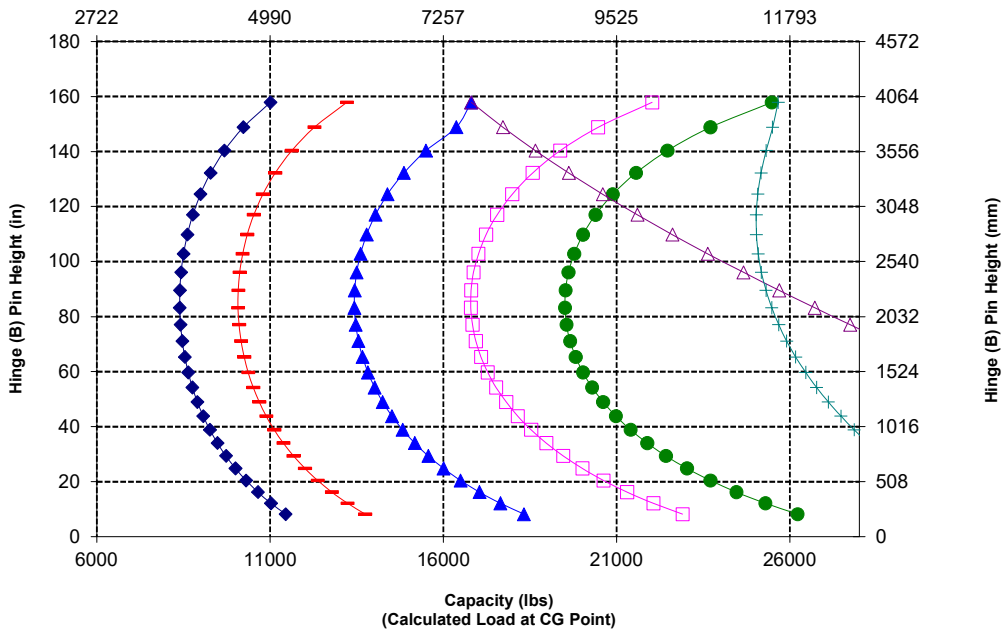

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	2134
		in	84.0
2	Load Center	mm	1067
		in	42.0
	Static Tipping Load - Straight (Forks Level)	kg	8411
		lbs	18538
	Static Tipping Load - Articulated (Forks Level)	kg	7231
		lbs	15937
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3615
		lbs	7968
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4338
		lbs	9562
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5785
		lbs	12749
3	Maximum Overall Length	mm	9545
		in	375.8
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	1786
		in	70.3
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	12700
		lbs	27991
	Operating Weight	kg	19498
		lbs	42974

*Negative values indicate below grade


950 STD Construction Fork, FUSION

108" Carriage 84" Tine
520-7968 520-7986

*Build 14A
*Parallel Z-Bar Linkage
*Standard Lift Configuration

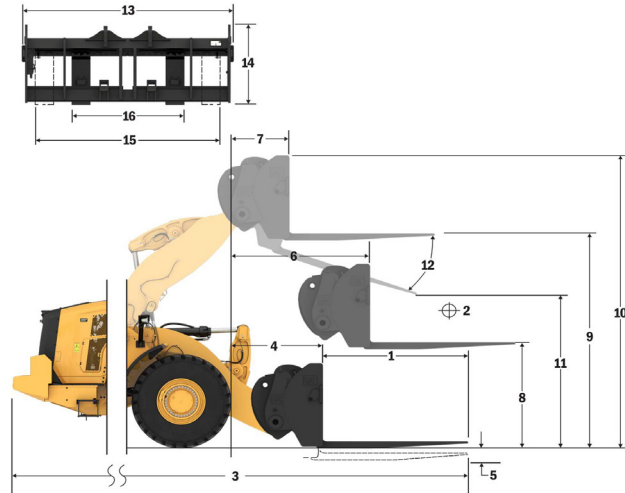

Capacity (kg)
(Calculated Load at CG Point)

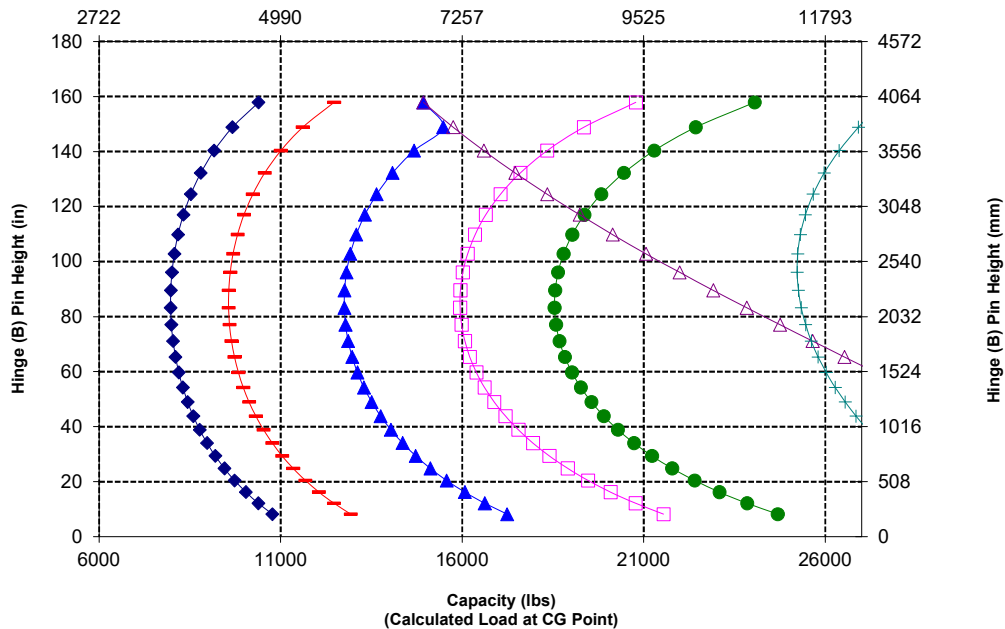

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJTL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	8004
		lbs	17642
	Static Tipping Load - Articulated (Forks Level)	kg	6871
		lbs	15144
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3436
		lbs	7572
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4123
		lbs	9087
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5497
		lbs	12115
3	Maximum Overall Length	mm	9849
		in	387.7
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	1544
		in	60.8
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	11300
		lbs	24905
	Operating Weight	kg	19561
		lbs	43113

*Negative values indicate below grade


950 STD Construction Fork, FUSION

108" Carriage 96" Tine
520-7968 520-7981

*Build 14A
*Parallel Z-Bar Linkage
*Standard Lift Configuration

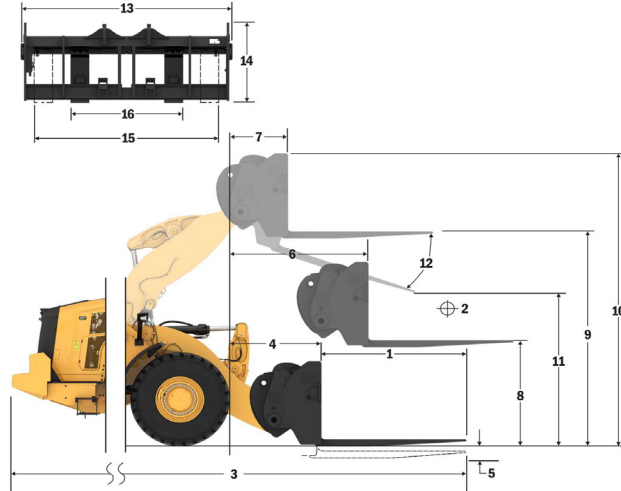

Capacity (kg)
(Calculated Load at CG Point)

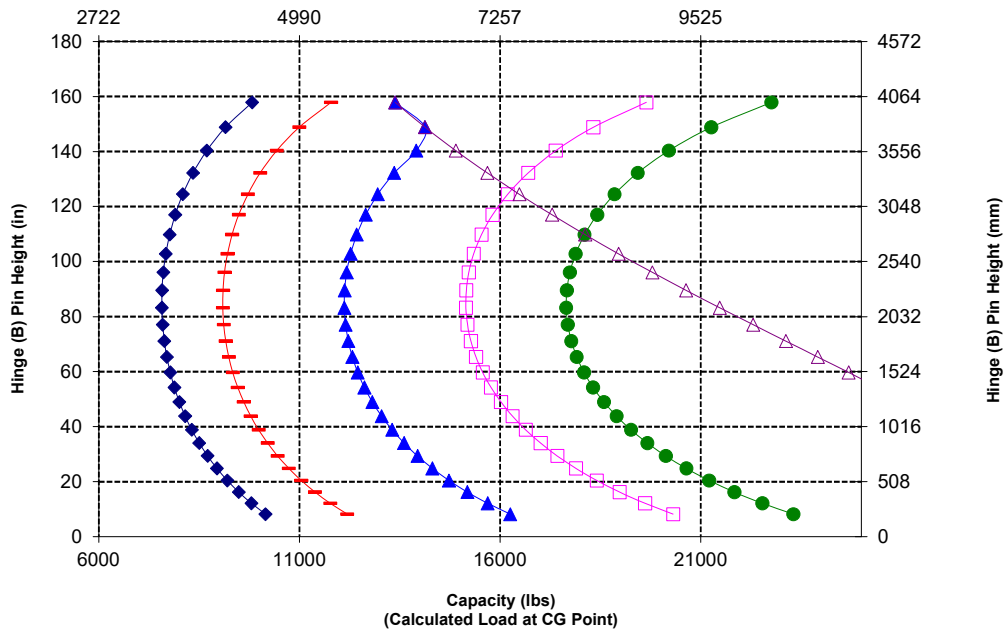

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJTL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Material Handling Arm Specifications


950 STD

289-9885

Material Handling Arm, FUSION

6 Position

- *Build 14A
- *Parallel Z-Bar Linkage
- *Standard Lift Configuration

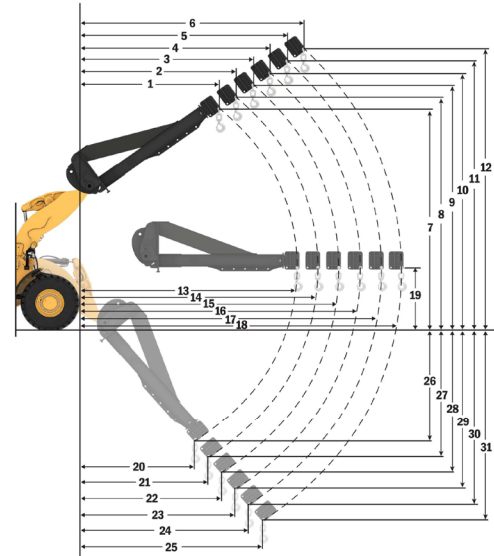

MHA Specifications

	Retracted	Extension 1	Extension 2	Extension 3	Extension 4	Extended
Max Lift - Hook Eyelet Reach (1, 2, 3, 4, 5, 6)	mm 2,291 ft, in 7' 6"	2,429 7' 11"	2,566 8' 5"	2,704 8' 10"	2,842 9' 3"	2,979 9' 9"
Max Lift - Hook Eyelet Height (7, 8, 9, 10, 11, 12)	mm 6,852 ft, in 22' 5"	7,124 23' 4"	7,396 24' 3"	7,668 25' 1"	7,939 26' 0"	8,211 26' 11"
Level - Hook Eyelet Reach (13, 14, 15, 16, 17, 18)	mm 4,610 ft, in 15' 1"	4,915 16' 1"	5,220 17' 1"	5,525 18' 1"	5,829 19' 1"	6,134 20' 1"
Level - Hook Eyelet Height (19)	mm 1,842 ft, in 6' 0.5"	1,842 6' 0.5"	1,842 6' 0.5"	1,842 6' 0.5"	1,842 6' 0.5"	1,842 6' 0.5"
Min Lift - Hook Eyelet Reach (20, 21, 22, 23, 24, 25)	mm 2,416 ft, in 7' 11"	2,596 8' 6"	2,777 9' 1"	2,957 9' 8"	3,137 10' 3"	3,318 10' 10"
Min Lift - Hook Eyelet Height (26, 27, 28, 29, 30, 31)	mm (2,593) ft, in -8' 5"	(2,839) -9' 8"	(3,085) -10' 10"	(3,330) -10' 0"	(3,576) -11' 3"	(3,822) -12' 5"
Static Tipping Load, Straight	kg 5,970 lb 13,157	5,645 12,442	5,353 11,798	5,089 11,216	4,849 10,687	4,629 10,203
Static Tipping Load, Articulated	kg 5,184 lb 11,425	4,901 10,801	4,646 10,240	4,416 9,733	4,207 9,272	4,016 8,851
Operating Weight	kg 18,708 lb 41,233	18,708 41,233	18,708 41,233	18,708 41,233	18,708 41,233	18,708 41,233

- Retracted
- Extension 1
- Extension 2
- Extension 3
- Extension 4
- Extended


NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1

The rated operating load for a loader equipped with a material handling arm is determined by:

SAE J1197: 50% of full turn static tipping load or hydraulic limit.

*SAE - Society of Automotive Engineers

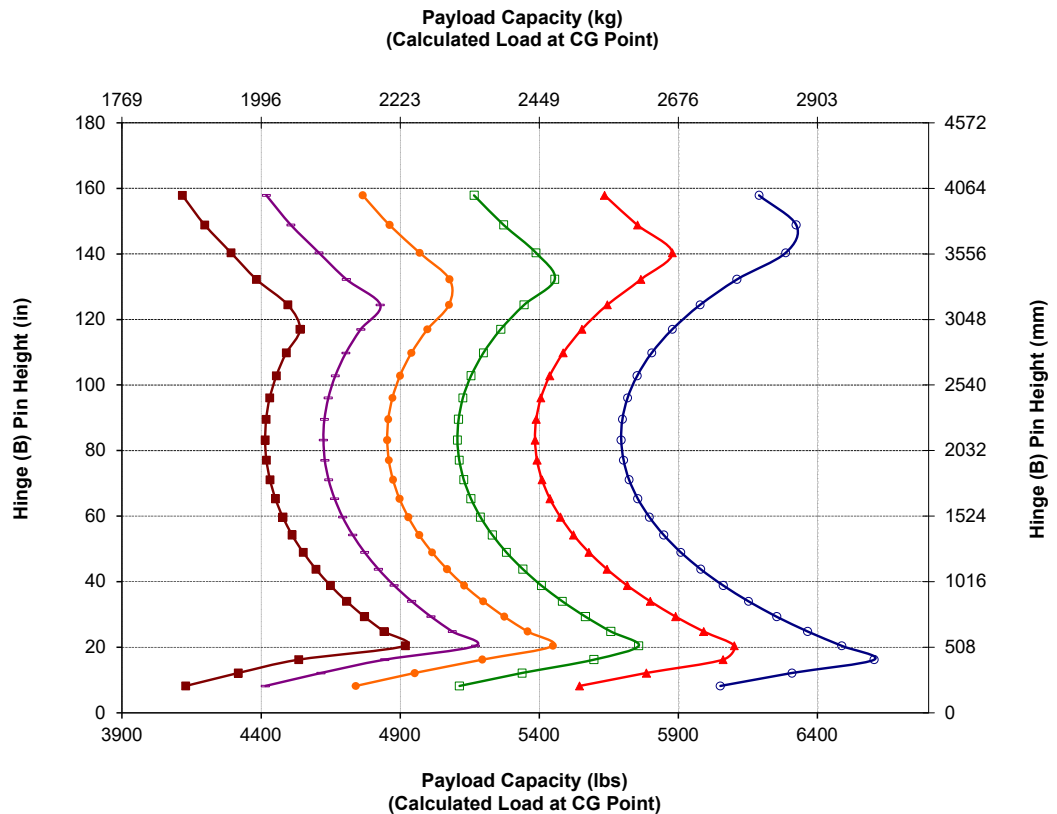

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	8954
		lbs	19734
	Static Tipping Load - Articulated (Forks Level)	kg	7704
		lbs	16980
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3852
		lbs	8490
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4623
		lbs	10188
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6163
		lbs	13584
3	Maximum Overall Length	mm	9448
		in	372.0
4	Reach with Forks at Ground Level	mm	1697
		in	66.8
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-164
		in	-6.5
6	Reach with Arms Horizontal and Forks Level	mm	2127
		in	83.7
7	Reach with Fork at Maximum Height	mm	1072
		in	42.2
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1772
		in	69.7
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4212
		in	165.8
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4987
		in	196.3
11	Clearance at Full Lift and Max Dump	mm	2887
		in	113.6
12	Max Discharge Angle from Horizontal	deg	44
13	Overall Carriage Width	mm	2217
		in	87.3
14	Overall Carriage Height	mm	840
		in	33.1
15	Outside Tine Width (max spread)	mm	2070
		in	81.5
16	Outside Tine Width (min spread)	mm	470
		in	18.5
	Tine Width (single tine)	mm	150.0
		in	5.9
	Tine Thickness	mm	65.0
		in	2.6
	Tine Capacity	kg	6300
		lbs	13885
	Operating Weight	kg	19611
		lbs	43222


*Negative values indicate below grade

950 HL Pallet Fork, FUSION


87" Carriage
530-1861

60" Tine
548-3265

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

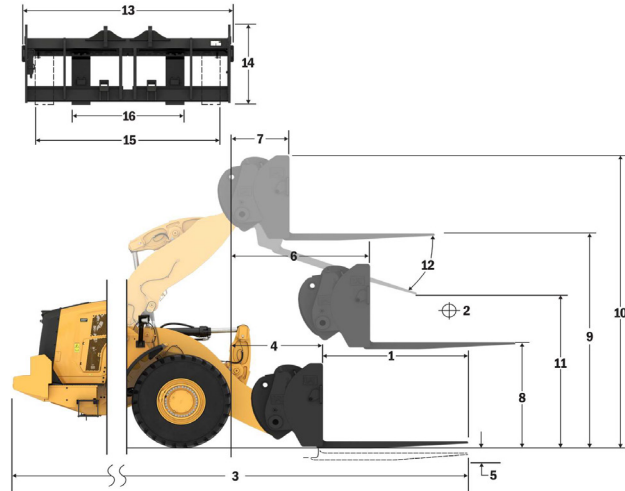

Capacity (kg)
(Calculated Load at CG Point)

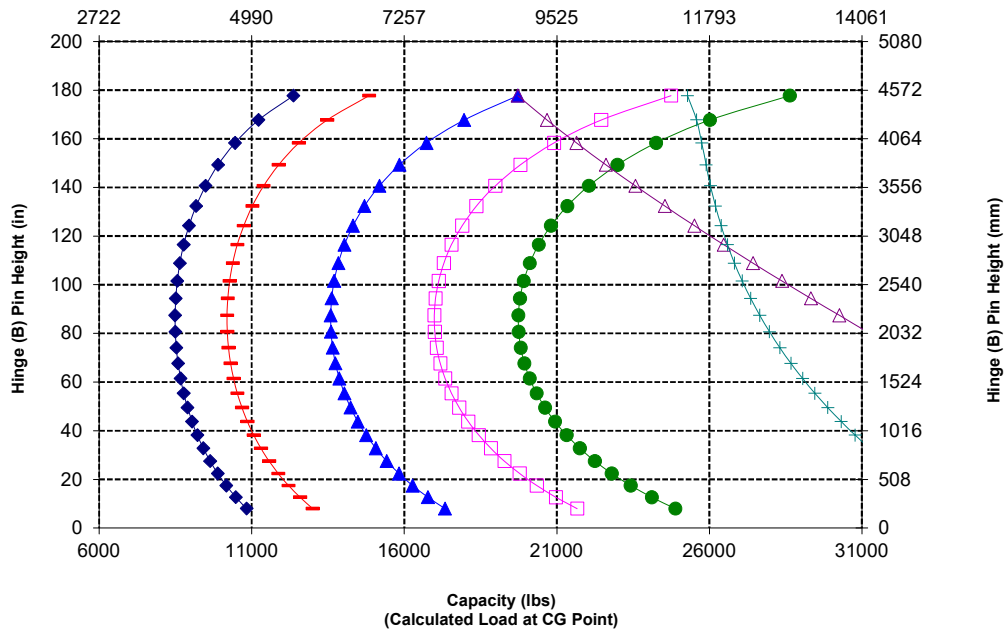

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJTL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1830
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	8553
		lbs	18851
	Static Tipping Load - Articulated (Forks Level)	kg	7353
		lbs	16206
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3677
		lbs	8103
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4412
		lbs	9724
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5883
		lbs	12965
3	Maximum Overall Length	mm	9754
		in	384.0
4	Reach with Forks at Ground Level	mm	1697
		in	66.8
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-164
		in	-6.5
6	Reach with Arms Horizontal and Forks Level	mm	2127
		in	83.7
7	Reach with Fork at Maximum Height	mm	1072
		in	42.2
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1772
		in	69.7
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4212
		in	165.8
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4987
		in	196.3
11	Clearance at Full Lift and Max Dump	mm	2675
		in	105.3
12	Max Discharge Angle from Horizontal	deg	44
13	Overall Carriage Width	mm	2217
		in	87.3
14	Overall Carriage Height	mm	840
		in	33.1
15	Outside Tine Width (max spread)	mm	2070
		in	81.5
16	Outside Tine Width (min spread)	mm	470
		in	18.5
	Tine Width (single tine)	mm	150.0
		in	5.9
	Tine Thickness	mm	65.0
		in	2.6
	Tine Capacity	kg	5246
		lbs	11562
	Operating Weight	kg	19658
		lbs	43326


*Negative values indicate below grade

950 HL Pallet Fork, FUSION


87" Carriage
530-1861

72" Tine
530-1869

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

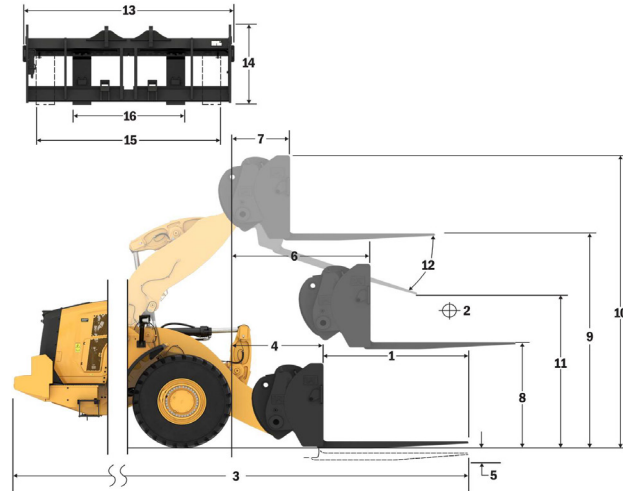

Capacity (kg)
(Calculated Load at CG Point)

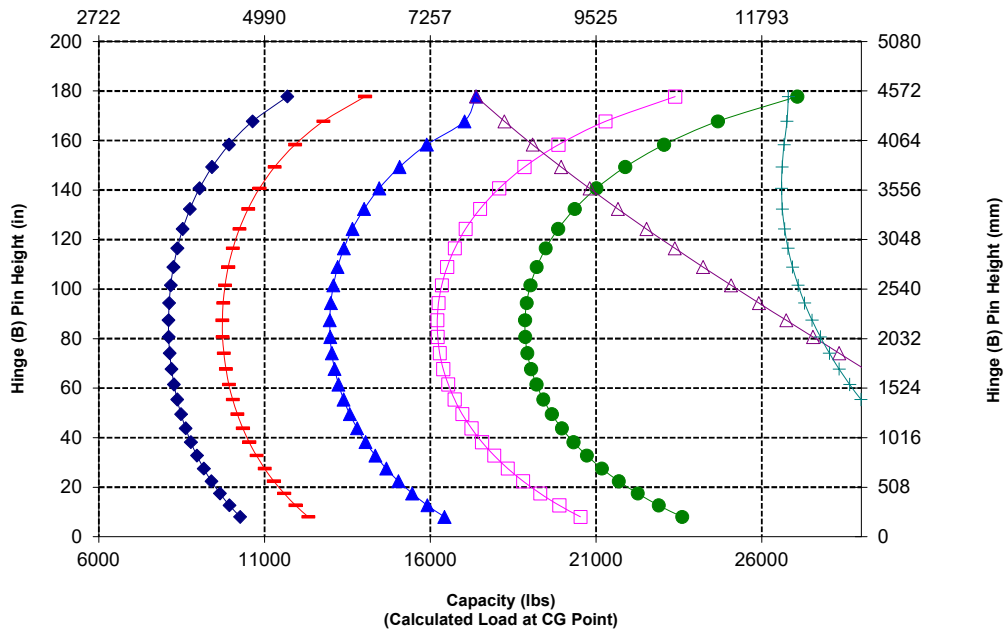

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJLT3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	8672
		lbs	19114
	Static Tipping Load - Articulated (Forks Level)	kg	7420
		lbs	16353
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3710
		lbs	8177
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4452
		lbs	9812
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5936
		lbs	13083
3	Maximum Overall Length	mm	9408
		in	370.4
4	Reach with Forks at Ground Level	mm	1657
		in	65.2
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	2119
		in	83.4
7	Reach with Fork at Maximum Height	mm	1064
		in	41.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4318
		in	170.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5358
		in	210.9
11	Clearance at Full Lift and Max Dump	mm	2826
		in	111.3
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	17800
		lbs	39231
	Operating Weight	kg	19986
		lbs	44049

*Negative values indicate below grade


950 HL Construction Fork, FUSION

96" Carriage 60" Tine
520-7957 520-7980

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

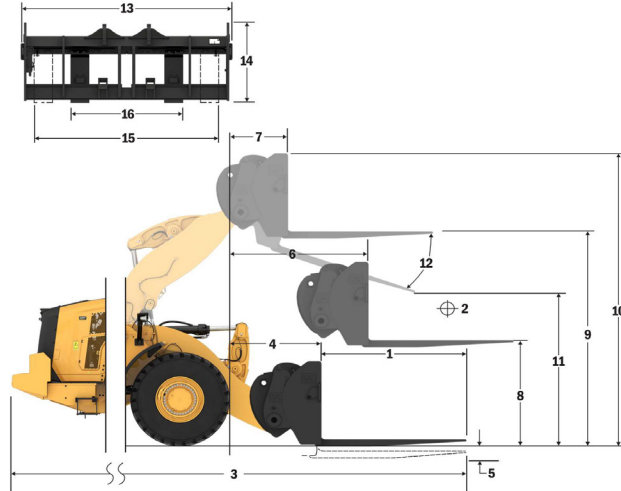

Capacity (kg)
(Calculated Load at CG Point)

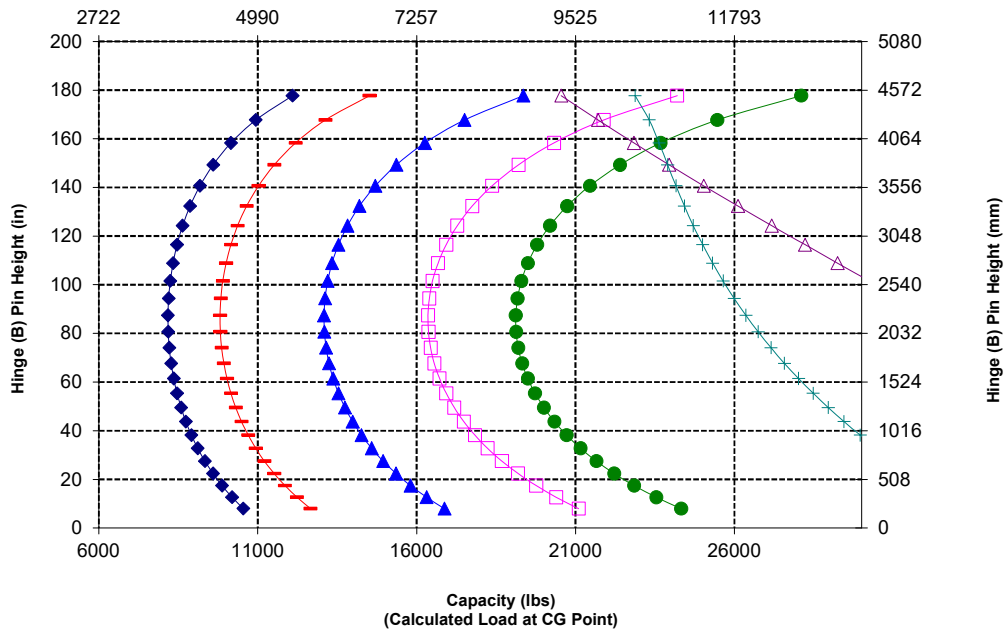

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1829
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	8266
		lbs	18218
	Static Tipping Load - Articulated (Forks Level)	kg	7063
		lbs	15566
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3531
		lbs	7783
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4238
		lbs	9340
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5650
		lbs	12453
3	Maximum Overall Length	mm	9713
		in	382.4
4	Reach with Forks at Ground Level	mm	1657
		in	65.2
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	2119
		in	83.4
7	Reach with Fork at Maximum Height	mm	1064
		in	41.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4318
		in	170.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5358
		in	210.9
11	Clearance at Full Lift and Max Dump	mm	2592
		in	102.1
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	14800
		lbs	32619
	Operating Weight	kg	20047
		lbs	44183

*Negative values indicate below grade


950 HL Construction Fork, FUSION

96" Carriage 72" Tine
520-7957 520-7979

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

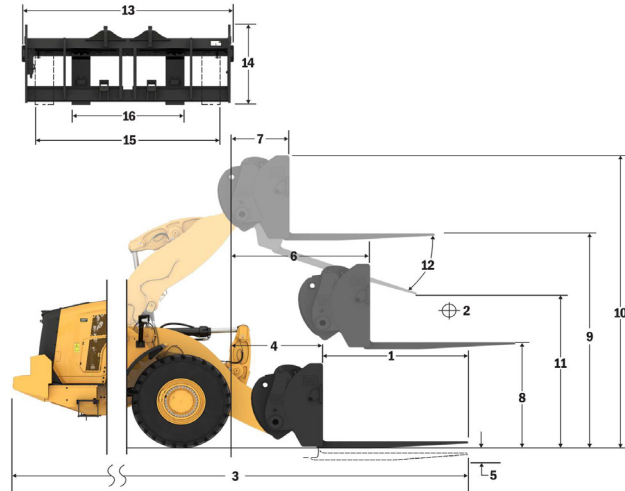

Capacity (kg)
(Calculated Load at CG Point)

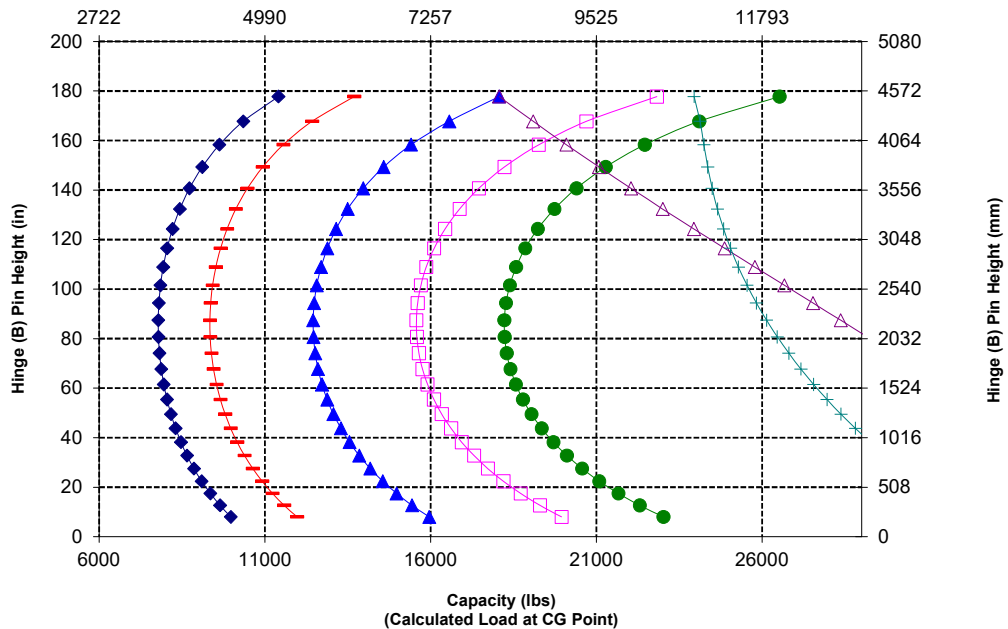

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	2134
		in	84.0
2	Load Center	mm	1067
		in	42.0
	Static Tipping Load - Straight (Forks Level)	kg	7884
		lbs	17376
	Static Tipping Load - Articulated (Forks Level)	kg	6726
		lbs	14825
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3363
		lbs	7413
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4036
		lbs	8895
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5381
		lbs	11860
3	Maximum Overall Length	mm	10018
		in	394.4
4	Reach with Forks at Ground Level	mm	1657
		in	65.2
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	2119
		in	83.4
7	Reach with Fork at Maximum Height	mm	1064
		in	41.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4318
		in	170.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5358
		in	210.9
11	Clearance at Full Lift and Max Dump	mm	2358
		in	92.8
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	12700
		lbs	27991
	Operating Weight	kg	20110
		lbs	44322

*Negative values indicate below grade


950 HL Construction Fork, FUSION

96" Carriage 84" Tine
520-7957 520-7986

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

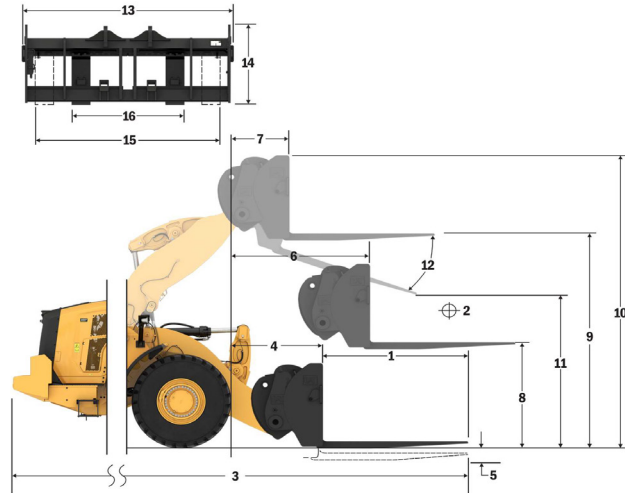

Capacity (kg)
(Calculated Load at CG Point)

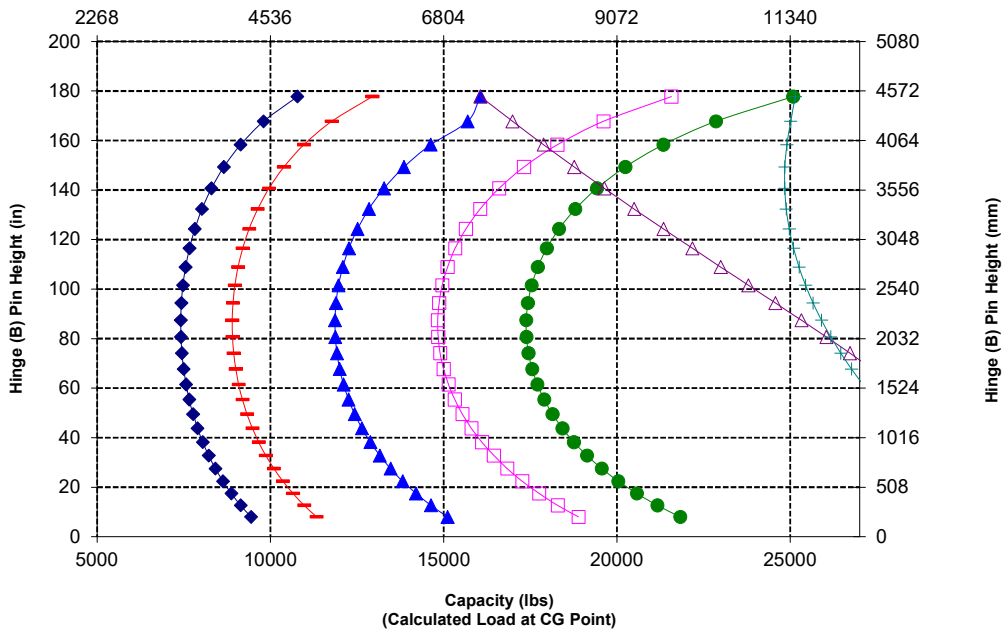

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	7528
		lbs	16592
	Static Tipping Load - Articulated (Forks Level)	kg	6412
		lbs	14133
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3206
		lbs	7067
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	3847
		lbs	8480
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5130
		lbs	11306
3	Maximum Overall Length	mm	10322
		in	406.4
4	Reach with Forks at Ground Level	mm	1657
		in	65.2
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	2119
		in	83.4
7	Reach with Fork at Maximum Height	mm	1064
		in	41.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4318
		in	170.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5358
		in	210.9
11	Clearance at Full Lift and Max Dump	mm	2125
		in	83.7
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	11300
		lbs	24905
	Operating Weight	kg	20172
		lbs	44459


*Negative values indicate below grade

950 HL Construction Fork, FUSION


96" Carriage
520-7957

96" Tine
520-7981

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

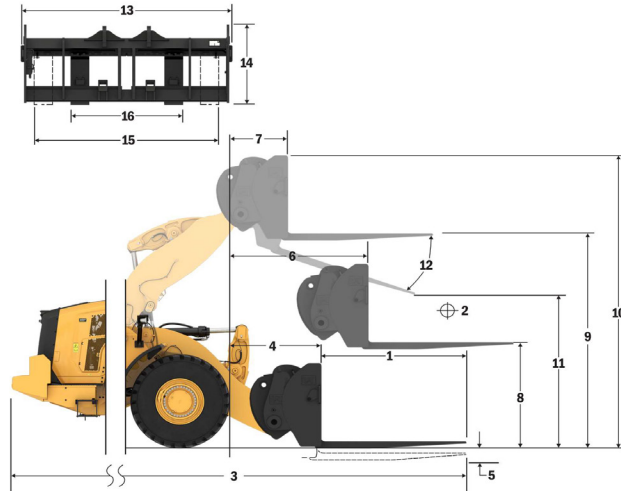

Capacity (kg)
(Calculated Load at CG Point)

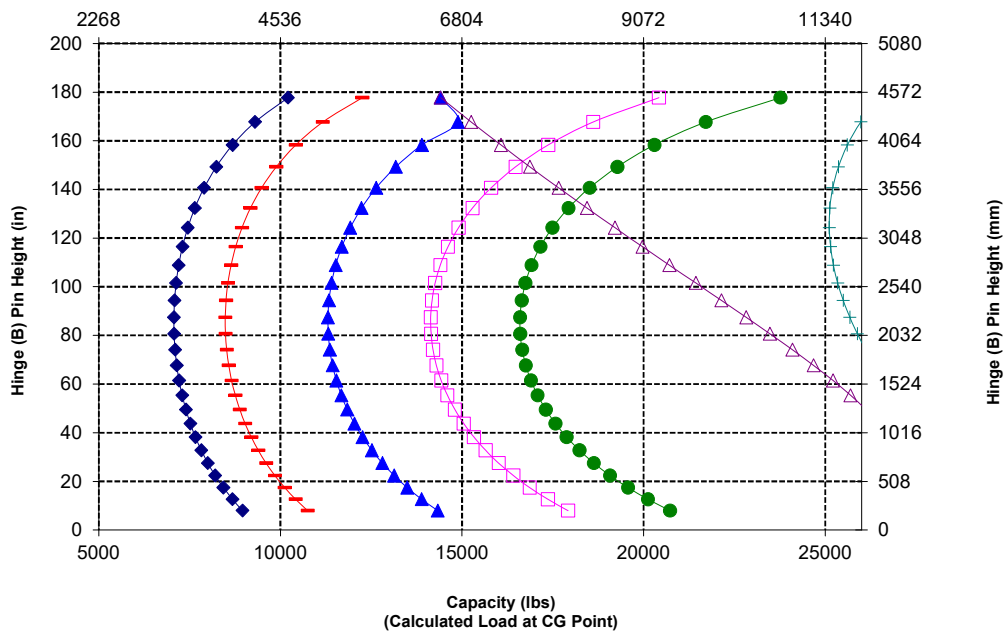

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1219
		in	48.0
2	Load Center	mm	610
		in	24.0
	Static Tipping Load - Straight (Forks Level)	kg	9070
		lbs	19991
	Static Tipping Load - Articulated (Forks Level)	kg	7765
		lbs	17114
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3882
		lbs	8557
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4659
		lbs	10268
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6212
		lbs	13691
3	Maximum Overall Length	mm	9103
		in	358.4
4	Reach with Forks at Ground Level	mm	1657
		in	65.2
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	2119
		in	83.4
7	Reach with Fork at Maximum Height	mm	1064
		in	41.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4318
		in	170.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5358
		in	210.9
11	Clearance at Full Lift and Max Dump	mm	3060
		in	120.5
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2493
		in	98.1
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	22200
		lbs	48929
	Operating Weight	kg	19973
		lbs	44020


*Negative values indicate below grade

950 HL Construction Fork, FUSION


108" Carriage
520-7968

48" Tine
520-7985

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

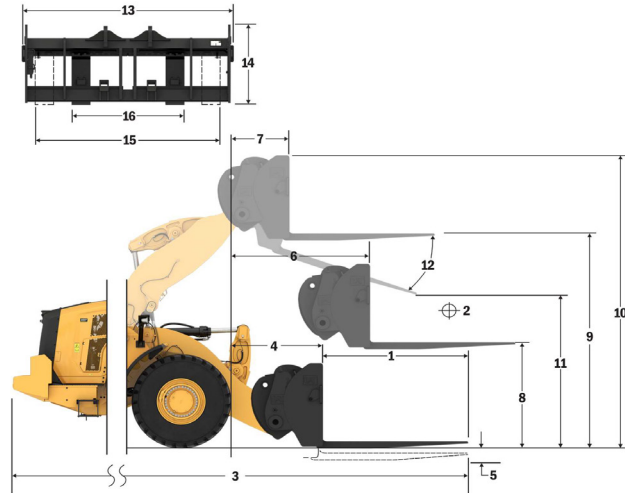

Capacity (kg)
(Calculated Load at CG Point)

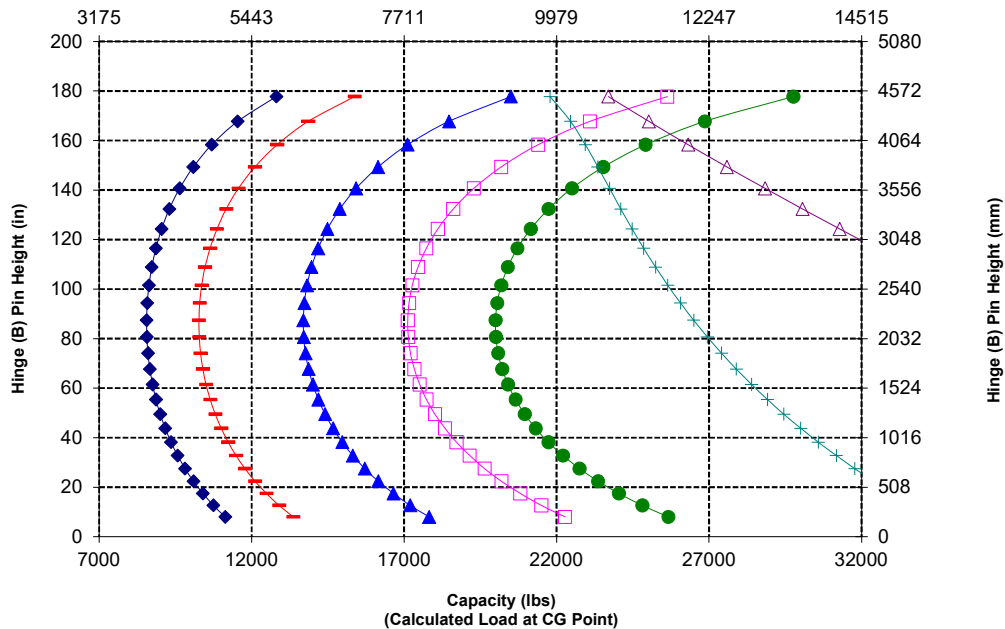

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJTL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	8636
		lbs	19033
	Static Tipping Load - Articulated (Forks Level)	kg	7383
		lbs	16273
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3692
		lbs	8137
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4430
		lbs	9764
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5907
		lbs	13018
3	Maximum Overall Length	mm	9408
		in	370.4
4	Reach with Forks at Ground Level	mm	1657
		in	65.2
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	2119
		in	83.4
7	Reach with Fork at Maximum Height	mm	1064
		in	41.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4318
		in	170.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5358
		in	210.9
11	Clearance at Full Lift and Max Dump	mm	2826
		in	111.3
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	17800
		lbs	39231
	Operating Weight	kg	20035
		lbs	44157

*Negative values indicate below grade


950 HL Construction Fork, FUSION

108" Carriage 60" Tine
520-7968 520-7980

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

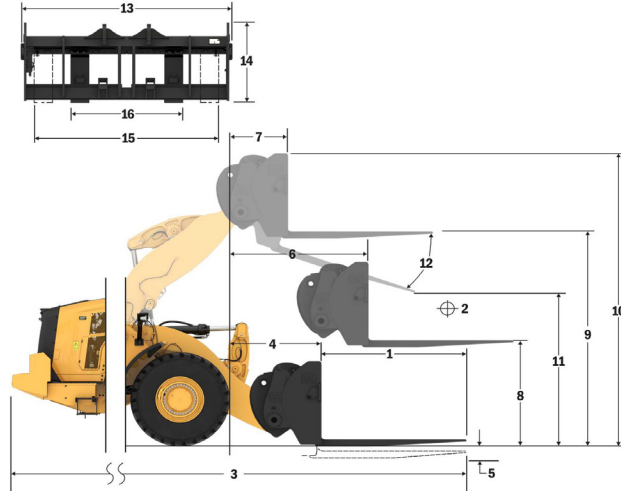

Capacity (kg)
(Calculated Load at CG Point)

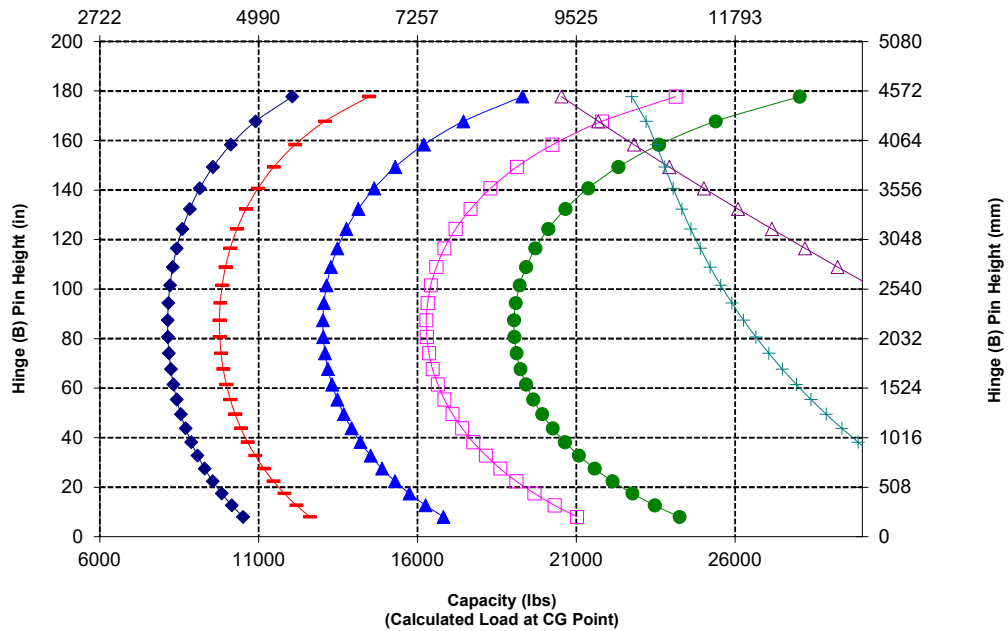

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1829
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	8230
		lbs	18139
	Static Tipping Load - Articulated (Forks Level)	kg	7027
		lbs	15487
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3513
		lbs	7743
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4216
		lbs	9292
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5621
		lbs	12389
3	Maximum Overall Length	mm	9713
		in	382.4
4	Reach with Forks at Ground Level	mm	1657
		in	65.2
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	2119
		in	83.4
7	Reach with Fork at Maximum Height	mm	1064
		in	41.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4318
		in	170.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5358
		in	210.9
11	Clearance at Full Lift and Max Dump	mm	2592
		in	102.1
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	14800
		lbs	32619
	Operating Weight	kg	20097
		lbs	44293

*Negative values indicate below grade


950 HL Construction Fork, FUSION

108" Carriage 72" Tine
520-7968 520-7979

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

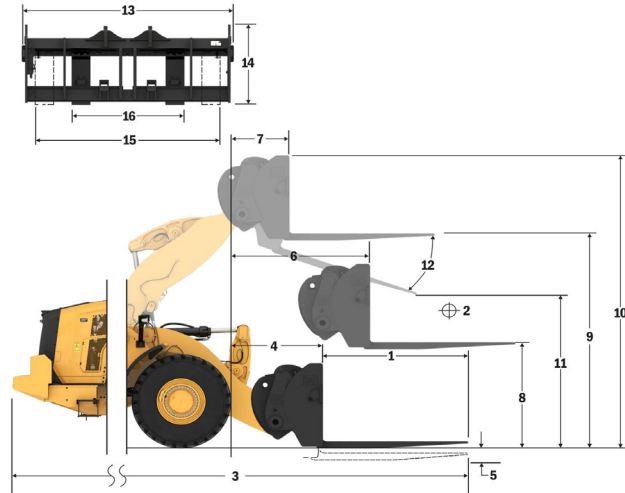

Capacity (kg)
(Calculated Load at CG Point)

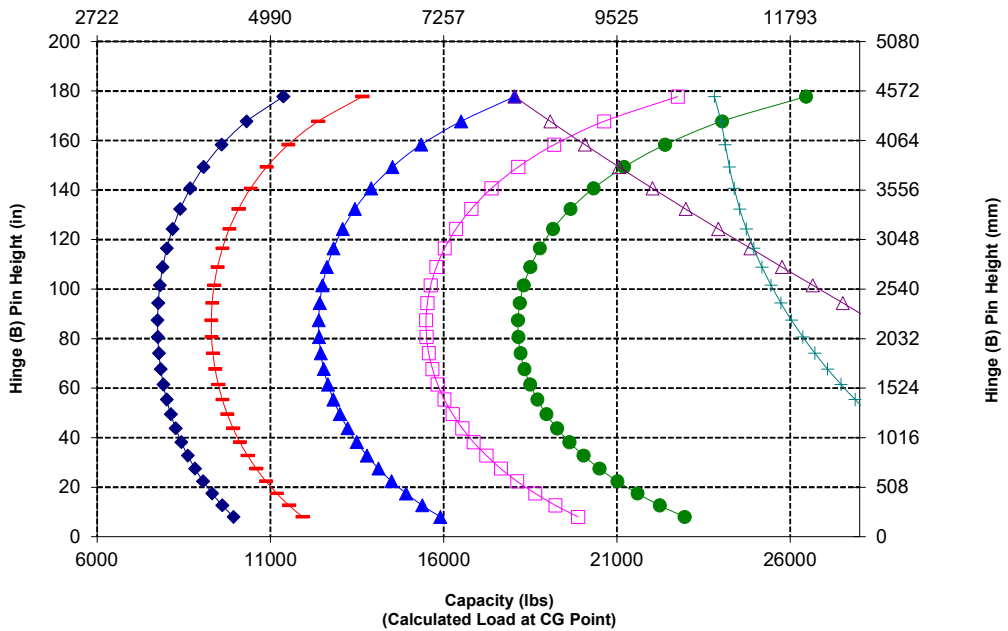

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJTL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	2134
		in	84.0
2	Load Center	mm	1067
		in	42.0
	Static Tipping Load - Straight (Forks Level)	kg	7850
		lbs	17302
	Static Tipping Load - Articulated (Forks Level)	kg	6693
		lbs	14751
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3346
		lbs	7375
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4016
		lbs	8850
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5354
		lbs	11801
3	Maximum Overall Length	mm	10018
		in	394.4
4	Reach with Forks at Ground Level	mm	1657
		in	65.2
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	2119
		in	83.4
7	Reach with Fork at Maximum Height	mm	1064
		in	41.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4318
		in	170.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5358
		in	210.9
11	Clearance at Full Lift and Max Dump	mm	2358
		in	92.8
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	12700
		lbs	27991
	Operating Weight	kg	20159
		lbs	44430

*Negative values indicate below grade


950 HL Construction Fork, FUSION

108" Carriage 84" Tine
520-7968 520-7986

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

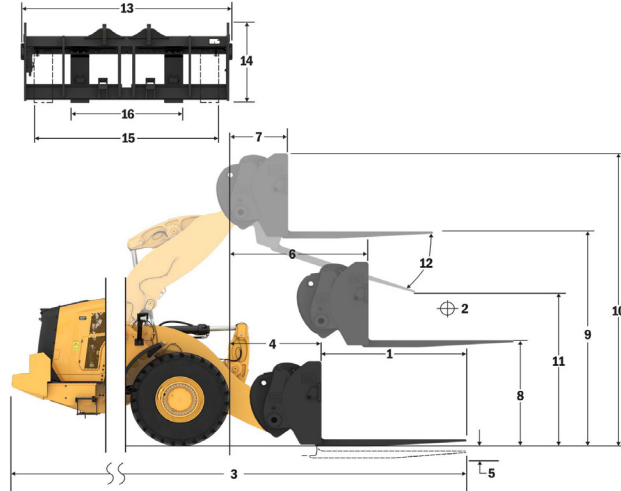

Capacity (kg)
(Calculated Load at CG Point)

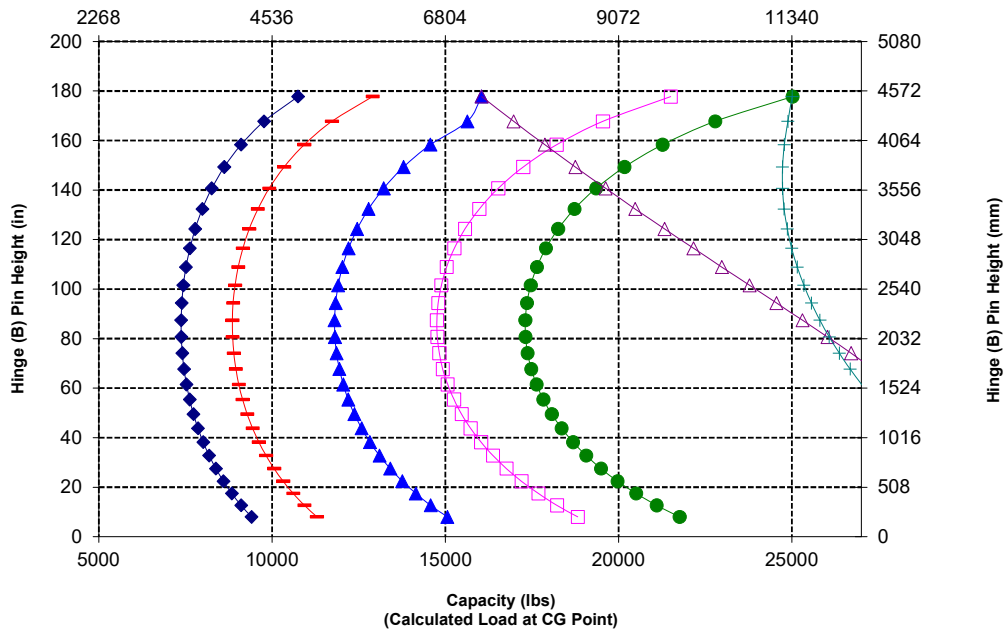

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	7495
		lbs	16518
	Static Tipping Load - Articulated (Forks Level)	kg	6379
		lbs	14059
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3190
		lbs	7030
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	3827
		lbs	8436
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5103
		lbs	11248
3	Maximum Overall Length	mm	10322
		in	406.4
4	Reach with Forks at Ground Level	mm	1657
		in	65.2
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	2119
		in	83.4
7	Reach with Fork at Maximum Height	mm	1064
		in	41.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	4318
		in	170.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5358
		in	210.9
11	Clearance at Full Lift and Max Dump	mm	2125
		in	83.7
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	11300
		lbs	24905
	Operating Weight	kg	20222
		lbs	44569


*Negative values indicate below grade

950 HL Construction Fork, FUSION


108" Carriage
520-7968

96" Tine
520-7981

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

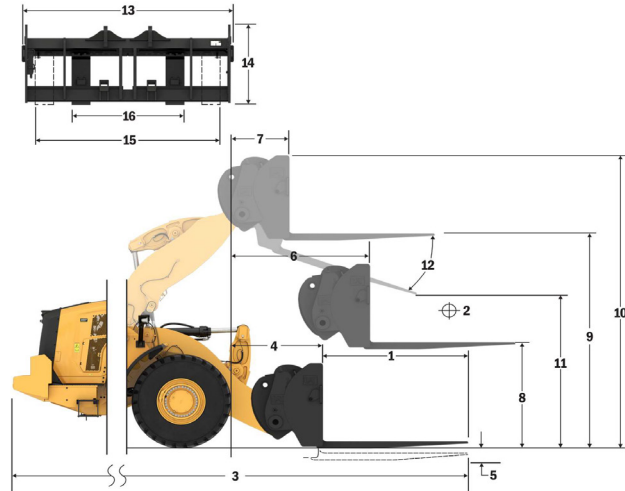

Capacity (kg)
(Calculated Load at CG Point)

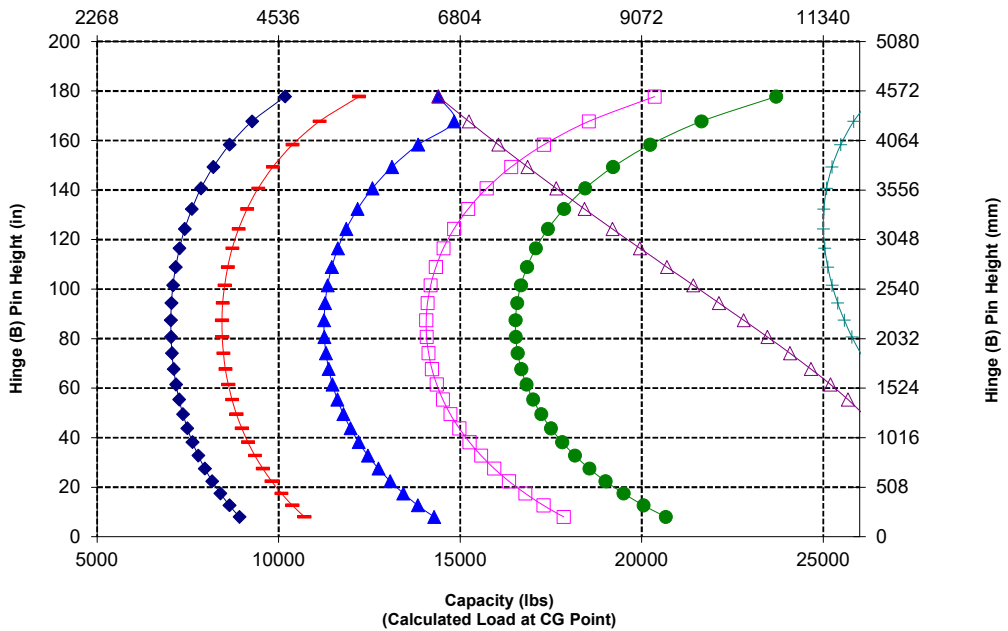

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJTL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Material Handling Arm Specifications

950 HL

289-9885


Material Handling Arm, FUSION

6 Position

MHA Specifications

	Retracted	Extension 1	Extension 2	Extension 3	Extension 4	Extended
Max Lift - Hook Eyelet Reach (1, 2, 3, 4, 5, 6)	mm 2,445	2,594	2,743	2,892	3,041	3,189
	ft. in 8' 0"	8' 6"	8' 11"	9' 5"	9' 11"	10' 5"
Max Lift - Hook Eyelet Height (7, 8, 9, 10, 11, 12)	mm 7,283	7,549	7,815	8,081	8,347	8,613
	ft. in 23' 10"	24' 9"	25' 7"	26' 6"	27' 4"	28' 3"
Level - Hook Eyelet Reach (13, 14, 15, 16, 17, 18)	mm 4,985	5,290	5,595	5,900	6,204	6,509
	ft. in 16' 4"	17' 4"	18' 4"	19' 4"	20' 4"	21' 4"
Level - Hook Eyelet Height (19)	mm 1,842	1,842	1,842	1,842	1,842	1,842
	ft. in 6' 0.5"	6' 0.5"	6' 0.5"	6' 0.5"	6' 0.5"	6' 0.5"
Min Lift - Hook Eyelet Reach (20, 21, 22, 23, 24, 25)	mm 2,812	2,987	3,161	3,336	3,510	3,685
	ft. in 9' 2"	9' 9"	10' 4"	10' 11"	11' 6"	12' 1"
Min Lift - Hook Eyelet Height (26, 27, 28, 29, 30, 31)	mm (2,638)	(2,888)	(3,138)	(3,388)	(3,638)	(3,888)
	ft. in -8' 4"	-9' 6"	-10' 8"	-11' 10"	-11' 0"	-12' 2"
Static Tipping Load, Straight	kg 5,788	5,492	5,224	4,980	4,758	4,553
	lb 12,756	12,104	11,514	10,977	10,486	10,036
Static Tipping Load, Articulated	kg 4,993	4,737	4,505	4,294	4,102	3,925
	lb 11,006	10,441	9,930	9,465	9,040	8,650
Operating Weight	kg 19,369	19,369	19,369	19,369	19,369	19,369
	lb 42,689	42,689	42,689	42,689	42,689	42,689

*Build 14A
*Parallel Z-Bar Linkage
*High Lift Configuration

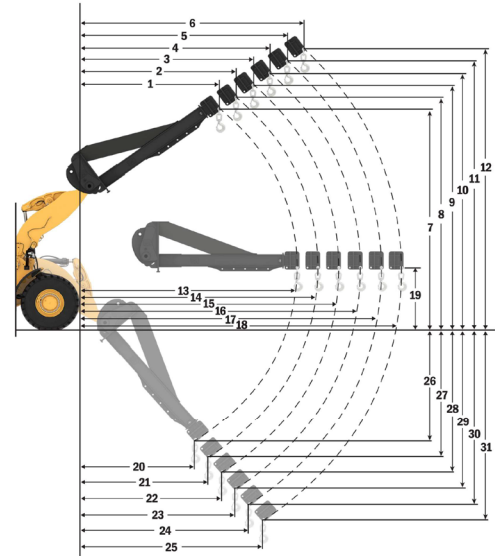

- Retracted
- Extension 1
- Extension 2
- Extension 3
- Extension 4
- Extended


NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1

The rated operating load for a loader equipped with a material handling arm is determined by:

SAE J1197: 50% of full turn static tipping load or hydraulic limit.

*SAE - Society of Automotive Engineers

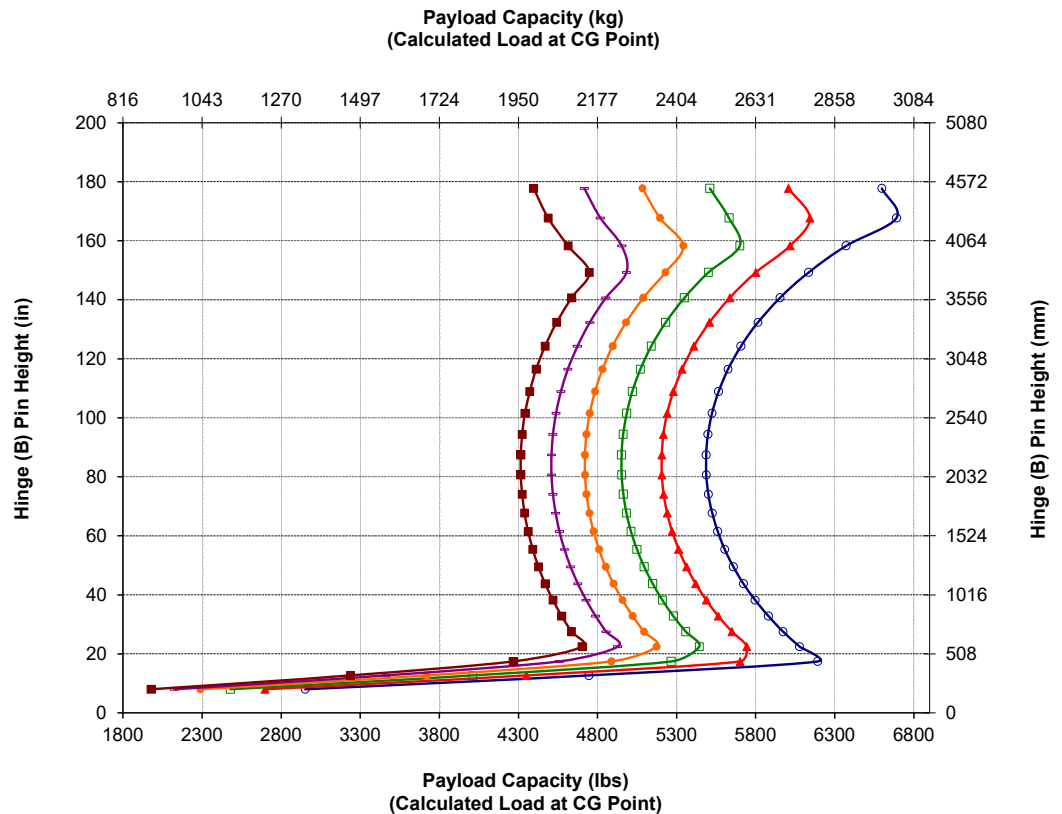

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	10234
		lbs	22556
	Static Tipping Load - Articulated (Forks Level)	kg	8847
		lbs	19498
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4423
		lbs	9749
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5308
		lbs	11699
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	7077
		lbs	15598
3	Maximum Overall Length	mm	9009
		in	354.7
4	Reach with Forks at Ground Level	mm	1258
		in	49.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-160
		in	-6.3
6	Reach with Arms Horizontal and Forks Level	mm	1752
		in	69.0
7	Reach with Fork at Maximum Height	mm	1037
		in	40.8
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1772
		in	69.7
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3707
		in	145.9
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4482
		in	176.4
11	Clearance at Full Lift and Max Dump	mm	2327
		in	91.6
12	Max Discharge Angle from Horizontal	deg	47
13	Overall Carriage Width	mm	2217
		in	87.3
14	Overall Carriage Height	mm	840
		in	33.1
15	Outside Tine Width (max spread)	mm	2070
		in	81.5
16	Outside Tine Width (min spread)	mm	470
		in	18.5
	Tine Width (single tine)	mm	150.0
		in	5.9
	Tine Thickness	mm	65.0
		in	2.6
	Tine Capacity	kg	6300
		lbs	13885
	Operating Weight	kg	19360
		lbs	42670


*Negative values indicate below grade

950 AUX Pallet Fork, FUSION


87" Carriage
530-1861

60" Tine
548-3265

*Build 14A
*Parallel Z-Bar Linkage
*Auxiliary CTWT Configuration

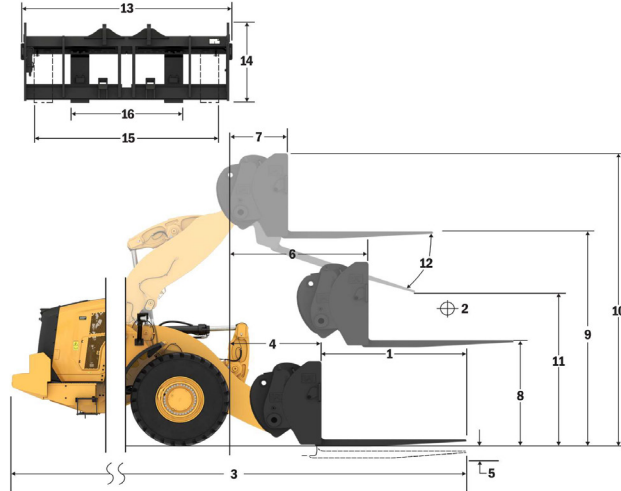

Capacity (kg)
(Calculated Load at CG Point)

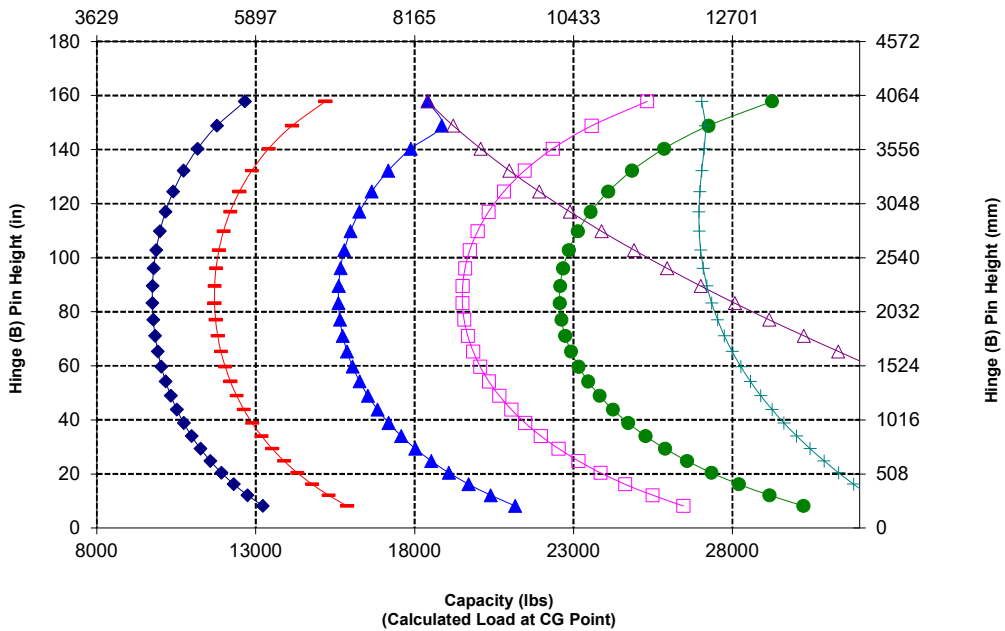

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1830
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	9741
		lbs	21470
	Static Tipping Load - Articulated (Forks Level)	kg	8414
		lbs	18545
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4207
		lbs	9273
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5049
		lbs	11127
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6732
		lbs	14836
3	Maximum Overall Length	mm	9315
		in	366.7
4	Reach with Forks at Ground Level	mm	1258
		in	49.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-160
		in	-6.3
6	Reach with Arms Horizontal and Forks Level	mm	1752
		in	69.0
7	Reach with Fork at Maximum Height	mm	1037
		in	40.8
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1772
		in	69.7
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3707
		in	145.9
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4482
		in	176.4
11	Clearance at Full Lift and Max Dump	mm	2105
		in	82.9
12	Max Discharge Angle from Horizontal	deg	47
13	Overall Carriage Width	mm	2217
		in	87.3
14	Overall Carriage Height	mm	840
		in	33.1
15	Outside Tine Width (max spread)	mm	2070
		in	81.5
16	Outside Tine Width (min spread)	mm	470
		in	18.5
	Tine Width (single tine)	mm	150.0
		in	5.9
	Tine Thickness	mm	65.0
		in	2.6
	Tine Capacity	kg	5246
		lbs	11562
	Operating Weight	kg	19407
		lbs	42774

*Negative values indicate below grade


950 AUX Pallet Fork, FUSION

87" Carriage 72" Tine
530-1861 530-1869

*Build 14A
*Parallel Z-Bar Linkage
*Auxiliary CTWT Configuration

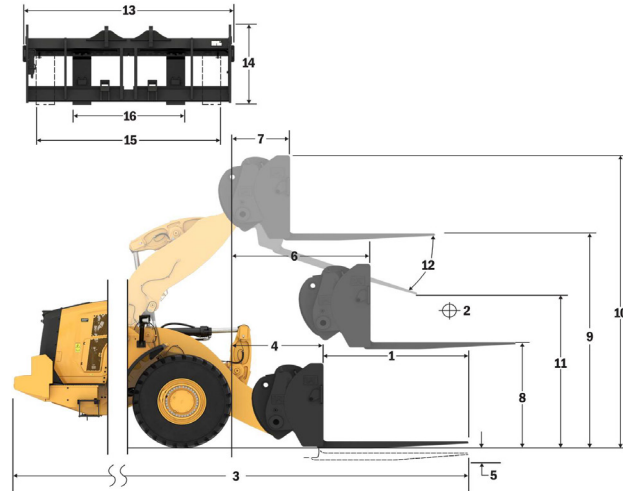

Capacity (kg)
(Calculated Load at CG Point)

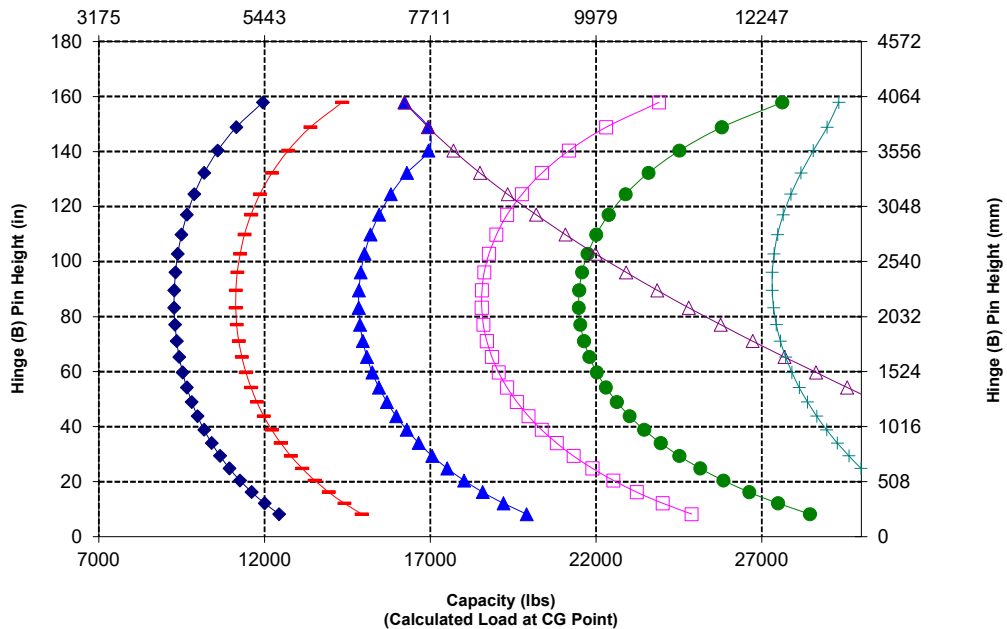

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	9966
		lbs	21966
	Static Tipping Load - Articulated (Forks Level)	kg	8575
		lbs	18899
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4287
		lbs	9450
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5145
		lbs	11340
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6860
		lbs	15119
3	Maximum Overall Length	mm	8964
		in	352.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	2272
		in	89.5
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	17800
		lbs	39231
	Operating Weight	kg	19735
		lbs	43497

*Negative values indicate below grade

950 AUX Construction Fork, FUSION


96" Carriage

60" Tine


520-7957

520-7980

- *Build 14A
- *Parallel Z-Bar Linkage
- *Auxiliary CTWT Configuration

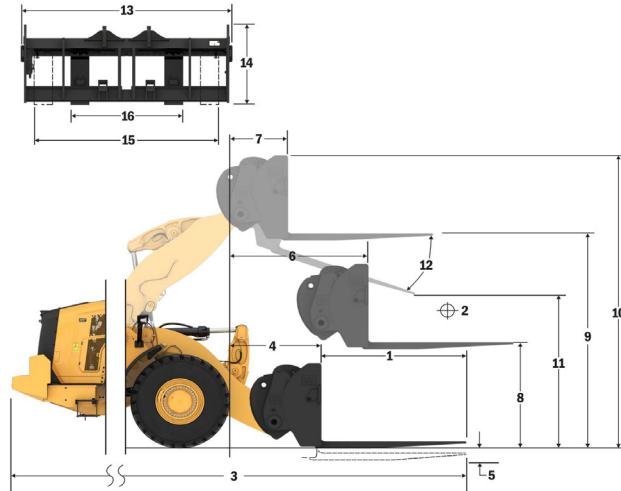

Capacity (kg)
(Calculated Load at CG Point)

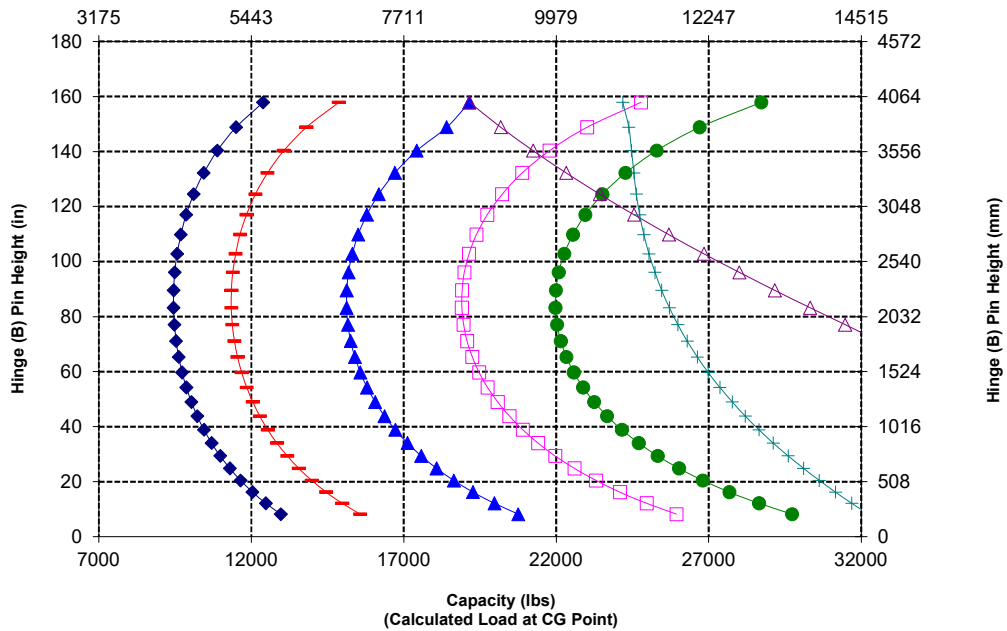

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1829
		in	72.0
2	Load Center	mm	935
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	9468
		lbs	20867
	Static Tipping Load - Articulated (Forks Level)	kg	8137
		lbs	17934
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4068
		lbs	8967
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4882
		lbs	10760
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6510
		lbs	14347
3	Maximum Overall Length	mm	9269
		in	364.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	2029
		in	79.9
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	14800
		lbs	32619
	Operating Weight	kg	19796
		lbs	43631

*Negative values indicate below grade


950 AUX Construction Fork, FUSION

96" Carriage 72" Tine
520-7957 520-7979

*Build 14A
*Parallel Z-Bar Linkage
*Auxiliary CTWT Configuration

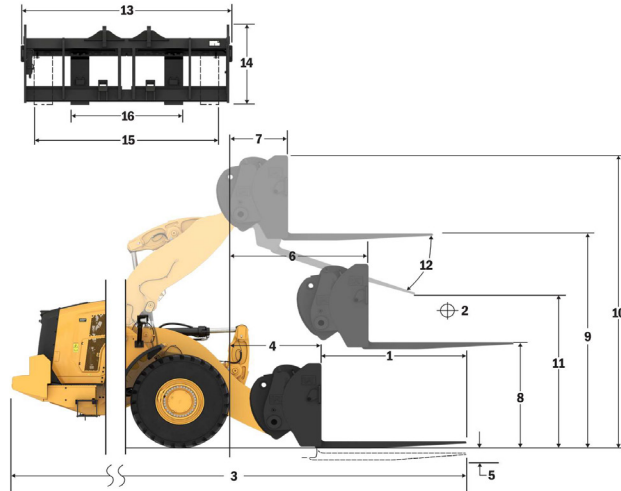

Capacity (kg)
(Calculated Load at CG Point)

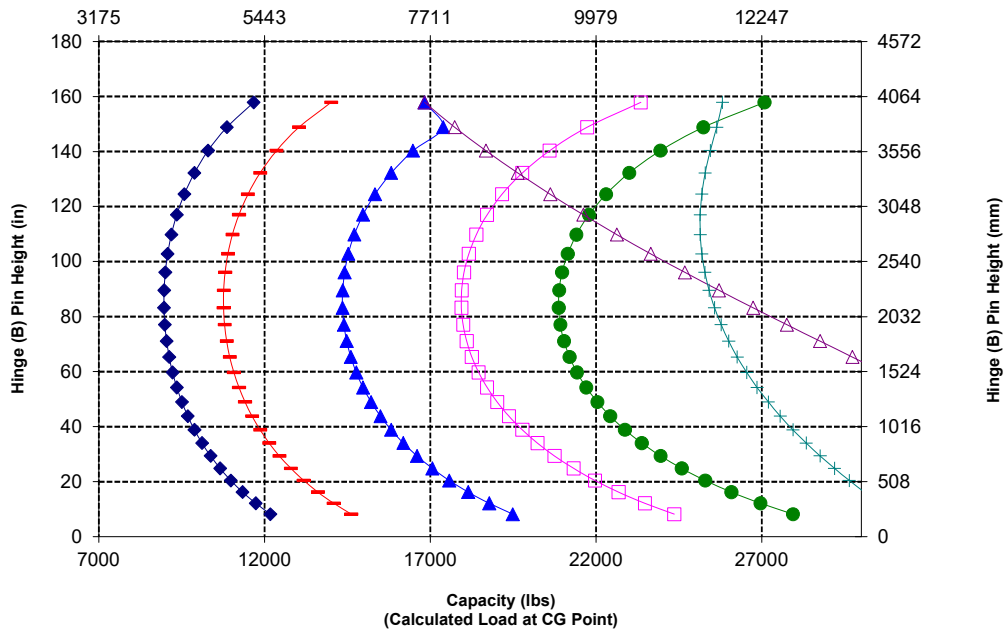

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	2134
		in	84.0
2	Load Center	mm	1067
		in	42.0
	Static Tipping Load - Straight (Forks Level)	kg	9004
		lbs	19845
	Static Tipping Load - Articulated (Forks Level)	kg	7729
		lbs	17034
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3864
		lbs	8517
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4637
		lbs	10220
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6183
		lbs	13627
3	Maximum Overall Length	mm	9574
		in	376.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	1786
		in	70.3
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	12700
		lbs	27991
	Operating Weight	kg	19859
		lbs	43770

*Negative values indicate below grade


950 AUX Construction Fork, FUSION

96" Carriage 84" Tine
520-7957 520-7986

*Build 14A
*Parallel Z-Bar Linkage
*Auxiliary CTWT Configuration

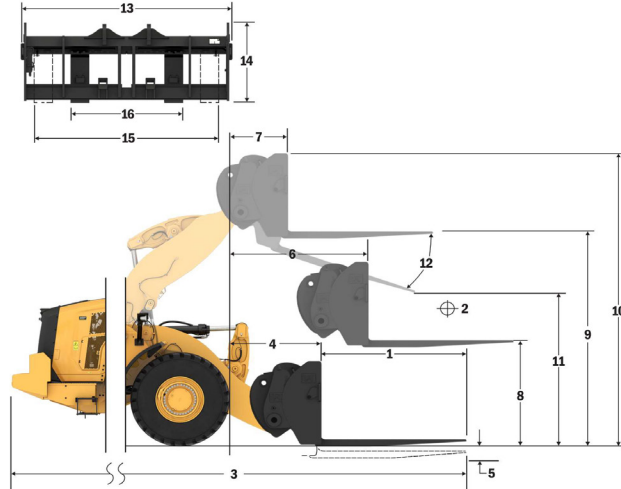

Capacity (kg)
(Calculated Load at CG Point)

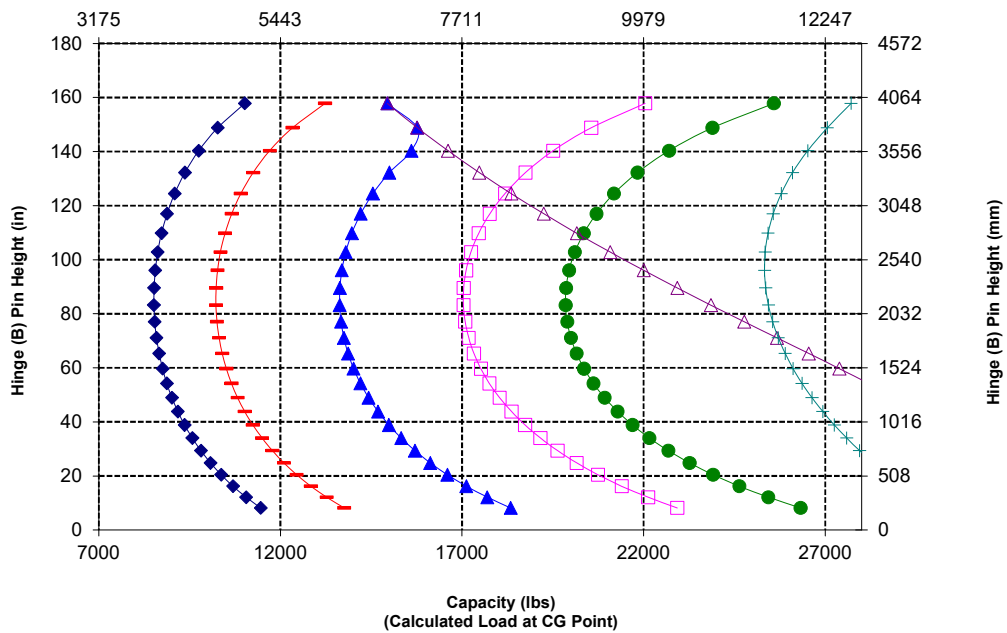

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJL L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	8575
		lbs	18899
	Static Tipping Load - Articulated (Forks Level)	kg	7351
		lbs	16201
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3675
		lbs	8100
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4410
		lbs	9720
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5880
		lbs	12960
3	Maximum Overall Length	mm	9878
		in	388.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	1544
		in	60.8
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	11300
		lbs	24905
	Operating Weight	kg	19921
		lbs	43907


*Negative values indicate below grade

950 AUX Construction Fork, FUSION


96" Carriage
520-7957

96" Tine
520-7981

*Build 14A
*Parallel Z-Bar Linkage
*Auxiliary CTWT Configuration

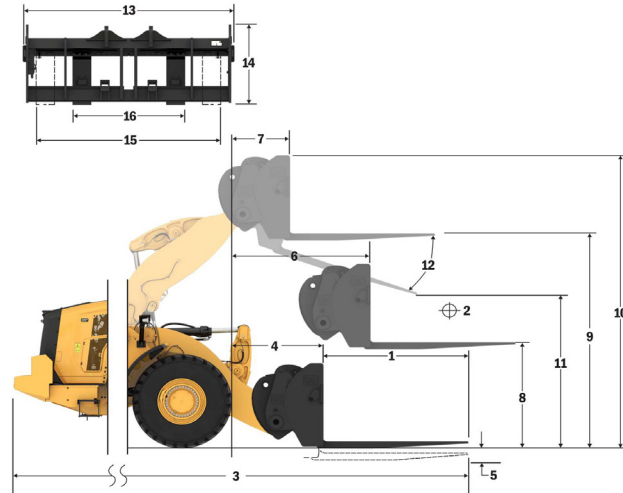

Capacity (kg)
(Calculated Load at CG Point)

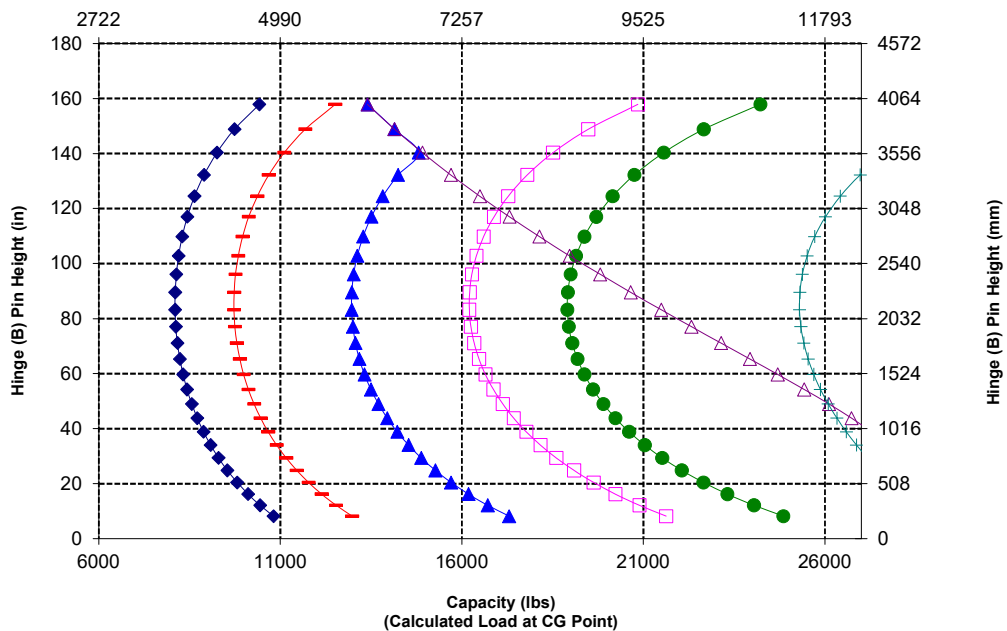

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	9931
		lbs	21888
	Static Tipping Load - Articulated (Forks Level)	kg	8540
		lbs	18822
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4270
		lbs	9411
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5124
		lbs	11293
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6832
		lbs	15058
3	Maximum Overall Length	mm	8964
		in	352.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	2272
		in	89.5
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	17800
		lbs	39231
	Operating Weight	kg	19784
		lbs	43605

*Negative values indicate below grade


950 AUX Construction Fork, FUSION

108" Carriage 60" Tine
520-7968 520-7980

*Build 14A
*Parallel Z-Bar Linkage
*Auxiliary CTWT Configuration

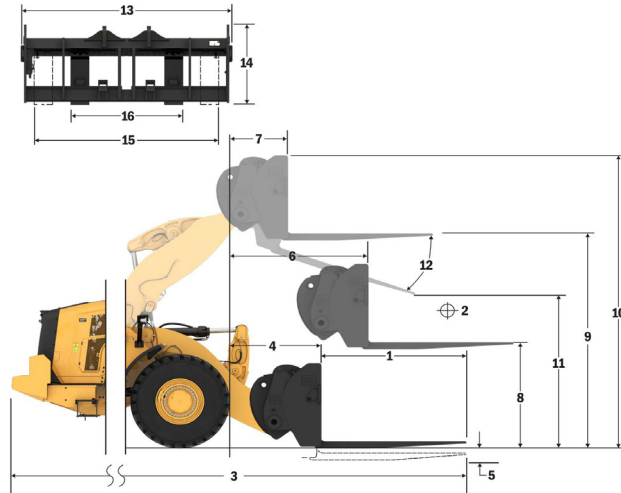

Capacity (kg)
(Calculated Load at CG Point)

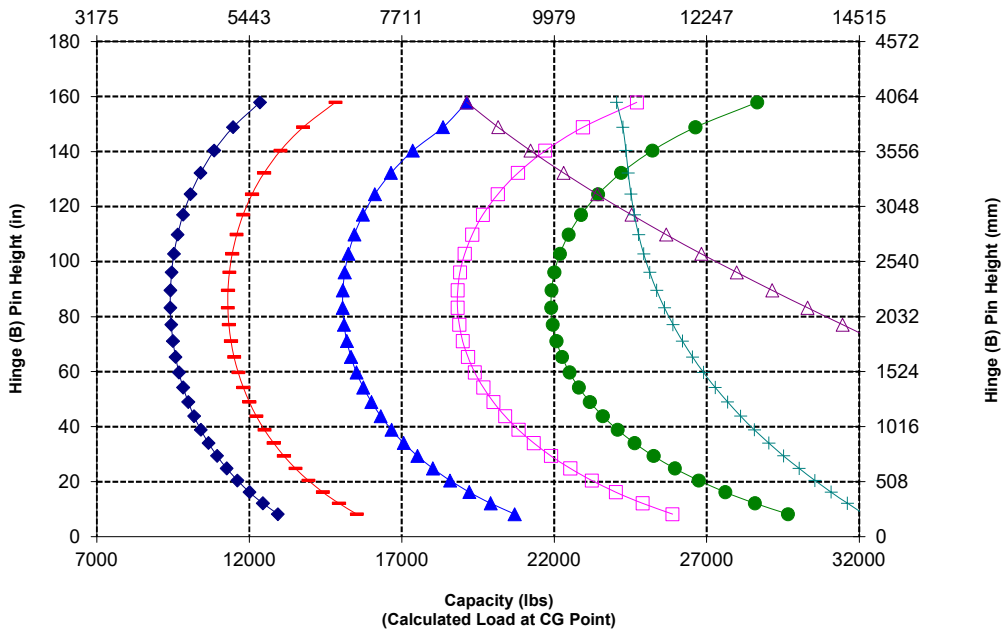

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	1829
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	9433
		lbs	20790
	Static Tipping Load - Articulated (Forks Level)	kg	8102
		lbs	17858
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4051
		lbs	8929
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4861
		lbs	10715
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6482
		lbs	14286
3	Maximum Overall Length	mm	9269
		in	364.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	2029
		in	79.9
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	14800
		lbs	32619
	Operating Weight	kg	19846
		lbs	43741

*Negative values indicate below grade


950 AUX Construction Fork, FUSION

108" Carriage 72" Tine
520-7968 520-7979

*Build 14A
*Parallel Z-Bar Linkage
*Auxiliary CTWT Configuration

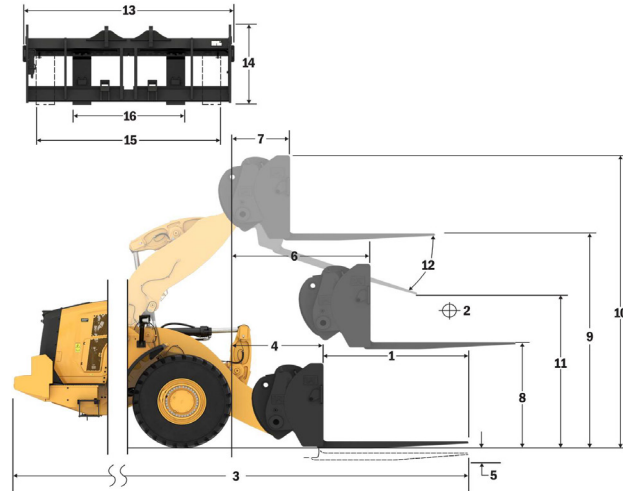

Capacity (kg)
(Calculated Load at CG Point)

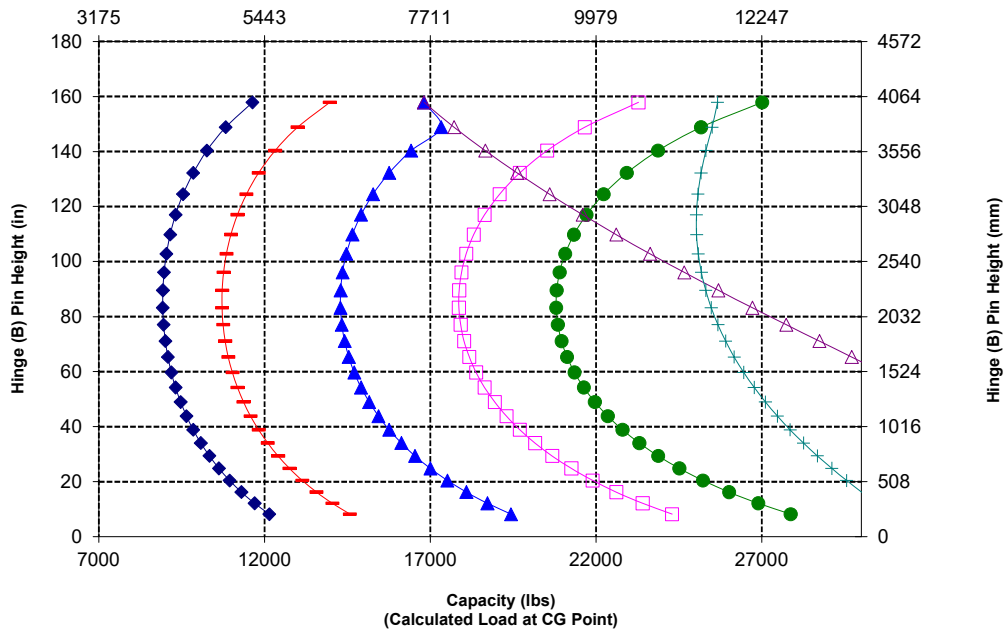

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	2134
		in	84.0
2	Load Center	mm	1067
		in	42.0
	Static Tipping Load - Straight (Forks Level)	kg	8972
		lbs	19774
	Static Tipping Load - Articulated (Forks Level)	kg	7696
		lbs	16963
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3848
		lbs	8482
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4618
		lbs	10178
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6157
		lbs	13570
3	Maximum Overall Length	mm	9574
		in	376.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	1786
		in	70.3
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	12700
		lbs	27991
	Operating Weight	kg	19908
		lbs	43878

*Negative values indicate below grade


950 AUX Construction Fork, FUSION

108" Carriage 84" Tine
520-7968 520-7986

*Build 14A
*Parallel Z-Bar Linkage
*Auxiliary CTWT Configuration

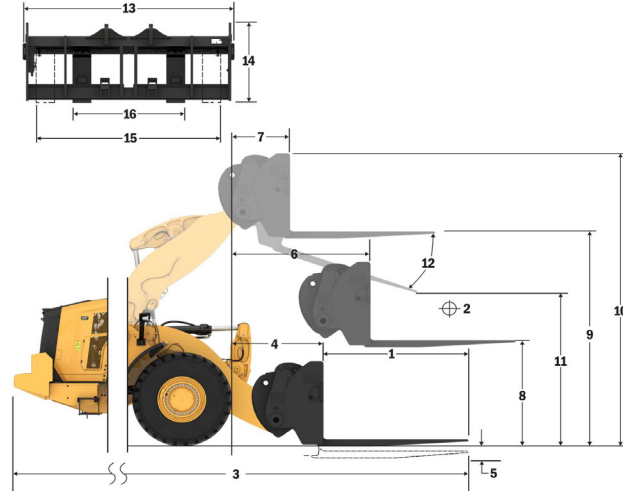

Capacity (kg)
(Calculated Load at CG Point)

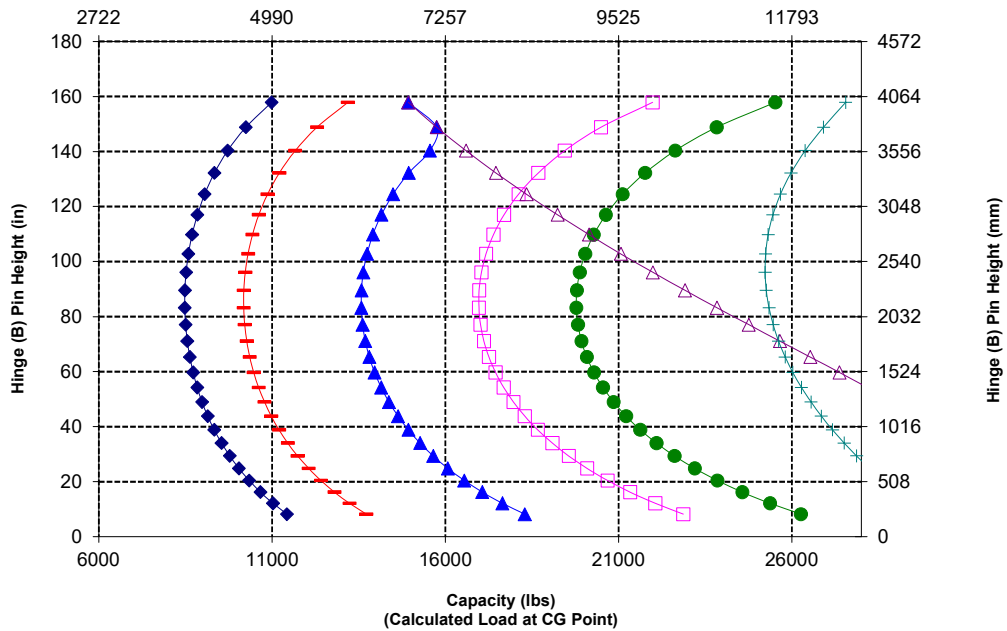

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	8543
		lbs	18829
	Static Tipping Load - Articulated (Forks Level)	kg	7319
		lbs	16131
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3659
		lbs	8065
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4391
		lbs	9678
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5855
		lbs	12904
3	Maximum Overall Length	mm	9878
		in	388.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1029
		in	40.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3812
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4853
		in	191.0
11	Clearance at Full Lift and Max Dump	mm	1544
		in	60.8
12	Max Discharge Angle from Horizontal	deg	53
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	11300
		lbs	24905
	Operating Weight	kg	19971
		lbs	44017

*Negative values indicate below grade


950 AUX Construction Fork, FUSION

108" Carriage 96" Tine
520-7968 520-7981

*Build 14A
*Parallel Z-Bar Linkage
*Auxiliary CTWT Configuration

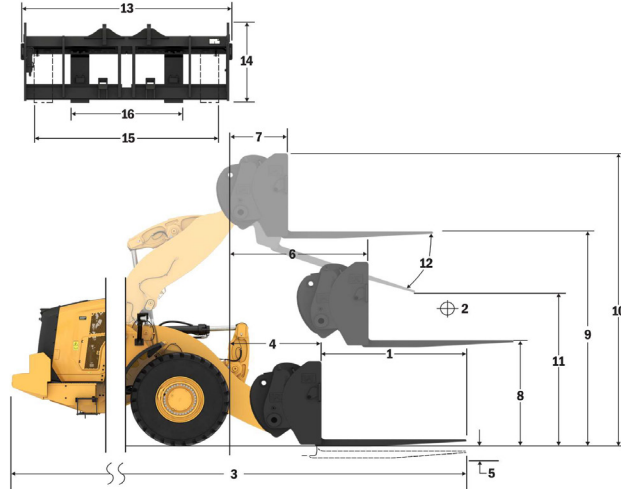

Capacity (kg)
(Calculated Load at CG Point)

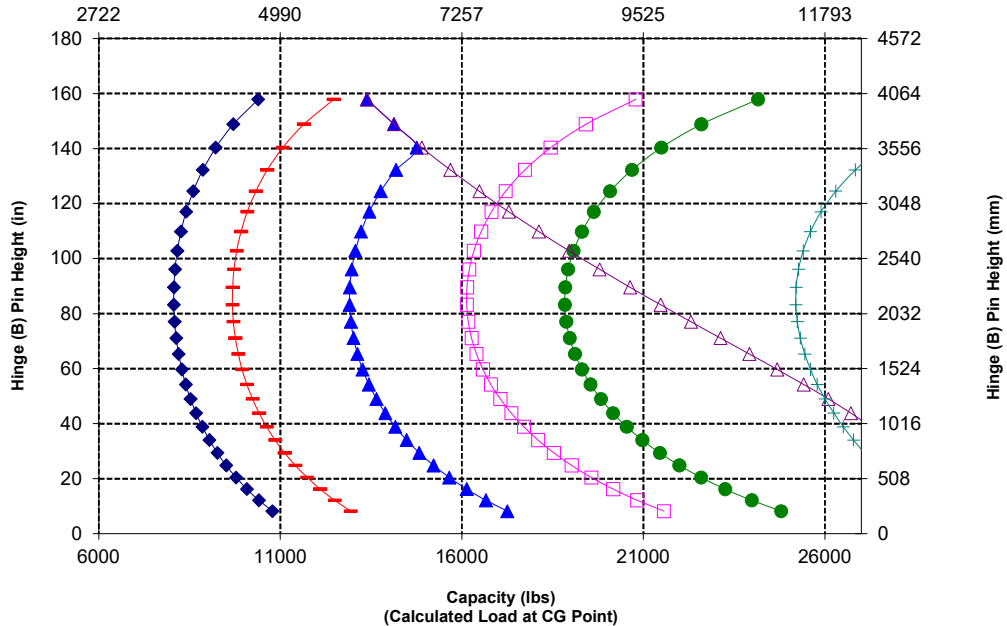

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Wheel Loader Specifications

Material Handling Arm Specifications

950 AUX

289-9885


Material Handling Arm, FUSION

6 Position

MHA Specifications

	Retracted	Extension 1	Extension 2	Extension 3	Extension 4	Extended
Max Lift - Hook Eyelet Reach (1, 2, 3, 4, 5, 6)	mm 2,291	2,429	2,566	2,704	2,842	2,979
	ft. in 7' 6"	7' 11"	8' 5"	8' 10"	9' 3"	9' 9"
Max Lift - Hook Eyelet Height (7, 8, 9, 10, 11, 12)	mm 6,852	7,124	7,396	7,668	7,939	8,211
	ft. in 22' 5"	23' 4"	24' 3"	25' 1"	26' 0"	26' 11"
Level - Hook Eyelet Reach (13, 14, 15, 16, 17, 18)	mm 4,610	4,915	5,220	5,525	5,829	6,134
	ft. in 15' 1"	16' 1"	17' 1"	18' 1"	19' 1"	20' 1"
Level - Hook Eyelet Height (19)	mm 1,842	1,842	1,842	1,842	1,842	1,842
	ft. in 6' 0.5"	6' 0.5"	6' 0.5"	6' 0.5"	6' 0.5"	6' 0.5"
Min Lift - Hook Eyelet Reach (20, 21, 22, 23, 24, 25)	mm 2,416	2,596	2,777	2,957	3,137	3,318
	ft. in 7' 11"	8' 6"	9' 1"	9' 8"	10' 3"	10' 10"
Min Lift - Hook Eyelet Height (26, 27, 28, 29, 30, 31)	mm (2,593)	(2,839)	(3,085)	(3,330)	(3,576)	(3,822)
	ft. in -8' 5"	-9' 8"	-10' 10"	-10' 0"	-11' 3"	-12' 5"
Static Tipping Load, Straight	kg 6,350	6,006	5,695	5,415	5,160	4,927
	lb 13,996	13,236	12,553	11,935	11,373	10,860
Static Tipping Load, Articulated	kg 5,501	5,202	4,932	4,689	4,467	4,265
	lb 12,125	11,465	10,871	10,334	9,845	9,399
Operating Weight	kg 19,118	19,118	19,118	19,118	19,118	19,118
	lb 42,137	42,137	42,137	42,137	42,137	42,137

- *Build 14A
- *Parallel Z-Bar Linkage
- *Auxiliary CTWT Configuration

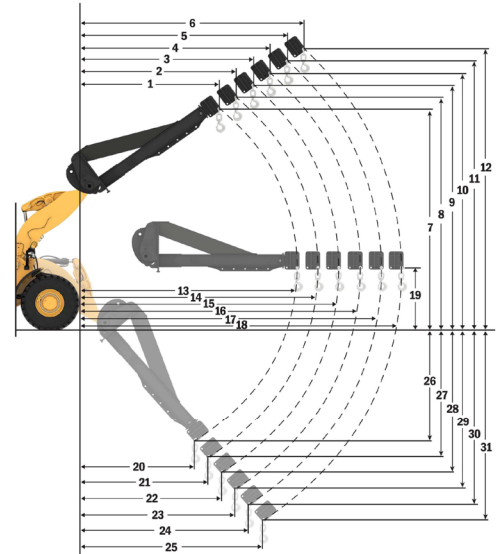

- Retracted
- Extension 1
- Extension 2
- Extension 3
- Extension 4
- Extended


NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1

The rated operating load for a loader equipped with a material handling arm is determined by:

SAE J1197: 50% of full turn static tipping load or hydraulic limit.

*SAE - Society of Automotive Engineers

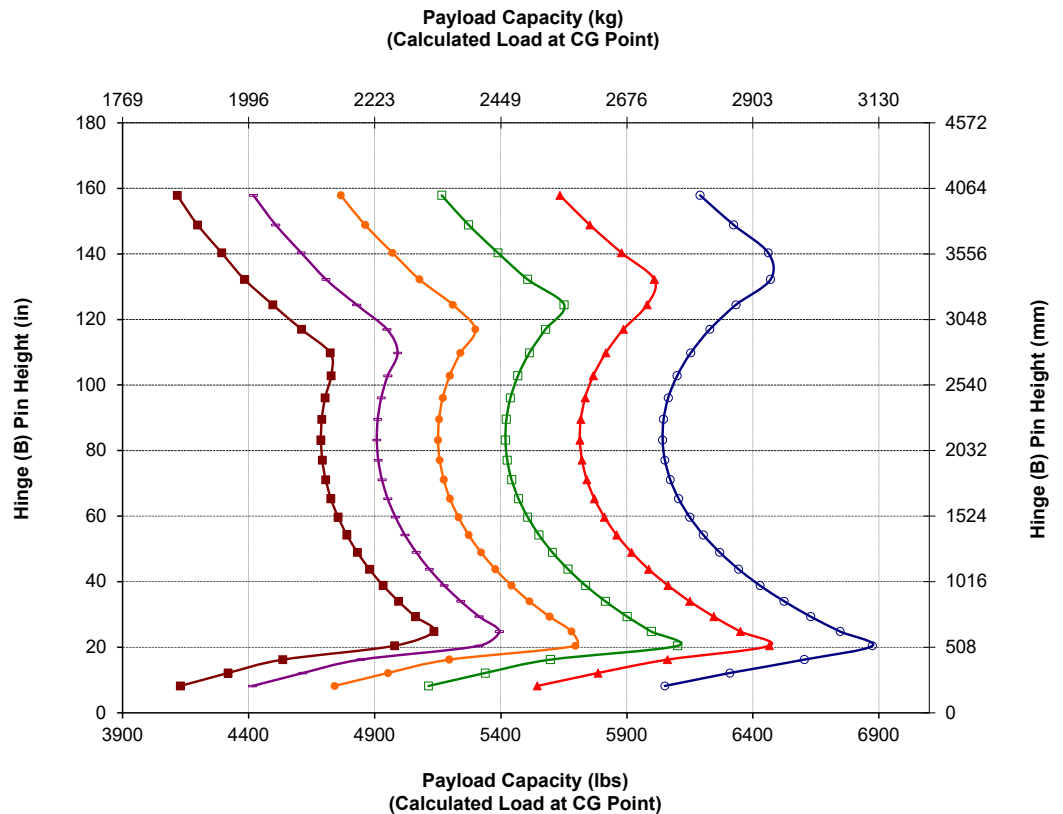

950 Wheel Loader Specifications

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
POWERTRAIN			OPERATOR ENVIRONMENT		
Cat® C7.1 engine	✓		Cab, pressurized, sound suppression	✓	
Electric fuel priming pump	✓		Door, remote opening system**		✓
Fuel-water separator and secondary fuel filter	✓		EH implement controls, parking brake	✓	
Engine, air precleaner	✓		Footrest		✓
Turbine, air precleaner		✓	HMU steering wheel	✓	
Radiator, high debris		✓	Steering, joystick (LHD)		✓
Cooling fan, reversible		✓	Implement joystick (2V, 3V only)		✓
Axles, open/open differentials**	✓		Entertainment radio		✓
Axles, auto front differential lock (LHD)	✓		CB radio ready		✓
Axles, auto front differential lock (HMU)		✓	Seat belt, monitored	✓	
Axles, auto differential locks front and rear		✓	Seat, cloth, air suspension	✓	
Axles, ecology drains, AOC ready, extreme temperature seals		✓	Seat, suede/cloth, air suspension, heated		✓
Axles, oil cooler		✓	Seat, leather/cloth, air suspension, heated/cooled		✓
Transmission, countershaft, automatic powershift	✓		Touchscreen display	✓	
Torque converter with lock-up	✓		Keypad, programmable buttons	✓	
Service brakes, hydraulic, fully enclosed wet disc, wear indicators	✓		Mirrors, heated		✓
Park brake, caliper on front axles, spring applied–pressure released	✓		Air conditioner, heater, defroster (auto temp, fan)	✓	
Brake pedal neutralizer with decel function	✓		Sun visor, front and rear retractable	✓	
ONBOARD TECHNOLOGIES			Windows, front, laminated	✓	
Autodig with auto set tires	✓		Windows, front, heavy duty		✓
Operator ID and machine security	✓		Full cab window guard		✓
Application profiles	✓				
Job aids	✓				
Controls help and eOMM	✓				
Cat Payload scale	✓				
Cat Advanced Payload		✓			
Cat Payload Printer with E-ticket		✓			
Key Features Inform	✓				
Bucket Carry Display Widget	✓				
Remote Flash	✓				

(continued on next page)

950 Wheel Loader Specifications

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
ELECTRICAL			SAFETY		
Starting and charging system, 24V	✓		Cat Detect rear radar system		✓
Starter, electric, heavy duty	✓		Dedicated rearview screen		✓
Cold start, 120V or 240V		✓	Visibility: mirrors, rearview camera	✓	
Lights: halogen, 4 work lights, 2 front roading lights with turn signals, 2 rearview lights	✓		Multiview (360°) vision system		✓
Lights: LED		✓	Window cleaning platform, front	✓	
HYDRAULICS			4-Point seat belt retractor		✓
Implement system, load sensing with variable displacement piston pump	✓		Reversing strobe lights		✓
Steering system, load sensing with dedicated variable displacement piston pump	✓		Seat belt monitoring beacon		✓
Ride control, dual accumulators**	✓		Secondary steering system, electrical**		✓
3 rd and 4 th auxiliary functions with ride control		✓	Wheel chocks		✓
Oil sampling valves, Cat XT™ hoses	✓		Warning beacon		✓
Quick coupler control		✓	SPECIAL CONFIGURATIONS*		
LINKAGE			Auxiliary counterweight		✓
Parallel lift, Z-bar	✓		Waste and industrial		✓
High lift		✓	Forestry		✓
Kickouts: lift and tilt	✓		Corrosion resistant		✓
MONITORING SYSTEM			* Not all configurations available in all regions, subject to availability.		
Front dash with analog gauges, LCD display, and warning lights	✓		** Standard or optional depending on region. Consult your dealer.		
Primary touchscreen monitor (Cat Payload, quad screens, machine settings and messages)	✓				
Tire Pressure Monitor		✓			
Maintenance Reminders	✓				
ADDITIONAL EQUIPMENT					
Cat Autolube system		✓			
Fenders, extensions or roading		✓			
Guards: powertrain, crankcase, window glass, cylinders, rear		✓			
Biodegradable hydraulic oil		✓			
High-speed oil change system		✓			
Rear cab access		✓			
Toolbox		✓			

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability.html>.

Engine

- The Cat® C7.1 engine meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards or Brazil MAR-1 and UN ECE R96 Stage IIIA emission standards, equivalent to U.S. EPA Tier 3 and EU Stage IIIA.
- Cat U.S. EPA Tier 4 Final, EU Stage V, Korea Stage V, China Nonroad Stage IV, Japan 2014 engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels
- Cat engines meeting Brazil MAR-1 and UN ECE R96 Stage IIIA emission standards, equivalent to U.S. EPA Tier 3 and EU Stage IIIA, are compatible with diesel fuel blended with the following lower-carbon intensity fuels** up to:
 - ✓ 100% biodiesel FAME (fatty acid methyl ester)
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

* Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.

** Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.6 kg (3.5 lb) of refrigerant, which has a CO₂ equivalent of 2.288 metric tonnes (2.522 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound

Operator Sound Pressure Level (ISO 6396:2008)	70 dB(A)
Exterior Sound Power Level (ISO 6395:2008)	107 dB(A)
Operator Sound Pressure Level (ISO 6396:2008)*	69 dB(A)
Exterior Sound Power Level (ISO 6395:2008)**	104 dB(A)

* Including countries that adopt the EU and UK directives.

** European Union Noise Directive 2000/14/EC and UK Noise Regulation 2001 No. 1701.

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Autodig with auto set tires provides consistent high bucket fill factors for up to 10% more productivity
 - 5-speed advanced powershift transmission, including a lock-up clutch torque converter delivers smooth shifting, fast acceleration, and speed on grade, amplifying your performance and fuel efficiency
 - Reliable fuel systems boost machine performance and fuel economy, lowering overall costs and fuel consumption
 - Automatic engine idle shutdown system reduces idle hours
 - Extended maintenance intervals reduce fluid and filter consumption
 - Remote Flash and Remote Troubleshoot

Recycling

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage
Steel	65.16%
Iron	15.93%
Nonferrous Metal	3.27%
Mixed Metal	0.58%
Mixed Metal and Nonmetal	0.08%
Plastic	0.98%
Rubber	7.84%
Mixed Nonmetallic	0.03%
Fluid	1.26%
Other	3.05%
Uncategorized	1.81%
Total	100%

- A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance end-of-life value of the product. According to ISO 16714 (Earthmoving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following value in the table may vary.

Recyclability – 97%



950

Waste & Scrap Handler

The Cat 950 Wheel Loader Waste and Scrap Handler package features guarding and reinforcement necessary for work in transfer stations, recycling depots, scrap yards, and demolition sites.

Proven Reliability

- Cat C7.1 engine offers high power density with a combination of proven electronics, fuel, and air systems.
- Equipped with automatic Cat regeneration system, Cat Clean Emissions Module (CEM) with diesel particulate filter (DPF), and diesel exhaust fluid (DEF) tank and pump.
- Thorough component design and machine validation processes result in unmatched reliability and uptime.

Durability

- Waste and scrap handler package adds additional steel guards all around the machine to protect your investment and keep debris out of the implement valve and engine compartments.
- Heavy-duty steel cable lower steps stand up to the harshest of conditions.
- Heavy-duty transmission and axles designed to handle waste and scrap applications.
- Automatic countershaft powershift (5F/3R) transmission features durable, long-lasting components.

Achieve Greater Fuel Efficiency and Productivity

- Optional high lift linkage provides additional dump clearance.
- Optional 3rd and 4th valve hydraulics for work tools that require additional functions.
- Optional variable pitch fan and high debris cooling cores keep the cores free from debris.
- Five-speed transmission and lock-up clutch torque converter, powertrains deliver smooth shifting, fast acceleration, and speed on grade for greater performance and fuel efficiency.
- Automatic idle engine shutdown system significantly reduces idle time, overall operating hours, and fuel consumption.
- Deeply integrated engine, powertrain, and hydraulic systems deliver unmatched productivity and fuel efficiency.

Safety Features

- Rear-vision camera enhances visibility behind the machine, helping you work safely and confidently.
- Cab access with wide door, optional remote door opening, and inclined steps add solid stability.
- Floor-to-ceiling windshield, large mirrors with integrated spot mirrors, and rear-vision camera provide industry leading all-around visibility.

- Monitored seat belt is standard and can be enhanced with an optional exterior indicator.
- Optional multiview (360°) vision system helps the operator monitor the surroundings of the machine at all times.
- Optional Cat Detect radar technology enhances awareness by monitoring the working environment and alerts operators to hazards.
- Optional access light and under-hood service light system to provide illuminated access to the machine and daily checks even in the dark.

Reduced Maintenance Time and Costs

- Extended fluid and filter change intervals reduce maintenance costs by up to 30%.*
- Optional turbine engine air precleaner improves air filter life.
- Remote Troubleshoot can connect the machine to the dealer service department to help diagnose problems quickly so you can get back to work.
- Remote Flash works around your schedule to ensure your machine's software is up to date for optimal performance.
- One-piece tilting hood makes engine compartment access fast and easy.
- Optional integrated autolube extends component and service life.

Work in Comfort in the All New Cab



- Carbon cab air filter reduces cabin odors.
- Optional powered cabin precleaner filters the incoming air and pressurizes the cab.
- New in-cab dashboard and high-resolution touch display(s) are easy to use, intuitive, and user friendly.
- Sound suppression, seals, and viscous cab mounts decrease noise and vibration for a quieter work environment.
- The seat-mounted electro-hydraulic joystick steering system provides precision control and dramatically reduces arm fatigue, resulting in excellent comfort and accuracy. Standard in North America and optional in all other regions.
- The hydraulic metering unit (HMU) steering wheel provides precision control, resulting in excellent comfort and accuracy. Standard in all regions except North America. Limited optional availability for North America, consult your Cat dealer.

**Parts and fluids only.*

950 Waste & Scrap Handler Specifications


950 Waste and Scrap Handler Features

1. Optional window guarding to provide impact resistance to the glass
2. Added steel guards include crankcase, powertrain, front frame, hitch, steering cylinder, service center, cab, platform, implement valve cover, and tilt cylinder
3. Carbon cab air filter removes harsh odors
4. Optional powered cab precleaner helps to improve cab filter life and keeps the cab pressurized
5. Optional 3rd and 4th valve hydraulics available to control a large variety of work tools
6. Large line of Cat waste and scrap work tools

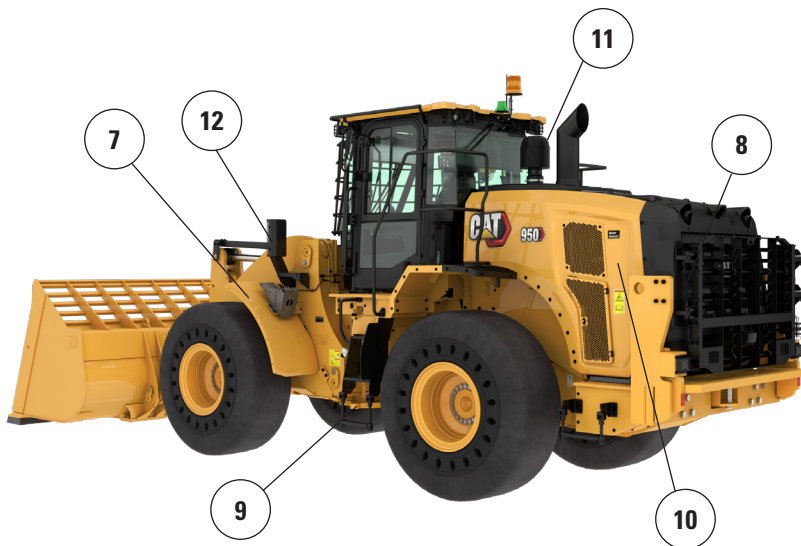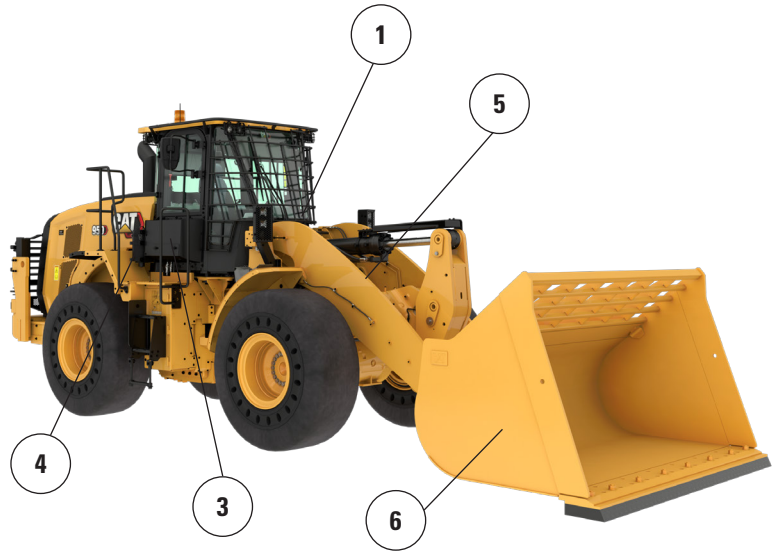

7. Narrow front steel fenders help to keep the windshield clean and are set inboard of the outer edge of the tire for added protection
8. Optional rear guard protects the rear grill and cooling package from impact
9. Heavy-duty steel cable lower steps stand up to the harshest conditions
10. Optional variable pitch fan and high debris cooling cores help to keep the cooling package clean
11. Optional turbine engine air precleaner with a trash screen option helps to extend engine air filter life
12. Front lights are guarded and positioned close to the frame for added protection

13. Lower front frame guard protects vital drivetrain components and keeps trash from getting in the front frame compartment
14. Powertrain guard protects the transmission and helps keep trash out of the engine compartment
15. Lower hydraulic service center guard protects the transmission filter and keeps trash out of the service center
16. Rear crankcase and platform guards keep trash and debris out

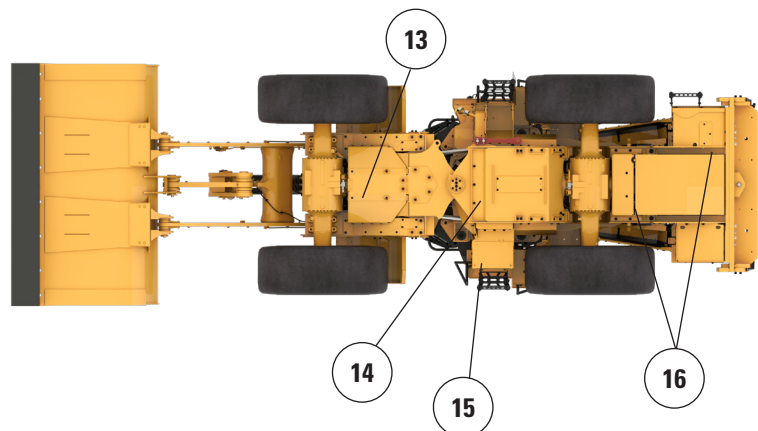

950 Waste & Scrap Handler Specifications

Tire Options

Tire Brand	BRAWLER	BRAWLER	BRIDGESTONE	MAXAM	MICHELIN
Tire Size	23.5X25	23.5X25	23.5R25	23.5R25	23.5R25
Tread Type	N/A	N/A	L-3	L-3	L-3
Tread Pattern	SMOOTH	TRACTION	VJT	MS302	XHA2
Casing Strength	SOLID	SOLID	*	**	**
Width over Tires – Maximum (empty)*	2140 mm 7'1"	2140 mm 7'1"	2804 mm 9'3"	2825 mm 9'4"	2823 mm 9'4"
Width over Tires – Maximum (loaded)*	2140 mm 7'1"	2140 mm 7'1"	2825 mm 9'4"	2829 mm 9'4"	2830 mm 9'4"
Change in Vertical Dimensions (average of front and rear)		0 mm 0"	-71 mm -2.8"	-54 mm -2.1"	-61 mm -2.4"
Change in Horizontal Reach		0 mm 0"	15 mm 0.6"	1 mm 0"	9 mm 0.4"
Change in Clearance Circle to Outside of Tires		0 mm 0"	685 mm 27.0"	689 mm 27.1"	690 mm 27.2"
Change in Clearance Circle to Inside of Tires		0 mm 0"	-685 mm -27.0"	-689 mm -27.1"	-690 mm -27.2"
Change in Operating Weight (without ballast)		-144 kg -318 lb	-3208 kg -7,074 lb	-3208 kg -7,074 lb	-3364 kg -7,418 lb
Change in Static Tipping Load – Straight		-96 kg -212 lb	-2037 kg -4,492 lb	-2037 kg -4,492 lb	-2136 kg -4,710 lb
Change in Static Tipping Load – Articulated		-84 kg -185 lb	-1780 kg -3,926 lb	-1780 kg -3,926 lb	-1867 kg -4,117 lb
Rear Axle Oscillation Angle	±8 degrees	±8 degrees	±13 degrees	±13 degrees	±13 degrees
Maximum Single-Wheel Rise and Fall	298 mm 1'0"	298 mm 1'0"	481 mm 1'7"	481 mm 1'7"	481 mm 1'7"

*Width over tire bulge and includes tire growth.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets

Linkage		Standard Linkage					
Bucket Type		General Purpose – Pin-On					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Tips	Bolt-On Cutting Edges	Teeth and Segments	Tips
Capacity – Rated	m ³	3.10	3.10	2.90	3.40	3.40	3.20
	yd ³	4.00	4.00	3.75	4.50	4.50	4.25
Capacity – Rated at 110% Fill Factor	m ³	3.40	3.40	3.20	3.70	3.70	3.50
	yd ³	4.50	4.50	4.25	4.75	4.75	4.50
Width	mm	2927	2994	2994	2927	2994	2994
	ft/in	9'7"	9'9"	9'9"	9'7"	9'9"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2929	2811	2811	2872	2753	2753
	ft/in	9'7"	9'2"	9'2"	9'5"	9'0"	9'0"
17 † Reach at Maximum Lift and 45° Discharge	mm	1420	1531	1531	1464	1573	1573
	ft/in	4'7"	5'0"	5'0"	4'9"	5'1"	5'1"
Reach at Level Lift Arm and Bucket Level	mm	2679	2840	2840	2752	2913	2913
	ft/in	8'9"	9'3"	9'3"	9'0"	9'6"	9'6"
A † Digging Depth	mm	37	37	7	37	37	7
	in	1.4"	1.4"	0.2"	1.4"	1.4"	0.2"
12 † Overall Length	mm	8323	8497	8497	8396	8570	8570
	ft/in	27'4"	27'11"	27'11"	27'7"	28'2"	28'2"
B † Overall Height with Bucket at Maximum Lift	mm	5578	5578	5578	5650	5650	5650
	ft/in	18'4"	18'4"	18'4"	18'7"	18'7"	18'7"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6733	6819	6819	6755	6842	6842
	ft/in	22'2"	22'5"	22'5"	22'2"	22'6"	22'6"
Static Tipping Load, Straight (No tire deflection)	kg	16 393	16 251	16 572	16 221	16 077	16 393
	lb	36,142	35,828	36,536	35,762	35,445	36,141
Static Tipping Load, Articulated (No tire deflection)	kg	14 324	14 182	14 481	14 160	14 016	14 310
	lb	31,580	31,266	31,926	31,218	30,901	31,549
Breakout Force (§)	kN	181	180	197	171	169	185
	lbf	40,817	40,546	44,351	38,437	38,168	41,582
Operating Weight*	kg	23 045	23 153	22 996	23 139	23 247	23 090
	lb	50,806	51,044	50,698	51,012	51,250	50,904

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets (continued)

Linkage		Standard Linkage					
Bucket Type		General Purpose – Pin-On					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Tips	Bolt-On Cutting Edges	Teeth and Segments	Tips
Capacity – Rated	m ³	3.60	3.60	3.40	3.80	3.80	3.60
	yd ³	4.75	4.75	4.50	5.00	5.00	4.75
Capacity – Rated at 110% Fill Factor	m ³	4.00	4.00	3.70	4.20	4.20	4.00
	yd ³	5.25	5.25	4.75	5.50	5.50	5.25
Width	mm	2927	2994	2994	2927	2994	2994
	ft/in	9'7"	9'9"	9'9"	9'7"	9'9"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2846	2726	2726	2811	2691	2691
	ft/in	9'4"	8'11"	8'11"	9'2"	8'9"	8'9"
17 † Reach at Maximum Lift and 45° Discharge	mm	1486	1595	1595	1515	1623	1623
	ft/in	4'10"	5'2"	5'2"	4'11"	5'3"	5'3"
Reach at Level Lift Arm and Bucket Level	mm	2787	2948	2948	2833	2994	2994
	ft/in	9'1"	9'8"	9'8"	9'3"	9'9"	9'9"
A † Digging Depth	mm	37	37	7	37	37	7
	in	1.4"	1.4"	0.2"	1.4"	1.4"	0.2"
12 † Overall Length	mm	8431	8605	8605	8477	8651	8651
	ft/in	27'8"	28'3"	28'3"	27'10"	28'5"	28'5"
B † Overall Height with Bucket at Maximum Lift	mm	5683	5683	5683	5731	5731	5731
	ft/in	18'8"	18'8"	18'8"	18'10"	18'10"	18'10"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6766	6853	6853	6780	6867	6867
	ft/in	22'3"	22'6"	22'6"	22'3"	22'7"	22'7"
Static Tipping Load, Straight (No tire deflection)	kg	16 147	16 002	16 314	16 041	15 896	16 203
	lb	35,598	35,279	35,966	35,366	35,045	35,721
Static Tipping Load, Articulated (No tire deflection)	kg	14 090	13 945	14 235	13 990	13 844	14 130
	lb	31,063	30,744	31,384	30,843	30,522	31,151
Breakout Force (§)	kN	166	165	179	160	159	172
	lbf	37,390	37,121	40,371	36,084	35,816	38,868
Operating Weight*	kg	23 175	23 283	23 126	23 230	23 338	23 181
	lb	51,092	51,330	50,984	51,213	51,451	51,104

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets (continued)

Linkage		Standard Linkage					
Bucket Type		General Purpose – Hook-On – Fusion					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Tips	Bolt-On Cutting Edges	Teeth and Segments	Tips
Capacity – Rated	m ³	3.10	3.10	2.90	3.40	3.40	3.20
	yd ³	4.00	4.00	3.75	4.50	4.50	4.25
Capacity – Rated at 110% Fill Factor	m ³	3.40	3.40	3.20	3.70	3.70	3.50
	yd ³	4.50	4.50	4.25	4.75	4.75	4.50
Width	mm	2927	2994	2994	2927	2994	2994
	ft/in	9'7"	9'9"	9'9"	9'7"	9'9"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2890	2771	2771	2832	2713	2713
	ft/in	9'5"	9'1"	9'1"	9'3"	8'10"	8'10"
17 † Reach at Maximum Lift and 45° Discharge	mm	1466	1576	1576	1509	1618	1618
	ft/in	4'9"	5'2"	5'2"	4'11"	5'3"	5'3"
Reach at Level Lift Arm and Bucket Level	mm	2739	2900	2900	2812	2973	2973
	ft/in	8'11"	9'6"	9'6"	9'2"	9'9"	9'9"
A † Digging Depth	mm	37	37	7	37	37	7
	in	1.4"	1.4"	0.2"	1.4"	1.4"	0.2"
12 † Overall Length	mm	8383	8557	8557	8456	8630	8630
	ft/in	27'7"	28'1"	28'1"	27'9"	28'4"	28'4"
B † Overall Height with Bucket at Maximum Lift	mm	5611	5611	5611	5683	5683	5683
	ft/in	18'5"	18'5"	18'5"	18'8"	18'8"	18'8"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6747	6834	6834	6769	6857	6857
	ft/in	22'2"	22'6"	22'6"	22'3"	22'6"	22'6"
Static Tipping Load, Straight (No tire deflection)	kg	15 752	15 610	15 982	15 612	15 469	15 838
	lb	34,728	34,415	35,236	34,420	34,104	34,918
Static Tipping Load, Articulated (No tire deflection)	kg	13 715	13 573	13 924	13 583	13 439	13 788
	lb	30,236	29,924	30,697	29,945	29,629	30,397
Breakout Force (§)	kN	172	171	187	163	162	176
	lbf	38,860	38,590	42,070	36,698	36,430	39,572
Operating Weight*	kg	23 515	23 623	23 466	23 585	23 693	23 536
	lb	51,841	52,079	51,733	51,995	52,234	51,887

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets *(continued)*

Linkage		Standard Linkage					
Bucket Type		General Purpose – Hook-On – Fusion					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Tips	Bolt-On Cutting Edges	Teeth and Segments	Tips
Capacity – Rated	m ³	3.60	3.60	3.40	3.80	3.80	3.60
	yd ³	4.75	4.75	4.50	5.00	5.00	4.75
Capacity – Rated at 110% Fill Factor	m ³	4.00	4.00	3.70	4.20	4.20	4.00
	yd ³	5.25	5.25	4.75	5.50	5.50	5.25
Width	mm	2927	2994	2994	2927	2994	2994
	ft/in	9'7"	9'9"	9'9"	9'7"	9'9"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2806	2686	2686	2771	2651	2651
	ft/in	9'2"	8'9"	8'9"	9'1"	8'8"	8'8"
17 † Reach at Maximum Lift and 45° Discharge	mm	1530	1639	1639	1559	1668	1668
	ft/in	5'0"	5'4"	5'4"	5'1"	5'5"	5'5"
Reach at Level Lift Arm and Bucket Level	mm	2847	3008	3008	2893	3054	3054
	ft/in	9'4"	9'10"	9'10"	9'5"	10'0"	10'0"
A † Digging Depth	mm	37	37	7	37	37	7
	in	1.4"	1.4"	0.2"	1.4"	1.4"	0.2"
12 † Overall Length	mm	8491	8665	8665	8537	8711	8711
	ft/in	27'11"	28'6"	28'6"	28'1"	28'7"	28'7"
B † Overall Height with Bucket at Maximum Lift	mm	5717	5717	5717	5764	5764	5764
	ft/in	18'10"	18'10"	18'10"	18'11"	18'11"	18'11"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6780	6868	6868	6795	6883	6883
	ft/in	22'3"	22'7"	22'7"	22'4"	22'7"	22'7"
Static Tipping Load, Straight (No tire deflection)	kg	15 543	15 399	15 767	15 452	15 307	15 674
	lb	34,267	33,950	34,762	34,066	33,747	34,555
Static Tipping Load, Articulated (No tire deflection)	kg	13 517	13 373	13 721	13 431	13 286	13 632
	lb	29,801	29,484	30,250	29,611	29,291	30,055
Breakout Force (§)	kN	159	157	171	153	152	165
	lbf	35,736	35,469	38,467	34,537	34,271	37,095
Operating Weight*	kg	23 619	23 727	23 570	23 664	23 772	23 615
	lb	52,071	52,309	51,963	52,170	52,408	52,062

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets *(continued)*

Linkage		Standard Linkage				
Bucket Type		High Dump – Hook-On – Fusion	Waste, Load and Carry – Pin-On		Waste, Dozing – Pin-On	
		Bolt-On Cutting Edges	Steel Bolt-On Cutting Edges	Rubber Cutting Edges	Steel Bolt-On Cutting Edges	Rubber Cutting Edges
Capacity – Rated	m ³	6.10	6.10	6.10	5.40	5.40
	yd ³	8.00	8.00	8.00	7.00	7.00
Capacity – Rated at 110% Fill Factor	m ³	6.70	6.70	6.70	5.90	5.90
	yd ³	8.75	8.75	8.75	7.75	7.75
Width	mm	2910	3059	3059	3059	3032
	ft/in	9'6"	10'0"	10'0"	10'0"	9'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2390	2519	2422	2786	2688
	ft/in	7'10"	8'3"	7'11"	9'1"	8'9"
17 † Reach at Maximum Lift and 45° Discharge	mm	1727	1685	1624	1418	1358
	ft/in	5'8"	5'6"	5'3"	4'7"	4'5"
Reach at Level Lift Arm and Bucket Level	mm	3296	3174	3199	2797	2823
	ft/in	10'9"	10'4"	10'5"	9'2"	9'3"
A † Digging Depth	mm	103	7	7	42	154
	in	4"	0.2"	0.2"	1.6"	6"
12 † Overall Length	mm	8990	8822	8930	8445	8554
	ft/in	29'6"	29'0"	29'4"	27'9"	28'1"
B † Overall Height with Bucket at Maximum Lift	mm	6139	5932	5932	6139	6139
	ft/in	20'2"	19'6"	19'6"	20'2"	20'2"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6946	6949	7001	6826	6868
	ft/in	22'10"	22'10"	23'0"	22'5"	22'7"
Static Tipping Load, Straight (No tire deflection)	kg	13 446	14 892	14 849	15 978	15 934
	lb	29,643	32,833	32,737	35,227	35,128
Static Tipping Load, Articulated (No tire deflection)	kg	11 542	12 899	12 855	13 853	13 808
	lb	25,445	28,437	28,341	30,541	30,442
Breakout Force (§)	kN	114	131	129	162	158
	lbf	25,759	29,444	29,188	36,502	35,523
Operating Weight*	kg	24 654	23 894	23 932	24 022	24 052
	lb	54,353	52,678	52,761	52,959	53,025

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets *(continued)*

Linkage		Standard Linkage	
Bucket Type		Waste, Top Clamp – Pin-On	
Edge Type		Steel Bolt-On Cutting Edges	Rubber Cutting Edges
Capacity – Rated	m ³	4.40	4.40
	yd ³	5.75	5.75
Capacity – Rated at 110% Fill Factor	m ³	4.80	4.80
	yd ³	6.25	6.25
Width	mm	3059	3059
	ft/in	10'0"	10'0"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2302	2204
	ft/in	7'6"	7'2"
17 † Reach at Maximum Lift and 45° Discharge	mm	1891	1831
	ft/in	6'2"	6'0"
Reach at Level Lift Arm and Bucket Level	mm	3474	3500
	ft/in	11'4"	11'5"
A † Digging Depth	mm	15	15
	in	0.5"	0.5"
12 † Overall Length	mm	9128	9236
	ft/in	30'0"	30'4"
B † Overall Height with Bucket at Maximum Lift	mm	5333	5333
	ft/in	17'6"	17'6"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7307	7363
	ft/in	24'0"	24'2"
Static Tipping Load, Straight (No tire deflection)	kg	10 312	10 373
	lb	22,734	22,870
Static Tipping Load, Articulated (No tire deflection)	kg	8755	8816
	lb	19,301	19,437
Breakout Force (§)	kN	25	33
	lbf	5,683	7,515
Operating Weight*	kg	24 891	24 819
	lb	54,876	54,717

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets (continued)

Linkage		High Lift Linkage					
Bucket Type		General Purpose – Pin-On					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Tips	Bolt-On Cutting Edges	Teeth and Segments	Tips
Capacity – Rated	m ³	3.10	3.10	2.90	3.40	3.40	3.20
	yd ³	4.00	4.00	3.75	4.50	4.50	4.25
Capacity – Rated at 110% Fill Factor	m ³	3.40	3.40	3.20	3.70	3.70	3.50
	yd ³	4.50	4.50	4.25	4.75	4.75	4.50
Width	mm	2927	2994	2994	2927	2994	2994
	ft/in	9'7"	9'9"	9'9"	9'7"	9'9"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	3434	3316	3316	3378	3258	3258
	ft/in	11'3"	10'10"	10'10"	11'0"	10'8"	10'8"
17 † Reach at Maximum Lift and 45° Discharge	mm	1456	1566	1566	1499	1609	1609
	ft/in	4'9"	5'1"	5'1"	4'11"	5'3"	5'3"
Reach at Level Lift Arm and Bucket Level	mm	3054	3215	3215	3127	3288	3288
	ft/in	10'0"	10'6"	10'6"	10'3"	10'9"	10'9"
A † Digging Depth	mm	41	41	11	41	41	11
	in	1.6"	1.6"	0.4"	1.6"	1.6"	0.4"
12 † Overall Length	mm	8783	8955	8955	8856	9028	9028
	ft/in	28'10"	29'5"	29'5"	29'1"	29'8"	29'8"
B † Overall Height with Bucket at Maximum Lift	mm	6083	6083	6083	6155	6155	6155
	ft/in	20'0"	20'0"	20'0"	20'3"	20'3"	20'3"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6932	7022	7022	6955	7046	7046
	ft/in	22'9"	23'1"	23'1"	22'10"	23'2"	23'2"
Static Tipping Load, Straight (No tire deflection)	kg	13 600	13 463	13 739	13 443	13 304	13 576
	lb	29,984	29,681	30,291	29,636	29,330	29,931
Static Tipping Load, Articulated (No tire deflection)	kg	11 832	11 694	11 954	11 681	11 542	11 798
	lb	26,085	25,782	26,355	25,752	25,446	26,010
Breakout Force (§)	kN	172	171	187	162	161	175
	lbf	38,692	38,449	42,076	36,426	36,184	39,439
Operating Weight*	kg	23 296	23 404	23 247	23 389	23 497	23 340
	lb	51,358	51,596	51,250	51,564	51,802	51,456

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets (continued)

Linkage		High Lift Linkage					
Bucket Type		General Purpose – Pin-On					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Tips	Bolt-On Cutting Edges	Teeth and Segments	Tips
Capacity – Rated	m ³	3.60	3.60	3.40	3.80	3.80	3.60
	yd ³	4.75	4.75	4.50	5.00	5.00	4.75
Capacity – Rated at 110% Fill Factor	m ³	4.00	4.00	3.70	4.20	4.20	4.00
	yd ³	5.25	5.25	4.75	5.50	5.50	5.25
Width	mm	2927	2994	2994	2927	2994	2994
	ft/in	9'7"	9'9"	9'9"	9'7"	9'9"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	3351	3232	3232	3317	3197	3197
	ft/in	10'11"	10'7"	10'7"	10'10"	10'5"	10'5"
17 † Reach at Maximum Lift and 45° Discharge	mm	1521	1630	1630	1550	1659	1659
	ft/in	4'11"	5'4"	5'4"	5'1"	5'5"	5'5"
Reach at Level Lift Arm and Bucket Level	mm	3162	3323	3323	3208	3369	3369
	ft/in	10'4"	10'10"	10'10"	10'6"	11'0"	11'0"
A † Digging Depth	mm	41	41	11	41	41	11
	in	1.6"	1.6"	0.4"	1.6"	1.6"	0.4"
12 † Overall Length	mm	8891	9063	9063	8937	9109	9109
	ft/in	29'3"	29'9"	29'9"	29'4"	29'11"	29'11"
B † Overall Height with Bucket at Maximum Lift	mm	6189	6189	6189	6236	6236	6236
	ft/in	20'4"	20'4"	20'4"	20'6"	20'6"	20'6"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6966	7058	7058	6981	7073	7073
	ft/in	22'11"	23'2"	23'2"	22'11"	23'3"	23'3"
Static Tipping Load, Straight (No tire deflection)	kg	13 375	13 236	13 505	13 279	13 139	13 404
	lb	29,488	29,180	29,774	29,277	28,968	29,552
Static Tipping Load, Articulated (No tire deflection)	kg	11 617	11 477	11 730	11 525	11 385	11 634
	lb	25,611	25,303	25,861	25,409	25,101	25,650
Breakout Force (§)	kN	157	156	170	152	151	163
	lbf	35,429	35,187	38,285	34,186	33,944	36,854
Operating Weight*	kg	23 426	23 534	23 377	23 480	23 588	23 431
	lb	51,644	51,882	51,536	51,765	52,003	51,657

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets (continued)

Linkage		High Lift Linkage					
Bucket Type		General Purpose – Hook-On – Fusion					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Tips	Bolt-On Cutting Edges	Teeth and Segments	Tips
Capacity – Rated	m ³	3.10	3.10	2.90	3.40	3.40	3.20
	yd ³	4.00	4.00	3.75	4.50	4.50	4.25
Capacity – Rated at 110% Fill Factor	m ³	3.40	3.40	3.20	3.70	3.70	3.50
	yd ³	4.50	4.50	4.25	4.75	4.75	4.50
Width	mm	2927	2994	2994	2927	2994	2994
	ft/in	9'7"	9'9"	9'9"	9'7"	9'9"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	3395	3277	3277	3338	3219	3219
	ft/in	11'1"	10'9"	10'9"	10'11"	10'6"	10'6"
17 † Reach at Maximum Lift and 45° Discharge	mm	1501	1612	1612	1544	1654	1654
	ft/in	4'11"	5'3"	5'3"	5'0"	5'5"	5'5"
Reach at Level Lift Arm and Bucket Level	mm	3114	3275	3275	3187	3348	3348
	ft/in	10'2"	10'8"	10'8"	10'5"	10'11"	10'11"
A † Digging Depth	mm	41	41	11	41	41	11
	in	1.6"	1.6"	0.4"	1.6"	1.6"	0.4"
12 † Overall Length	mm	8843	9015	9015	8916	9088	9088
	ft/in	29'1"	29'7"	29'7"	29'4"	29'10"	29'10"
B † Overall Height with Bucket at Maximum Lift	mm	6116	6116	6116	6188	6188	6188
	ft/in	20'1"	20'1"	20'1"	20'4"	20'4"	20'4"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6941	7032	7032	6964	7056	7056
	ft/in	22'10"	23'1"	23'1"	22'11"	23'2"	23'2"
Static Tipping Load, Straight (No tire deflection)	kg	13 016	12 879	13 199	12 889	12 751	13 068
	lb	28,696	28,394	29,098	28,416	28,111	28,812
Static Tipping Load, Articulated (No tire deflection)	kg	11 272	11 135	11 438	11 151	11 013	11 315
	lb	24,850	24,548	25,217	24,584	24,279	24,945
Breakout Force (§)	kN	163	162	177	154	153	166
	lbf	36,829	36,587	39,905	34,772	34,530	37,526
Operating Weight*	kg	23 766	23 874	23 717	23 835	23 943	23 786
	lb	52,393	52,632	52,285	52,548	52,786	52,440

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets *(continued)*

Linkage		High Lift Linkage					
Bucket Type		General Purpose – Hook-On – Fusion					
Edge Type		Bolt-On Cutting Edges	Teeth and Segments	Tips	Bolt-On Cutting Edges	Teeth and Segments	Tips
Capacity – Rated	m ³	3.60	3.60	3.40	3.80	3.80	3.60
	yd ³	4.75	4.75	4.50	5.00	5.00	4.75
Capacity – Rated at 110% Fill Factor	m ³	4.00	4.00	3.70	4.20	4.20	4.00
	yd ³	5.25	5.25	4.75	5.50	5.50	5.25
Width	mm	2927	2994	2994	2927	2994	2994
	ft/in	9'7"	9'9"	9'9"	9'7"	9'9"	9'9"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	3311	3192	3192	3277	3157	3157
	ft/in	10'10"	10'5"	10'5"	10'9"	10'4"	10'4"
17 † Reach at Maximum Lift and 45° Discharge	mm	1566	1675	1675	1595	1703	1703
	ft/in	5'1"	5'5"	5'5"	5'2"	5'7"	5'7"
Reach at Level Lift Arm and Bucket Level	mm	3222	3383	3383	3268	3429	3429
	ft/in	10'6"	11'1"	11'1"	10'8"	11'3"	11'3"
A † Digging Depth	mm	41	41	11	41	41	11
	in	1.6"	1.6"	0.4"	1.6"	1.6"	0.4"
12 † Overall Length	mm	8951	9123	9123	8997	9169	9169
	ft/in	29'5"	30'0"	30'0"	29'7"	30'1"	30'1"
B † Overall Height with Bucket at Maximum Lift	mm	6222	6222	6222	6270	6270	6270
	ft/in	20'5"	20'5"	20'5"	20'7"	20'7"	20'7"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	6976	7067	7067	6991	7083	7083
	ft/in	22'11"	23'3"	23'3"	23'0"	23'3"	23'3"
Static Tipping Load, Straight (No tire deflection)	kg	12 826	12 687	13 004	12 743	12 604	12 920
	lb	28,278	27,971	28,670	28,095	27,787	28,484
Static Tipping Load, Articulated (No tire deflection)	kg	11 091	10 953	11 254	11 013	10 873	11 174
	lb	24,453	24,147	24,811	24,280	23,972	24,635
Breakout Force (§)	kN	150	149	162	145	144	156
	lbf	33,856	33,614	36,474	32,715	32,473	35,167
Operating Weight*	kg	23 870	23 978	23 821	23 915	24 023	23 866
	lb	52,623	52,861	52,515	52,722	52,960	52,614

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets *(continued)*

Linkage		High Lift Linkage				
Bucket Type		High Dump – Hook-On – Fusion	Waste, Load and Carry – Pin-On		Waste, Dozing – Pin-On	
		Bolt-On Cutting Edges	Steel Bolt-On Cutting Edges	Rubber Cutting Edges	Steel Bolt-On Cutting Edges	Rubber Cutting Edges
Capacity – Rated	m ³	6.10	6.10	6.10	5.40	5.40
	yd ³	8.00	8.00	8.00	7.00	7.00
Capacity – Rated at 110% Fill Factor	m ³	6.70	6.70	6.70	5.90	5.90
	yd ³	8.75	8.75	8.75	7.75	7.75
Width	mm	2910	3059	3059	3059	3032
	ft/in	9'6"	10'0"	10'0"	10'0"	9'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2895	3025	2928	3291	3193
	ft/in	9'6"	9'11"	9'7"	10'9"	10'5"
17 † Reach at Maximum Lift and 45° Discharge	mm	1763	1720	1659	1454	1393
	ft/in	5'9"	5'7"	5'5"	4'9"	4'6"
Reach at Level Lift Arm and Bucket Level	mm	3671	3549	3574	3172	3198
	ft/in	12'0"	11'7"	11'8"	10'4"	10'5"
A † Digging Depth	mm	108	11	11	46	158
	in	4.2"	0.4"	0.4"	1.8"	6.2"
12 † Overall Length	mm	9442	9281	9376	8904	9000
	ft/in	31'0"	30'6"	30'10"	29'3"	29'7"
B † Overall Height with Bucket at Maximum Lift	mm	6645	6437	6437	6644	6644
	ft/in	21'10"	21'2"	21'2"	21'10"	21'10"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7160	7154	7230	7020	7081
	ft/in	23'6"	23'6"	23'9"	23'1"	23'3"
Static Tipping Load, Straight (No tire deflection)	kg	10 972	12 234	12 191	12 991	12 949
	lb	24,189	26,971	26,877	28,642	28,548
Static Tipping Load, Articulated (No tire deflection)	kg	9333	10 526	10 483	11 188	11 146
	lb	20,577	23,206	23,113	24,666	24,573
Breakout Force (§)	kN	108	123	123	153	150
	lbf	24,407	27,840	27,759	34,563	33,827
Operating Weight*	kg	24 905	24 145	24 183	24 272	24 302
	lb	54,905	53,230	53,313	53,511	53,577

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Waste & Scrap Handler Specifications

Operating Specifications – Buckets *(continued)*

Linkage		High Lift Linkage	
Bucket Type		Waste, Top Clamp – Pin-On	
Edge Type		Steel Bolt-On Cutting Edges	Rubber Cutting Edges
Capacity – Rated	m ³	4.40	4.40
	yd ³	5.75	5.75
Capacity – Rated at 110% Fill Factor	m ³	4.80	4.80
	yd ³	6.25	6.25
Width	mm	3059	3059
	ft/in	10'0"	10'0"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2807	2709
	ft/in	9'2"	8'10"
17 † Reach at Maximum Lift and 45° Discharge	mm	1927	1866
	ft/in	6'3"	6'1"
Reach at Level Lift Arm and Bucket Level	mm	3849	3875
	ft/in	12'7"	12'8"
A † Digging Depth	mm	19	19
	in	0.7"	0.7"
12 † Overall Length	mm	9586	9681
	ft/in	31'6"	31'10"
B † Overall Height with Bucket at Maximum Lift	mm	5838	5838
	ft/in	19'2"	19'2"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7573	7624
	ft/in	24'11"	25'1"
Static Tipping Load, Straight (No tire deflection)	kg	8651	8714
	lb	19,072	19,211
Static Tipping Load, Articulated (No tire deflection)	kg	7266	7329
	lb	16,019	16,158
Breakout Force (§)	kN	26	33
	lbf	6,030	7,446
Operating Weight*	kg	25 142	25 070
	lb	55,428	55,269

* Static tipping loads and operating weights shown are based on a machine configuration with Brawler 23.5X25 Smooth solid tires, full fluids, operator, cab precleaner, fabricated counterweight with rear guard (1460 kg), flat window glass with front guard, industrial package, ride control, standard starting, narrow fenders, turbine engine precleaner, Product Link, auto diff lock axles (front/rear), powertrain guard, standard steering, industrial sound suppression and variable pitch fan.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.



950

Forestry Machine

The Cat 950 Wheel Loader Forestry package provides the additional performance, productivity, and safety that is demanded in the woods and the millyard.

Proven Reliability

- Cat C7.1 engine offers high power density with a combination of proven electronics, fuel, and air systems.
- Equipped with automatic Cat regeneration system, Cat Clean Emissions Module (CEM) with diesel particulate filter (DPF), and diesel exhaust fluid (DEF) tank and pump.
- Features an electric fuel priming pump, fuel-water separator, and secondary fuel filter.
- Thorough component design and machine validation processes result in unmatched reliability and uptime.

Durability

- Heavy-duty axles are designed to handle extreme applications.
- Automatic countershaft powershift (5F/3R) transmission features durable, long-lasting components.

Achieve Greater Fuel Efficiency and Productivity

- Forestry package includes additional counterweight, larger lift cylinders, and larger tilt cylinders.
- Optional variable pitch fan and high debris coolers minimize the potential for overheating and reduce downtime for radiator clean out in high debris applications.
- Optional 3rd and 4th valve auxiliary hydraulics to control work tools requiring the additional function.
- Five-speed transmission and lock-up clutch torque converter, powertrains deliver smooth shifting, fast acceleration, and speed on grade for greater performance and fuel efficiency.
- Single clutch and lock-to-lock shifting for faster acceleration and speed on grades.
- Deeply integrated engine, powertrain, and hydraulic systems deliver unmatched productivity and fuel efficiency.

Safety Features

- Rearview camera enhances visibility behind the machine, helping you work safely and confidently.
- Optional multiview (360°) vision system helps the operator monitor the surroundings of the machine at all times.
- Optional Cat Detect radar technology enhances awareness by monitoring the working environment and alerts operators to hazards.

- Cab access with wide door, optional remote door opening, and stair-like steps add solid stability.
- Floor-to-ceiling windshield, large mirrors with integrated spot mirrors, and rearview camera provide industry leading all-around visibility.

Reduced Maintenance Time and Costs

- Extended fluid and filter change intervals reduce maintenance costs by up to 30%.*
- Optional turbine engine air precleaner improves air filter life.
- Remote Troubleshoot can connect the machine to the dealer service department to help diagnose problems quickly so you can get back to work.
- Remote Flash works around your schedule to ensure your machine's software is up to date for optimal performance.
- The Cat app helps you manage fleet location, hours, and maintenance schedules; it also alerts you for required maintenance and allows you to request service from your local Cat dealer.
- One-piece tilting hood makes engine compartment access fast and easy.
- Optional integrated autolube extends component and service life.

Work in Comfort in the All New Cab



- Optional powered cabin precleaner filters the incoming air and pressurizes the cab.
- Next-generation, easily adjustable seat and suspension for improved operator comfort. It comes in three trim levels and can be equipped with a 4-point harness.
- New in-cab dashboard and high-resolution touch display(s) are easy to use, intuitive, and user friendly.
- Sound suppression, seals, and viscous cab mounts decrease noise and vibration for a quieter work environment.
- The seat-mounted electro-hydraulic joystick steering system provides precision control and dramatically reduces arm fatigue, resulting in excellent comfort and accuracy. Standard in North America and optional in all other regions.
- The hydraulic metering unit (HMU) steering wheel provides precision control, resulting in excellent comfort and accuracy. Standard in all regions except North America. Limited optional availability for North America, consult your Cat dealer.

**Parts and fluids only.*

950 Forestry Machine Specifications

950 Forestry Machine Features

1. Larger tilt cylinder and larger lift cylinders for increased load control in fork applications
2. Heavier counterweight provides increased tipping loads in a millyard application
3. Optional window guarding to provide impact resistance to the glass
4. Optional 3rd and 4th function hydraulics provide auxiliary hydraulic control for work tools like millyard or logging forks
5. Wide range of millyard work tools

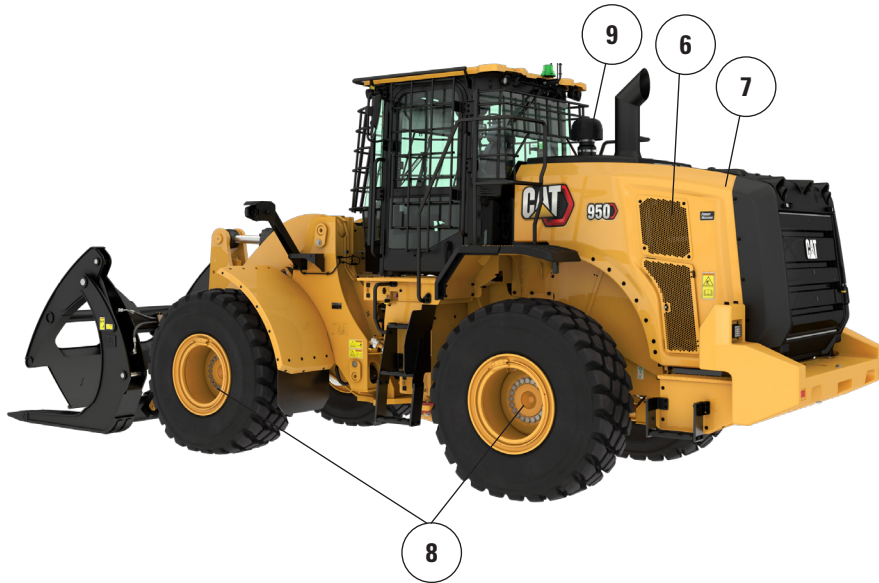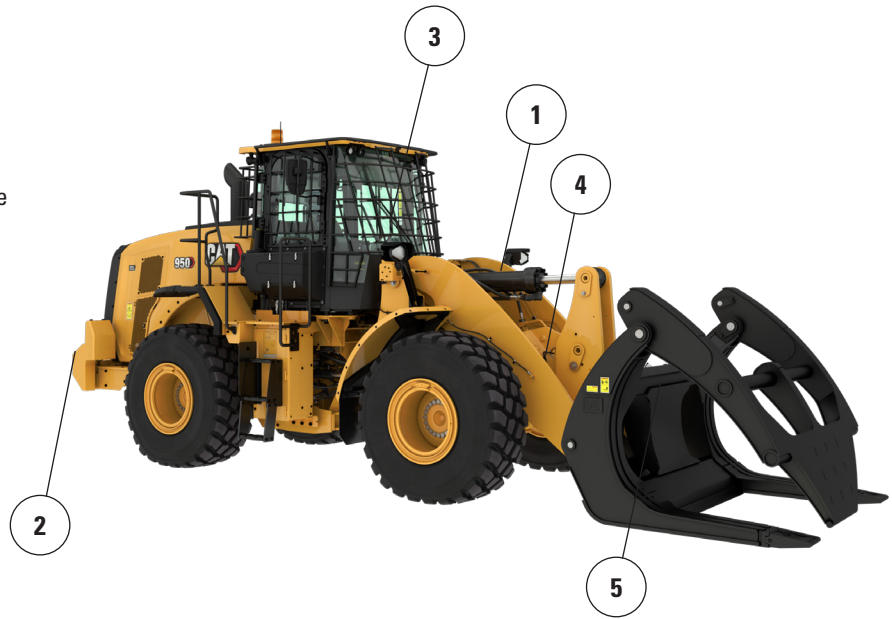

6. Optional variable pitch fan helps to keep rear grill and cooling cores clean in high debris applications
7. Optional high debris/wide fin spacing cooling cores are less prone to plugging
8. Optional axle oil cooler provides lower axle oil temperatures in high braking applications
9. Optional engine and cab precleaners for use in high debris applications

950 Forestry Machine Specifications

Tire Options

Tire Brand	BRIDGESTONE	MICHELIN	MICHELIN	BRIDGESTONE	MAXAM
Tire Size	23.5R25	23.5R25	750/65R25	750/65R25	23.5R25
Tread Type	L-3	L-3	L-3	L-3	L-3
Tread Pattern	VJT	XHA2	XLD	VTS	MS302
Casing Strength	*	*	*	*	**
Width over Tires – Maximum (empty)*	2800 mm 9'3"	2816 mm 9'3"	2934 mm 9'8"	2930 mm 9'8"	2820 mm 9'4"
Width over Tires – Maximum (loaded)*	2824 mm 9'4"	2828 mm 9'4"	2968 mm 9'9"	2951 mm 9'9"	2828 mm 9'4"
Change in Vertical Dimensions (average of front and rear)		10 mm 0.4"	12 mm 0.5"	19 mm 0.7"	14 mm 0.5"
Change in Horizontal Reach		-6 mm -0.2"	5 mm 0.2"	-4 mm -0.2"	-15 mm -0.6"
Change in Clearance Circle to Outside of Tires		4 mm 0.2"	144 mm 5.7"	128 mm 5"	4 mm 0.2"
Change in Clearance Circle to Inside of Tires		-4 mm -0.2"	-144 mm -5.7"	-128 mm -5"	-4 mm -0.2"
Change in Operating Weight (without ballast)		-156 kg -344 lb	633 kg 1,395 lb	737 kg 1,625 lb	0 kg 0 lb
Change in Static Tipping Load – Straight		-104 kg -229 lb	421 kg 928 lb	490 kg 1,080 lb	0 kg 0 lb
Change in Static Tipping Load – Articulated		-90 kg -200 lb	367 kg 809 lb	427 kg 942 lb	0 kg 0 lb
Rear Axle Oscillation Angle	±13 degrees	±13 degrees	±8 degrees	±8 degrees	±13 degrees
Maximum Single-Wheel Rise and Fall	481 mm 1'7"	481 mm 1'7"	298 mm 1'0"	298 mm 1'0"	481 mm 1'7"

*Width over tire bulge and includes tire growth.

950 Forestry Machine Specifications

Operating Specifications – Buckets

Linkage		Forestry Linkage		
Bucket Type		High Dump – Pin-On		
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	6.10	7.60	9.20
	yd ³	8.00	10.00	12.00
Capacity – Rated at 110% Fill Factor	m ³	6.70	8.40	10.10
	yd ³	8.75	11.00	13.25
Width	mm	3037	3350	3350
	ft/in	9'11"	10'11"	10'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2350	2279	2138
	ft/in	7'8"	7'5"	7'0"
17 † Reach at Maximum Lift and 45° Discharge	mm	1815	1885	2027
	ft/in	5'11"	6'2"	6'7"
Reach at Level Lift Arm and Bucket Level	mm	3378	3478	3678
	ft/in	11'1"	11'4"	12'0"
A † Digging Depth	mm	72	72	72
	in	2.8"	2.8"	2.8"
12 † Overall Length	mm	9027	9127	9327
	ft/in	29'8"	30'0"	30'8"
B † Overall Height with Bucket at Maximum Lift	mm	5988	6075	6276
	ft/in	19'8"	20'0"	20'8"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7001	7171	7239
	ft/in	23'0"	23'7"	23'9"
Static Tipping Load, Straight (With tire deflection)	kg	11 733	11 412	11 075
	lb	25,867	25,160	24,416
Static Tipping Load, Straight (No tire deflection)	kg	12 552	12 231	11 898
	lb	27,673	26,966	26,232
Static Tipping Load, Articulated (With tire deflection)	kg	9909	9600	9281
	lb	21,846	21,164	20,462
Static Tipping Load, Articulated (No tire deflection)	kg	10 738	10 429	10 115
	lb	23,674	22,992	22,300
Breakout Force (§)	kN	133	124	111
	lbf	29,908	28,022	25,045
Operating Weight*	kg	20 900	21 129	21 302
	lb	46,076	46,580	46,962

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, axle oil cooler, logger counterweight, ride control, cold start, roading fenders, Product Link, manual diff lock/open axles (front/rear), logger package, powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

Operating Specifications – Buckets (continued)

Linkage		Forestry Linkage		
Bucket Type		High Dump – Hook-On – Fusion		
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	6.10	7.60	9.20
	yd ³	8.00	10.00	12.00
Capacity – Rated at 110% Fill Factor	m ³	6.70	8.40	10.10
	yd ³	8.75	11.00	13.25
Width	mm	3037	3350	3350
	ft/in	9'11"	10'11"	10'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2305	2233	2092
	ft/in	7'6"	7'3"	6'10"
17 † Reach at Maximum Lift and 45° Discharge	mm	1860	1931	2073
	ft/in	6'1"	6'4"	6'9"
Reach at Level Lift Arm and Bucket Level	mm	3442	3543	3743
	ft/in	11'3"	11'7"	12'3"
A † Digging Depth	mm	102	72	72
	in	4"	2.8"	2.8"
12 † Overall Length	mm	9091	9192	9392
	ft/in	29'10"	30'2"	30'10"
B † Overall Height with Bucket at Maximum Lift	mm	6049	6115	6316
	ft/in	19'11"	20'1"	20'9"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7022	7193	7262
	ft/in	23'1"	23'8"	23'10"
Static Tipping Load, Straight (With tire deflection)	kg	10 639	10 761	10 433
	lb	23,456	23,725	23,002
Static Tipping Load, Straight (No tire deflection)	kg	11 383	11 563	11 238
	lb	25,095	25,492	24,777
Static Tipping Load, Articulated (With tire deflection)	kg	8914	8976	8667
	lb	19,653	19,790	19,108
Static Tipping Load, Articulated (No tire deflection)	kg	9671	9788	9482
	lb	21,321	21,580	20,905
Breakout Force (§)	kN	121	119	107
	lbf	27,237	26,884	24,084
Operating Weight*	kg	21 477	21 696	21 868
	lb	47,348	47,830	48,210

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, axle oil cooler, logger counterweight, ride control, cold start, roading fenders, Product Link, manual diff lock/open axles (front/rear), logger package, powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Forestry Machine Specifications

Operating Specifications – Buckets *(continued)*

Linkage		Forestry Linkage		
Bucket Type		High Dump – Hook-On – Fusion – VCE Small		
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	6.10	7.60	9.20
	yd ³	8.00	10.00	12.00
Capacity – Rated at 110% Fill Factor	m ³	6.70	8.40	10.10
	yd ³	8.75	11.00	13.25
Width	mm	3037	3350	3350
	ft/in	9'11"	10'11"	10'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	2294	2223	2081
	ft/in	7'6"	7'3"	6'9"
17 † Reach at Maximum Lift and 45° Discharge	mm	1871	1942	2083
	ft/in	6'1"	6'4"	6'10"
Reach at Level Lift Arm and Bucket Level	mm	3458	3558	3758
	ft/in	11'4"	11'8"	12'3"
A † Digging Depth	mm	72	72	72
	in	2.8"	2.8"	2.8"
12 † Overall Length	mm	9107	9207	9407
	ft/in	29'11"	30'3"	30'11"
B † Overall Height with Bucket at Maximum Lift	mm	6034	6122	6323
	ft/in	19'10"	20'1"	20'9"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7026	7197	7268
	ft/in	23'1"	23'8"	23'11"
Static Tipping Load, Straight (With tire deflection)	kg	11 179	10 862	10 534
	lb	24,647	23,947	23,224
Static Tipping Load, Straight (No tire deflection)	kg	11 978	11 660	11 336
	lb	26,407	25,707	24,991
Static Tipping Load, Articulated (With tire deflection)	kg	9390	9083	8773
	lb	20,702	20,026	19,342
Static Tipping Load, Articulated (No tire deflection)	kg	10 199	9892	9586
	lb	22,485	21,809	21,134
Breakout Force (§)	kN	126	118	106
	lbf	28,379	26,621	23,859
Operating Weight*	kg	21 245	21 475	21 648
	lb	46,836	47,343	47,725

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, axle oil cooler, logger counterweight, ride control, cold start, roading fenders, Product Link, manual diff lock/open axles (front/rear), logger package, powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

Operating Specifications – Buckets (continued)

Linkage		Forestry Linkage				
Bucket Type		Flat Floor – Pin-On	Woodchip – Pin-On		Woodchip – Hook-On – Fusion	
Edge Type		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges
Capacity – Rated	m ³	6.10	9.20	9.90	9.20	9.90
	yd ³	8.00	12.00	13.00	12.00	13.00
Capacity – Rated at 110% Fill Factor	m ³	6.70	10.10	10.90	10.10	10.90
	yd ³	8.75	13.25	14.25	13.25	14.25
Width	mm	3357	3330	3330	3330	3330
	ft/in	11'0"	10'11"	10'11"	10'11"	10'11"
16 † Dump Clearance at Maximum Lift and 45° Discharge	mm	1917	2262	2188	2169	2165
	ft/in	6'3"	7'5"	7'2"	7'1"	7'1"
17 † Reach at Maximum Lift and 45° Discharge	mm	2113	1909	1984	2003	2007
	ft/in	6'11"	6'3"	6'6"	6'6"	6'7"
Reach at Level Lift Arm and Bucket Level	mm	3895	3507	3613	3639	3645
	ft/in	12'9"	11'6"	11'10"	11'11"	11'11"
A † Digging Depth	mm	197	97	97	97	97
	in	7.7"	3.8"	3.8"	3.8"	3.8"
12 † Overall Length	mm	9612	9152	9258	9284	9290
	ft/in	31'7"	30'1"	30'5"	30'6"	30'6"
B † Overall Height with Bucket at Maximum Lift	mm	5573	6266	6358	6324	6375
	ft/in	18'4"	20'7"	20'11"	20'9"	20'11"
Loader Clearance Circle Radius with Bucket at Carry Position	mm	7465	7170	7206	7215	7217
	ft/in	24'6"	23'7"	23'8"	23'9"	23'9"
Static Tipping Load, Straight (With tire deflection)	kg	8508	12 177	12 103	10 869	10 921
	lb	18,758	26,847	26,683	23,963	24,077
Static Tipping Load, Straight (No tire deflection)	kg	9096	13 025	12 961	11 613	11 674
	lb	20,054	28,717	28,575	25,603	25,736
Static Tipping Load, Articulated (With tire deflection)	kg	6936	10 352	10 271	9169	9214
	lb	15,291	22,824	22,644	20,214	20,314
Static Tipping Load, Articulated (No tire deflection)	kg	7542	11 210	11 138	9926	9980
	lb	16,627	24,714	24,557	21,883	22,002
Breakout Force (§)	kN	92	119	112	111	110
	lbf	20,860	26,841	25,336	25,062	24,918
Operating Weight*	kg	22 503	20 402	20 494	21 037	20 998
	lb	49,609	44,978	45,180	46,377	46,291

* Static tipping loads and operating weights shown are based on a machine configuration with Bridgestone 23.5R25 VJT L3 radial tires, full fluids, operator, axle oil cooler, logger counterweight, ride control, cold start, roading fenders, Product Link, manual diff lock/open axles (front/rear), logger package, powertrain guard, secondary steering and sound suppression.

† Illustration shown with Dimension charts.

(§) Measured 100 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with ISO 14397-2:2007.

(With tire deflection) Full compliance to ISO 14397-1:2007 Sections 1 thru 6, which requires 2% verification between calculations and testing.

(No tire deflection) Compliance to ISO 14397-1:2007 Sections 1 thru 5.

Other buckets are available and offerings vary by region. Consult your local Cat dealer for further details.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine length	mm	1609
		in	63.3
2	Fork width	mm	2324
		in	91.5
End area	m2	1.26	
	ft2	14	
3	Inside Height (only applies to double top clamp)	mm	0
		in	0
4	Min. opening (only applies to milliard forks)	mm	427
		in	17
Operating Weight	kg	20555	
	lbs	45316	
5	Distance inside of tine tips	mm	1780
		in	70
Static tipping load, articulated Fork level	kg	9031	
	lbs	19910.2	
Static tipping load, straight Fork level	kg	10632	
	lbs	23438.7	
6	Max. height of fork (w/clamp open if applicable)	mm	2843
		in	111.9
7	Clearance w/full lift, 45 deg dump (if max. dump <= 45)	mm	2629
		in	103.5
8	Clearance @ full lift fork level	mm	3761
		in	148.1
9	Reach w/full lift, 45 deg dump (if max. dump <= 45)	mm	1588
		in	62.5
10	Reach w/lift arm horizontal and fork level	mm	3021
		in	118.9
11	*Ground to Bottom of Tool at Minimum Height and Tool Level	mm	-66
		in	-2.6
12	Width over tines	mm	2286
		in	90.0
13	Reach @ ground level	mm	2415
		in	95
14	Max. opening across tine and clamp	mm	2709
		in	106.7
15	Overall height of fork @ full lift and clamp open	mm	6605
		in	260.0
16	Overall length	mm	8642
		in	340.2
17	Clearance @ full lift and max. dump Discharge (if <= 45)	mm	2613
		in	102.9
18	Clearance w/horizontal lift arms and fork level	mm	1800.2
		in	70.9
19	Reach @ full lift and fork level	mm	2283.4
		in	89.9
20	Max. discharge angle from horizontal	deg	46
		rad	0.8

*Negative values indicate below grade


950 LOG

Milliard Fork, Pin-On


63" Tine

374-7148

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

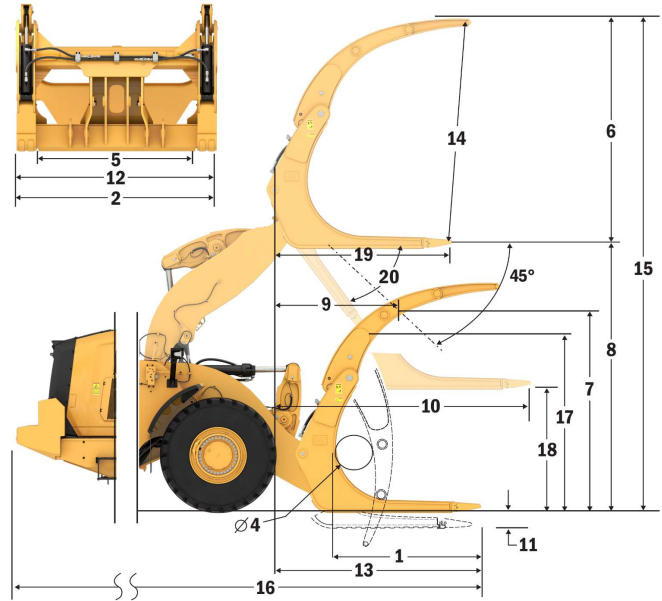

Capacity (kg)
(Calculated Load at CG Point)

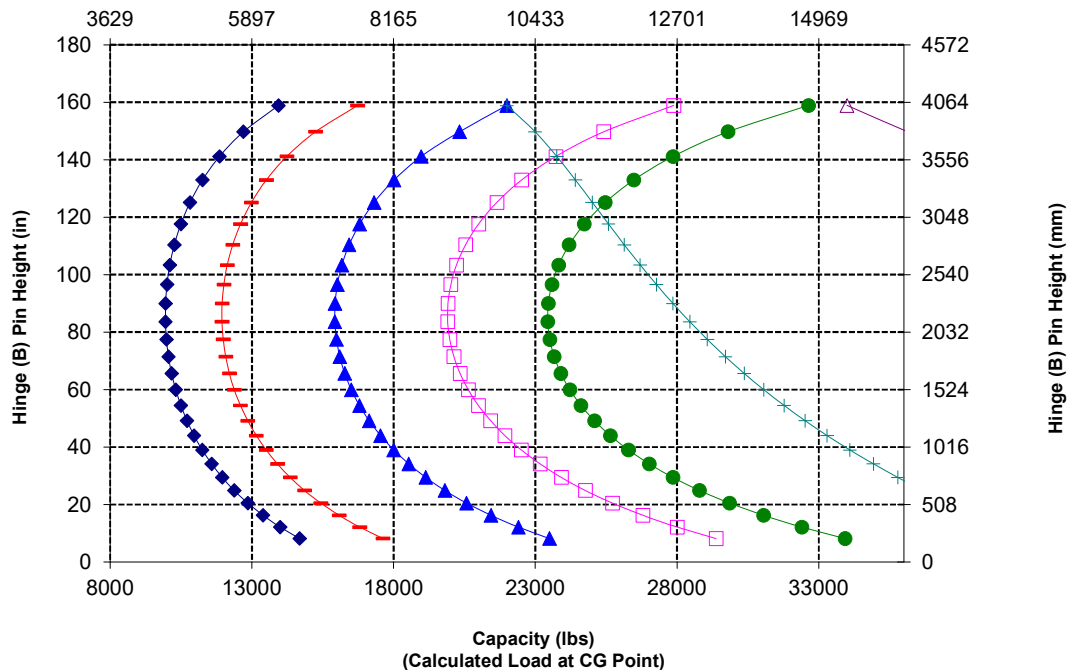

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine length	mm	1609
		in	63.3
2	Fork width	mm	2324
		in	91.5
	End area	m ²	1.26
		ft ²	14
3	Inside Height (only applies to double top clamp)	mm	0
		in	0
4	Min. opening (only applies to milliard forks)	mm	427
		in	17
	Operating Weight	kg	21227
		lbs	46798
5	Distance inside of tine tips	mm	1780
		in	70
	Static tipping load, articulated Fork level	kg	8038
		lbs	17720.8
	Static tipping load, straight Fork level	kg	9567
		lbs	21090.6
6	Max. height of fork (w/clamp open if applicable)	mm	2843
		in	111.9
7	Clearance w/full lift, 45 deg dump (if max. dump <= 45)	mm	2542
		in	100.1
8	Clearance @ full lift fork level	mm	3775
		in	148.6
9	Reach w/full lift, 45 deg dump (if max. dump <= 45)	mm	1694
		in	66.7
10	Reach w/lift arm horizontal and fork level	mm	3158
		in	124.3
11	*Ground to Bottom of Tool at Minimum Height and Tool Level	mm	-52
		in	-2.1
12	Width over tines	mm	2286
		in	90.0
13	Reach @ ground level	mm	2541
		in	100
14	Max. opening across tine and clamp	mm	2709
		in	106.7
15	Overall height of fork @ full lift and clamp open	mm	6618
		in	260.5
16	Overall length	mm	8768
	Tip of tine to rear of machine	in	345.2
17	Clearance @ full lift and max. dump Discharge (if <= 45)	mm	2266
		in	89.2
18	Clearance w/horizontal lift arms and fork level	mm	1813.9
		in	71.4
19	Reach @ full lift and fork level	mm	2420.5
		in	95.3
20	Max. discharge angle from horizontal	deg	63
		rad	1.1

*Negative values indicate below grade


950 LOG

Millyard Fork, FUSION


63" Tine

383-3523

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

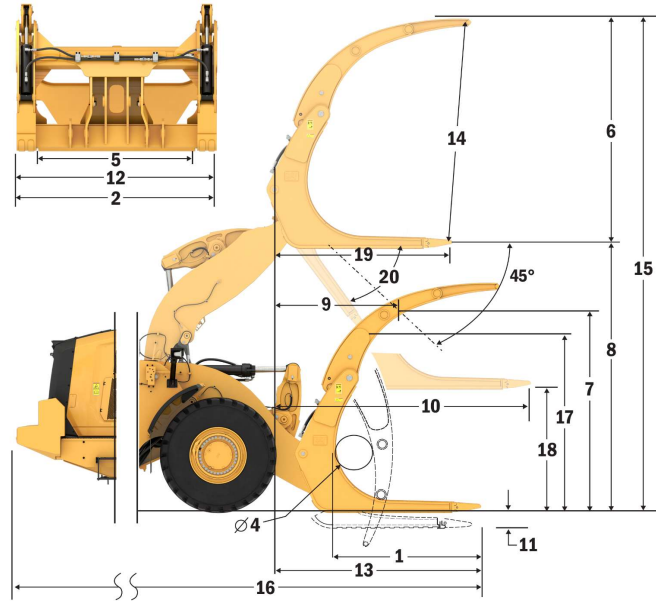

Capacity (kg)
(Calculated Load at CG Point)

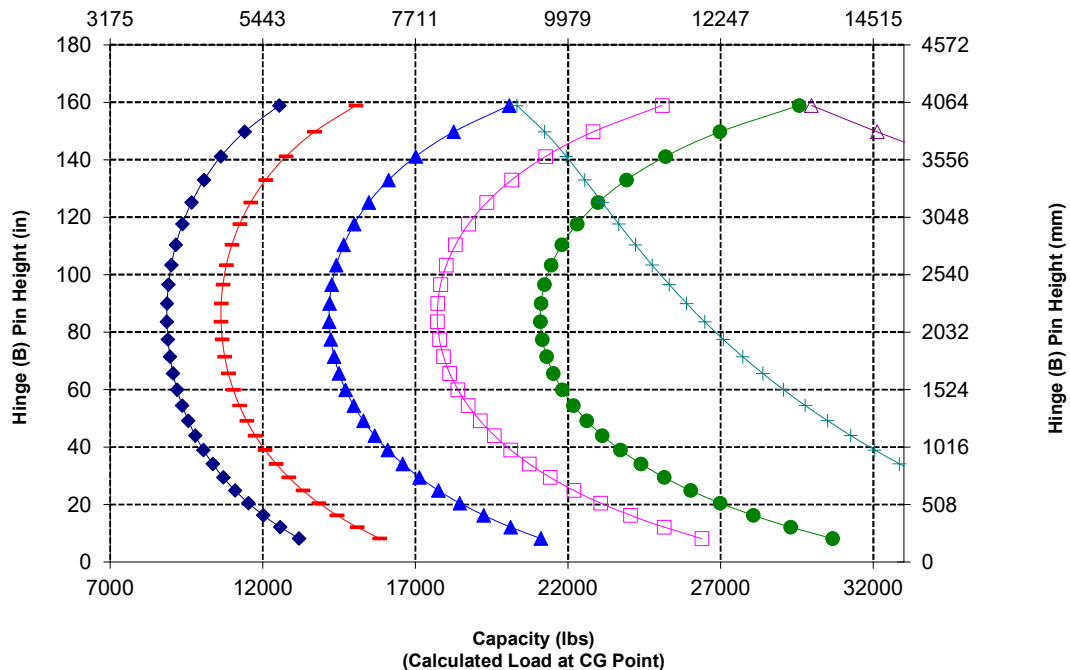

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine length	mm	1677
		in	66.0
2	Fork width	mm	2236
		in	88.0
	End area	m ²	1.39
		ft ²	15
3	Inside Height (only applies to double top clamp)	mm	0
		in	0
4	Min. opening (only applies to millyard forks)	mm	330
		in	13
	Operating Weight	kg	19934
		lbs	43947
5	Distance inside of tine tips	mm	1904
		in	75
	Static tipping load, articulated Fork level	kg	8774
		lbs	19343.1
	Static tipping load, straight Fork level	kg	10242
		lbs	22579.4
6	Max. height of fork (w/clamp open if applicable)	mm	3144
		in	123.8
7	Clearance w/full lift, 45 deg dump (if max. dump <= 45)	mm	2362
		in	93.0
8	Clearance @ full lift fork level	mm	3659
		in	144.1
9	Reach w/full lift, 45 deg dump (if max. dump <= 45)	mm	1711
		in	67.3
10	Reach w/lift arm horizontal and fork level	mm	3297
		in	129.8
11	*Ground to Bottom of Tool at Minimum Height and Tool Level	mm	-168
		in	-6.6
12	Width over tines	mm	2184
		in	86.0
13	Reach @ ground level	mm	2765
		in	109
14	Max. opening across tine and clamp	mm	2914
		in	114.7
15	Overall height of fork @ full lift and clamp open	mm	6803
		in	267.8
16	Overall length	mm	8992
	Tip of tine to rear of machine	in	354.0
17	Clearance @ full lift and max. dump Discharge (if <= 45)	mm	2344
		in	92.3
18	Clearance w/horizontal lift arms and fork level	mm	1698.0
		in	66.9
19	Reach @ full lift and fork level	mm	2559.3
		in	100.8
20	Max. discharge angle from horizontal	deg	46
		rad	0.8

*Negative values indicate below grade


950 LOG

Milliard Pole Fork, Pin-On


66" Tine

445-2466

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

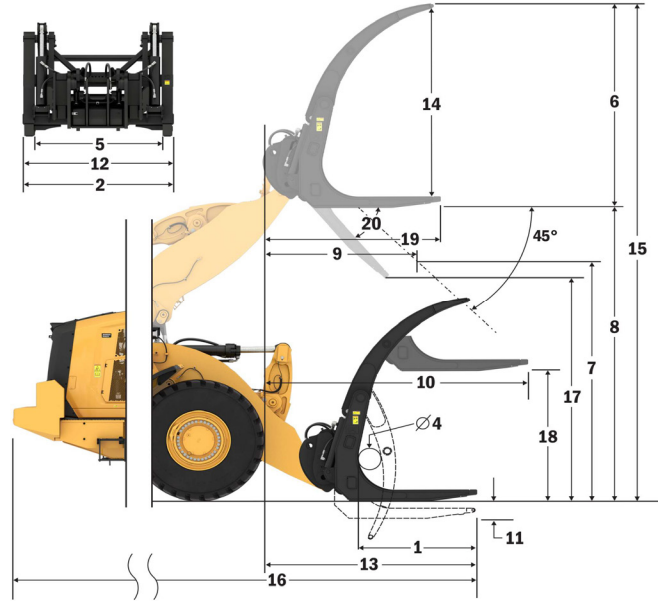

Capacity (kg)
(Calculated Load at CG Point)

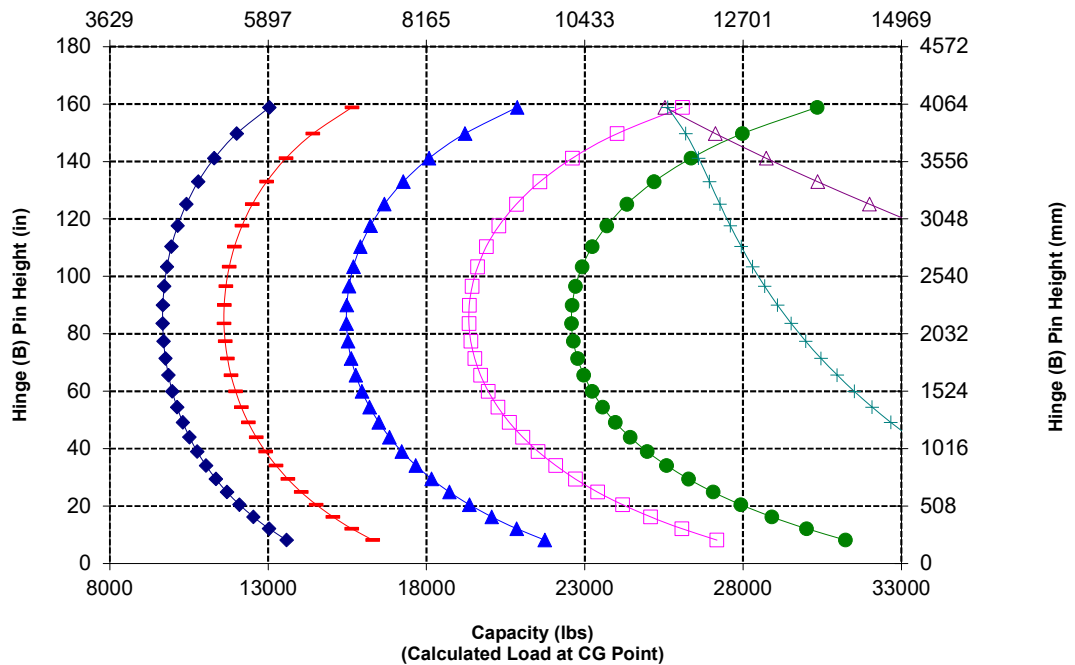

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine length	mm	1609
		in	63.3
2	Fork width	mm	2332
		in	91.8
	End area	m ²	1.9
		ft ²	20
3	Inside Height (only applies to double top clamp)	mm	1381
		in	54
4	Min. opening (only applies to millyard forks)	mm	N/A
		in	N/A
	Operating Weight	kg	20367
		lbs	44902
5	Distance inside of tine tips	mm	1776
		in	70
	Static tipping load, articulated Fork level	kg	8748
		lbs	19285.0
	Static tipping load, straight Fork level	kg	10260
		lbs	22619.7
6	Max. height of fork (w/clamp open if applicable)	mm	2944
		in	115.9
7	Clearance w/full lift, 45 deg dump (if max. dump <= 45)	mm	2628
		in	103.5
8	Clearance @ full lift fork level	mm	3762
		in	148.1
9	Reach w/full lift, 45 deg dump (if max. dump <= 45)	mm	1589
		in	62.6
10	Reach w/lift arm horizontal and fork level	mm	3022
		in	119.0
11	*Ground to Bottom of Tool at Minimum Height and Tool Level	mm	-65
		in	-2.6
12	Width over tines	mm	2298
		in	90.5
13	Reach @ ground level	mm	2416
		in	95
14	Max. opening across tine and clamp	mm	2542
		in	100.1
15	Overall height of fork @ full lift and clamp open	mm	6705
		in	264.0
16	Overall length	mm	8643
	Tip of tine to rear of machine	in	340.3
17	Clearance @ full lift and max. dump Discharge (if <= 45)	mm	2613
		in	102.9
18	Clearance w/horizontal lift arms and fork level	mm	1800.7
		in	70.9
19	Reach @ full lift and fork level	mm	2285.1
		in	90.0
20	Max. discharge angle from horizontal	deg	46
		rad	0.8

*Negative values indicate below grade


950 LOG

Logging Fork, Pin-On


63" Tine

379-5408

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

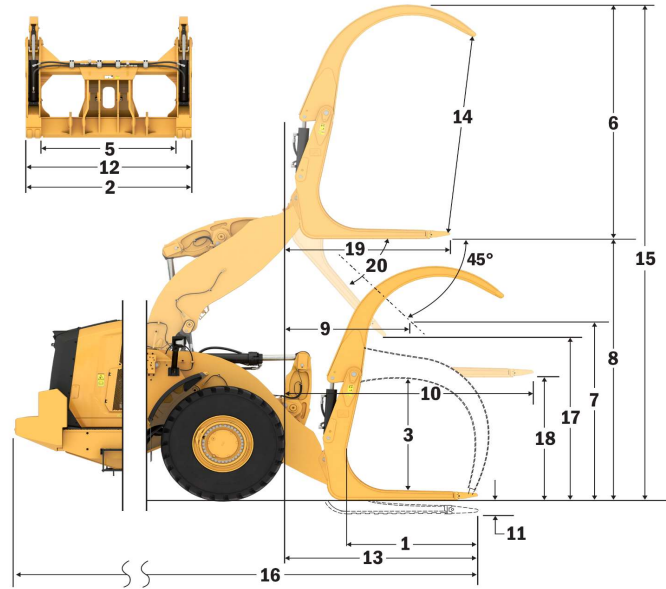

Capacity (kg) (Calculated Load at CG Point)

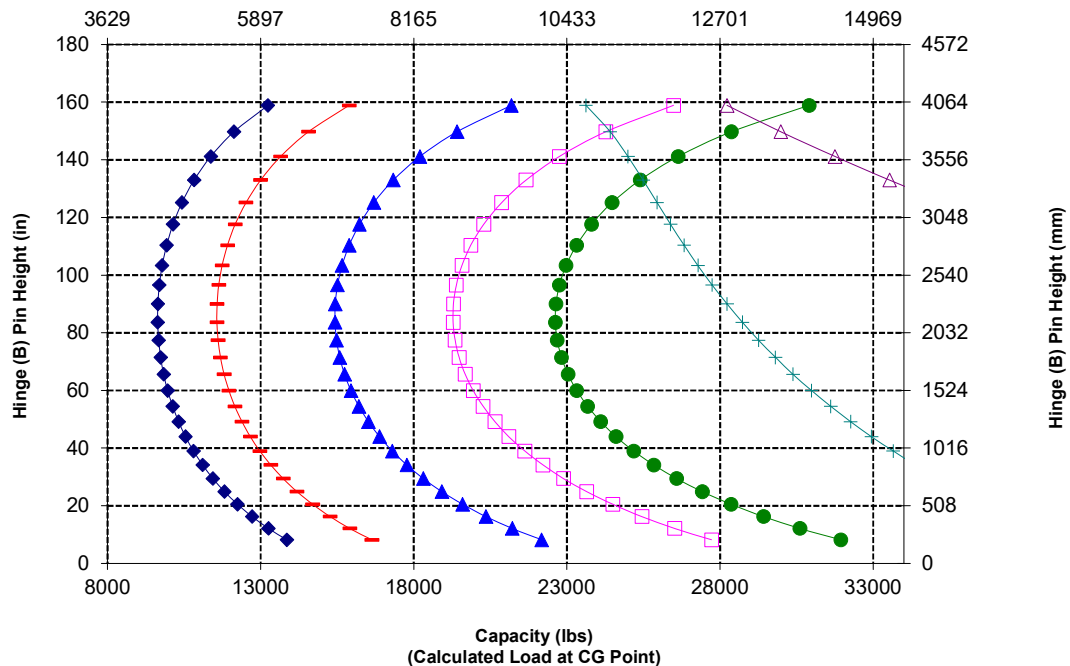

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine length	mm	917
		in	36.1
2	Fork width	mm	1855
		in	73.0
	End area	m ²	2.5
		ft ²	27
3	Inside Height (only applies to double top clamp)	mm	0
		in	0
4	Min. opening (only applies to millyard forks)	mm	1450
		in	57
	Operating Weight	kg	20605
		lbs	45426
5	Distance inside of tine tips	mm	1314
		in	52
	Static tipping load, articulated Fork level	kg	8102
		lbs	17861.8
	Static tipping load, straight Fork level	kg	9542
		lbs	21035.9
6	Max. height of fork (w/clamp open if applicable)	mm	3433
		in	135.1
7	Clearance w/full lift, 45 deg dump (if max. dump <= 45)	mm	3023
		in	119.0
8	Clearance @ full lift fork level	mm	3674
		in	144.7
9	Reach w/full lift, 45 deg dump (if max. dump <= 45)	mm	1071
		in	42.2
10	Reach w/lift arm horizontal and fork level	mm	2376
		in	93.6
11	*Ground to Bottom of Tool at Minimum Height and Tool Level	mm	-153
		in	-6.0
12	Width over tines	mm	1850
		in	72.8
13	Reach @ ground level	mm	1834
		in	72
14	Max. opening across tine and clamp	mm	3123
		in	123.0
15	Overall height of fork @ full lift and clamp open	mm	7107
		in	279.8
16	Overall length	mm	8061
		in	317.4
17	Clearance @ full lift and max. dump Discharge (if <= 45)	mm	2943
		in	115.9
18	Clearance w/horizontal lift arms and fork level	mm	1713.3
		in	67.5
19	Reach @ full lift and fork level	mm	1639.1
		in	64.5
20	Max. discharge angle from horizontal	deg	57
		rad	1.0

*Negative values indicate below grade


950 LOG

Grapple Fork, FUSION


36" Tine

352-7339

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

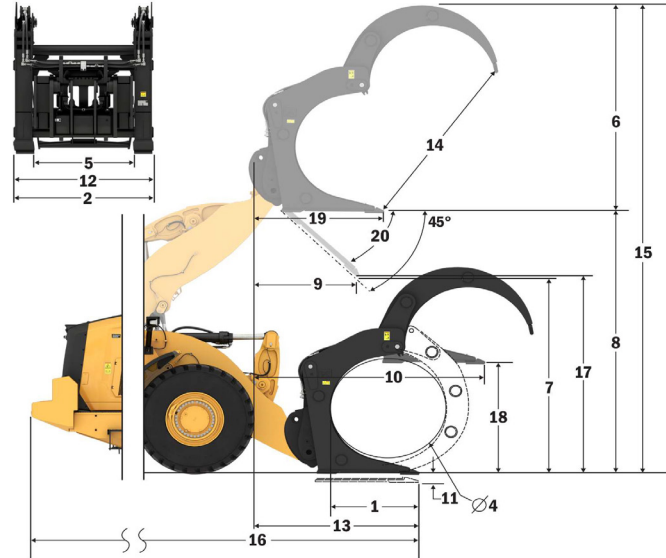

Capacity (kg) (Calculated Load at CG Point)

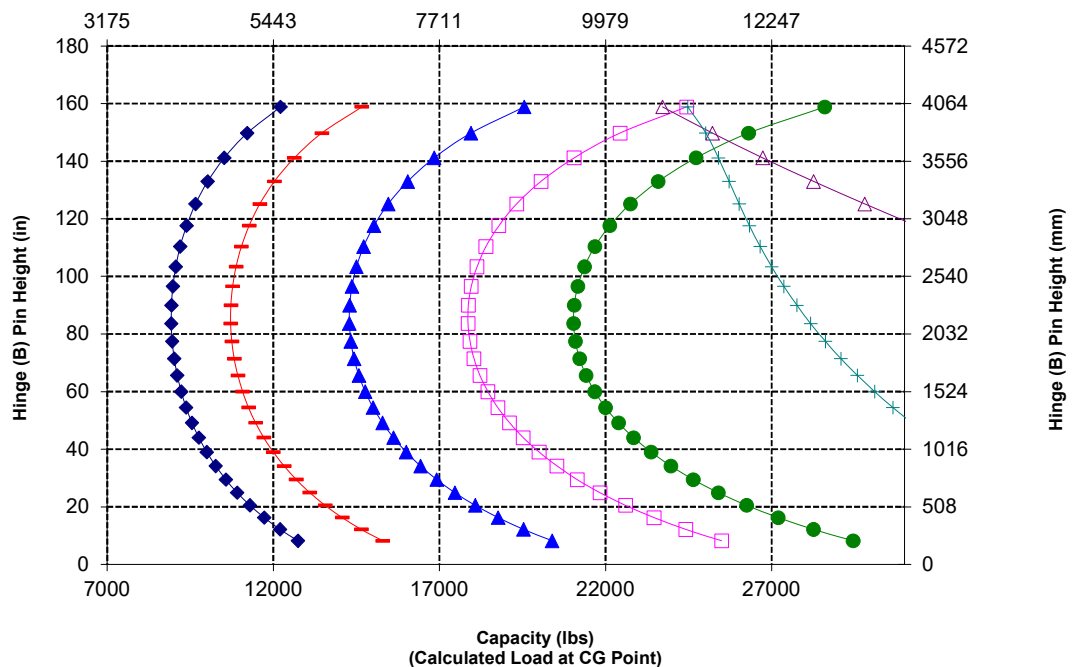

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine length	mm	1220
		in	48.0
2	Fork width	mm	1855
		in	73.0
	End area	m ²	2.63
		ft ²	28
3	Inside Height (only applies to double top clamp)	mm	0
		in	0
4	Min. opening (only applies to millyard forks)	mm	1448
		in	57
	Operating Weight	kg	20766
		lbs	45781
5	Distance inside of tine tips	mm	1314
		in	52
	Static tipping load, articulated Fork level	kg	7850
		lbs	17305.9
	Static tipping load, straight Fork level	kg	9276
		lbs	20448.9
6	Max. height of fork (w/clamp open if applicable)	mm	3356
		in	132.1
7	Clearance w/full lift, 45 deg dump (if max. dump <= 45)	mm	2841
		in	111.9
8	Clearance @ full lift fork level	mm	3747
		in	147.5
9	Reach w/full lift, 45 deg dump (if max. dump <= 45)	mm	1356
		in	53.4
10	Reach w/lift arm horizontal and fork level	mm	2707
		in	106.6
11	*Ground to Bottom of Tool at Minimum Height and Tool Level	mm	-80
		in	-3.2
12	Width over tines	mm	1850
		in	72.8
13	Reach @ ground level	mm	2111
		in	83
14	Max. opening across tine and clamp	mm	3027
		in	119.2
15	Overall height of fork @ full lift and clamp open	mm	7103
		in	279.7
16	Overall length	mm	8338
	Tip of tine to rear of machine	in	328.3
17	Clearance @ full lift and max. dump Discharge (if <= 45)	mm	2707
		in	106.6
18	Clearance w/horizontal lift arms and fork level	mm	1786.0
		in	70.3
19	Reach @ full lift and fork level	mm	1969.4
		in	77.5
20	Max. discharge angle from horizontal	deg	57
		rad	1.0

*Negative values indicate below grade


950 LOG

Grapple Fork, FUSION


48" Tine

442-9358

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

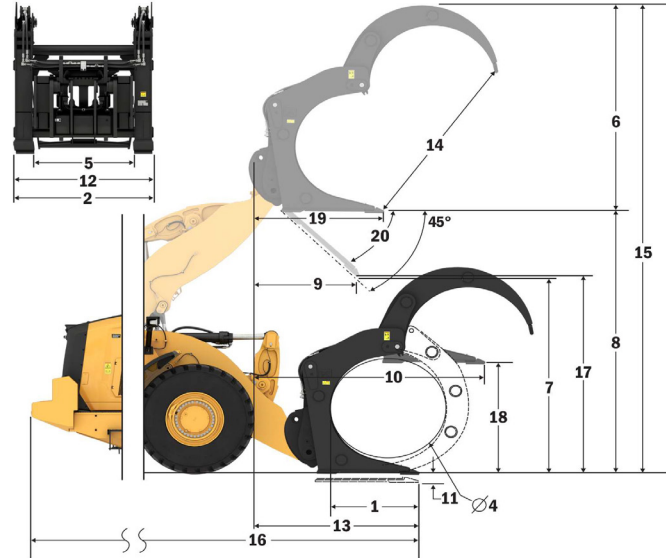

Capacity (kg)
(Calculated Load at CG Point)

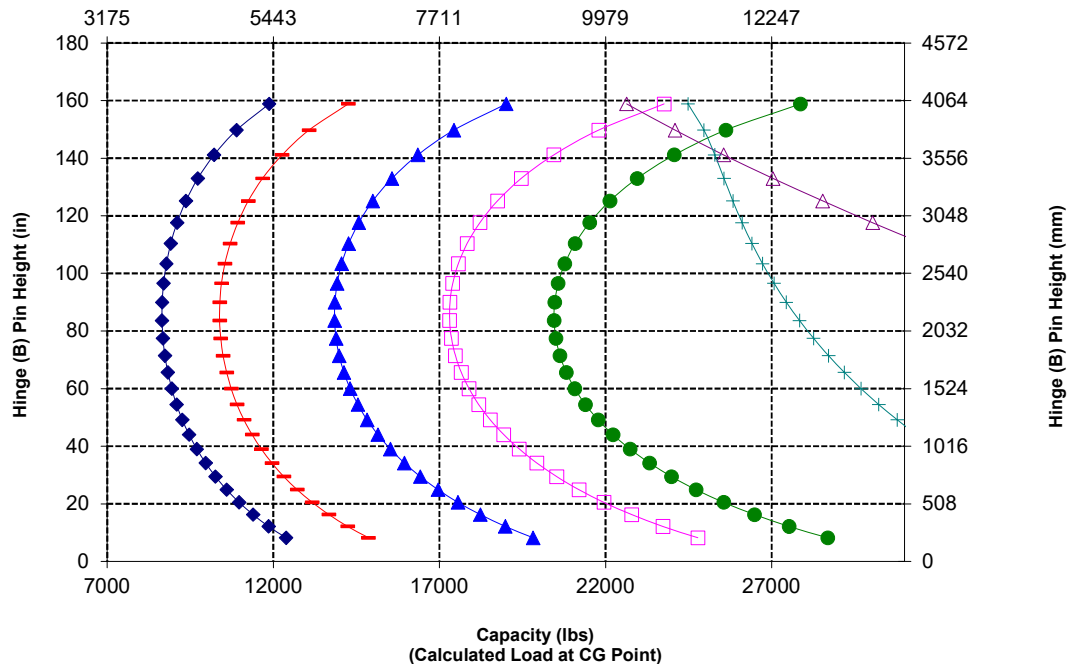

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1219
		in	48.0
2	Load Center	mm	610
		in	24.0
	Static Tipping Load - Straight (Forks Level)	kg	11263
		lbs	24823
	Static Tipping Load - Articulated (Forks Level)	kg	9775
		lbs	21545
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4888
		lbs	10773
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5865
		lbs	12927
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	7820
		lbs	17236
3	Maximum Overall Length	mm	8567
		in	337.3
4	Reach with Forks at Ground Level	mm	1121
		in	44.1
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	1667
		in	65.6
7	Reach with Fork at Maximum Height	mm	930
		in	36.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1848
		in	72.8
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3809
		in	150.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5345
		in	210.4
11	Clearance at Full Lift and Max Dump	mm	2698
		in	106.2
12	Max Discharge Angle from Horizontal	deg	46
13	Overall Carriage Width	mm	2470
		in	97.3
14	Overall Carriage Height	mm	1601
		in	63.0
15	Outside Tine Width (max spread)	mm	2366
		in	93.1
16	Outside Tine Width (min spread)	mm	1002
		in	39.4
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	65.0
		in	2.6
	Tine Capacity	kg	10500
		lbs	23142
	Operating Weight	kg	19031
		lbs	41945

*Negative values indicate below grade



950 LOG

Log & Lumber Fork, No TC, Pin-On

48" Tine

379-2323

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

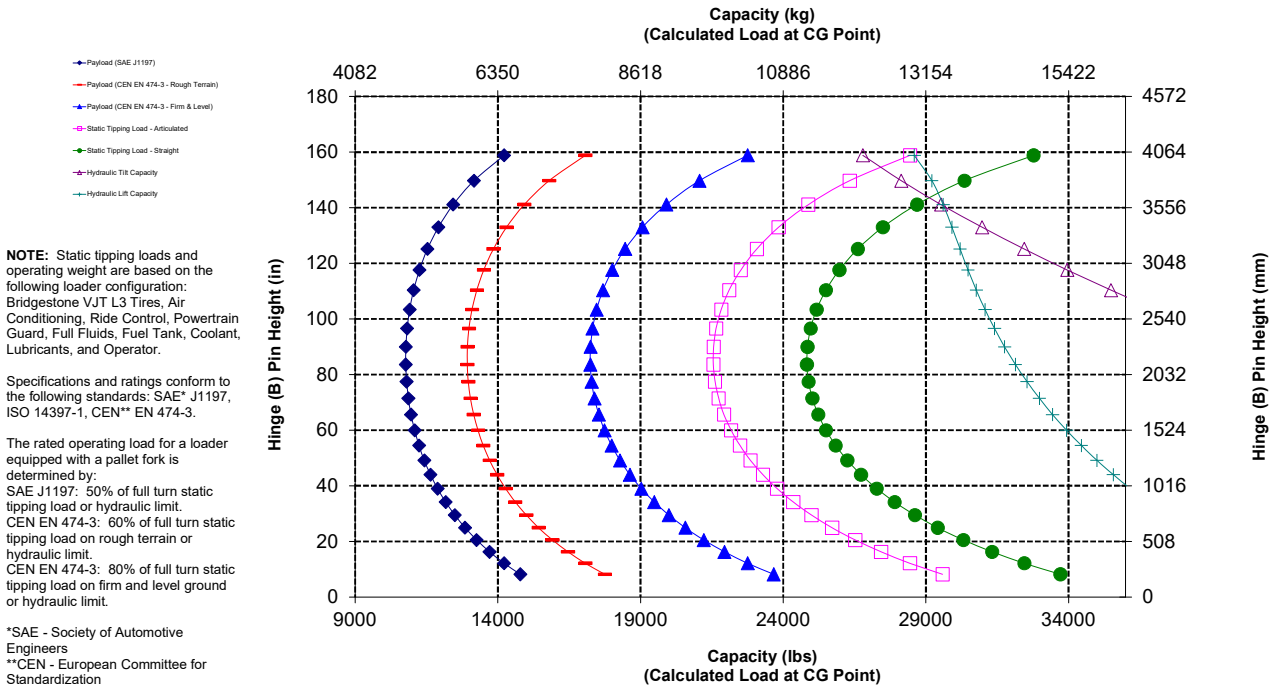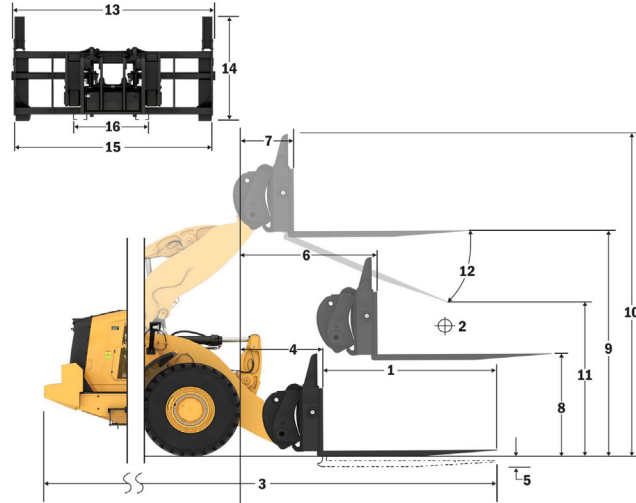

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1219
		in	48.0
2	Load Center	mm	610
		in	24.0
	Static Tipping Load - Straight (Forks Level)	kg	10594
		lbs	23350
	Static Tipping Load - Articulated (Forks Level)	kg	9148
		lbs	20161
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4574
		lbs	10081
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5489
		lbs	12097
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	7318
		lbs	16129
3	Maximum Overall Length	mm	8653
		in	340.7
4	Reach with Forks at Ground Level	mm	1207
		in	47.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-81
		in	-3.2
6	Reach with Arms Horizontal and Forks Level	mm	1755
		in	69.1
7	Reach with Fork at Maximum Height	mm	1018
		in	40.1
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1850
		in	72.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3811
		in	150.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5350
		in	210.6
11	Clearance at Full Lift and Max Dump	mm	2572
		in	101.3
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2470
		in	97.3
14	Overall Carriage Height	mm	1603
		in	63.1
15	Outside Tine Width (max spread)	mm	2366
		in	93.1
16	Outside Tine Width (min spread)	mm	1002
		in	39.4
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	65.0
		in	2.6
	Tine Capacity	kg	10500
		lbs	23142
	Operating Weight	kg	19534
		lbs	43054

*Negative values indicate below grade


950 LOG

Log & Lumber Fork, No TC, FUSION


48" Tine

379-2063

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

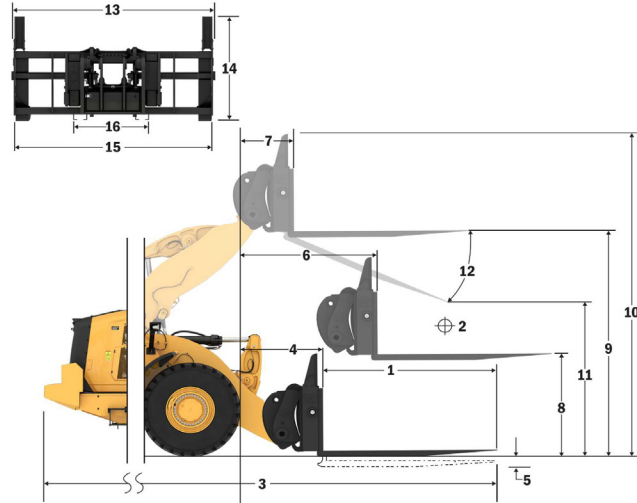

Capacity (kg)
(Calculated Load at CG Point)

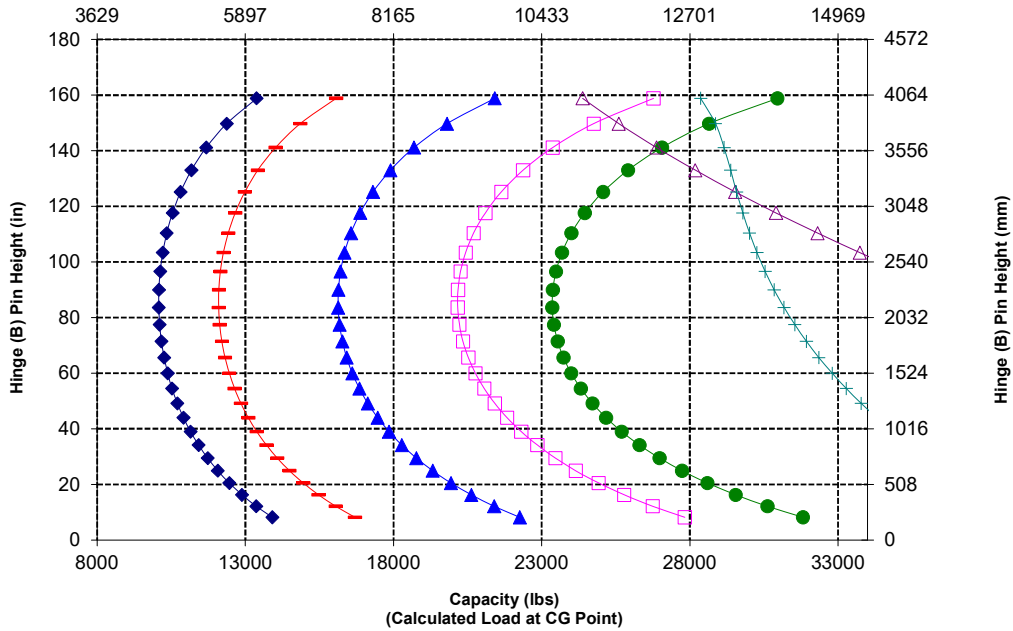

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	10478
		lbs	23094
	Static Tipping Load - Articulated (Forks Level)	kg	9071
		lbs	19993
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4536
		lbs	9996
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5443
		lbs	11996
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	7257
		lbs	15994
3	Maximum Overall Length	mm	8915
		in	351.0
4	Reach with Forks at Ground Level	mm	1164
		in	45.8
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	1692
		in	66.6
7	Reach with Fork at Maximum Height	mm	955
		in	37.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1873
		in	73.8
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3834
		in	151.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5345
		in	210.4
11	Clearance at Full Lift and Max Dump	mm	2461
		in	96.9
12	Max Discharge Angle from Horizontal	deg	46
13	Overall Carriage Width	mm	2470
		in	97.3
14	Overall Carriage Height	mm	1601
		in	63.0
15	Outside Tine Width (max spread)	mm	2366
		in	93.1
16	Outside Tine Width (min spread)	mm	1002
		in	39.4
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	15906
		lbs	35057
	Operating Weight	kg	19232
		lbs	42388

*Negative values indicate below grade


950 LOG

Log & Lumber Fork, No TC, Pin-On

60" Tine

379-2340

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

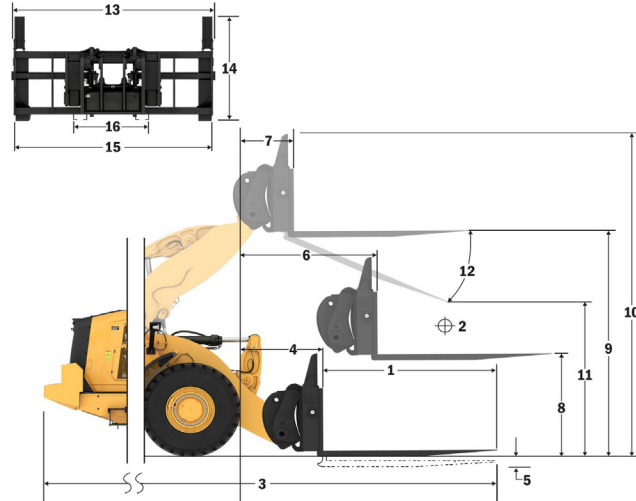


- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Tilt Capacity
- ◆ Hydraulic Lift Capacity

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

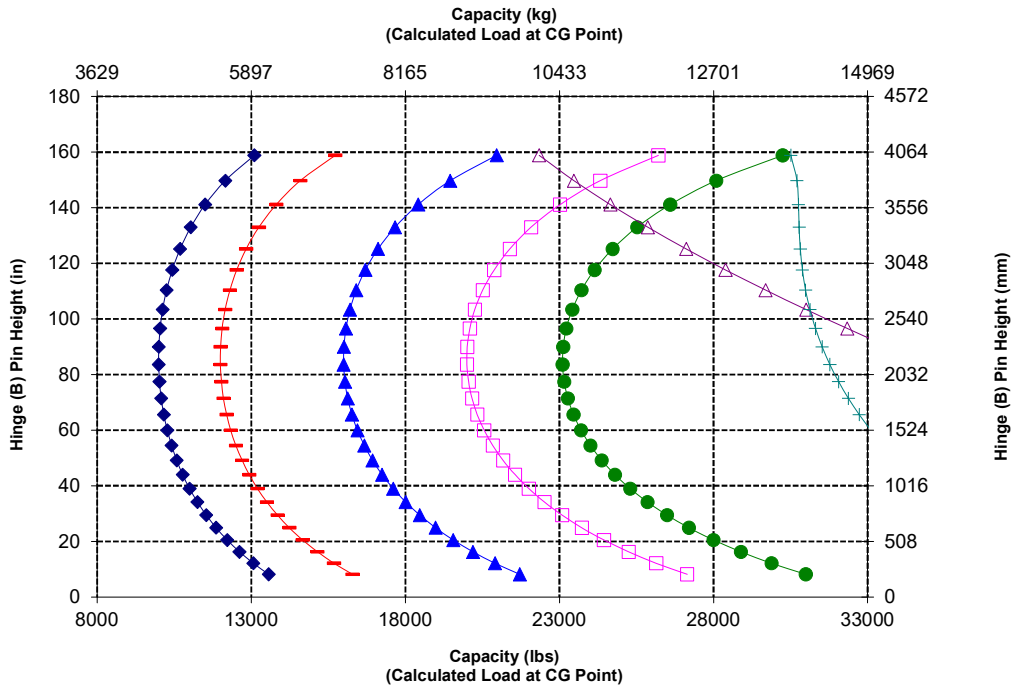

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

Fork Specifications

Fork Specifications

1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	9854
		lbs	21718
	Static Tipping Load - Articulated (Forks Level)	kg	8486
		lbs	18702
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4243
		lbs	9351
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5091
		lbs	11221
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6788
		lbs	14962
3	Maximum Overall Length	mm	9007
		in	354.6
4	Reach with Forks at Ground Level	mm	1256
		in	49.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-81
		in	-3.2
6	Reach with Arms Horizontal and Forks Level	mm	1786
		in	70.3
7	Reach with Fork at Maximum Height	mm	1049
		in	41.3
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1875
		in	73.8
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3836
		in	151.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5347
		in	210.5
11	Clearance at Full Lift and Max Dump	mm	2315
		in	91.1
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2176
		in	85.7
14	Overall Carriage Height	mm	1601
		in	63.0
15	Outside Tine Width (max spread)	mm	2084
		in	82.0
16	Outside Tine Width (min spread)	mm	1002
		in	39.4
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	15906
		lbs	35057
	Operating Weight	kg	19715
		lbs	43453

*Negative values indicate below grade


950 LOG

Log & Lumber Fork, No TC, FUSION

60" Tine

435-4634

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

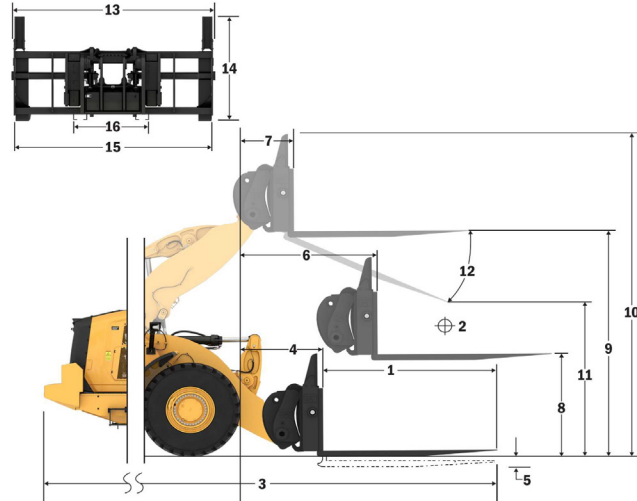

- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Tilt Capacity
- ◆ Hydraulic Lift Capacity


NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization

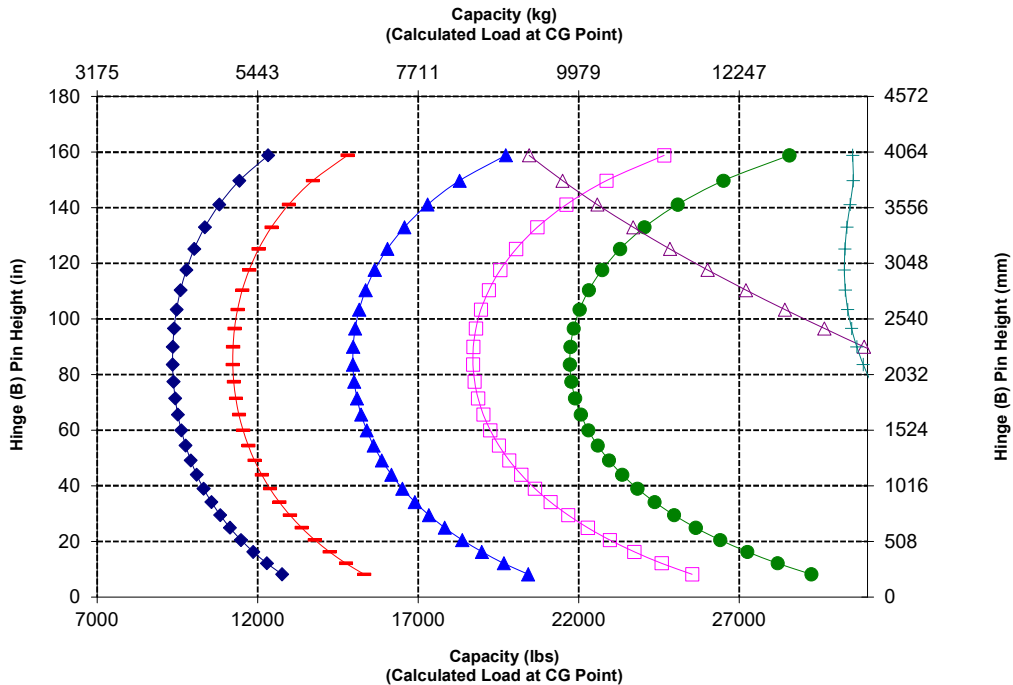

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	9703
		lbs	21385
	Static Tipping Load - Articulated (Forks Level)	kg	8353
		lbs	18410
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4177
		lbs	9205
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5012
		lbs	11046
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6683
		lbs	14728
3	Maximum Overall Length	mm	9021
		in	355.2
4	Reach with Forks at Ground Level	mm	1270
		in	50.0
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-70
		in	-2.8
6	Reach with Arms Horizontal and Forks Level	mm	1826
		in	71.9
7	Reach with Fork at Maximum Height	mm	1089
		in	42.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1860
		in	73.2
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3821
		in	150.4
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5336
		in	210.1
11	Clearance at Full Lift and Max Dump	mm	2420
		in	95.3
12	Max Discharge Angle from Horizontal	deg	44
13	Overall Carriage Width	mm	2537
		in	99.9
14	Overall Carriage Height	mm	1578
		in	62.1
15	Outside Tine Width (max spread)	mm	2339
		in	92.1
16	Outside Tine Width (min spread)	mm	742
		in	29.2
	Tine Width (single tine)	mm	203.2
		in	8.0
	Tine Thickness	mm	63.5
		in	2.5
	Tine Capacity	kg	7170
		lbs	15803
	Operating Weight	kg	19734
		lbs	43494

*Negative values indicate below grade


950 LOG

Log & Lumber Fork, Top Clamp, FUSION

60" Tine

416-4599

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

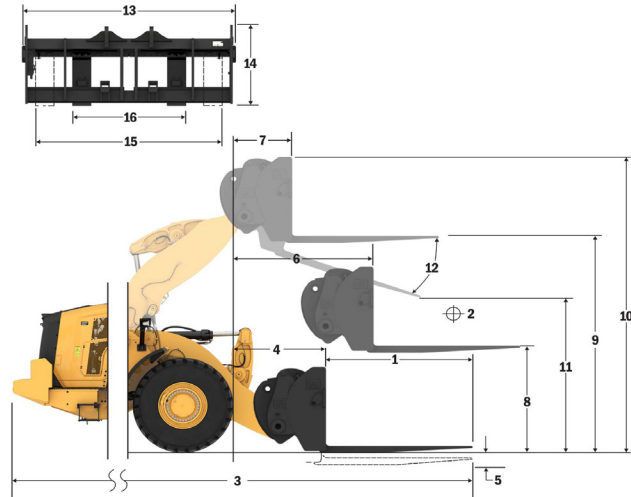


- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Tilt Capacity
- ◆ Hydraulic Lift Capacity

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

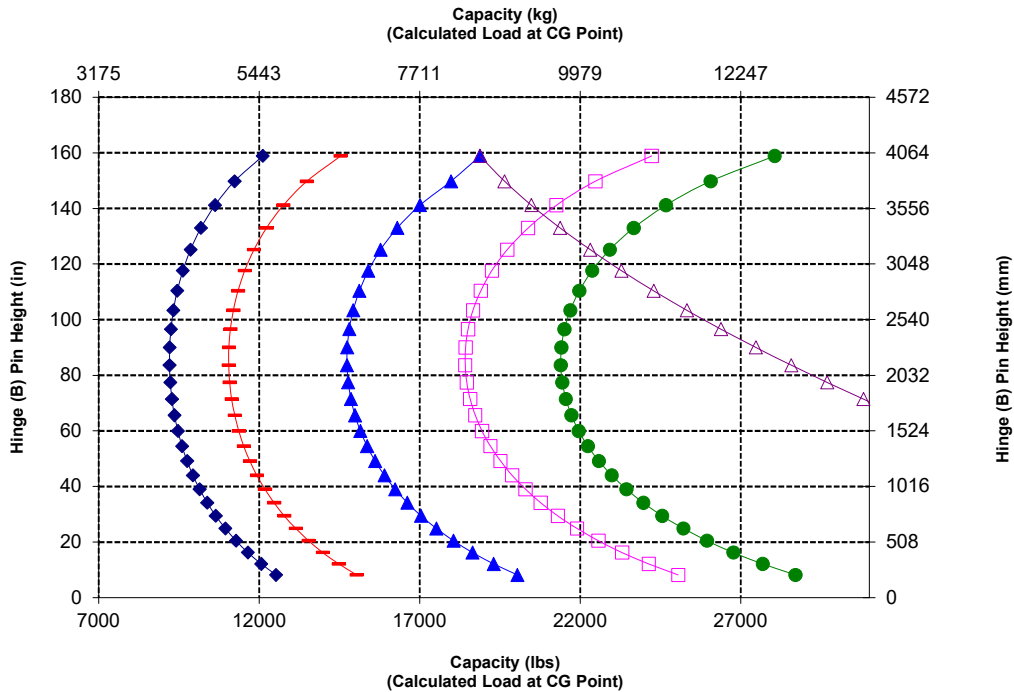

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1829
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	9369
		lbs	20649
	Static Tipping Load - Articulated (Forks Level)	kg	8057
		lbs	17757
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4028
		lbs	8879
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4834
		lbs	10654
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6445
		lbs	14206
3	Maximum Overall Length	mm	9312
		in	366.6
4	Reach with Forks at Ground Level	mm	1256
		in	49.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-81
		in	-3.2
6	Reach with Arms Horizontal and Forks Level	mm	1786
		in	70.3
7	Reach with Fork at Maximum Height	mm	1049
		in	41.3
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1875
		in	73.8
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3836
		in	151.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5350
		in	210.6
11	Clearance at Full Lift and Max Dump	mm	2081
		in	81.9
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2470
		in	97.3
14	Overall Carriage Height	mm	1603
		in	63.1
15	Outside Tine Width (max spread)	mm	2366
		in	93.1
16	Outside Tine Width (min spread)	mm	1002
		in	39.4
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	12600
		lbs	27770
	Operating Weight	kg	19797
		lbs	43633

*Negative values indicate below grade



950 LOG

Log & Lumber Fork, No TC, FUSION

72" Tine

379-2199

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

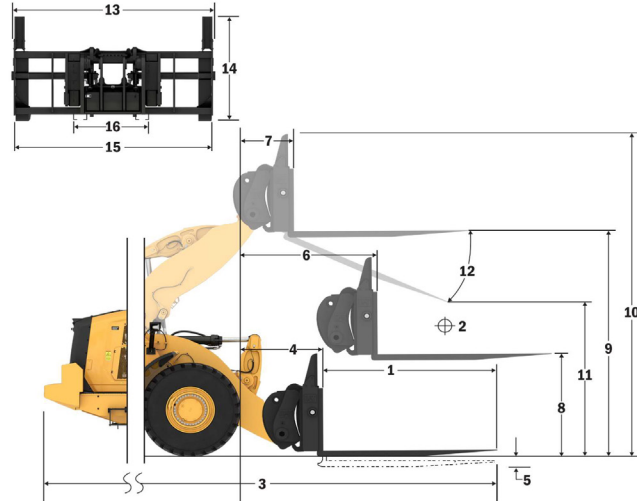


NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization

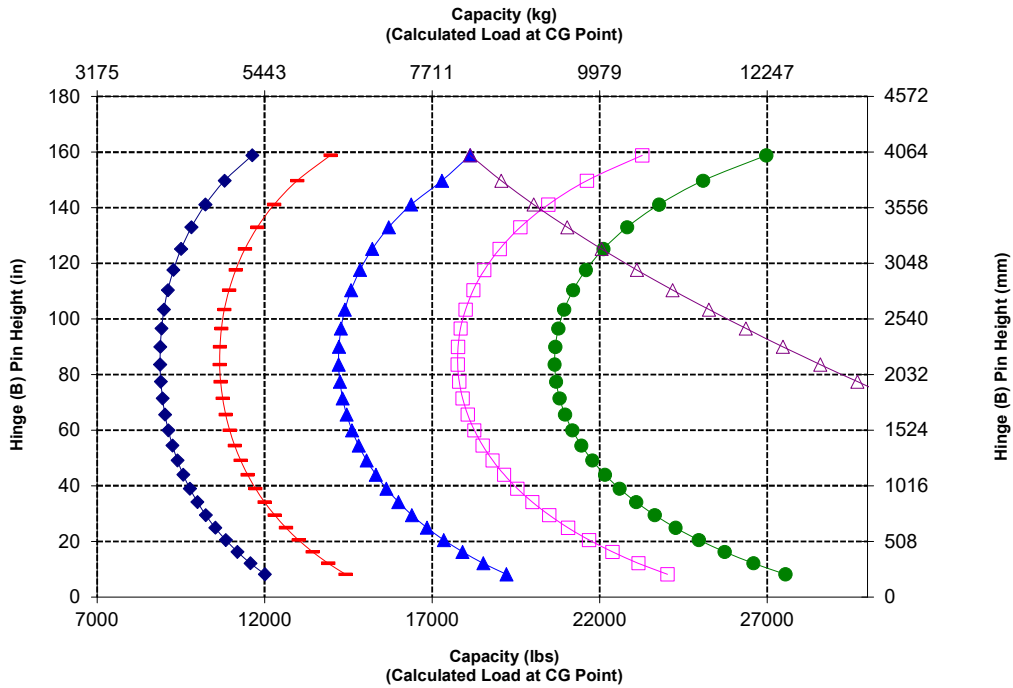

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1829
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	9364
		lbs	20639
	Static Tipping Load - Articulated (Forks Level)	kg	8055
		lbs	17752
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4027
		lbs	8876
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4833
		lbs	10651
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6444
		lbs	14202
3	Maximum Overall Length	mm	9312
		in	366.6
4	Reach with Forks at Ground Level	mm	1256
		in	49.4
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-81
		in	-3.2
6	Reach with Arms Horizontal and Forks Level	mm	1786
		in	70.3
7	Reach with Fork at Maximum Height	mm	1049
		in	41.3
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1875
		in	73.8
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3836
		in	151.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5347
		in	210.5
11	Clearance at Full Lift and Max Dump	mm	2081
		in	81.9
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2176
		in	85.7
14	Overall Carriage Height	mm	1601
		in	63.0
15	Outside Tine Width (max spread)	mm	2084
		in	82.0
16	Outside Tine Width (min spread)	mm	1002
		in	39.4
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	12600
		lbs	27770
	Operating Weight	kg	19777
		lbs	43589

*Negative values indicate below grade


950 LOG

Log & Lumber Fork, No TC, FUSION

72" Tine

435-4684

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

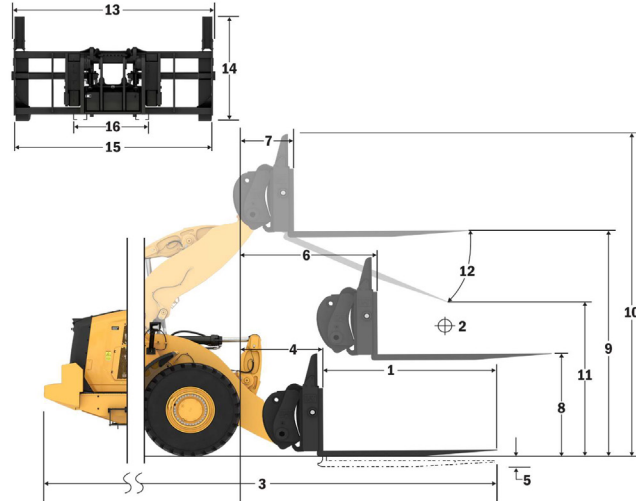

- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Tilt Capacity
- ◆ Hydraulic Lift Capacity


NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization

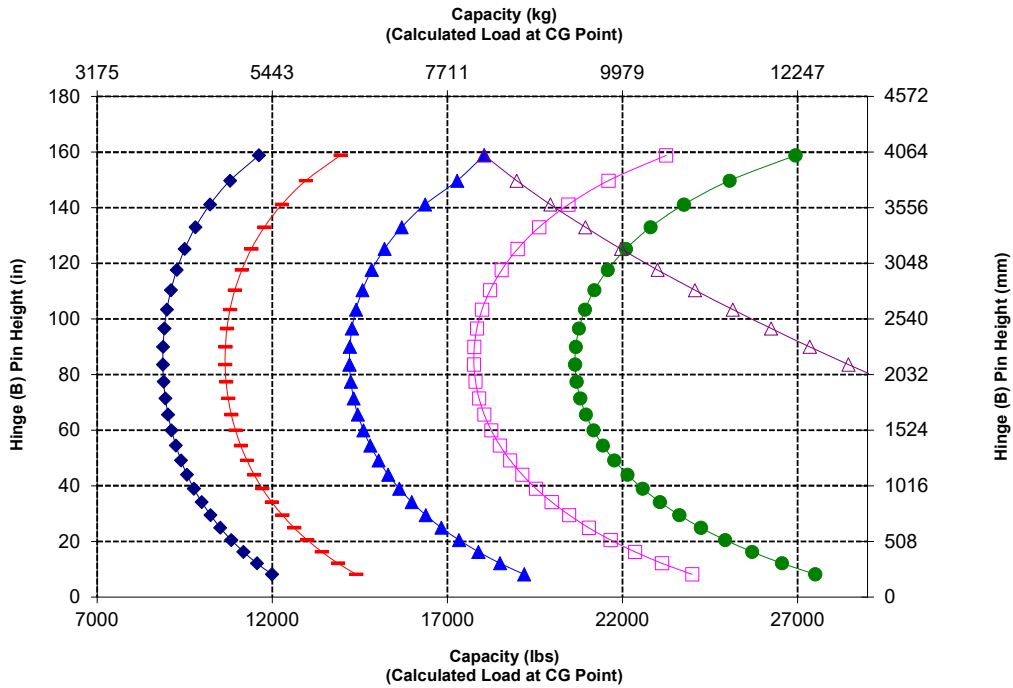

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	8487
		lbs	18706
	Static Tipping Load - Articulated (Forks Level)	kg	7280
		lbs	16045
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3640
		lbs	8022
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4368
		lbs	9627
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5824
		lbs	12836
3	Maximum Overall Length	mm	9922
		in	390.6
4	Reach with Forks at Ground Level	mm	1257
		in	49.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-81
		in	-3.2
6	Reach with Arms Horizontal and Forks Level	mm	1787
		in	70.3
7	Reach with Fork at Maximum Height	mm	1049
		in	41.3
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1875
		in	73.8
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3836
		in	151.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5350
		in	210.6
11	Clearance at Full Lift and Max Dump	mm	1614
		in	63.6
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2470
		in	97.3
14	Overall Carriage Height	mm	1603
		in	63.1
15	Outside Tine Width (max spread)	mm	2366
		in	93.1
16	Outside Tine Width (min spread)	mm	1002
		in	39.4
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	10100
		lbs	22260
	Operating Weight	kg	19925
		lbs	43915

*Negative values indicate below grade


950 LOG

Log & Lumber Fork, No TC, FUSION

96" Tine

379-2321

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

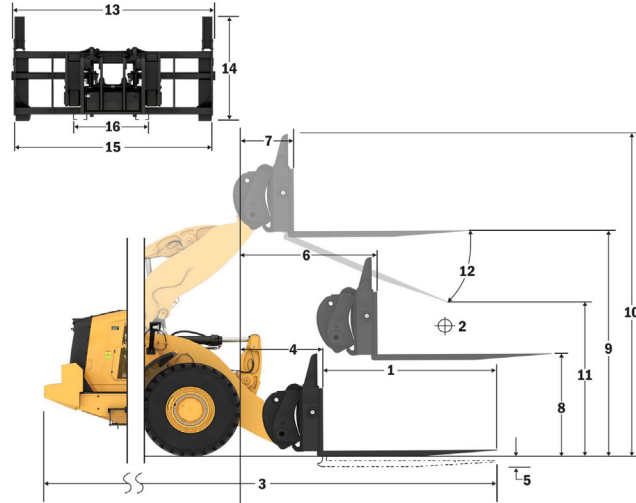

- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Lift Capacity


NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization

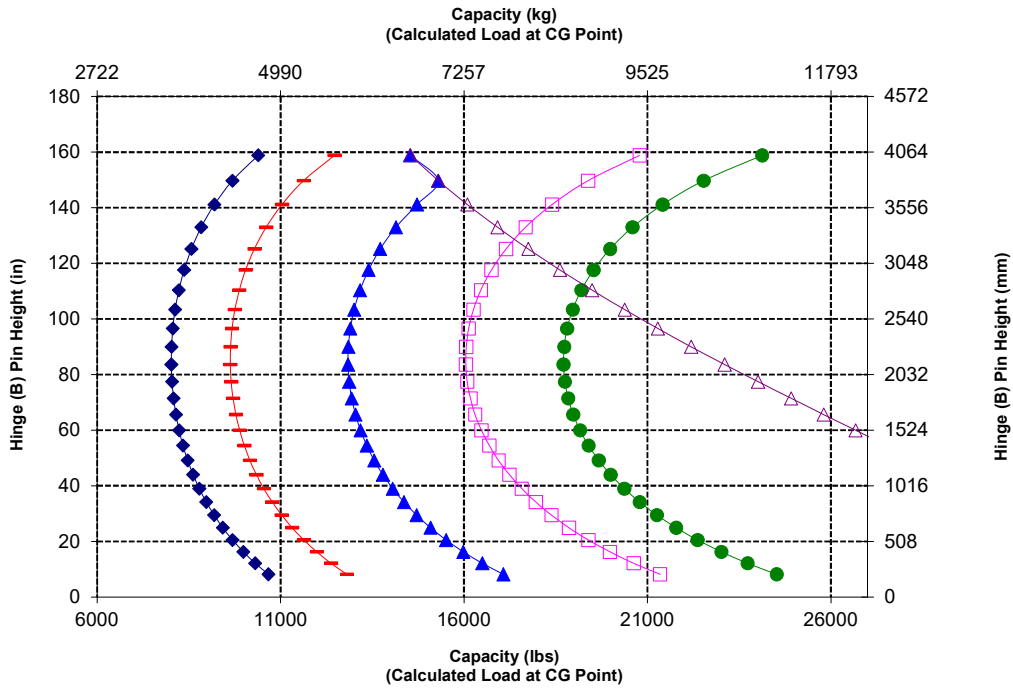

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	9004
		lbs	19846
	Static Tipping Load - Articulated (Forks Level)	kg	7769
		lbs	17123
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3884
		lbs	8561
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4661
		lbs	10274
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6215
		lbs	13698
3	Maximum Overall Length	mm	9829
		in	387.0
4	Reach with Forks at Ground Level	mm	1164
		in	45.8
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-83
		in	-3.3
6	Reach with Arms Horizontal and Forks Level	mm	1692
		in	66.6
7	Reach with Fork at Maximum Height	mm	955
		in	37.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1873
		in	73.8
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3834
		in	151.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5345
		in	210.4
11	Clearance at Full Lift and Max Dump	mm	1805
		in	71.1
12	Max Discharge Angle from Horizontal	deg	46
13	Overall Carriage Width	mm	2470
		in	97.3
14	Overall Carriage Height	mm	1601
		in	63.0
15	Outside Tine Width (max spread)	mm	2366
		in	93.1
16	Outside Tine Width (min spread)	mm	1002
		in	39.4
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	10100
		lbs	22260
	Operating Weight	kg	19422
		lbs	42807

*Negative values indicate below grade


950 LOG

Log & Lumber Fork, No TC, Pin-On

96" Tine

379-2346

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

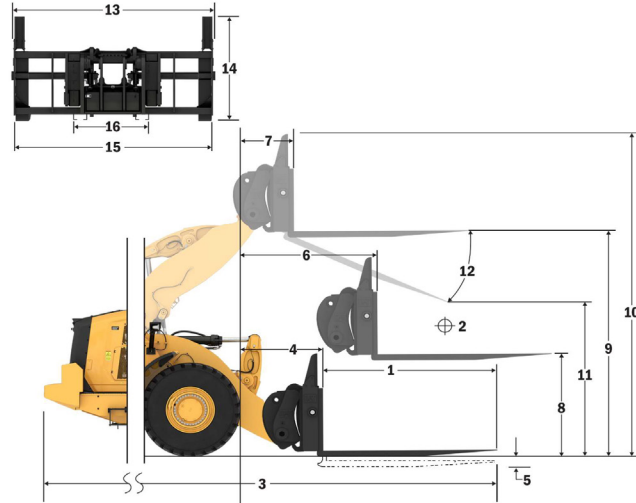


- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Tilt Capacity
- ◆ Hydraulic Lift Capacity

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJTL3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

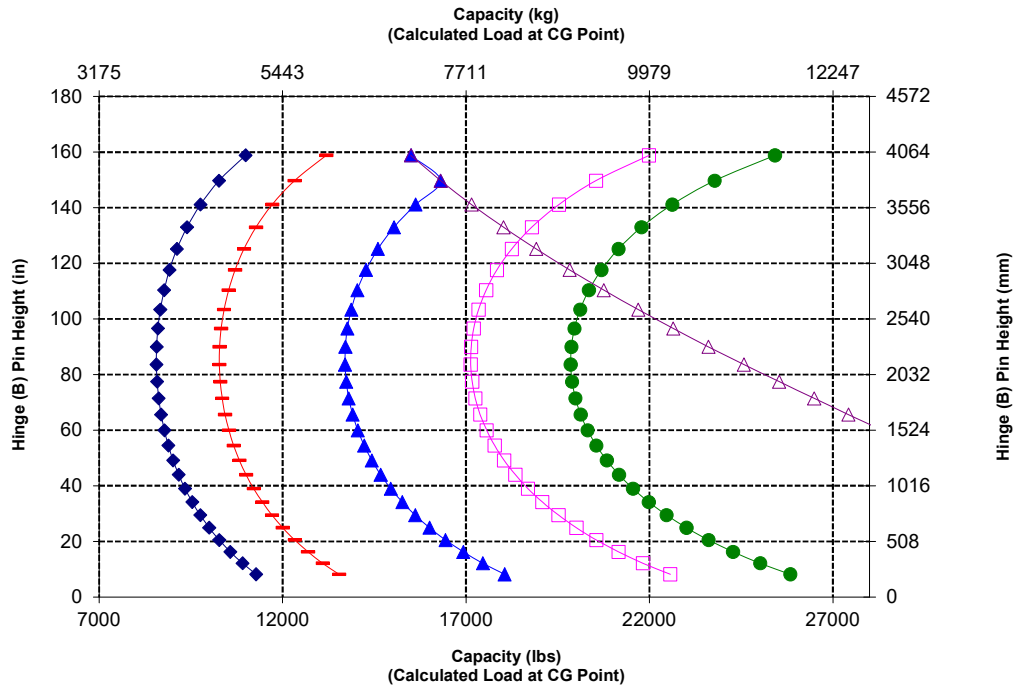

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

Fork Specifications

Fork Specifications


1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	8484
		lbs	18699
	Static Tipping Load - Articulated (Forks Level)	kg	7279
		lbs	16042
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3639
		lbs	8021
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4367
		lbs	9625
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5823
		lbs	12834
3	Maximum Overall Length	mm	9922
		in	390.6
4	Reach with Forks at Ground Level	mm	1257
		in	49.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-81
		in	-3.2
6	Reach with Arms Horizontal and Forks Level	mm	1787
		in	70.3
7	Reach with Fork at Maximum Height	mm	1049
		in	41.3
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1875
		in	73.8
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3836
		in	151.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5347
		in	210.5
11	Clearance at Full Lift and Max Dump	mm	1614
		in	63.6
12	Max Discharge Angle from Horizontal	deg	50
13	Overall Carriage Width	mm	2176
		in	85.7
14	Overall Carriage Height	mm	1601
		in	63.0
15	Outside Tine Width (max spread)	mm	2084
		in	82.0
16	Outside Tine Width (min spread)	mm	1002
		in	39.4
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	10100
		lbs	22260
	Operating Weight	kg	19905
		lbs	43871

*Negative values indicate below grade


950 LOG Log & Lumber Fork, FUSION

96" Tine
435-4686

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

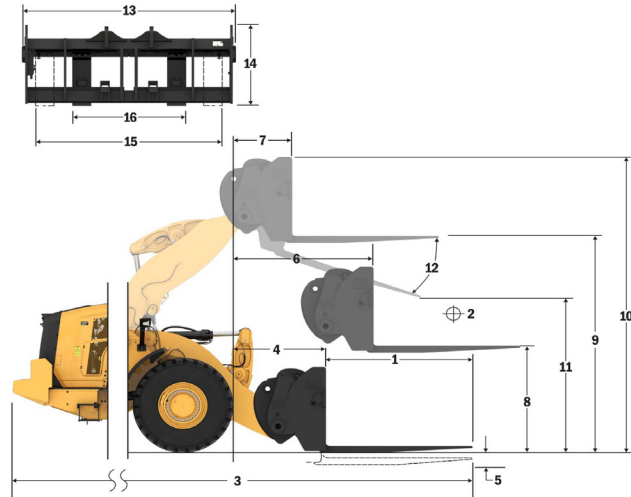

Capacity (kg)
(Calculated Load at CG Point)

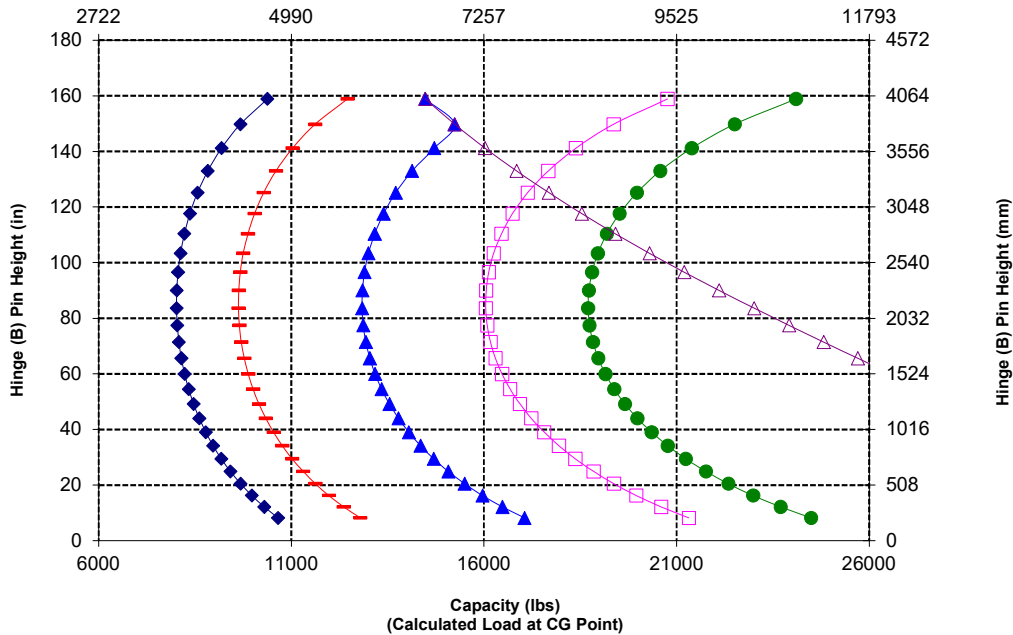

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	8386
		lbs	18483
	Static Tipping Load - Articulated (Forks Level)	kg	7189
		lbs	15844
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3594
		lbs	7922
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4313
		lbs	9507
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5751
		lbs	12675
3	Maximum Overall Length	mm	9954
		in	391.9
4	Reach with Forks at Ground Level	mm	1289
		in	50.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-89
		in	-3.5
6	Reach with Arms Horizontal and Forks Level	mm	1813
		in	71.4
7	Reach with Fork at Maximum Height	mm	1076
		in	42.3
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1867
		in	73.5
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3828
		in	150.7
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	5262
		in	207.2
11	Clearance at Full Lift and Max Dump	mm	1782
		in	70.2
12	Max Discharge Angle from Horizontal	deg	44
13	Overall Carriage Width	mm	2812
		in	110.7
14	Overall Carriage Height	mm	1524
		in	60.0
15	Outside Tine Width (max spread)	mm	2697
		in	106.2
16	Outside Tine Width (min spread)	mm	1002
		in	39.4
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	10100
		lbs	22260
	Operating Weight	kg	19956
		lbs	43984

*Negative values indicate below grade


950 LOG

Log & Lumber Fork, No TC, FUSION

96" Tine

464-3422

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

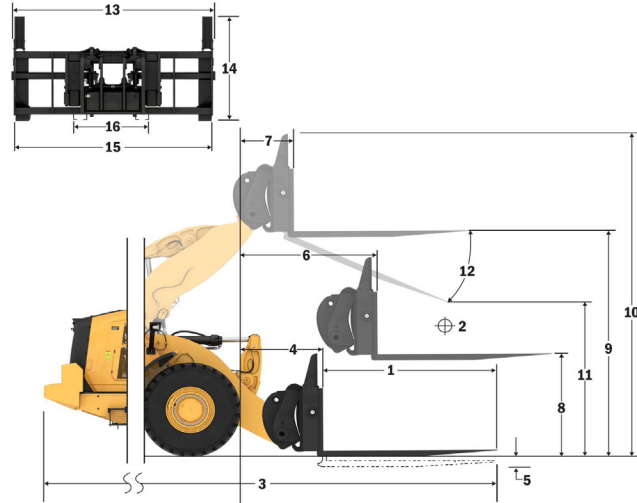


- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Tilt Capacity
- ◆ Hydraulic Lift Capacity

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

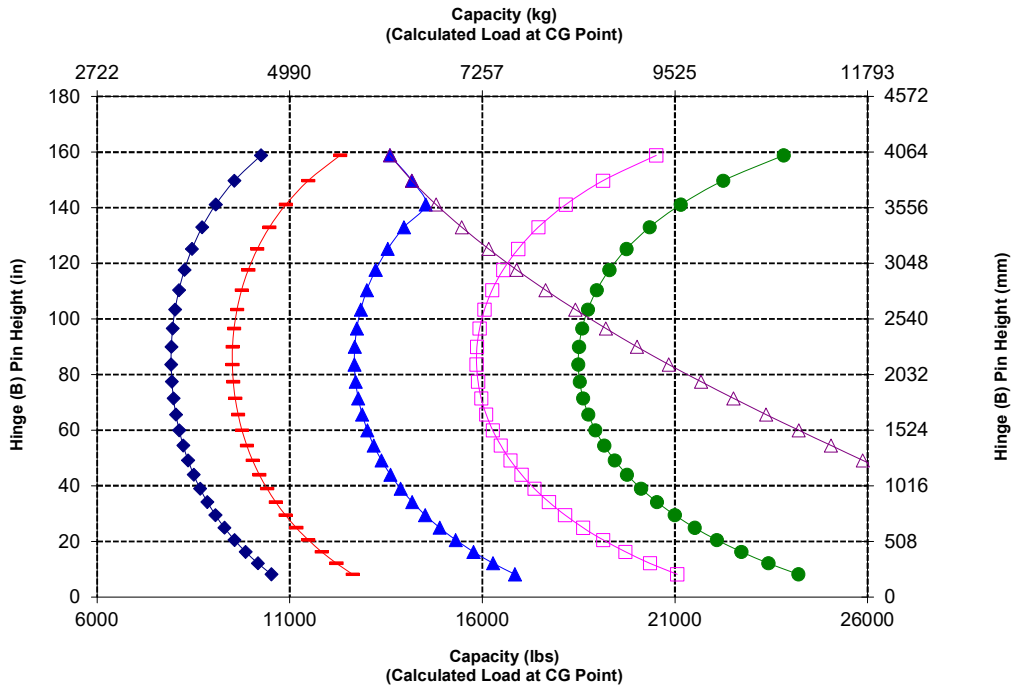

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine length	mm	1219
		in	48.0
2	Fork width	mm	1893
		in	74.5
	End area	m ²	1.45
		ft ²	16
3	Inside Height (only applies to double top clamp)	mm	0
		in	0
4	Min. opening (only applies to millyard forks)	mm	325
		in	13
	Operating Weight	kg	20468
		lbs	45124
5	Distance inside of tine tips	mm	1409
		in	55
	Static tipping load, articulated Fork level	kg	8058
		lbs	17763.6
	Static tipping load, straight Fork level	kg	9467
		lbs	20871.1
6	Max. height of fork (w/clamp open if applicable)	mm	2932
		in	115.4
7	Clearance w/full lift, 45 deg dump (if max. dump <= 45)	mm	2535
		in	99.8
8	Clearance @ full lift fork level	mm	3732
		in	146.9
9	Reach w/full lift, 45 deg dump (if max. dump <= 45)	mm	1640
		in	64.6
10	Reach w/lift arm horizontal and fork level	mm	3125
		in	123.0
11	*Ground to Bottom of Tool at Minimum Height and Tool Level	mm	-96
		in	-3.8
12	Width over tines	mm	1769
		in	69.6
13	Reach @ ground level	mm	2595
		in	102
14	Max. opening across tine and clamp	mm	2635
		in	103.7
15	Overall height of fork @ full lift and clamp open	mm	6664
		in	262.3
16	Overall length	mm	8822
	Tip of tine to rear of machine	in	347.3
17	Clearance @ full lift and max. dump Discharge (if <= 45)	mm	2348
		in	92.5
18	Clearance w/horizontal lift arms and fork level	mm	1770.6
		in	69.7
19	Reach @ full lift and fork level	mm	2387.5
		in	94.0
20	Max. discharge angle from horizontal	deg	57
		rad	1.0
	Tine Capacity	kg	14100
		lbs	31076


*Negative values indicate below grade

950 LOG


Log & Lumber Fork, Top Clamp, FUSION

48" Tine

380-8227

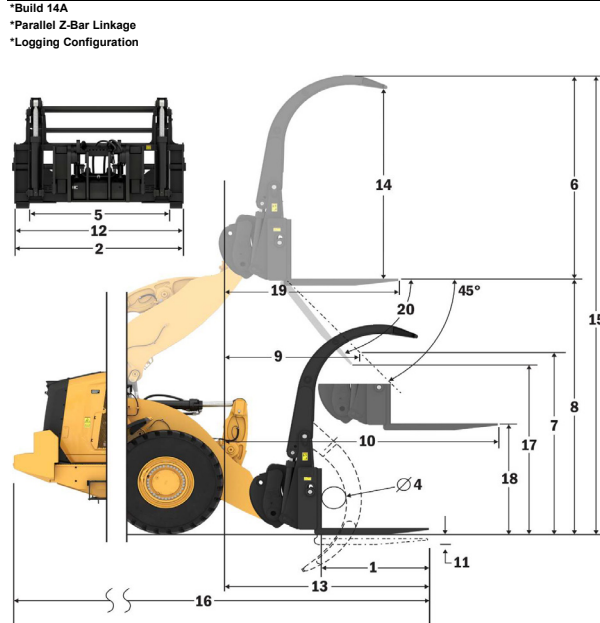

Capacity (kg)
(Calculated Load at CG Point)

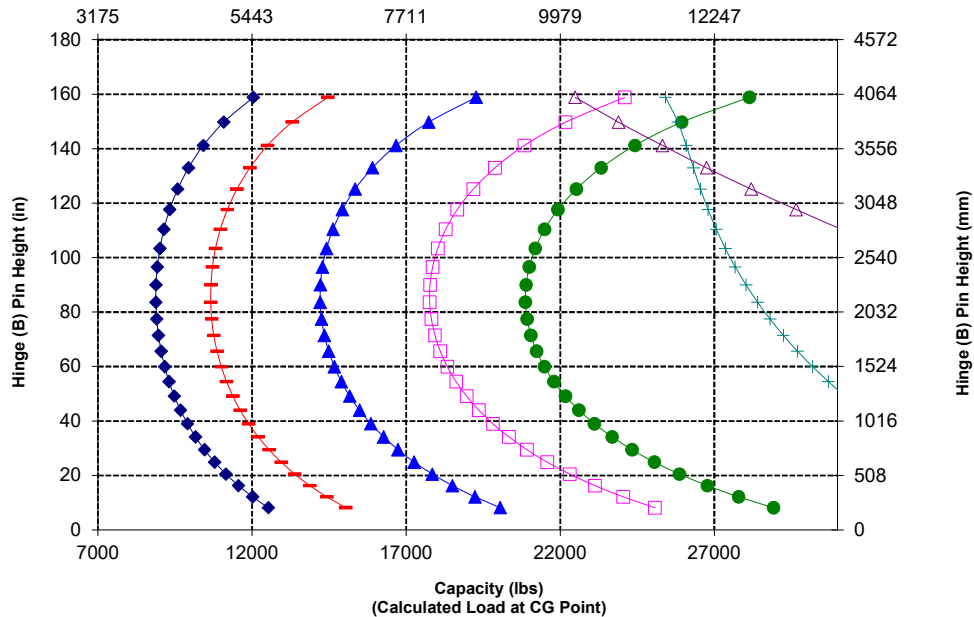

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	10212
		lbs	22506
	Static Tipping Load - Articulated (Forks Level)	kg	8830
		lbs	19461
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4415
		lbs	9730
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5298
		lbs	11676
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	7064
		lbs	15568
3	Maximum Overall Length	mm	9009
		in	354.7
4	Reach with Forks at Ground Level	mm	1258
		in	49.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-160
		in	-6.3
6	Reach with Arms Horizontal and Forks Level	mm	1752
		in	69.0
7	Reach with Fork at Maximum Height	mm	1014
		in	39.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1772
		in	69.7
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3733
		in	147.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4508
		in	177.5
11	Clearance at Full Lift and Max Dump	mm	2365
		in	93.1
12	Max Discharge Angle from Horizontal	deg	46
13	Overall Carriage Width	mm	2217
		in	87.3
14	Overall Carriage Height	mm	840
		in	33.1
15	Outside Tine Width (max spread)	mm	2070
		in	81.5
16	Outside Tine Width (min spread)	mm	470
		in	18.5
	Tine Width (single tine)	mm	150.0
		in	5.9
	Tine Thickness	mm	65.0
		in	2.6
	Tine Capacity	kg	6300
		lbs	13885
	Operating Weight	kg	19410
		lbs	42780


*Negative values indicate below grade

950 LOG

Pallet Fork, FUSION

87" Carriage 60" Tine
530-1861 548-3265

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

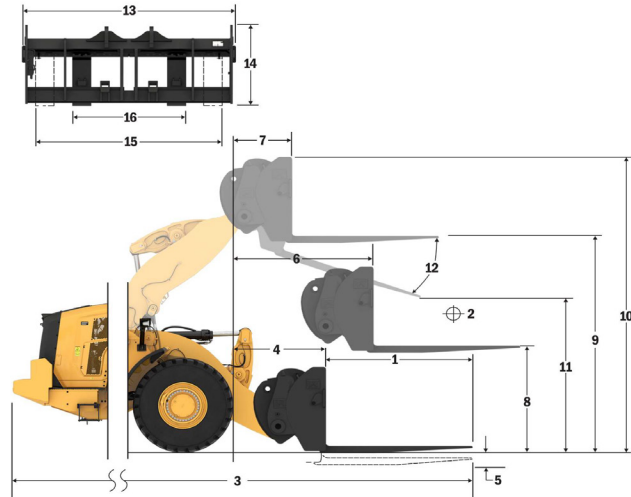


- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Tilt Capacity
- ◆ Hydraulic Lift Capacity

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

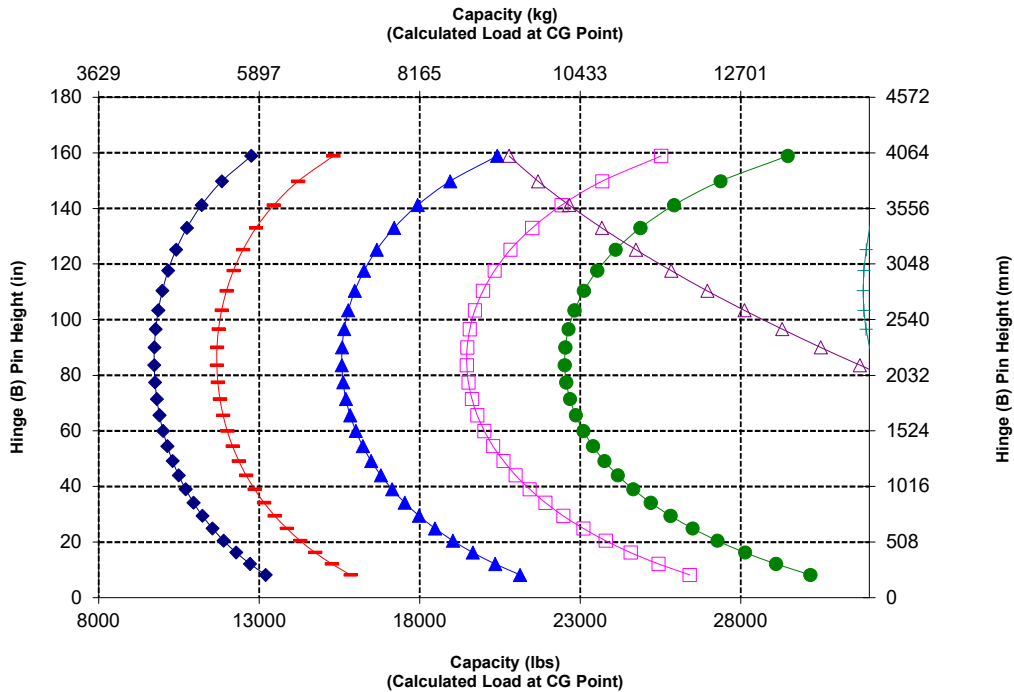

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

Fork Specifications

Fork Specifications

1	Tine Length	mm	1830
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	9720
		lbs	21422
	Static Tipping Load - Articulated (Forks Level)	kg	8398
		lbs	18509
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4199
		lbs	9255
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5039
		lbs	11106
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6718
		lbs	14808
3	Maximum Overall Length	mm	9315
		in	366.7
4	Reach with Forks at Ground Level	mm	1258
		in	49.5
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-160
		in	-6.3
6	Reach with Arms Horizontal and Forks Level	mm	1752
		in	69.0
7	Reach with Fork at Maximum Height	mm	1014
		in	39.9
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1772
		in	69.7
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3733
		in	147.0
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4508
		in	177.5
11	Clearance at Full Lift and Max Dump	mm	2145
		in	84.5
12	Max Discharge Angle from Horizontal	deg	46
13	Overall Carriage Width	mm	2217
		in	87.3
14	Overall Carriage Height	mm	840
		in	33.1
15	Outside Tine Width (max spread)	mm	2070
		in	81.5
16	Outside Tine Width (min spread)	mm	470
		in	18.5
	Tine Width (single tine)	mm	150.0
		in	5.9
	Tine Thickness	mm	65.0
		in	2.6
	Tine Capacity	kg	5246
		lbs	11562
	Operating Weight	kg	19457
		lbs	42884


*Negative values indicate below grade

950 LOG Pallet Fork, FUSION

87" Carriage 72" Tine

530-1861 530-1869

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

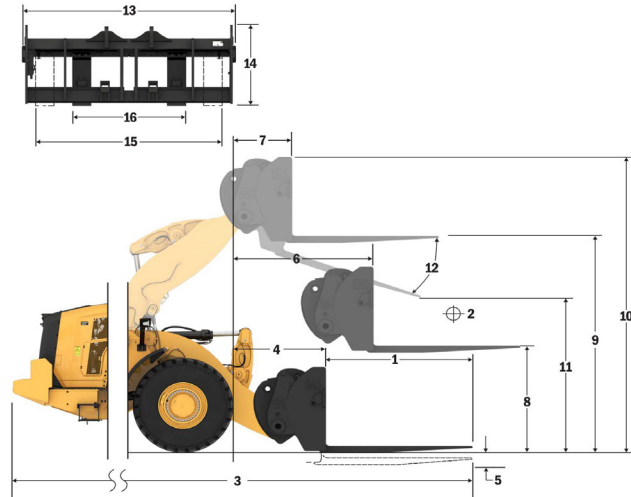


- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Tilt Capacity
- ◆ Hydraulic Lift Capacity

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

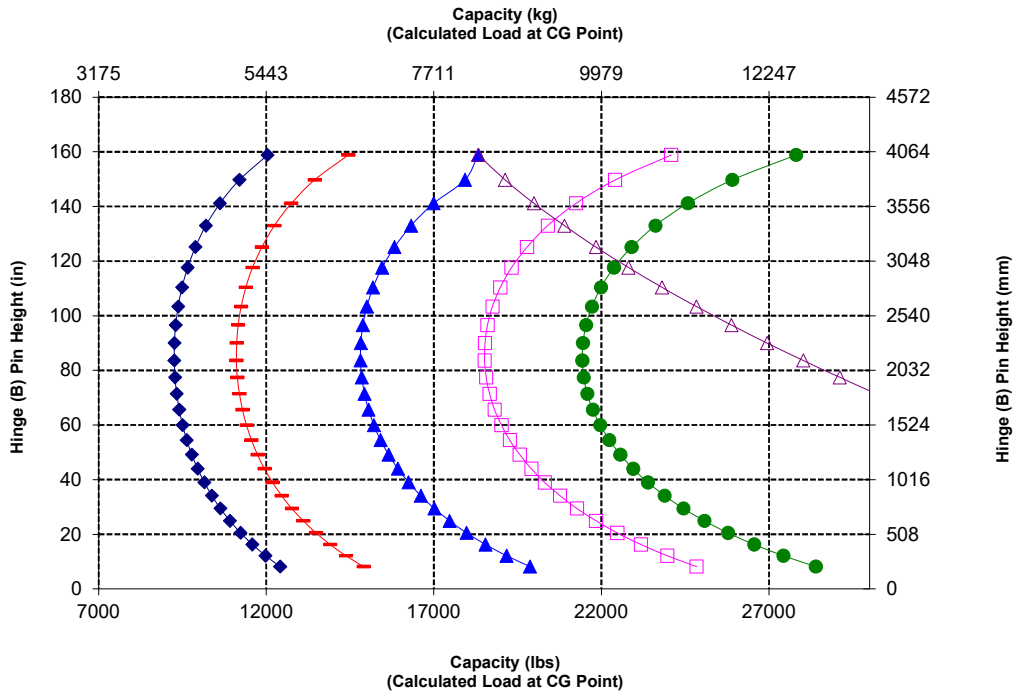

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications



1	Tine Length	mm	1219
		in	48.0
2	Load Center	mm	610
		in	24.0
	Static Tipping Load - Straight (Forks Level)	kg	10487
		lbs	23112
	Static Tipping Load - Articulated (Forks Level)	kg	9035
		lbs	19913
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4518
		lbs	9957
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5421
		lbs	11948
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	7228
		lbs	15931
3	Maximum Overall Length	mm	8659
		in	340.9
4	Reach with Forks at Ground Level	mm	1212
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.6
7	Reach with Fork at Maximum Height	mm	1006
		in	39.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3838
		in	151.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4878
		in	192.1
11	Clearance at Full Lift and Max Dump	mm	2550
		in	100.4
12	Max Discharge Angle from Horizontal	deg	52
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	22200
		lbs	48929
	Operating Weight	kg	19719
		lbs	43461

*Negative values indicate below grade

950 LOG Pallet Fork, FUSION

96" Carriage 48" Tine
520-7957 520-7985

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

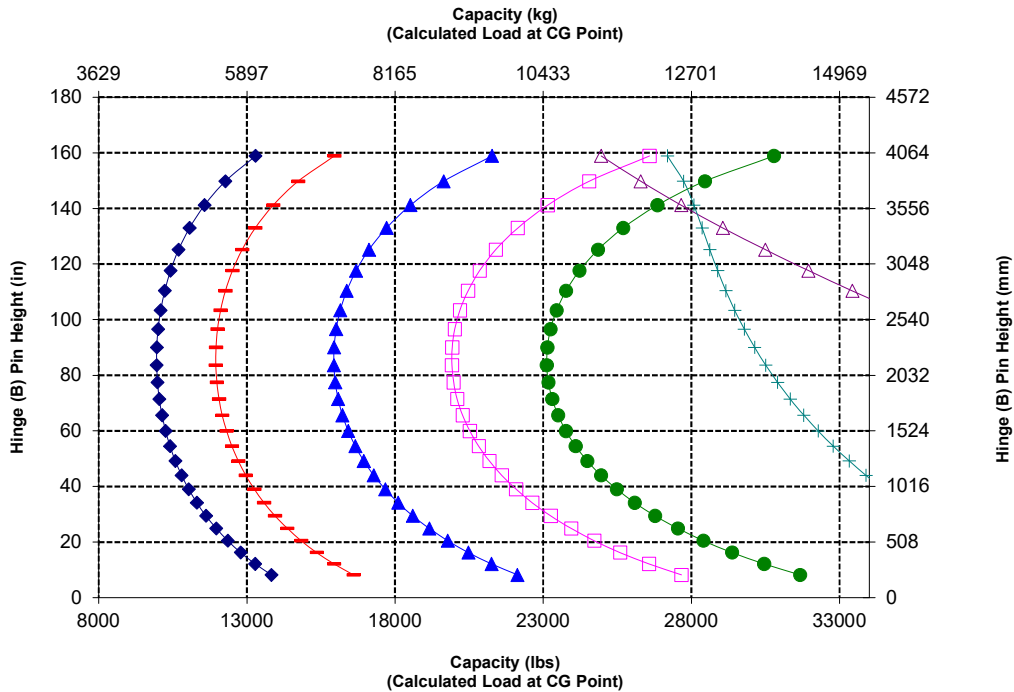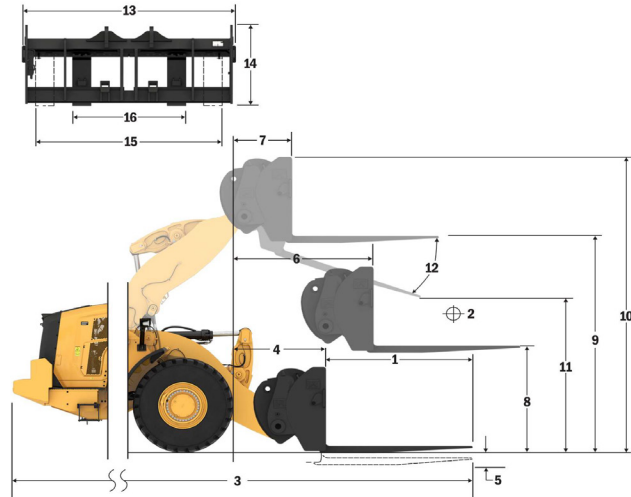

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
 SAE J1197: 50% of full turn static tipping load or hydraulic limit.
 CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
 CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications



1	Tine Length	mm	1829
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	9446
		lbs	20819
	Static Tipping Load - Articulated (Forks Level)	kg	8121
		lbs	17898
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4060
		lbs	8949
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4872
		lbs	10739
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6496
		lbs	14318
3	Maximum Overall Length	mm	9269
		in	364.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1007
		in	39.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3838
		in	151.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4878
		in	192.1
11	Clearance at Full Lift and Max Dump	mm	2068
		in	81.4
12	Max Discharge Angle from Horizontal	deg	52
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	14800
		lbs	32619
	Operating Weight	kg	19846
		lbs	43741

*Negative values indicate below grade

950 LOG Pallet Fork, FUSION

96" Carriage 72" Tine
520-7957 520-7979

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

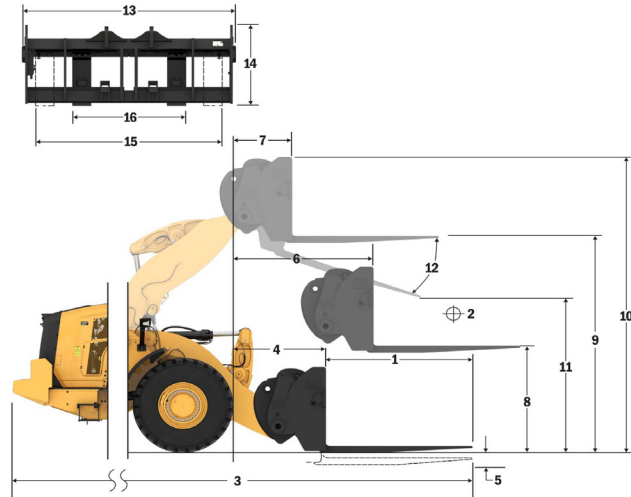


NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJ T L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

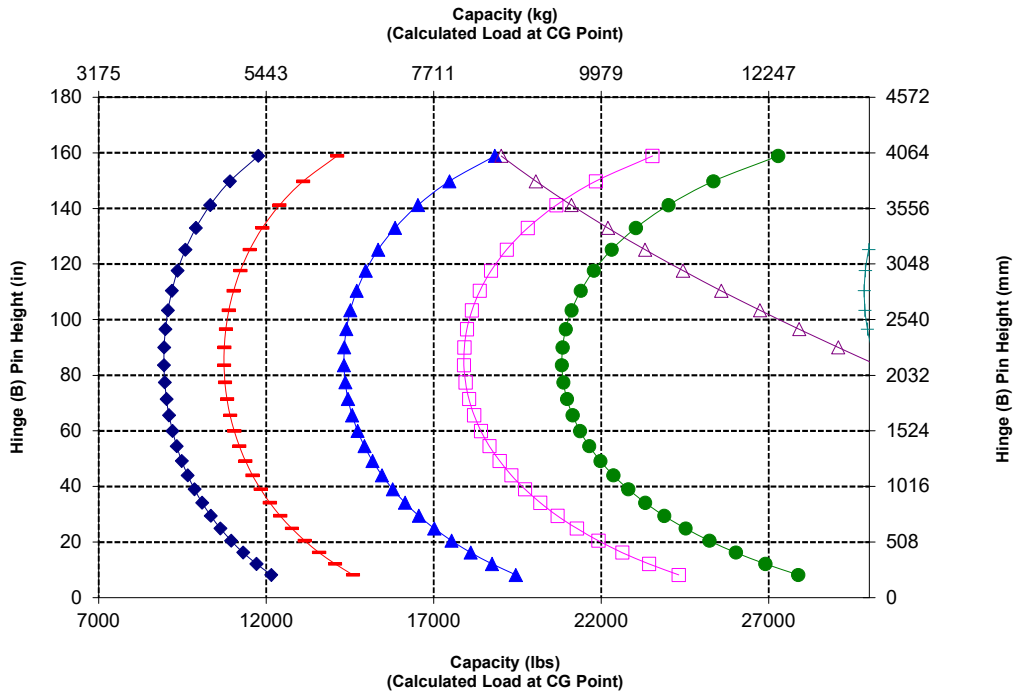



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

Fork Specifications

Fork Specifications

1	Tine Length	mm	2134
		in	84.0
2	Load Center	mm	1067
		in	42.0
	Static Tipping Load - Straight (Forks Level)	kg	8983
		lbs	19799
	Static Tipping Load - Articulated (Forks Level)	kg	7713
		lbs	17000
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3857
		lbs	8500
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4628
		lbs	10200
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6170
		lbs	13600
3	Maximum Overall Length	mm	9574
		in	376.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1007
		in	39.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3838
		in	151.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4878
		in	192.1
11	Clearance at Full Lift and Max Dump	mm	1827
		in	71.9
12	Max Discharge Angle from Horizontal	deg	52
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	12700
		lbs	27991
	Operating Weight	kg	19909
		lbs	43880

*Negative values indicate below grade

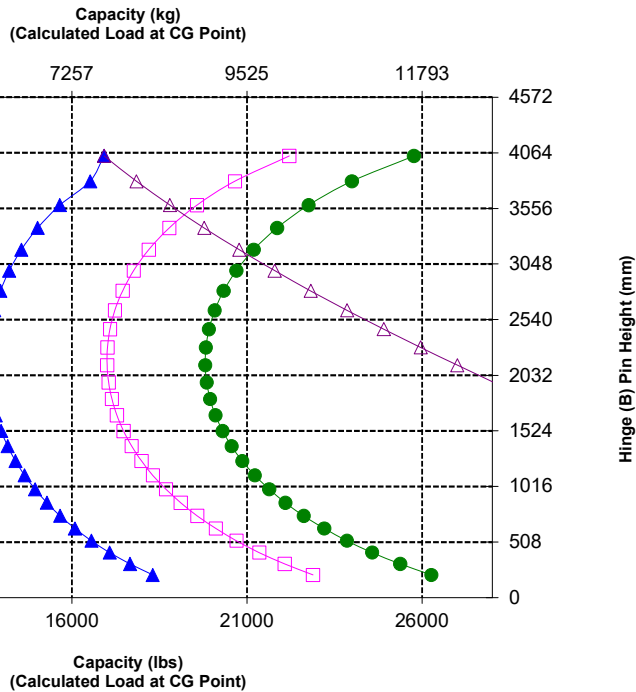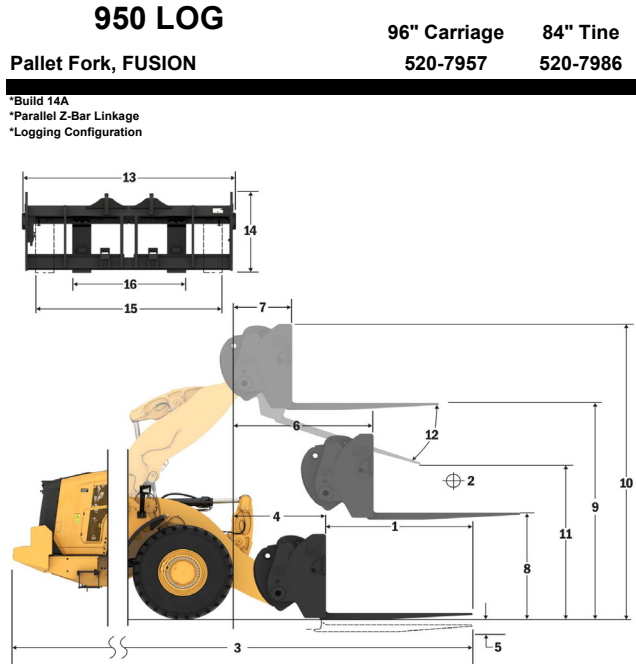

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications


1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	8555
		lbs	18855
	Static Tipping Load - Articulated (Forks Level)	kg	7336
		lbs	16168
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3668
		lbs	8084
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4401
		lbs	9701
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5868
		lbs	12934
3	Maximum Overall Length	mm	9878
		in	388.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1007
		in	39.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3838
		in	151.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4878
		in	192.1
11	Clearance at Full Lift and Max Dump	mm	1587
		in	62.5
12	Max Discharge Angle from Horizontal	deg	52
13	Overall Carriage Width	mm	2528
		in	99.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2178
		in	85.7
16	Outside Tine Width (min spread)	mm	576
		in	22.7
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	11300
		lbs	24905
	Operating Weight	kg	19971
		lbs	44017

*Negative values indicate below grade

950 LOG Pallet Fork, FUSION

96" Carriage 96" Tine
520-7957 520-7981

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

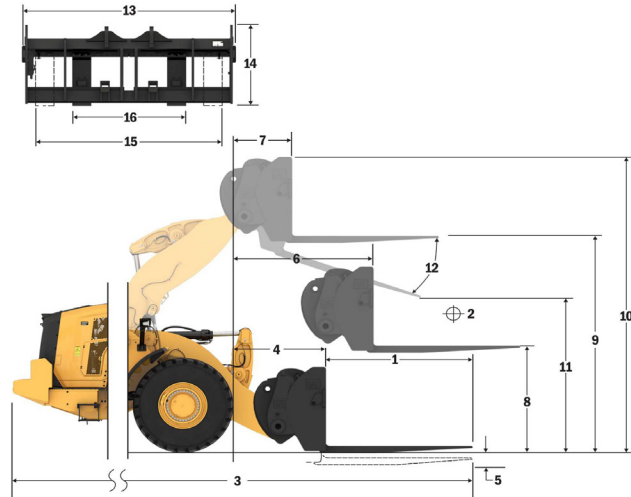


- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Tilt Capacity
- ◆ Hydraulic Lift Capacity

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

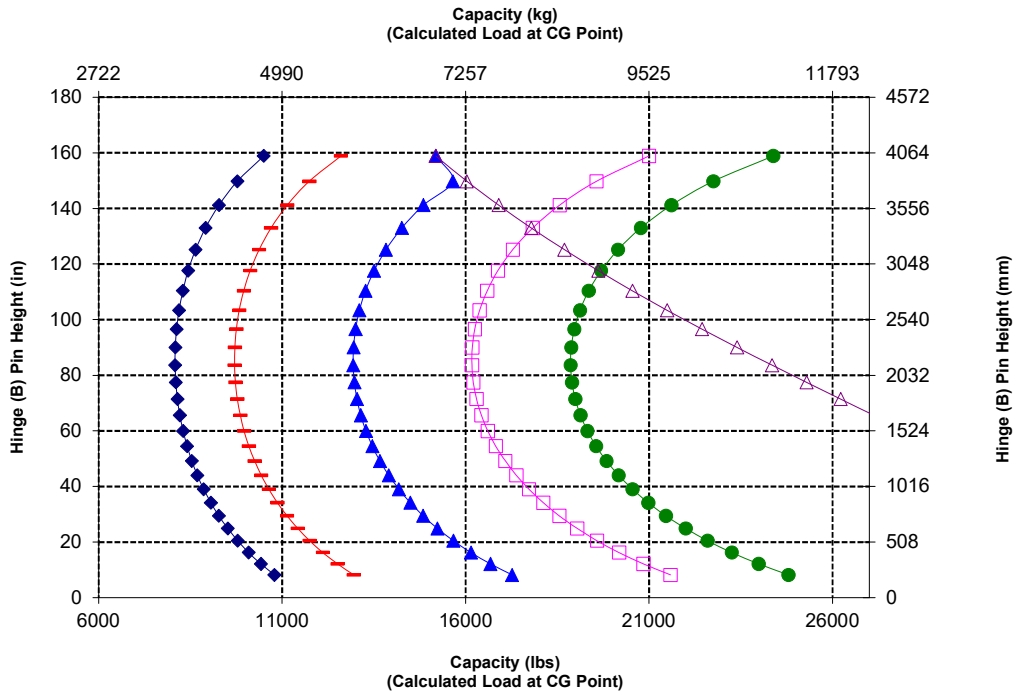


WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

Fork Specifications


Fork Specifications

1	Tine Length	mm	1219
		in	48.0
2	Load Center	mm	610
		in	24.0
	Static Tipping Load - Straight (Forks Level)	kg	10446
		lbs	23023
	Static Tipping Load - Articulated (Forks Level)	kg	8995
		lbs	19824
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4497
		lbs	9912
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5397
		lbs	11894
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	7196
		lbs	15859
3	Maximum Overall Length	mm	8659
		in	340.9
4	Reach with Forks at Ground Level	mm	1212
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.6
7	Reach with Fork at Maximum Height	mm	1006
		in	39.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3838
		in	151.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4878
		in	192.1
11	Clearance at Full Lift and Max Dump	mm	2550
		in	100.4
12	Max Discharge Angle from Horizontal	deg	52
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2493
		in	98.1
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	22200
		lbs	48929
	Operating Weight	kg	19772
		lbs	43578

*Negative values indicate below grade

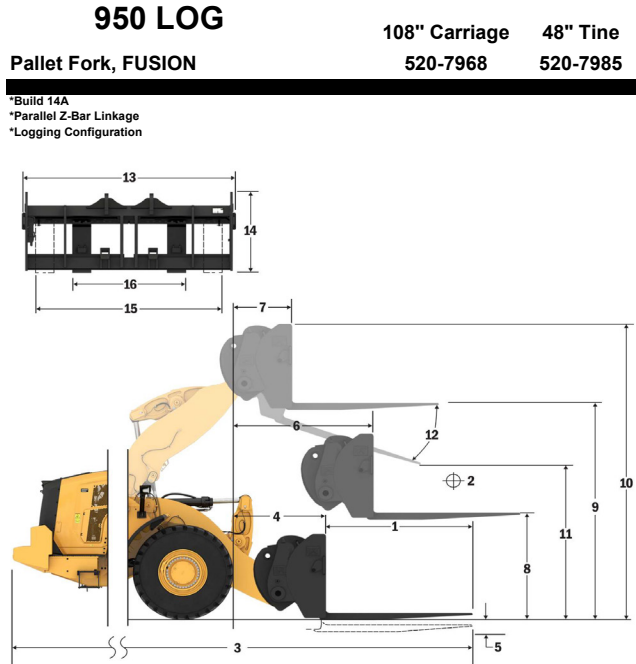

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

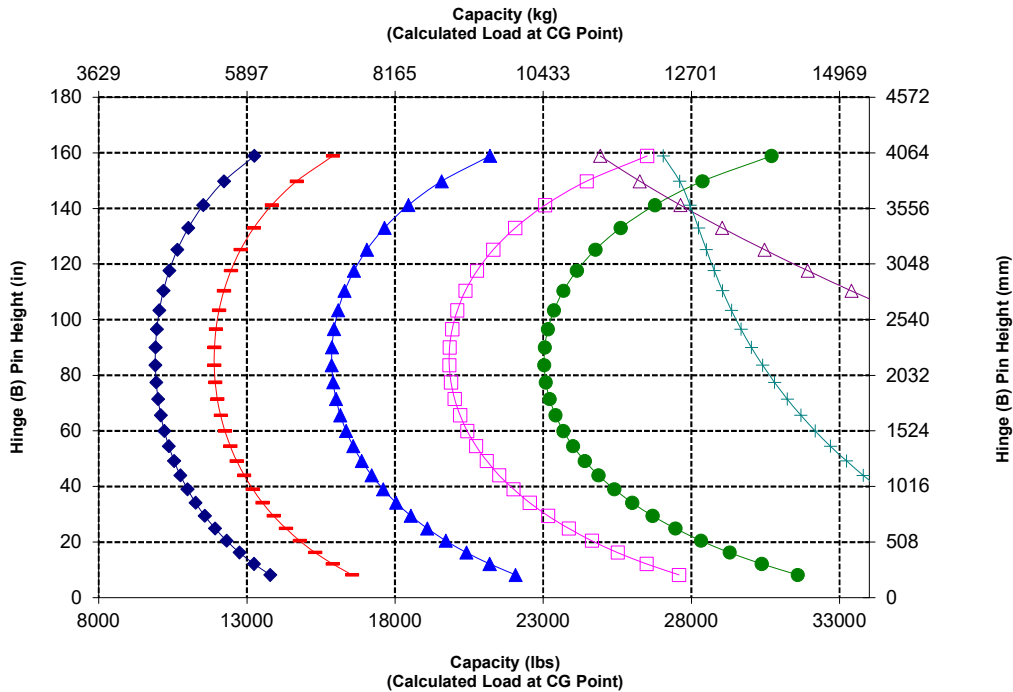

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	1524
		in	60.0
2	Load Center	mm	762
		in	30.0
	Static Tipping Load - Straight (Forks Level)	kg	9909
		lbs	21839
	Static Tipping Load - Articulated (Forks Level)	kg	8523
		lbs	18784
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4261
		lbs	9392
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	5114
		lbs	11271
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6818
		lbs	15028
3	Maximum Overall Length	mm	8964
		in	352.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1007
		in	39.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3838
		in	151.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4878
		in	192.1
11	Clearance at Full Lift and Max Dump	mm	2309
		in	90.9
12	Max Discharge Angle from Horizontal	deg	52
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	17800
		lbs	39231
	Operating Weight	kg	19834
		lbs	43715

*Negative values indicate below grade

950 LOG

Pallet Fork, FUSION



108" Carriage

60" Tine

520-7968

520-7980

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

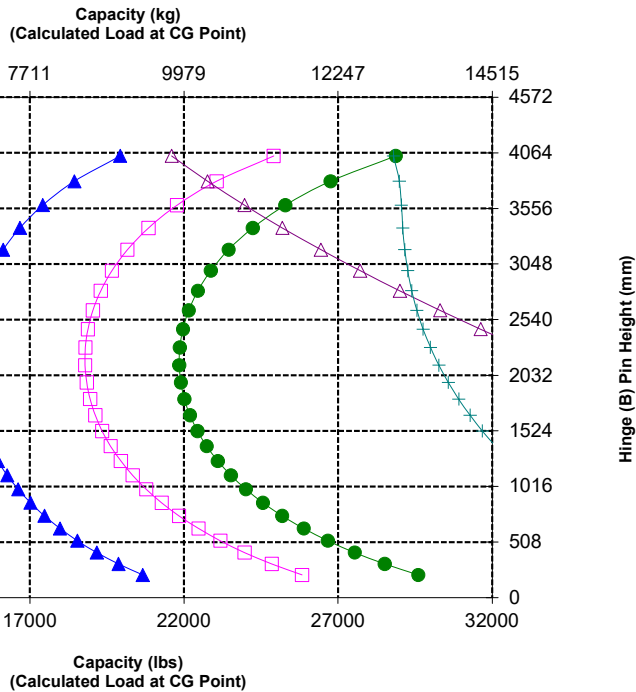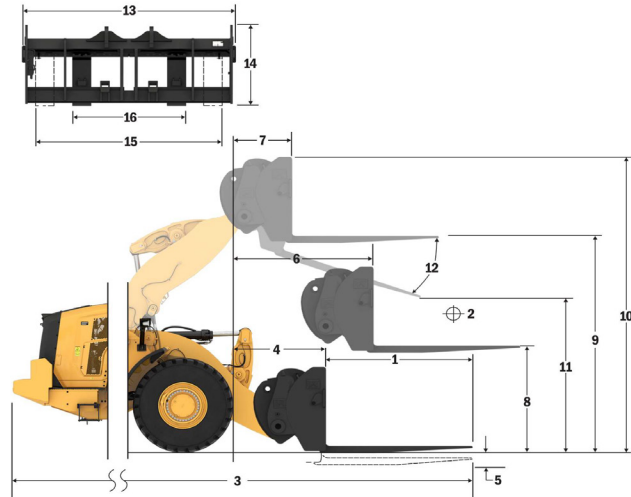

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers

**CEN - European Committee for Standardization



WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

Fork Specifications

Fork Specifications


1	Tine Length	mm	1829
		in	72.0
2	Load Center	mm	915
		in	36.0
	Static Tipping Load - Straight (Forks Level)	kg	9412
		lbs	20743
	Static Tipping Load - Articulated (Forks Level)	kg	8086
		lbs	17822
	Rated Load (SAE J1197 - 50% FTSTL)	kg	4043
		lbs	8911
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4852
		lbs	10693
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6469
		lbs	14257
3	Maximum Overall Length	mm	9269
		in	364.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1007
		in	39.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3838
		in	151.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4878
		in	192.1
11	Clearance at Full Lift and Max Dump	mm	2068
		in	81.4
12	Max Discharge Angle from Horizontal	deg	52
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	14800
		lbs	32619
	Operating Weight	kg	19896
		lbs	43851

*Negative values indicate below grade

950 LOG Pallet Fork, FUSION

108" Carriage 72" Tine
520-7968 520-7979

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

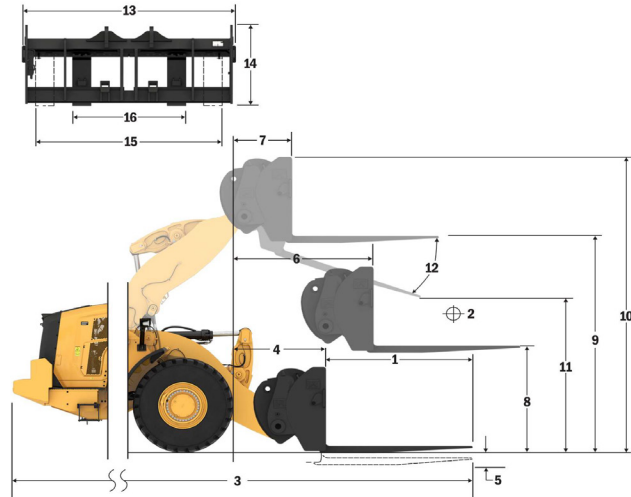


- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Tilt Capacity
- ◆ Hydraulic Lift Capacity

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

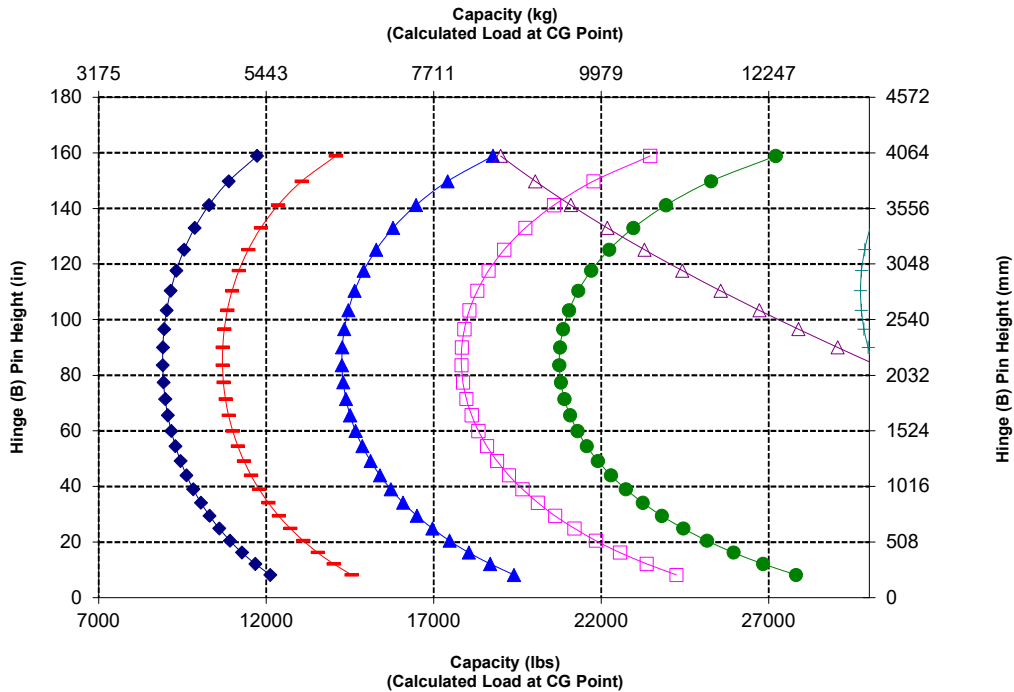

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications


Fork Specifications

1	Tine Length	mm	2134
		in	84.0
2	Load Center	mm	1067
		in	42.0
	Static Tipping Load - Straight (Forks Level)	kg	8951
		lbs	19728
	Static Tipping Load - Articulated (Forks Level)	kg	7681
		lbs	16929
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3840
		lbs	8464
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4609
		lbs	10157
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	6145
		lbs	13543
3	Maximum Overall Length	mm	9574
		in	376.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1007
		in	39.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3838
		in	151.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4878
		in	192.1
11	Clearance at Full Lift and Max Dump	mm	1827
		in	71.9
12	Max Discharge Angle from Horizontal	deg	52
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	12700
		lbs	27991
	Operating Weight	kg	19958
		lbs	43988

*Negative values indicate below grade

950 LOG Pallet Fork, FUSION 108" Carriage 84" Tine 520-7968 84" Tine 520-7986

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

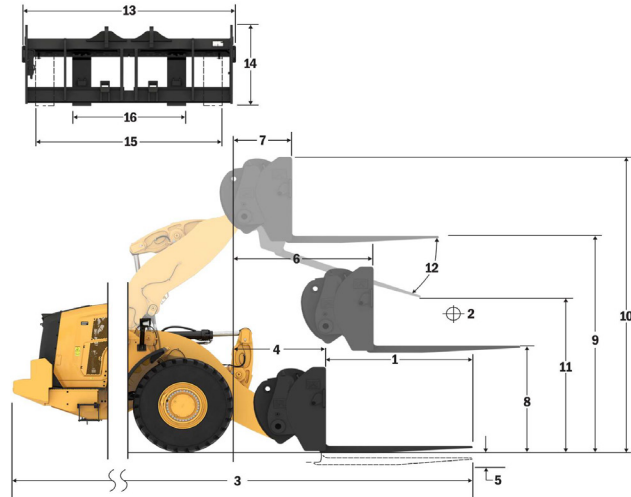


- ◆ Payload (SAE J1197)
- ◆ Payload (CEN EN 474-3 - Rough Terrain)
- ◆ Payload (CEN EN 474-3 - Firm & Level)
- ◆ Static Tipping Load - Articulated
- ◆ Static Tipping Load - Straight
- ◆ Hydraulic Lift Capacity
- ◆ Hydraulic Tilt Capacity

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

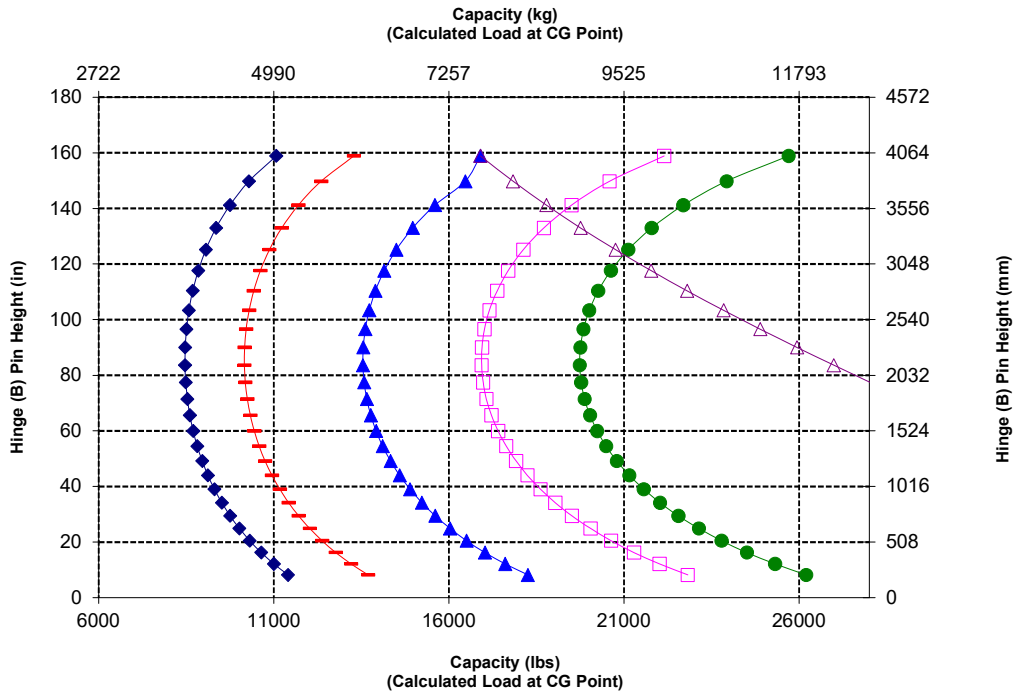

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.


950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	8523
		lbs	18785
	Static Tipping Load - Articulated (Forks Level)	kg	7304
		lbs	16097
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3652
		lbs	8049
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4382
		lbs	9658
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5843
		lbs	12878
3	Maximum Overall Length	mm	9878
		in	388.9
4	Reach with Forks at Ground Level	mm	1213
		in	47.7
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-79
		in	-3.1
6	Reach with Arms Horizontal and Forks Level	mm	1744
		in	68.7
7	Reach with Fork at Maximum Height	mm	1007
		in	39.6
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1877
		in	73.9
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3838
		in	151.1
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4878
		in	192.1
11	Clearance at Full Lift and Max Dump	mm	1587
		in	62.5
12	Max Discharge Angle from Horizontal	deg	52
13	Overall Carriage Width	mm	2833
		in	111.5
14	Overall Carriage Height	mm	1130
		in	44.5
15	Outside Tine Width (max spread)	mm	2483
		in	97.8
16	Outside Tine Width (min spread)	mm	590
		in	23.2
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	11300
		lbs	24905
	Operating Weight	kg	20021
		lbs	44127


*Negative values indicate below grade

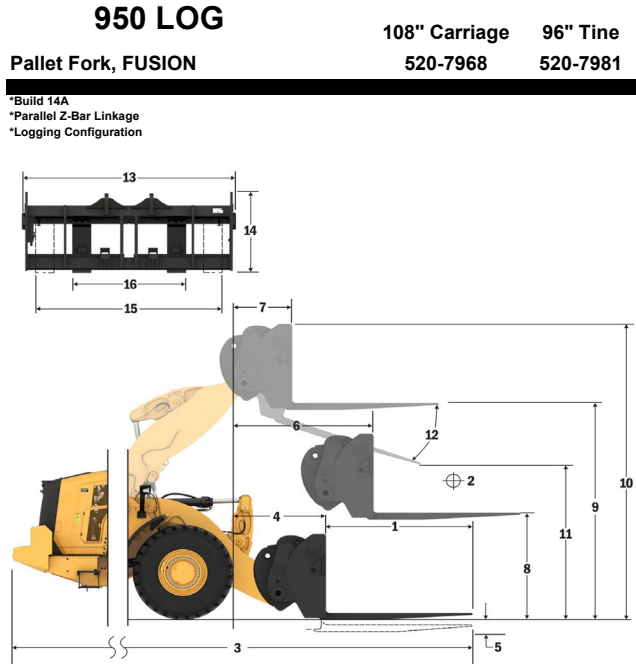

950 LOG
Pallet Fork, FUSION

108" Carriage 96" Tine
520-7968 520-7981

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

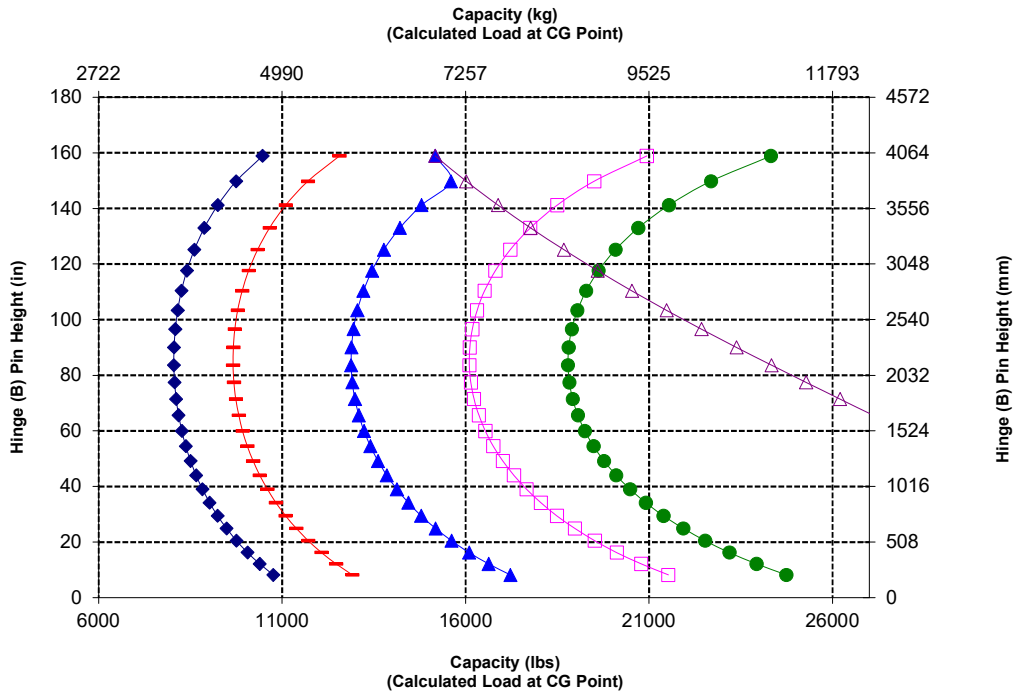

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

950 Forestry Machine Specifications

Fork Specifications

Fork Specifications

1	Tine Length	mm	2438
		in	96.0
2	Load Center	mm	1219
		in	48.0
	Static Tipping Load - Straight (Forks Level)	kg	8244
		lbs	18170
	Static Tipping Load - Articulated (Forks Level)	kg	7056
		lbs	15551
	Rated Load (SAE J1197 - 50% FTSTL)	kg	3528
		lbs	7775
	Rated Load (CEN EN 474-3 Rough Terrain - 60% FTSTL)	kg	4233
		lbs	9331
	Rated Load (CEN EN 474-3 Firm and Level Ground - 80% FTSTL)	kg	5645
		lbs	12441
3	Maximum Overall Length	mm	9984
		in	393.1
4	Reach with Forks at Ground Level	mm	1319
		in	51.9
5	*Ground to Bottom of Tine at Minimum Height and Fork Level	mm	-90
		in	-3.5
6	Reach with Arms Horizontal and Forks Level	mm	1843
		in	72.6
7	Reach with Fork at Maximum Height	mm	1106
		in	43.5
8	Ground to Top of Tine with Arms Horizontal and Fork Level	mm	1867
		in	73.5
9	Ground to Top of Tine at Maximum Height and Fork Level	mm	3828
		in	150.7
10	Overall Height of Fork at Full Lift (top of carriage to ground)	mm	4896
		in	192.7
11	Clearance at Full Lift and Max Dump	mm	1513
		in	59.6
12	Max Discharge Angle from Horizontal	deg	52
13	Overall Carriage Width	mm	2542
		in	100.1
14	Overall Carriage Height	mm	1158
		in	45.6
15	Outside Tine Width (max spread)	mm	2312
		in	91.0
16	Outside Tine Width (min spread)	mm	896
		in	35.3
	Tine Width (single tine)	mm	180.0
		in	7.1
	Tine Thickness	mm	90.0
		in	3.5
	Tine Capacity	kg	10100
		lbs	22260
	Operating Weight	kg	20070
		lbs	44235

*Negative values indicate below grade


950 LOG

Pallet - Hyd Adjustable, FUSION

96" Tine

468-2852

*Build 14A
*Parallel Z-Bar Linkage
*Logging Configuration

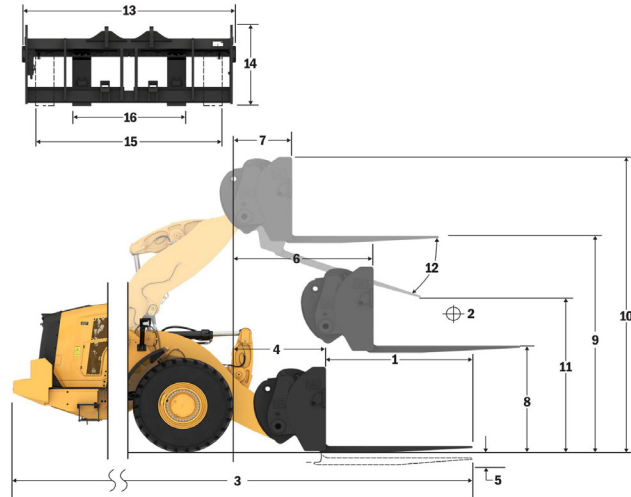


- Payload (SAE J1197)
- Payload (CEN EN 474-3 - Rough Terrain)
- Payload (CEN EN 474-3 - Firm & Level)
- Static Tipping Load - Articulated
- Static Tipping Load - Straight
- Hydraulic Lift Capacity
- Hydraulic Lift Capacity

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3 Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1, CEN** EN 474-3.

The rated operating load for a loader equipped with a pallet fork is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.
CEN EN 474-3: 60% of full turn static tipping load on rough terrain or hydraulic limit.
CEN EN 474-3: 80% of full turn static tipping load on firm and level ground or hydraulic limit.

*SAE - Society of Automotive Engineers
**CEN - European Committee for Standardization

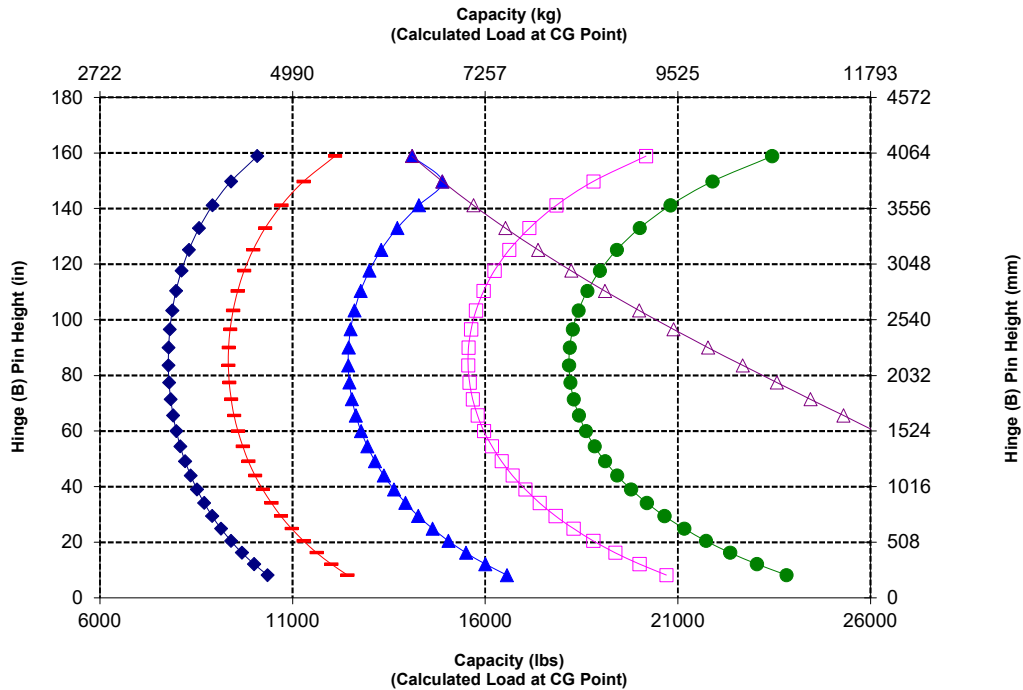

WARNING: Do not exceed tine load capacity. Individual tine capacity is stamped on the side of each tine.

Material Handling Specifications


950 LOG

289-9885

Material Handling Arm, FUSION

6 Position

- *Build 14A
- *Parallel Z-Bar Linkage
- *Logging Configuration

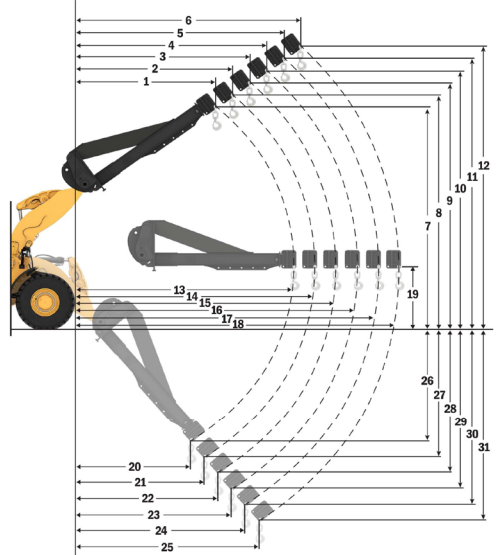

MHA Specifications

	Retracted	Extension 1	Extension 2	Extension 3	Extension 4	Extended	
Max Lift - Hook Eyelet Reach (1, 2, 3, 4, 5, 6)	mm ft, in	2,282 7' 5"	2,421 7' 11"	2,560 8' 4"	2,698 8' 10"	2,837 9' 3"	2,976 9' 9"
Max Lift - Hook Eyelet Height (7, 8, 9, 10, 11, 12)	mm ft, in	6,870 22' 6"	7,141 23' 5"	7,412 24' 3"	7,684 25' 2"	7,955 26' 1"	8,226 26' 11"
Level - Hook Eyelet Reach (13, 14, 15, 16, 17, 18)	mm ft, in	4,610 15' 1"	4,915 16' 1"	5,220 17' 1"	5,525 18' 1"	5,829 19' 1"	6,134 20' 1"
Level - Hook Eyelet Height (19)	mm ft, in	1,842 6' 0.5"	1,842 6' 0.5"	1,842 6' 0.5"	1,842 6' 0.5"	1,842 6' 0.5"	1,842 6' 0.5"
Min Lift - Hook Eyelet Reach (20, 21, 22, 23, 24, 25)	mm ft, in	2,416 7' 11"	2,596 8' 6"	2,777 9' 1"	2,957 9' 8"	3,137 10' 3"	3,318 10' 10"
Min Lift - Hook Eyelet Height (26, 27, 28, 29, 30, 31)	mm ft, in	(2,593) -8' 5"	(2,839) -9' 8"	(3,085) -10' 10"	(3,330) -10' 0"	(3,576) -11' 3"	(3,822) -12' 5"
Static Tipping Load, Straight	kg lb	6,336 13,965	5,992 13,207	5,683 12,525	5,403 11,908	5,149 11,348	4,916 10,836
Static Tipping Load, Articulated	kg lb	5,491 12,102	5,192 11,443	4,923 10,850	4,680 10,314	4,458 9,826	4,256 9,381
Operating Weight	kg lb	19,168 42,247	19,168 42,247	19,168 42,247	19,168 42,247	19,168 42,247	19,168 42,247


- Retracted
- Extension 1
- Extension 2
- Extension 3
- Extension 4
- Extended

NOTE: Static tipping loads and operating weight are based on the following loader configuration: Bridgestone VJT L3Tires, Air Conditioning, Ride Control, Powertrain Guard, Full Fluids, Fuel Tank, Coolant, Lubricants, and Operator.

Specifications and ratings conform to the following standards: SAE* J1197, ISO 14397-1

The rated operating load for a loader equipped with a material handling arm is determined by:
SAE J1197: 50% of full turn static tipping load or hydraulic limit.

*SAE - Society of Automotive Engineers

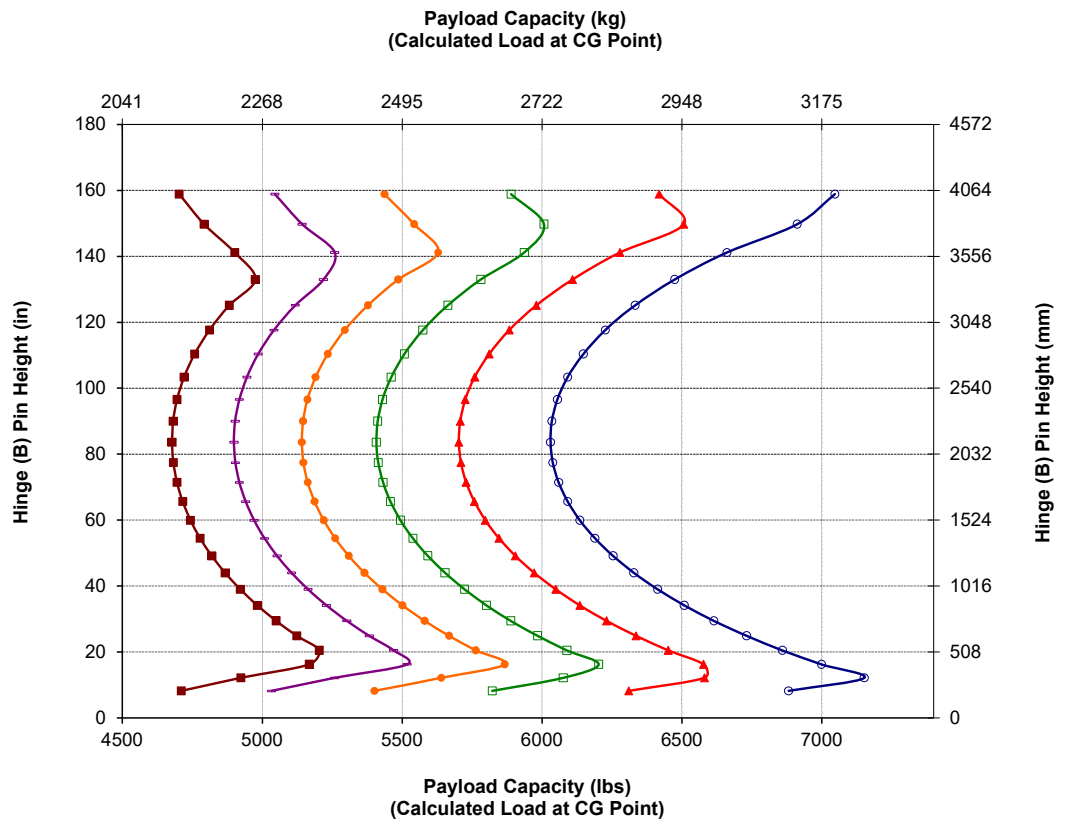



950

Corrosion Resistant

The Cat 950 Wheel Loader Corrosion Resistant package adds real value in protecting your machine investment. An industry-unique factory treatment provides more protection for all machine components that can be affected by corrosive materials. It's designed for improving reliability and durability in demanding corrosive environments such as fertilizer plants, chemical industries, agriculture, saltwater ports, and others.

Proven Reliability

- Cat C7.1 engine offers high power density with a combination of proven electronics, fuel, and air systems.
- Equipped with automatic Cat regeneration system, Cat Clean Emissions Module (CEM) with diesel particulate filter (DPF), and diesel exhaust fluid (DEF) tank and pump.
- Thorough component design and machine validation processes result in unmatched reliability and uptime.

Durability

- Corrosion resistant package includes silicon protection applied to all electrical terminals: alternator, engine starter, engine ground cable, and battery cables to maximize component life.
- Exposed electrical connectors are treated with shrinkable heat tube.
- Heavy-duty brushless alternator is utilized for increased durability.
- Optional paint protection that is more than two times the thickness of the standard paint. Extra primer coats are applied before the final polyurethane topcoat.

Achieve Greater Fuel Efficiency and Productivity

- Five-speed transmission and lock-up clutch torque converter, powertrains deliver smooth shifting, fast acceleration, and speed on grade for greater performance and fuel efficiency.
- Deeply integrated engine, powertrain, and hydraulic systems deliver unmatched productivity and fuel efficiency.

Safety Features

- Rear-vision camera enhances visibility behind the machine, helping you work safely and confidently.
- Cab access with wide door, optional remote door opening, and inclined steps add solid stability.
- Floor-to-ceiling windshield, large mirrors with integrated spot mirrors, and rear-vision camera provide industry leading all-around visibility.
- Monitored seat belt is standard and can be enhanced with an optional exterior indicator.
- Optional multiview (360°) vision system helps the operator monitor the surroundings of the machine at all times.

- Optional Cat Detect radar technology enhances awareness by monitoring the working environment and alerts operators to hazards.
- Optional access light and under-hood service light system to provide illuminated access to the machine and daily checks even in the dark.

Reduced Maintenance Time and Costs

- Extended fluid and filter change intervals reduce maintenance costs by up to 30%.*
- Remote Troubleshoot can connect the machine to the dealer service department to help diagnose problems quickly so you can get back to work.
- Remote Flash works around your schedule to ensure your machine's software is up to date for optimal performance.
- One-piece tilting hood makes engine compartment access fast and easy.
- Optional integrated autolube extends component and service life.

Work in Comfort in the All New Cab



- Optional powered cabin precleaner filters the incoming air and pressurizes the cab.
- Next-generation, easily adjustable seat and suspension for improved operator comfort. It comes in three trim levels and can be equipped with a 4-point harness.
- New in-cab dashboard and high-resolution touch display(s) are easy to use, intuitive, and user friendly.
- Sound suppression, seals, and viscous cab mounts decrease noise and vibration for a quieter work environment.
- The seat-mounted electro-hydraulic joystick steering system provides precision control and dramatically reduces arm fatigue, resulting in excellent comfort and accuracy. Standard in North America and optional in all other regions.
- The hydraulic metering unit (HMU) steering wheel provides precision control, resulting in excellent comfort and accuracy. Standard in all regions except North America. Limited optional availability for North America, consult your Cat dealer.

*Parts and fluids only.

950 Corrosion Resistant Specifications

950 Corrosion Resistant Features

1. Silicon protection applied to all electric terminals
2. Shrinkable heat-tube on exposed electrical connectors
3. Zerust vapor capsules in electrical compartments
4. Grease points on hood articulation pins
5. Optional corrosion resistant cooling package: E-coated cooling cores, heavy-duty latch, and greaseable hinges
6. Optional hydraulic system protection that includes silicone sealant and heat shrinkable tubing over the couplings

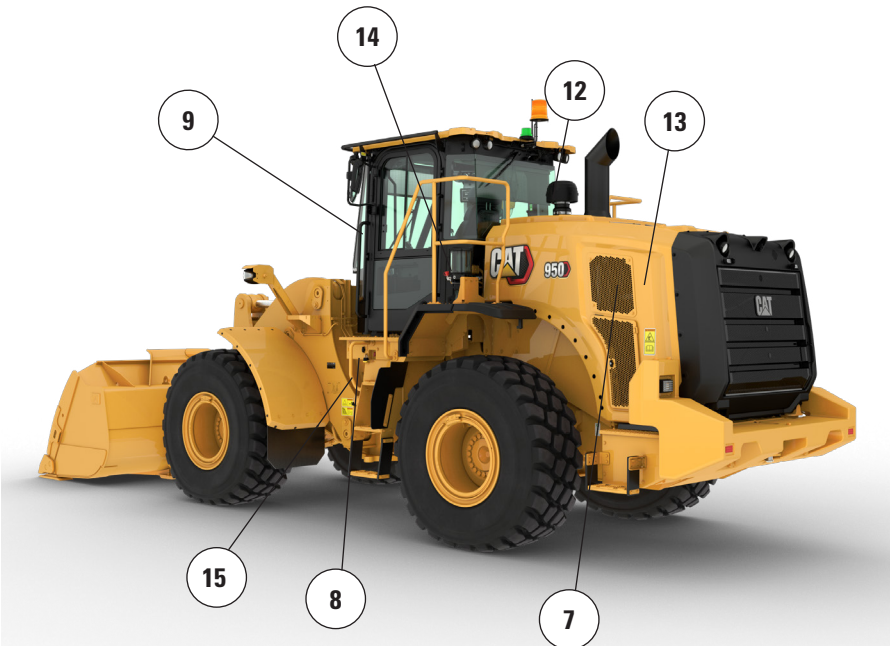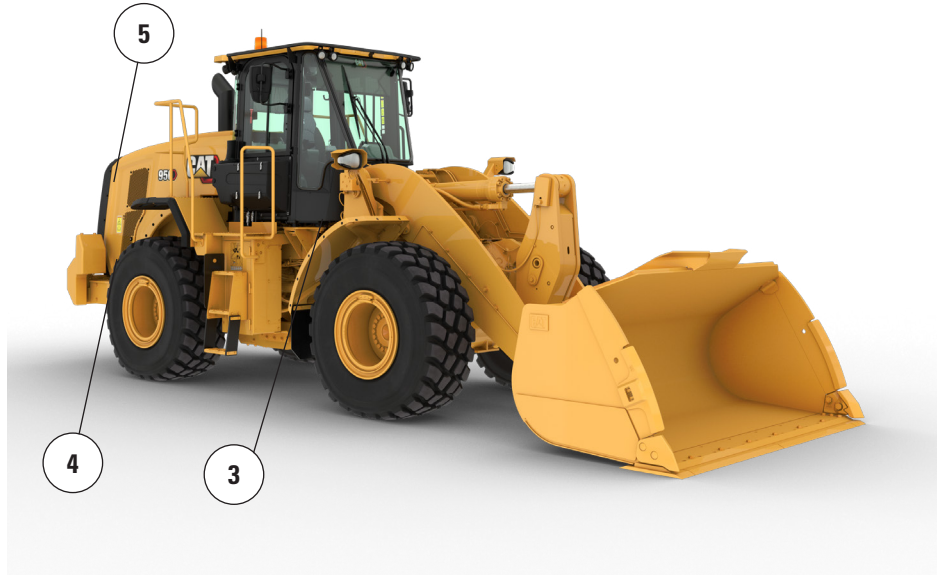

7. Heavy-duty brushless alternator
8. Sealed disconnect switch
9. Grease points on the cab door hinges
10. Additional coats of paint. Extra primer coats are applied before the final polyurethane topcoat
11. Varnish protection applied to under hood components
12. Optional turbine precleaner
13. Optional variable pitch fan
14. Optional autolube system
15. Anti-corrosion transmission fill cover

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com.

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

© 2024 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, Product Link, XT, Fusion, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ3709-00 (5-2024)
Build Number: 14B
(N Am, Europe, Aus-NZ,
Turkey, Chile, Colombia)

