



Cat[®] 785

Mining Truck

Technical Specifications

Configurations and features may vary by region. Please consult your Cat[®] dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Weights – Approximate	2
Weight Distributions – Approximate	2
Final Drives	2
Transmission	2
Tires and Rims	2
Braking System	2
Capacity – HP Body – 100% fill factor	3
Body Hoists	3
Suspension	3
Service Refill Capacities	3
Cab	3
Steering	3
Dimensions	4
785 Rimpull	5
785 Resistive Braking (retarding) – Continuous	5
785 Resistive Braking – 450 m (1,475 ft)	6
785 Resistive Braking – 1500 m (4,900 ft)	6
Standard and Optional Equipment	7

785 Mining Truck Specifications

Engine

Engine Model	Cat® 3512E	
Gross Power – SAE J1995:2014	1193 kW	1,600 hp
Net Power – SAE J1349:2011	1125 kW	1,509 hp
Rated Speed	1,650 rpm	
Emissions Rating	Fuel Optimized	
Bore	170 mm	6.7 in
Stroke	215 mm	8.5 in
Displacement	58.56 L	3,573 in ³

- Net Power advertised is the power available at the flywheel when the engine is equipped with air intake system, exhaust system, and alternator.
- U.S. EPA Tier 4 Final/EU Stage V available for applicable markets
- Additional fuel optimized selectable power ratings: 1081 kW (1,450 hp).

Weights – Approximate

Rated Gross Machine Weight (RGMW)		
33.00 R51 Tires	249 476 kg	550,000 lb
36.00 R51 Tires	255 826 kg	564,000 lb
Chassis Weight (CW)		
33.00 R51 Tires	85 156 kg	187,736 lb
36.00 R51 Tires	87 525 kg	192,959 lb
Body Weight (BW) unlined HP Body	20 927 kg	46,136 lb
Nominal Rated Payload (NRP)		
33.00 R51 Tires	143 tonnes	158 tons
36.00 R51 Tires	147 tonnes	162 tons

- Consult your tire manufacturer for maximum tire load.
- Chassis weight with full fuel and fluids, standard and mandatory attachments, hoist, body mounting group, rims, and tires.

Weight Distributions – Approximate

Front Axle – Empty	48 %
Rear Axle – Empty	52 %
Front Axle – Loaded	33 %
Rear Axle – Loaded	67 %

- Weight distributions optimized with Cat body.

Final Drives

Double reduction, planetary with full floating axles.

Differential Ratio	2:10:1
Planetary Ratio	10.83:1
Total Reduction Ratio	22.75:1

Transmission

Forward 1	12.0 km/h	7.4 mph
Forward 2	16.2 km/h	10.0 mph
Forward 3	22.1 km/h	13.7 mph
Forward 4	29.8 km/h	18.5 mph
Forward 5	40.2 km/h	25.0 mph
Forward 6	57.2 km/h	35.6 mph
Reverse	11.6 km/h	7.2 mph
Top Speed – Loaded	57.2 km/h	35.6 mph

- Maximum travel speed(s) with standard 33.00 R51 tires.

Tires and Rims

33.00 R51 (optional)
36.00 R51 (optional)
610 mm (24") Rims (optional)
660 mm (26") Rims (optional)

- Quick Change Rims optional.
- Caterpillar recommends the customer evaluate all job conditions and consult tire manufacturer for proper tire selection and Tonne Kilometers Per Hour (TKPH) Ton-Miles Per Hour (TMPH) capabilities.

Braking System

Service Brakes	Four-Corner, Wet Disc, Oil Cooled, Hydraulically Actuated	
Front Wet Disc Brake Surface Area	61 270 cm ²	9,487 in ²
Rear Wet Disc Brake Surface Area	89 728 cm ²	13,908 in ²
Standards (Service and Secondary)	ISO 3450:2011	
Parking Brake	Four-corner, Multi-disc, Spring applied, Hydraulically Released	

Capacity – HP Body – 100% fill factor

Struck	84 m ³	110 yd ³
Heaped (SAE 2:1)	110 m ³	144 yd ³

- Consult your local Cat dealer for body recommendations.

Body Hoists

Twin, two-stage hydraulic cylinders with snubbing valve.

Pump Flow – High Idle	847 L/min	223 gal/min
Relief Valve Setting – Raise	17 225 kPa	2,500 psi
Body Raise Time – High Idle	15.0 sec	
Body Lower Time – Float	15.6 sec	
Body Power Down – High Idle	15.5 sec	

Suspension

Self-contained nitrogen/oil cylinders, pin-to-pin mounting, top and bottom double shear clevis attachments.

Effective Cylinder Stroke – Front	320 mm	12.6 in
Effective Cylinder Stroke – Rear	165 mm	6.5 in

Rear Axle Oscillation ± 5.4 degrees

Service Refill Capacities

Fuel Tank	1552 L	410 gal
Diesel Exhaust Fluid (DEF) Tank	136 L	36 gal
Cooling System	476 L	126 gal
Crankcase	204 L	54 gal
Front Wheels (each)	27 L	7.1 gal
Differential and Final Drives	527 L	139 gal
Steering Tank	110 L	29 gal
Steering System (includes tank)	117 L	31 gal
Brake/Hoist Tank	511 L	135 gal
Brake/Hoist System (includes tank)	541 L	143 gal
Torque Converter/Transmission System (includes sump)	175 L	46 gal

Cab

Air Conditioning (HFC – 134A refrigerant)	24,500 Btu/hr
---	---------------

Heater/Defroster	33,300 Btu/hr
------------------	---------------

Operator Sound pressure level Tested to ISO 6396:2008	80 dB(A)
--	----------

Rollover Protective Structure (ROPS) for:

Operator meets	ISO 3471:2008
----------------	---------------

Trainer meets	ISO 13459:2012
---------------	----------------

Falling Objects Protective Structure (FOPS) for:

Operator meets	ISO 3449:2005 Level II
----------------	------------------------

Trainer meets	ISO 13459:2012 Level II
---------------	-------------------------

Steering

Steer Angle	25.1 degrees
-------------	--------------


Turning Diameter (ISO 7457:1997)	29.4 m	96.6 ft
----------------------------------	--------	---------

Steering Standards	ISO 5010:2019
--------------------	---------------

785 Mining Truck Specifications

Dimensions

All dimensions are approximate and may vary depending on body and tire selection. MSDII body shown.

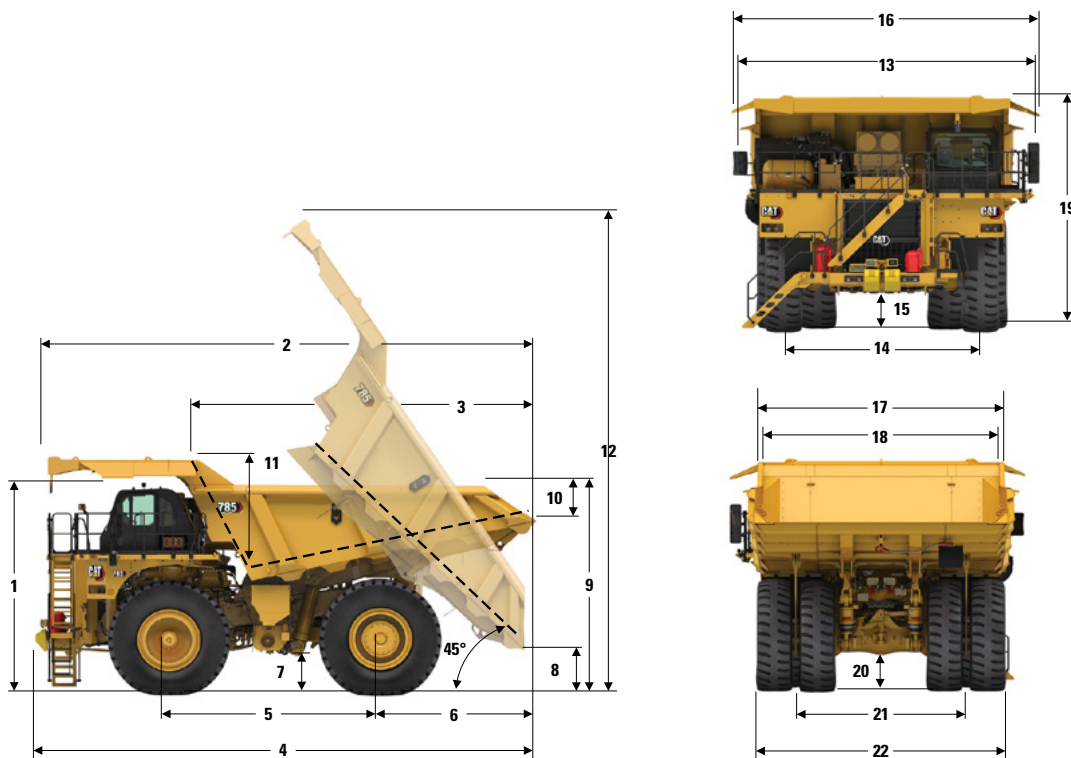

1 Height to Top of ROPS	5208 mm	17 ft 1 in
2 Overall Body Length	11 985 mm	39 ft 4 in
3 Inside Body Length	8318 mm	27 ft 3 in
4 Overall Length	11 957 mm	39 ft 3 in
5 Wheelbase	5180 mm	17 ft 0 in
6 Rear Axle to Tail	3829 mm	12 ft 7 in
7 Ground Clearance	1004 mm	3 ft 4 in
8 Dump Clearance	1128 mm	3 ft 8 in
9 Loading Height – Empty	5299 mm	17 ft 5 in
10 Rear Sidewall Height	874 mm	2 ft 10 in
11 Inside Body Depth – Maximum	2790 mm	9 ft 2 in
12 Overall Height – Body Raised	12 032 mm	39 ft 6 in
13 Operating Width	7535 mm	24 ft 9 in
14 Centerline Front Tire Width	4850 mm	15 ft 11 in
15 Engine Guard Clearance	1038 mm	3 ft 5 in
16 Overall Canopy Width	7562 mm	24 ft 10 in
17 Outside Body Width	6714 mm	22 ft 0 in
18 Inside Body Width	6010 mm	19 ft 9 in
19 Front Canopy Height	6035 mm	19 ft 10 in
20 Rear Axle Clearance	990 mm	3 ft 3 in
21 Centerline Rear Dual Tire Width	4285 mm	14 ft 1 in
22 Overall Tire Width	6277 mm	20 ft 7 in

785 Mining Truck Specifications

785 Rimpull

To determine gradeability performance: Read from gross weight down to the percent of total resistance. Total resistance equals actual percent grade plus 1% for each 10 kg/t (20 lb/ton) of rolling resistance. From this weight-resistance point, read horizontally to the curve with the highest obtainable gear, then down to maximum speed. Usable rimpull will depend upon traction available and weight on drive wheels. The following charts are based on these conditions: 32° C (90° F) ambient temperature, at sea level, with 33R51 tires.


Typical Field Empty Weight (E)

Gross Machine Operating Loaded Weight (L)
249 476 kg (550,000 lb)

Torque Converter Drive

Direct Drive

- 1 – 1st Gear
- 2 – 2nd Gear
- 3 – 3rd Gear
- 4 – 4th Gear
- 5 – 5th Gear
- 6 – 6th Gear

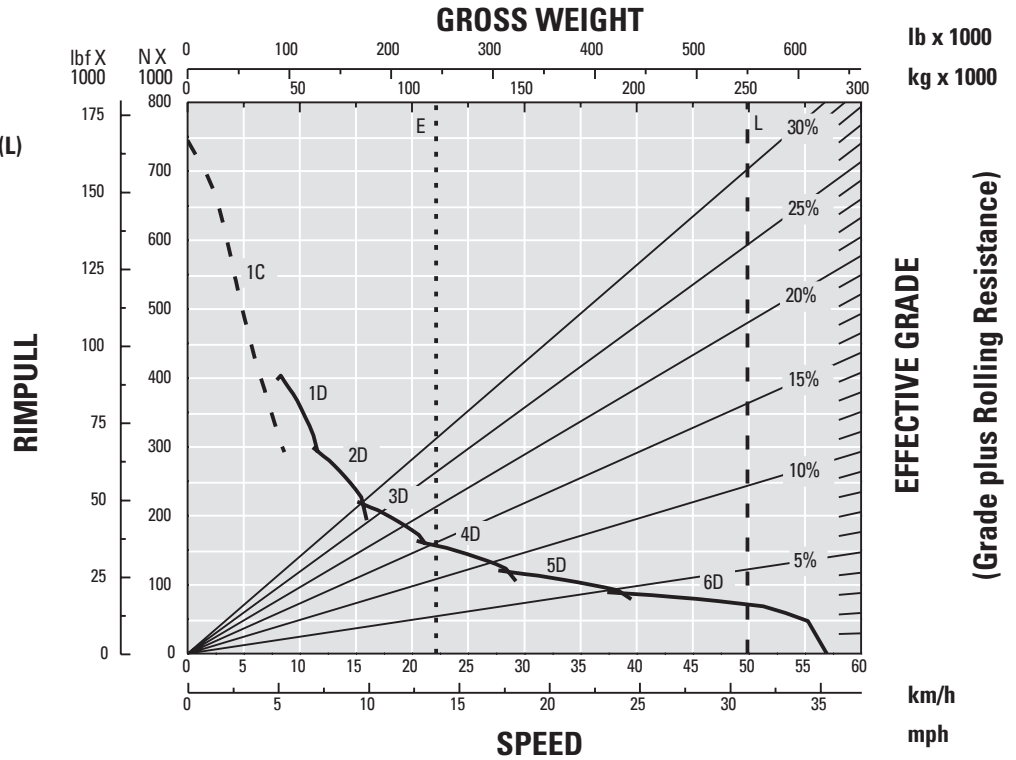


785 Resistive Braking – Continuous

Typical Field Empty Weight (E)

Gross Machine Operating
Loaded Weight (L)
249 476 kg (550,000 lb)

- 1 – 1st Gear
- 2 – 2nd Gear
- 3 – 3rd Gear
- 4 – 4th Gear
- 5 – 5th Gear
- 6 – 6th Gear

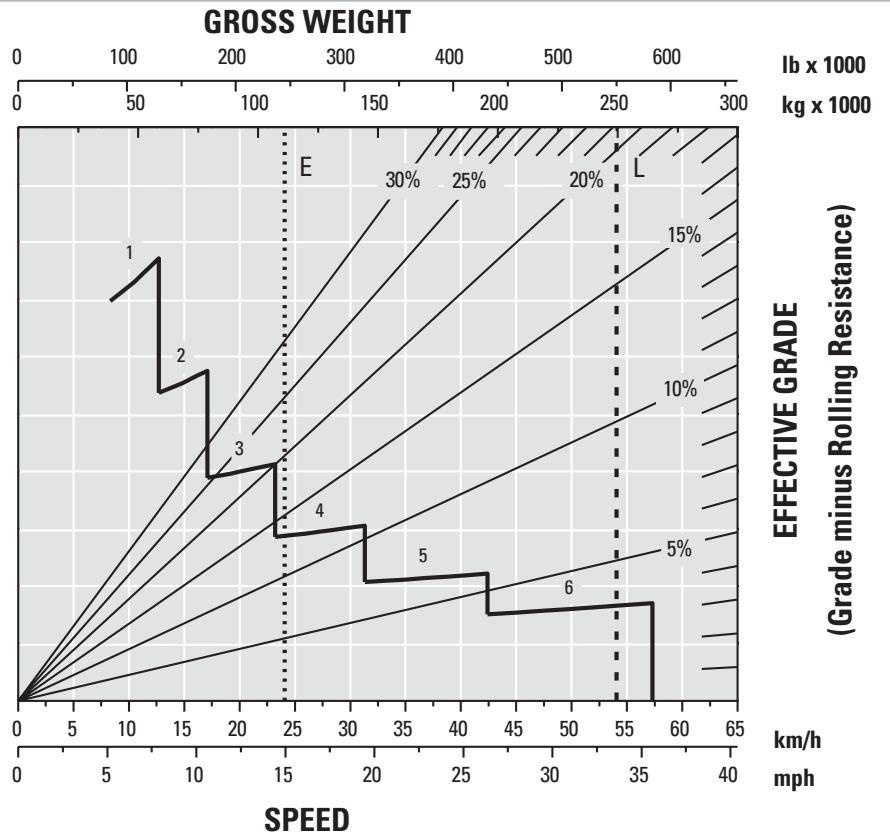


785 Mining Truck Specifications

785 Resistive Braking – 450 m (1,475 ft)

Typical Field Empty Weight (E)

Gross Machine Operating
Loaded Weight (L)
249 476 kg (550,000 lb)

- 1 – 1st Gear
- 2 – 2nd Gear
- 3 – 3rd Gear
- 4 – 4th Gear
- 5 – 5th Gear
- 6 – 6th Gear

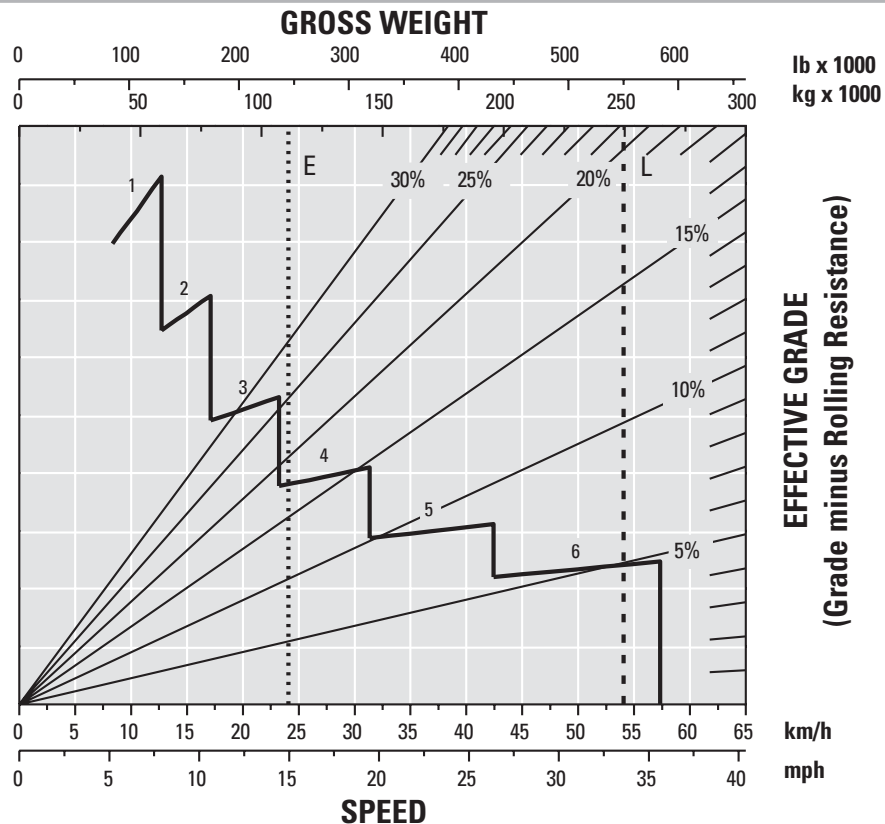


785 Resistive Braking – 1500 m (4,900 ft)

Typical Field Empty Weight (E)

Gross Machine Operating
Loaded Weight (L)
249 476 kg (550,000 lb)

- 1 – 1st Gear
- 2 – 2nd Gear
- 3 – 3rd Gear
- 4 – 4th Gear
- 5 – 5th Gear
- 6 – 6th Gear

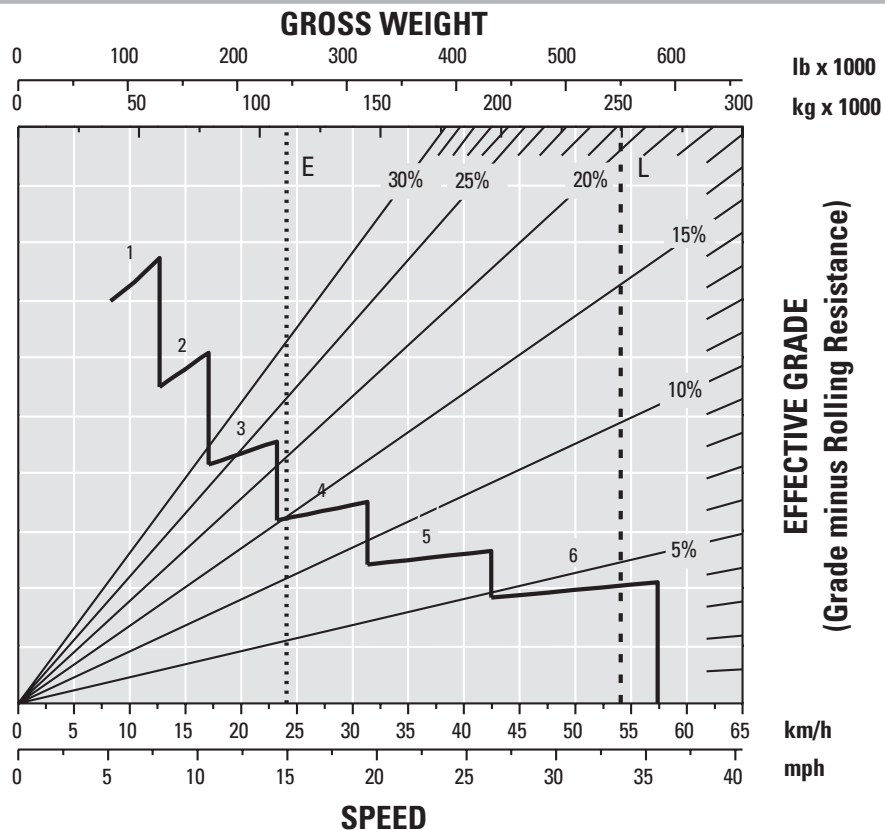

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
ELECTRICAL			OPERATOR ENVIRONMENT		
24V electrical system, low maintenance batteries (two) 93 amp-hour	✓		5V USB charging port	✓	
Alarm, backup	✓		12V auxiliary power connection	✓	
Auxiliary rear work lights, (one) Left Hand (LH) side		✓	Cup holders	✓	
Brushless alternator, 225 amp	✓		Diagnostic connection port COM3 and Ethernet	✓	
Digital Payload Display		✓	Delayed Engine Shutdown	✓	
Ground accessible power control box:	✓		Dome courtesy light and map lights	✓	
– Ethernet Vital Information Management System (VIMS™) port and VIMS lamp			Emergency stop	✓	
– Engine starter, transmission and battery lockouts			Entertainment radio ready:		
Jump start/battery charge receptacle	✓		– Speakers	✓	
LED payload indicator lamps	✓		– Radio mounting provisions and 12V power supply	✓	
LED Lighting system:	✓		– Antenna (AM/FM/WB/satellite radio)		✓
– Back-up and hazard lights			Fire suppression ready	✓	
– Curb lights, (one) Right Hand (RH) side, (one) LH side			Floor mat, multi-piece and replaceable	✓	
– Turn signals (front and rear)			Gauges and indicators panel:	✓	
– Engine compartment lights			– Critical oil and coolant temperatures		
– Headlights with low-high beam selector			– Fuel and DEF level (if applicable)		
– Ladder light and service deck lights			– Engine system, brake and transmission fault indicators		
– Stop/tail lights			– Operator selectable max. machine speed by rotary dial		
– Additional lighting package		✓	– Speedometer, Tachometer		
– Auxiliary VIMS			Heated mirrors, right and left	✓	
– Body rear			Hoist, body control	✓	
– Seat and park brake			Interactive touchscreen vehicle information display:	✓	
– Workshop horn			– Day/night mode		
TRUCK BODIES			– Action alarm		
MSD II body		✓	– Quad gauge display		
Dual slope body		✓	Operator air suspension seat	✓	
High Performance (HP) body		✓	Operator Door Power Window	✓	
Combination body (Coal/Overburden)		✓	Provision for customer accessory mounting	✓	
Body specific side wall and tail extensions		✓	Push button secure start	✓	
Customizable body liner packages		✓	Retractable front visor	✓	
Body heat exhaust		✓	ROPS cab, insulated/sound suppressed	✓	
Rock ejectors		✓	Stairway and walkway access, 600 mm (24 in)	✓	
Rear body lighting group:		✓	Steering wheel, tiltable, telescopic	✓	
– Directional signals			Self-filling to windshield washer fluid from AC condensate	✓	
– Stop/tail lights			Storage locations for operator gear	✓	
FLUIDS					
Extended Life Coolant to –35° C (–30° F)	✓				
Antifreeze/coolant protects to –50° C (–58° F)		✓			

(continued on next page)

785 Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
OPERATOR ENVIRONMENT <i>(continued)</i>			POWER TRAIN <i>(continued)</i>		
Three point seat belt for operator seat	✓		Hydraulic braking system:	✓	
Trainer air suspension seat		✓	– Automatic Resistive Braking control, adjustable and automatic		
Windshield wiper, intermittent control/washer	✓		– Brake release motor (towing)		
Unitized hydraulic powered HVAC with automatic temperature control	✓		– Engine over speed protection		
Ventilated operator seat	✓		– Extended life brake disc material		
Deluxe Cab:		✓	– Oil-cooled, multi-disc (front and rear)		
– Advanced cabin filtration system			– Service, Resistive braking, parking, secondary		
– Catwalk and handrails for rear cab access			– Park brake integrated with gear selector		
– Heated, cooled and ventilated front seat			Transmission:	✓	
– Power right side window			– Six-speed, automatic power shift with Electronic Clutch Pressure Control (ECPC)		
– Suspended companion seat			– Advanced Productivity Electronic Control Strategy (APECS)		
– Storage tray			– Body-up reverse neutralizer		
POWER TRAIN			– Body-up shift inhibitor		
Powertrain for size 33R51 tires	✓		– Downshift/reverse shift inhibitor		
Powertrain for size 36R51 tires		✓	– Directional shift management		
Cat 3512E engine:	✓		– Enhanced Traction Control System		
– Automatic engine and DEF thermal management (if applicable)			– Programmable top speed		
– Automatic low voltage idle management			– Oil level sensor		
– Air cleaner with pre-cleaner (two)			– Neutral coast inhibitor		
– Turbocharging (four) with air-to-air aftercooler			– Neutral start switch		
– Mechanical Electronic Unit Injector (MEUI™-A) fuel system			– Lock-up torque converter		
– Automatic starter protection			– Rear axle continuous lubrication/ filtration		
– Automatic ether starting aid			– Engine pre-lubrication system		✓
– No air – electric starter with 93-amp hour batteries (four), electric horn and automatic lubrication system		✓	– Rear axle continuous lubrication/ filtration with cooler		✓
– Turbine air starter with air tank, air horn and automatic lubrication system		✓			
– Variable speed fan drive		✓			

(continued on next page)

785 Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
OTHER EQUIPMENT			CAT TECHNOLOGY PRODUCTS		
2560 L (676 gal) fuel tank (non-Tier 4)		✓	360 degree surround view camera		✓
Auxiliary “buddy” dumping quick connect	✓		4G cellular/satellite dual mode		✓
Auxiliary connection ‘user defined shutdown’	✓		Connectivity bundle (includes: wireless operator ID, bluetooth key FOB to start)		✓
Auxiliary steering quick connect (towing)	✓		Cyber security	✓	
Body heat exhaust		✓	Driver Safety System (DSS) 4.0 Ready		✓
Bumper towing – center pin kit		✓	Integrated object detection system with touchscreen display	✓	
Cold weather start (block heater)		✓	Minestar GPS		✓
Communication Ar – Minestar™ radio		✓	Minestar communication group (enables: Minestar Fleet, Auxiliary)		✓
Fast fill fuel and DEF remote fill system	✓		Minestar Command Autonomous-ready		✓
Fire extinguisher, portable		✓	Oil Renewal System (ORS) (non-Tier 4)		✓
Five piece crankcase guards		✓	Productivity bundle (includes: AutoHoist, crusher mode dump control, Speed Coaching)		✓
Fuel heater, fuel water separator		✓	Road Analysis Control (RAC)	✓	
Fuel tank mud guard		✓	Truck Payload Monitoring System 2 (TPMS 2)	✓	
Gauge, brake wear indicator		✓	Product Link™ Elite	✓	
Ground accessible fluid service center, hydraulic and coolant		✓	Remote Troubleshoot	✓	
Guards for rotating components	✓		Electronic Operations and Maintenance Manual	✓	
Hill Start Assist/Anti Roll Back	✓		Ground Control Standard Package	✓	
Hub odometer, kilometers		✓	Ground Control Advanced with Anti-lock Braking System (ABS) and Dynamic Stability Control (DSC)		✓
Hydraulic Filters, 1,000 hours	✓		Cruise Control		✓
Powered access stairway		✓			
Rim Diffuser		✓			
Secondary steering (automatic)	✓				
Tie off points	✓				
Tow hooks (front) and tow pin (rear)	✓				
Sight glasses for hydraulic oils	✓				
Scheduled Oil Sampling (S-O-S™) ports	✓				
Wheel chocks		✓			
Working at heights protection		✓			
VIMS	✓				

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2025 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, VisionLink, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ3668-03 (05-2025)
Replaces AEXQ3668-02
Build Number: 08
(Global)

