



FB100-4A

Prime rating

Meets latest India CPCB emission norms (CPCBIV+) and noise norms





Genset Technical Data		Alternator Technical Data	
Genset Rating (kVA)	100	Alternator Make	Leroy Somer
No of Phases	3	No of Bearings	1
Power Factor	0.8	Alternator model	LSAP 44.3 C
Voltage (V)	415/240	Alternator rating	100
Frequency (Hz)	50	Class of insulation	H
Controller Type	GC1206	Coupling details	SAE 3/10
Starting System	12V / 130 AH	Voltage Variation (%)	1
Genset Dry Weight (kg)	1380	Rated Full Load Current (A)	140
Noise @ 75% load (dBA)	< 75 @ 1m (As per ISO 8528-10)	Short circuit fault current(Xd'')(kA)	0.096
Genset Dimensions (LxWxH) (mm)	3100 x 1300 x 1605		
Genset Dimensions (with Exhaust)	3100 x 1300 x 2490		
Battery Type	Lead Acid		
Circuit Breaker Rating (A)(3P/4P)	160/3P		
Engine Technical Data		Fuel & Oil Systems Technical Data	
Engine Model	H4G4DE100	Fuel System	CRS
Engine Speed (rpm)	1500	Type Of Fuel	Diesel
Engine Volume (l)	4	Genset Fuel Tank Capacity (l)	235
Gross Rated Power (kW/hp)	92/122	Fuel Consumption - @ 75% Load (l/hr)*	17
No. of cylinder	4	Lube Oil change period (hrs)	750 Hrs. or 1 Year
Bore (mm)xStroke(mm)	104 x 118	Oil Type	10W30 CK4
Compression Ratio	16.5 : 1	Oil Capacity (l)	12
Displacement (Litres)	4	Oil Consumption @100% load	< 0.1% of FC
Aspiration	TA		
Cooling System	Liquid Cooled		
Cooling System Capacity (l)	22.5		
Cooling System Capability	50 °C		
Governing	Electronic A0		
DEF tank Capacity(L)	24		

Ratings in accordance with ISO 8528, ISO 3046, BS 5514 under standard reference conditions.

* With Diesel specific gravity of 0.8355 at NTP and tolerance of +5%

FB100-4A

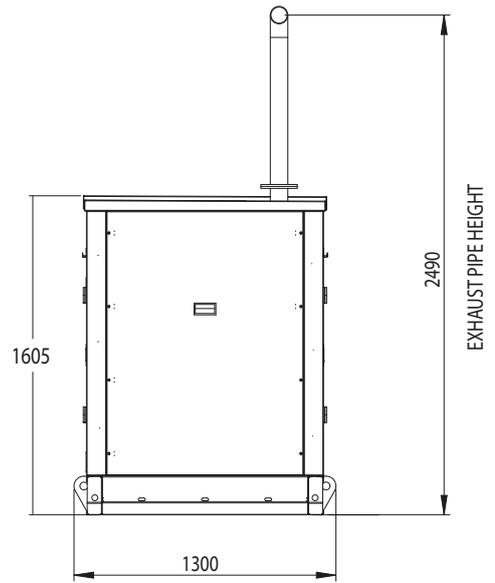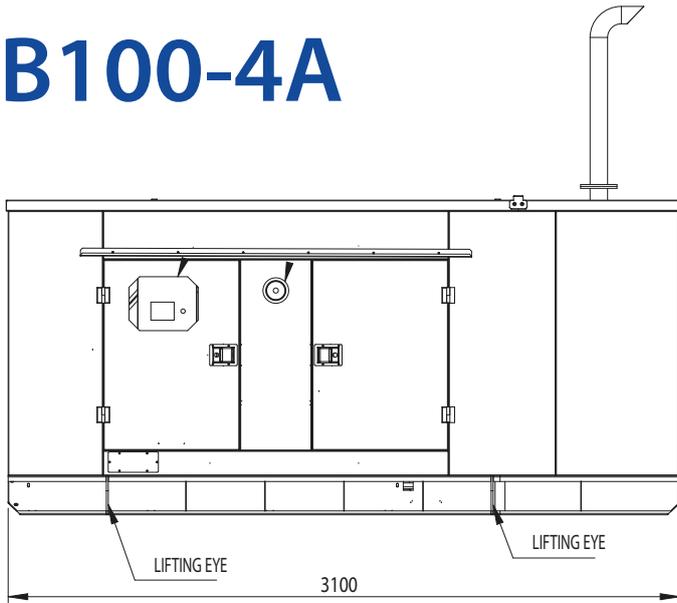

Caterpillar (NI) Limited is the manufacturer of FG Wilson brand diesel generating sets, and our facilities manufacture products in the following locations:
Brazil • China • India
With headquarters in Northern Ireland, FG Wilson products are distributed through a Global Dealer Network.
To contact your local Sales Office, please visit the FG Wilson website at www.fgwilson.com

In line with our policy of continuous product development, we reserve the right to change specification without notice.