

FB100-4A Prime rating

Meets latest India CPCB emission norms (CPCBIV+) and noise norms

Genset Technical Data

Genset Rating (kVA)	100
No of Phases	3
Power Factor	0.8
Voltage (V)	415/240
Frequency (Hz)	50
Controller Type	GC1206
Starting System	12V / 130 AH
Genset Dry Weight (kg)	1380
Noise @ 75% load (dBA)	< 75 @ 1m (As per ISO 8528-10)
Genset Dimensions (LxWxH) (mm)	3100 x 1300 x 1605
Genset Dimensions (with Exhaust)	3100 x 1300 x 2490
Battery Type	Lead Acid
Circuit Breaker Rating (A)(3P/4P)	160/3P

Engine Technical Data

Engine Model	H4G4DE100
Engine Speed (rpm)	1500
Engine Volume (I)	4
Gross Rated Power (kW/hp)	92/122
No. of cylinder	6
Bore (mm)xStroke(mm)	104 x 118
Compression Ratio	16.5 : 1
Displacement (Litres)	4
Aspiration	TA
Cooling System	Liquid Cooled
Cooling System Capacity (I)	22.5
Cooling System Capability	50 °C
Governing	Electronic A0
DEF tank Capacity(L)	24




Alternator Technical Data

Alternator Make	Leroy Somer
No of Bearings	1
Alternator model	LSAP 44.3 C
Alternator rating	100
Class of insulation	Н
Coupling details	SAE 3/10
Voltage Variation (%)	1
Rated Full Load Current (A)	140
Short circuit fault current(Xd")(kA)	0.096

Fuel & Oil Systems Technical Data

Fuel System	CRS
Type Of Fuel	Diesel
Genset Fuel Tank Capacity (I)	250
Fuel Consumption - @ 75% Load (I/hr)*	17
Lube Oil change period (hrs)	750 Hrs. or 1 Year
Oil Type	10W30 CK4
Oil Capacity (I)	12
Oil Consumption @100% load	< 0.1% of FC

Ratings in accordance with ISO 8528, ISO 3046, BS 5514 under standard reference conditions. * With Diesel specific gravity of 0.8355 at NTP and tolerance of +5%

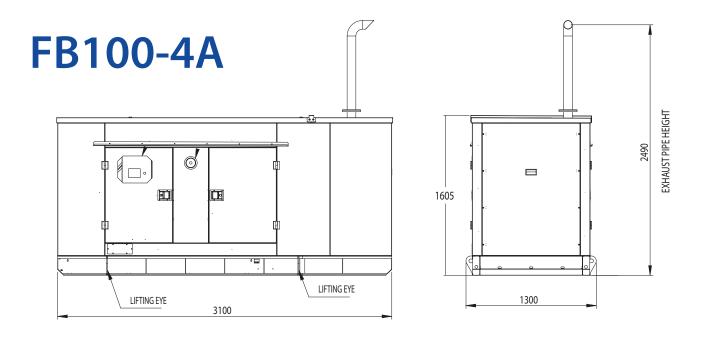

Caterpillar (NI) Limited is the manufacturer of FG Wilson brand diesel generating sets, and our facilities manufacture products in the following locations: Brazil • China • India

With headquarters in Northern Ireland, FG Wilson products are distributed through a Global Dealer Network. To contact your local Sales Office, please visit the FG Wilson website at www.fgwilson.com