

# FB125-4A

# **Prime rating**

Circuit Breaker Rating (A)(3P/4P)

DEF tank Capacity(L)24

Meets latest India CPCB emission norms (CPCBIV+) and noise norms



#### **Genset Technical Data** Genset Rating (kVA) 125 No of Phases 3 **Power Factor** 0.8 Voltage (V) 415/240 Frequency (Hz) 50 Controller Type GC1206 Starting System 12V / 130 AH Genset Dry Weight (kg) 1400 Noise @ 75% load (dBA) < 75 @ 1m (As per ISO 8528-10) Genset Dimensions (LxWxH) (mm) 3400 x 1300 x 1605 Genset Dimensions (with Exhaust) 3400 x 1300 x 2480 **Battery Type** Lead Acid

Engine Technical Data	
Engine Model	H6G4DE125
Engine Speed (rpm)	1500
Engine Volume (I)	6
Gross Rated Power (kW/hp)	116/154
No. of cylinder	6
Bore (mm)xStroke(mm)	104 x 118
Compression Ratio	16.5 : 1

Compression Ratio	16.5 : 1
Displacement (Litres)	6
Aspiration	TA
Cooling System	Liquid Cooled
Cooling System Capacity (I)	22.5
Cooling System Capability	50 °C
Governing	Electronic A0

## **Alternator Technical Data**

Leroy Somer
1
LSAP 44.3 D
125
Н
SAE 3/10
1
175
0.103


## Fuel & Oil Systems Technical Data


200/3P

Fuel System	CRS
Type Of Fuel	Diesel
Genset Fuel Tank Capacity (I)	250
Fuel Consumption - @ 75% Load (I/hr)*	22.1
Lube Oil change period (hrs)	750 Hrs. or 1 Year
Oil Type	10W30 CK4
Oil Capacity (I)	18
Oil Consumption @100% load	< 0.1% of FC

Ratings in accordance with ISO 8528, ISO 3046, BS 5514 under standard reference conditions

\* With Diesel specific gravity of 0.8355 at NTP and tolerance of +5%

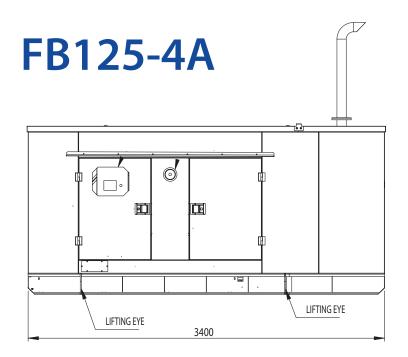

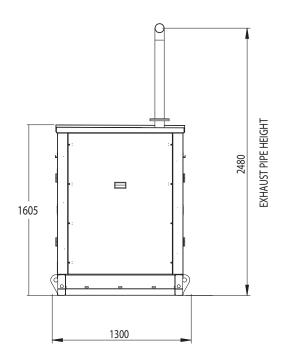

Caterpillar (NI) Limited is the manufacturer of FG Wilson brand diesel generating sets, and our facilities manufacture products in the following locations: Brazil • China • India

With headquarters in Northern Ireland, FG Wilson products are distributed through a Global Dealer Network. To contact your local Sales Office, please visit the FG Wilson website at www.fgwilson.com