



D5

Track-Type Tractor

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

D5 Track-Type Tractor

Specifications	3	D5 VPAT Fine Grading Dimensions.....	7
Engine.....	3	Blades.....	7
Fluid/Refill Capacities.....	3	D5 Semi Universal (SU) Dimensions.....	8
Air Conditioning System.....	3	Blade.....	8
Transmission.....	3	D5 Super LGP Dimensions.....	9
Drawbar Pull.....	3	Blade.....	9
Hydraulic Controls.....	4	Ripper.....	10
Advanced Cabin Filtration.....	4	Winch.....	11
Standards.....	4	Track Shoes.....	11
Sound Level.....	4	D5 Fine Grading Arrangement.....	12
Test Method.....	4	D5 Super LGP.....	12
D5 Variable Pitch Angle Tilt (VPAT) Dimensions.....	5	Dozer Technology Features.....	13
Blades.....	5	Standard and Optional Equipment	14
D5 Low Ground Pressure (LGP) VPAT Dimensions.....	6	Environmental Declaration	16
Blades.....	6		

(continued on next page)

D5 Track-Type Tractor Table of Contents

Table of Contents *(continued)*

D5 Track Type Tractor – Waste Handler

Key Features and Benefits	17
D5 Waste Handler Features	18
Specifications	19
Engine	19
Fluid/Refill Capacities	19
Air Conditioning System	19
Transmission	19
Drawbar Pull	19
Hydraulic Controls	20
Advanced Cabin Filtration	20
Standards	20
Sound Level	20

Test Method	20
D5 Waste Handler – LGP VPAT Dimensions	21
Blade	21
D5 Waste Handler – VPAT Dimensions	22
Blade	22
D5 Waste Handler – SU Dimensions	23
Blade	23
Ripper	24
Winch	25
Track Shoes	25

Standard and Optional Equipment

26

D5 Track-Type Tractor – Heavy Duty/Forestry

Key Features and Benefits	28
D5 Heavy Duty/Forestry Features	29
Specifications	30
Engine	30
Fluid/Refill Capacities	30
Air Conditioning System	30
Transmission	30
Drawbar Pull	30
Hydraulic Controls	31
Advanced Cabin Filtration	31
Standards	31

Sound Level	31
Test Method	31
D5 VPAT – Heavy Duty/Forestry Dimensions	32
Blade	32
D5 LGP VPAT – Heavy Duty/Forestry Dimensions	33
Blade	33
D5 LGP VPAT – Heavy Duty/Forestry Dimensions	34
Ripper	35
Winch	36
Track Shoes	36

Standard and Optional Equipment

37

D5 Track-Type Tractor – Fire Suppression Dozer

Key Features and Benefits	40
D5 Fire Suppression Dozer Features	41
Specifications	42
Engine	42
Fluid/Refill Capacities	42
Air Conditioning System	42
Transmission	42
Drawbar Pull	42
Hydraulic Controls	43
Advanced Cabin Filtration	43
Standards	43

Sound Level	43
Test Method	43
D5 LGP VPAT – Fire Suppression	44
Blade	44
D5 VPAT – Fire Suppression Dimensions	45
Blade	45
Ripper	46
Winch	47
Track Shoes	47

Standard and Optional Equipment

48

D5 Track-Type Tractor Specifications

Engine

Engine Model	Cat® C7.1	
Emissions	U.S. EPA Tier 4 Final/ EU Stage V/Japan 2014/ Korea Stage V	
Power Train	Fully automatic 3-speed	
Net Power (1,770 rpm)		
ISO 9249/SAE J1349	127 kW	170 hp
ISO 9249 (DIN)	172 mhp	
Engine Power – Maximum (1,600 rpm)		
ISO 14396	148 kW	198 hp
ISO 14396 (DIN)	201 mhp	
Gross Power – Maximum (1,600 rpm)		
SAE J1995:2014	151 kW	202 hp
Bore	105 mm	4.1 in
Stroke	135 mm	5.3 in
Displacement	7.1 L	433.27 in ³

- Net power advertised is the power available at the engine flywheel when the engine is equipped with a fan, air cleaner, clean emissions module and alternator.
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- No derating required up to 3000 m (9,840 ft) altitude, beyond 3000 m (9,840 ft) automatic derating occurs.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 30% biodiesel.*

Fluid/Refill Capacities

Fuel Tank	315 L	83.2 gal
Diesel Exhaust Fluid (DEF) Tank	16 L	4.2 gal
Cooling System	36 L	9.5 gal
Engine Crankcase	18 L	4.8 gal
Power Train	160 L	42.3 gal
Final Drives (each)	8 L	2.1 gal
Roller Frames – Standard (each)	18 L	4.8 gal
Roller Frames – Low Ground Pressure (LGP) (each)	27 L	7.1 gal
Hydraulic Tank	80 L	21.1 gal

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.36 kg (2.99 lb) of refrigerant which has a CO₂ equivalent of 1.946 metric tonnes (2.145 tons).


Transmission

0.5 Forward	2.5 km/h	1.55 mph
0.5 Forward (EU)	2.4 km/h	1.50 mph
1.0 Forward	3.3 km/h	2.03 mph
1.0 Forward (EU)	3.0 km/h	1.89 mph
1.5 Forward	4.4 km/h	2.71 mph
2.0 Forward	5.8 km/h	3.57 mph
2.5 Forward	7.6 km/h	4.69 mph
3.0 Forward	9.8 km/h	6.07 mph
0.5 Reverse	3.1 km/h	1.91 mph
0.5 Reverse (EU)	2.9 km/h	1.80 mph
1.0 Reverse	4.1 km/h	2.53 mph
1.0 Reverse (EU)	3.6 km/h	2.20 mph
1.5 Reverse	5.4 km/h	3.36 mph
2.0 Reverse	7.1 km/h	4.43 mph
2.5 Reverse	9.5 km/h	5.92 mph
3.0 Reverse	12.2 km/h	7.59 mph

Drawbar Pull

1.0 Forward	320 kN	71,939 lbf
2.0 Forward	198 kN	44,512 lbf
3.0 Forward	113 kN	25,403 lbf

Drawbar Pull

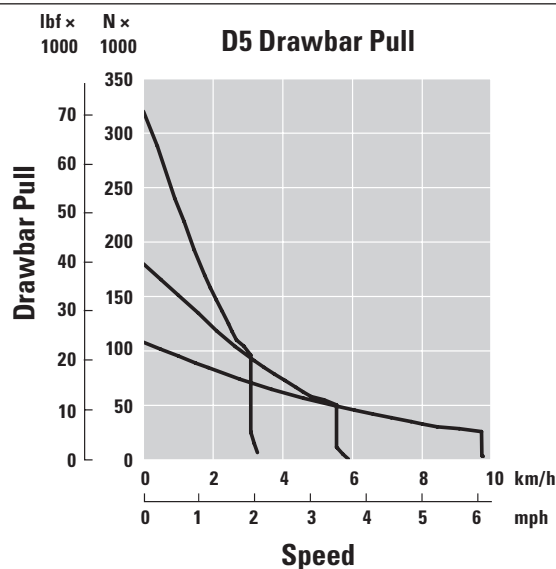

D5 Track-Type Tractor Specifications

Hydraulic Controls

Maximum Operating Pressure

Implement	25 000 kPa	3,626 psi
Steering	45 000 kPa	6,527 psi

Pump

Pump Output (Steering)	165 L/min	43.6 gal/min
Pump Output (Implement)	127 L/min	33.5 gal/min
Pump Output (Fan)	49 L/min	12.9 gal/min
Lift Cylinder Flow	127 L/min	33.5 gal/min
Tilt Cylinder Flow	127 L/min	33.5 gal/min
Ripper Cylinder Flow	127 L/min	33.5 gal/min
Angle Cylinder Flow – Variable Pitch Power Angle Tilt (VPAT)	127 L/min	33.5 gal/min

Advanced Cabin Filtration

Operator Cabin

- Distributed HVAC ducting with automatic temperature control and blower speed provides ultimate operator comfort with less user input.
- Reduced maintenance of the condenser core with automatic reversing fans.
- Cat Advanced Cabin Filtration is standard.

Cat Advanced Cabin Filtration

- Operator protection from respirable particulate (0.3-10-micron size).
- Sustainably pressurized cab (U.S. Silica compliant).
- Reduced maintenance with longer life, high efficiency filters.
- Protection for all cabin components: electronics, etc.
- Helps meet U.S. Occupational Safety and Health Administration Silica Rule Table 1 requirements for operator cabs.
- Multi-tiered filter offerings for optional efficiency upgrades. Contact Cat dealer for availability.
 - MERV 16 – Standard Equipment
 - HEPA
 - Activated Carbon + HEPA
 - ABEK1 + HEPA

Standards

Sound Level Information

- Hearing protection may be needed when the machine is operated with an open operator station, in a noisy environment, with a cab that is not properly maintained, or when the doors and windows are open for extended periods of time.

Sound Level		Test Method
Operator Sound Pressure Level	76 dB(A)	"ISO 6396:2008" ⁽¹⁾
	76 dB(A) *	
Exterior Sound Pressure Level	110 dB(A)	"ISO 6395:2008" ⁽²⁾
	110 dB(A) *	"ISO 6395:1988" ⁽²⁾

*For machines required to meet applicable regional regulations of Ukraine, United Kingdom, and Countries that Adopt the "EU Directives".

⁽¹⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds. The measurement was conducted with the cab doors and the cab windows closed. The cab was properly installed and maintained.

⁽²⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.

- The sound levels listed above include both measurement uncertainty and uncertainty due to production variation.

Vibration Levels

Maximum Hand/Arm*

ISO 5349:2001	2.5 m/s ²
---------------	----------------------

Maximum Whole Body*

ISO/TR25398:2006	0.5 m/s ²
------------------	----------------------

Seat Transmissibility Factor

ISO 7096:2000 – spectral class EM6	<0.7
------------------------------------	------

*Values are for an experienced operator in a dozing application. Consult the Operating and Maintenance Manual (OMM) for further details.

Rollover Protective Structure (ROPS)/Falling Object Protective Structure (FOPS)/Operator Protective Structure (OPS)

- ROPS meets the following criteria: ISO 3471:2008.
- FOPS meets the following criteria: ISO 3449:2005 Level II.
- OPS screens meets OPS criteria per ISO 8084:2003 and WCB G604:2011.

Brakes

- Brakes meet the standard ISO 10265:2008.

D5 Track-Type Tractor Specifications

D5 VPAT Dimensions

Operating Weight ¹	17 180 kg	37,875 lb
Shipping Weight ²	16 950 kg	37,368 lb
Ground Pressure (ISO 16754)	47.6 kPa	6.90 psi
Undercarriage (Standard)	40 Sections with 7 Bottom Rollers	
1 Track Gauge	1.89 m	6'2"
2 Width of Track Shoe (Standard)	610 mm	24.0 in
3 Width of Tractor	2.50 m	8'2"
4 Length of Track on Ground	2.562 m	8'5"
Ground Contact Area (ISO 16754)	3.5 m ²	123.6 ft ²
Grouser Height (Moderate Service)	57 mm	2.2 in
Ground Clearance	358 mm	14.1 in
5 Machine Height ³	3.085 m	10'1"
6 Length of Basic Tractor ⁴	4.644 m	15'3"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in
Ripper	1060 mm	41.7 in
Striker Box	152 mm	6.0 in
Winch	446 mm	17.6 in



All dimensions above with Cat Abrasion™ undercarriage with Extreme Service shoes of maximum width for configuration, VPAT blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes blade, lubricants, coolant, full fuel tank, ROPS/FOPS cab, drawbar, and 75 kg (165 lb) operator.

²Shipping weight includes blade lift cylinders, C-frame, lubricants, coolant, 10% fuel, ROPS/FOPS cab, and drawbar.

³Machine height from tip of grouser to top of Product Link™ Antenna. For sweeps, add 64 mm (2.5 in) to overall machine height. For sweeps, add 81 mm (3.2 in). With Extreme Service, add 9 mm (0.4 in). When Cat Grade with 3D antennas are installed there is no added machine height.

⁴Length of Basic Tractor from the back of the drawbar to front of C-frame.

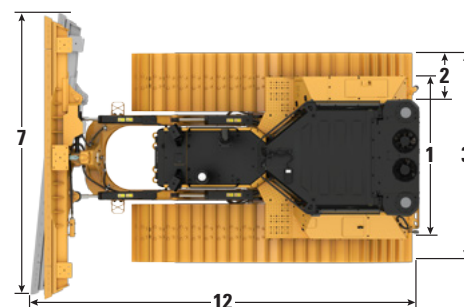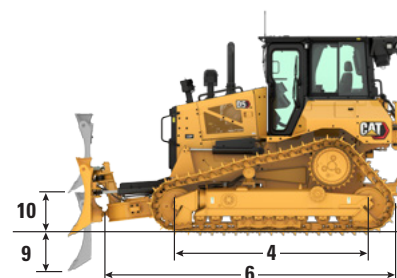

NOTE: LGP VPAT model shown for reference.

Blades

Type	VPAT		VPAT – Foldable	
Capacity (ISO 9246)	3.5 m ³	4.58 yd ³	3.5 m ³	4.58 yd ³
7 Width across End bits	3272 mm	128.8 in	3272 mm	128.8 in
Width without End bits	3159 mm	124.4 in	3159 mm	124.4 in
Width across End bits (Blade Angled 24°)	2998 mm	118.0 in	2558 mm	100.7 in
Width without End bits (Blade Angled 24°)	2908 mm	114.5 in	2539 mm	100.0 in
8 Height	1261 mm	49.6 in	1261 mm	49.6 in
9 Dig Depth	559 mm	22.0 in	559 mm	22.0 in
10 Lift Height	971 mm	38.2 in	971 mm	38.2 in
11 Maximum Tilt at Blade Corner	257 mm	10.1 in	257 mm	10.1 in
Maximum Tilt Angle	8.5°		8.5°	
Pitch Adjustment	60° (cutting edge/ground, nominal); -2°/+4°		60° (cutting edge/ground, nominal); -2°/+4°	
12 Length of Machine (Blade Straight)	5 m	16'5"	5.02 m	16'5"
Length of Machine (Blade Angled 24°, without fuel tank guard)	5.621 m	18'5"	5.621 m	18'5"
Blade Weight	1090 kg	2,403 lb	1286 kg	2,835 lb

D5 Track-Type Tractor Specifications

D5 LGP VPAT Dimensions

Operating Weight ¹	19 170 kg	42,263 lb
Shipping Weight ²	18 940 kg	41,756 lb
Ground Pressure (ISO 16754)	32.6 kPa	4.73 psi
Undercarriage (Standard)	46 Sections with 8 Bottom Rollers	
1 Track Gauge	2.16 m	7'1"
2 Width of Track Shoe (Standard)	840 mm	33.1 in
3 Width of Tractor	3.00 m	9'10"
4 Length of Track on Ground	3.116 m	10'3"
Ground Contact Area (ISO 16754)	5.8 m ²	204.8 ft ²
Grouser Height (Moderate Service)	57 mm	2.2 in
Ground Clearance	473 mm	18.6 in
5 Machine Height ³	3.20 m	10'6"
6 Length of Basic Tractor ⁴	5.012 m	16'5"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in
Ripper	1060 mm	41.7 in
Striker Box	152 mm	6.0 in
Winch	446 mm	17.6 in



All dimensions above with Cat Abrasion™ undercarriage with Extreme Service shoes of maximum width for configuration, VPAT blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes blade, lubricants, coolant, full fuel tank, ROPS/FOPS cab, drawbar, and 75 kg (165 lb) operator.

²Shipping weight includes blade lift cylinders, C-frame, lubricants, coolant, 10% fuel, ROPS/FOPS cab, and drawbar.

³Machine height from tip of grouser to top of Product Link™ Antenna. For sweeps, add 64 mm (2.5 in) to overall machine height. For sweeps, add 81 mm (3.2 in). With Extreme Service, add 9 mm (0.4 in). When Cat Grade with 3D antennas are installed there is no added machine height.

⁴Length of Basic Tractor from the back of the drawbar to front of C-frame.

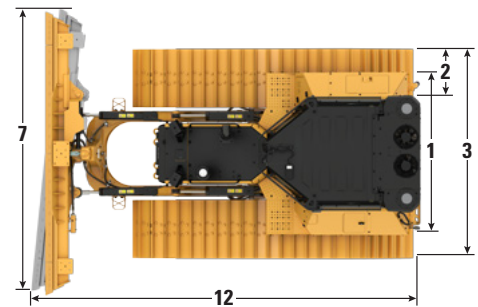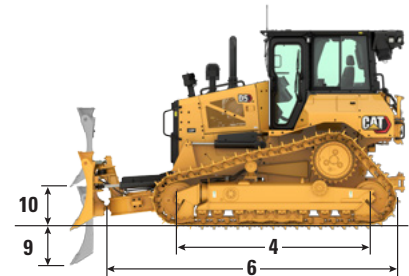

NOTE: LGP VPAT model shown.

Blades

Type	LGP VPAT		LGP VPAT – Foldable	
Capacity (ISO 9246)	4.0 m ³	5.23 yd ³	4.2 m ³	5.49 yd ³
7 Width across End bits	4080 mm	160.6 in	4080 mm	160.6 in
Width without End bits	3969 mm	156.3 in	3969 mm	156.3 in
Width across End bits (Blade Angled 24°)	3736 mm	147.1 in	3736 mm	147.1 in
Width without End bits (Blade Angled 24°)	3640 mm	143.3 in	3640 mm	143.3 in
Width across End bits (Blade Angled 33° for transportation purpose only)	—	—	3000 mm	118.1 in
Maximum Blade Angle	24°		24°	
8 Height	1263 mm	49.7 in	1263 mm	49.7 in
9 Dig Depth	580 mm	22.8 in	580 mm	22.8 in
10 Lift Height	1051 mm	41.4 in	1051 mm	41.4 in
11 Maximum Tilt at Blade Corner	371 mm	14.6 in	371 mm	14.6 in
Maximum Tilt Angle	8.5°		8.5°	
Pitch Adjustment	60° (cutting edge/ground, nominal); –2°/+4°		60° (cutting edge/ground, nominal); –2°/+4°	
12 Length of Machine (Blade Straight)	5.35 m	17'7"	5.35 m	17'7"
Length of Machine (Blade Angled 24°, without fuel tank guard)	6.137 m	20'2"	6.027 m	19'9"
VPAT Blade foldable, angled 33° for transportation purpose only	—	—	6.377 m	20'11"
Blade Weight	1256 kg	2,769 lb	1526 kg	3,364 lb

D5 Track-Type Tractor Specifications

D5 VPAT Fine Grading Dimensions

Operating Weight ¹	17 780 kg	39,198 lb
Shipping Weight ²	17 550 kg	38,691 lb
Ground Pressure (ISO 16754)	41.4 kPa	6.0 psi
Undercarriage (Standard)	46 Sections with 8 Bottom Rollers	
1 Track Gauge	1.89 m	6'2"
2 Width of Track Shoe (Standard)	610 mm	24.0 in
3 Width of Tractor	2.50 m	8'2"
4 Length of Track on Ground	3.116 m	10'3"
Ground Contact Area (ISO 16754)	5.8 m ²	204.8 in ²
Grouser Height (Moderate Service)	57 mm	2.2 in
Ground Clearance	473 mm	18.6 in
5 Machine Height ³	3.20 m	10'6"
6 Length of Basic Tractor ⁴	5.012 m	16'5"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in
Ripper	1060 mm	41.7 in
Striker Box	152 mm	6.0 in
Winch	446 mm	17.6 in



All dimensions above with Cat Abrasion undercarriage with Extreme Service shoes of maximum width for configuration, VPAT blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes blade, lubricants, coolant, full fuel tank, ROPS/FOPS cab, drawbar, and 75 kg (165 lb) operator.

²Shipping weight includes blade lift cylinders, C-frame, lubricants, coolant, 10% fuel, ROPS/FOPS cab, and drawbar.

³Machine height from tip of grouser to top of Product Link Antenna. For sweeps, add 64 mm (2.5 in) to overall machine height. For sweeps, add 81 mm (3.2 in). With Extreme Service, add 9 mm (0.4 in). When Cat Grade with 3D antennas are installed there is no added machine height.

⁴Length of Basic Tractor from the back of the drawbar to front of C-frame.

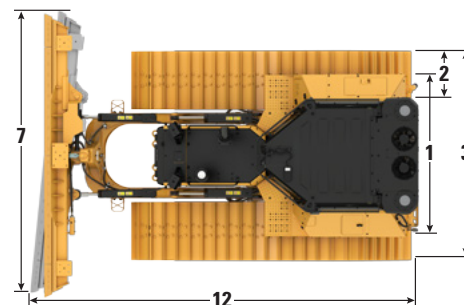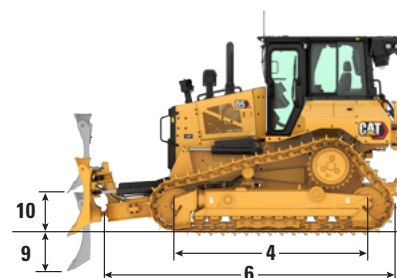

NOTE: LGP VPAT model shown for reference.

Blades

Type	VPAT		VPAT – Foldable	
Capacity (ISO 9246)	3.5 m ³	4.58 yd ³	3.5 m ³	4.58 yd ³
7 Width across End bits	3272 mm	128.8 in	3272 mm	128.8 in
Width without End bits	3159 mm	124.4 in	3159 mm	124.4 in
Width across End bits (Blade Angled 24°)	2998 mm	118.0 in	2558 mm	100.7 mm
Width without End bits (Blade Angled 24°)	2908 mm	114.5 in	2539 mm	100.0 in
Maximum Blade Angle	24°		24°	
8 Height	1261 mm	49.6 in	1261 mm	49.6 in
9 Dig Depth	580 mm	22.8 in	580 mm	22.8 in
10 Lift Height	1051 mm	41.4 in	1051 mm	41.4 in
11 Maximum Tilt at Blade Corner	257 mm	10.1 in	257 mm	10.1 in
Maximum Tilt Angle	8.5°		8.5°	
Pitch Adjustment	60° (cutting edge/ground, nominal); -2°/+4°		60° (cutting edge/ground, nominal); -2°/+4°	
12 Length of Machine (Blade Straight)	5.35 m	17'7"	5.35 m	17'7"
Length of Machine (Blade Angled 24°, without fuel tank guard)	5.969 m	19'7"	5.969 m	19'7"
Blade Weight	1090 kg	2,403 lb	1286 kg	2,835 lb

D5 Track-Type Tractor Specifications

D5 SU Dimensions

Operating Weight ¹	17 340 kg	38,228 lb
Shipping Weight ²	17 110 kg	37,721 lb
Ground Pressure (ISO 16754)	48.2 kPa	6.99 psi
Undercarriage (Standard)	40 Sections with 7 Bottom Rollers	
1 Track Gauge	1.89 m	6'2"
2 Width of Track Shoe (Standard)	610 mm	24.0 in
3 Width of Tractor	2.50 m	8'2"
4 Length of Track on Ground	2.562 m	8'5"
Ground Contact Area (ISO 16754)	3.5 m ²	123.6 ft ²
Grouser Height (Moderate Service)	57 mm	2.2 in
Ground Clearance	358 mm	14.1 in
5 Machine Height ³	3.09 m	10'1"
6 Length of Basic Tractor ⁴	3.990 m	13'1"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in
Ripper	1060 mm	41.7 in
Striker Box	152 mm	6.0 in
Winch	446 mm	17.6 in



All dimensions above with Cat Abrasion undercarriage with Extreme Service shoes of maximum width for configuration, VPAT blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes blade, lubricants, coolant, full fuel tank, ROPS/FOPS cab, drawbar, and 75 kg (165 lb) operator.

²Shipping weight includes blade lift cylinders, C-frame, lubricants, coolant, 10% fuel, ROPS/FOPS cab, and drawbar.

³Machine height from tip of grouser to top of Product Link Antenna. For sweeps, add 64 mm (2.5 in) to overall machine height. For sweeps, add 81 mm (3.2 in). With Extreme Service, add 9 mm (0.4 in). When Cat Grade with 3D antennas are installed there is no added machine height.

⁴Length of Basic Tractor from the back of the drawbar to the top of the lift cylinder.

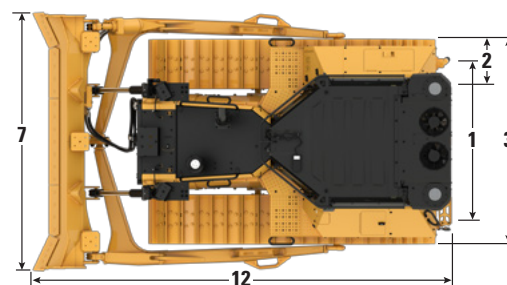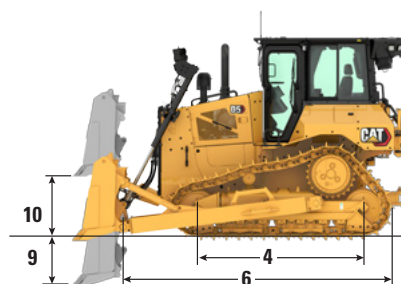

NOTE: SU model shown.

Blade

Type	SU	
Capacity (ISO 9246)	4.3 m ³	5.62 yd ³
7 Width across End bits	3164 mm	124.6 in
Width without End bits	3122 mm	122.9 in
8 Height	1338 mm	52.7 in
9 Dig Depth	544 mm	21.4 in
10 Lift Height	1104 mm	43.4 in
11 Maximum Tilt at Blade Corner	140 mm	5.5 in
Maximum Tilt Angle	8°	
Pitch Adjustment	±5.1°	
12 Length of Machine with SU Blade (without fuel tank guard)	5.09 m	16'8"
Blade Weight (blade + push arms installed)	2050 kg	4,519 lb

D5 Track-Type Tractor Specifications

D5 Super LGP Dimensions

Operating Weight ¹	21 630 kg	47,686 lb
Shipping Weight ²	21 400 kg	47,179 lb
Ground Pressure (ISO 16754)	24.8 kPa	3.60 psi
Undercarriage (Standard)	52 Sections with 9 Bottom Rollers	
1 Track Gauge	2.365 m	7'9"
2 Width of Track Shoe (Standard)	1070 mm	42.1 in
3 Width of Tractor	3.44 m	11'3"
4 Length of Track on Ground	3.695 m	12'1"
Ground Contact Area (ISO 16754)	8.56 m ²	302.3 ft ²
Grouser Height (Moderate Service)	35 mm	1.4 in
Ground Clearance	469 mm	18.5 in
5 Machine Height ³	3.17 m	10'5"
6 Length of Basic Tractor ⁴	4.804 m	15'9"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in




All dimensions above with Cat Abrasion undercarriage with Moderate Service shoes of maximum width for configuration, Semi Universal (SU) blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes blade, lubricants, coolant, full fuel tank, ROPS/FOPS cab, drawbar, and 75 kg (165 lb) operator. With APEX shoes, remove 1450 kg (3,197 lb).

²Shipping weight includes blade lift cylinders, lubricants, coolant, 10% fuel, ROPS/FOPS cab, drawbar, push arms and blade.

³Machine height from tip of grouser (Double Grouser shoes) to top of Product Link Antenna. With APEX shoes, add 42 mm (1.65 in).

⁴Length of Basic Tractor from the rear track shoe to the tip of lift cylinder blades (shipping).

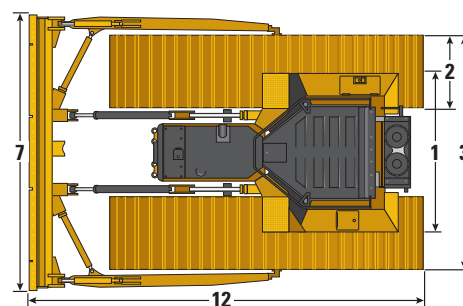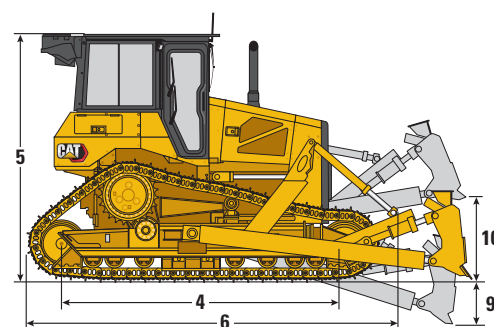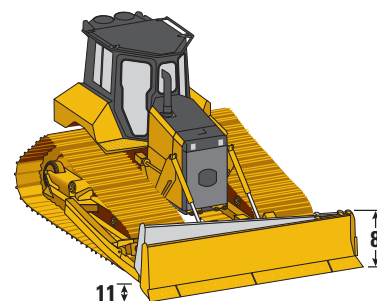



Blade

Type	Straight Blade	
Capacity (ISO 9246)	2.7 m ³	3.53 yd ³
7 Width across End bits	4027 mm	158.5 in
Width without End bits	3980 mm	156.7 in
8 Height	900 mm	35.4 in
9 Dig Depth	541 mm	21.3 in
10 Lift Height	996 mm	39.2 in
11 Maximum Tilt at Blade Corner	209 mm	8.2 in
Maximum Tilt Angle	6°	
Pitch Adjustment	±8°	
12 Length of Machine with SU Blade (without fuel tank guard)	5.77 m	18'11"
Blade Weight (blade and push arms, tilt lines and cylinders, covers and trunnions)	1940 kg	4,277 lb

D5 Track-Type Tractor Specifications

Ripper

Type	Fixed Parallelogram	
Weight	1393 kg	3,071 lb
1 Maximum Clearance, Raised (Shank Tip)		
D5 VPAT/Push Arms	404 mm	15.9 in
D5 LGP VPAT	518 mm	20.4 in
2 Maximum Penetration		
Standard	552 mm	21.7 in
LGP	437 mm	17.2 in
3 Pocket Spacing	1000 mm	39.4 in
4 Shank Gauge	2.0 m	78.7 in
Shank Section	73 mm × 176 mm	2.9 in × 6.9 in
Number of Pockets	3	
5 Overall Beam Width	2202 mm	86.7 in
Beam Cross Section	219 mm × 254 mm	8.6 in × 10.0 in
Maximum Penetration Force		
Standard	51.6 kN	11,600 lbf
LGP	43 kN	9,667 lbf
Maximum Pryout Force		
Standard	211.2 kN	47,480 lbf
LGP	170 kN	38,217 lbf

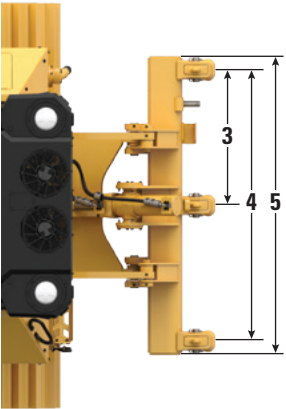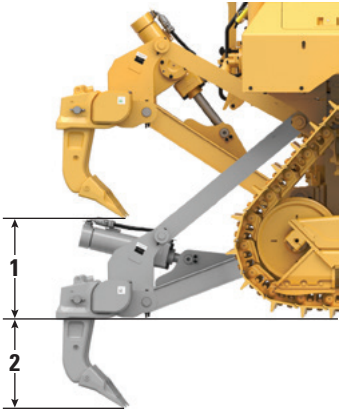

D5 Track-Type Tractor Specifications

Winch

Model	PA55 Standard Speed		PA55 Slow Speed	
Weight*	1277 kg	2,815 lb	1277 kg	2,815 lb
Oil Capacity	73 L	19.3 gal	73 L	19.3 gal
Winch and Bracket Length	1145 mm	45.1 in	1145 mm	45.1 in
Winch Case Width	975 mm	38.4 in	975 mm	38.4 in
Drum Diameter	254 mm	10 in	254 mm	10.0 in
Drum Width	315 mm	12.4 in	315 mm	12.4 in
Flange Diameter	504 mm	19.8 in	504 mm	19.8 in
Drum Capacity – 22 mm (0.88 in)	88 m	288'9"	88 m	288'9"
Winch Drive	Mechanical		Mechanical	
Control	Electrical		Electrical	
Overall Width	975 mm	38.4 in	975 mm	38.4 in
Rope Diameter (recommended)	19 mm	0.75 in	19 mm	0.75 in
Cable Ferrule Size (O.D. × Length)	54 mm × 67 mm	2.1 in × 2.6 in	54 mm × 67 mm	2.1 in × 2.6 in
Maximum Bare Drum				
Line Pull	31 388 kg	69,200 lb	31 388 kg	69,200 lb
Line Speed	43 m/min	141 ft/min	16 m/min	53 ft/min
Maximum Full Drum				
Line Pull	23 359 kg	51,498 lb	31 388 kg	69,200 lb
Line Speed	66 m/min	210 ft/min	28 m/min	91 ft/min

*Weight: Includes pump, operator controls, oil, mounting brackets and spacers.

Slow and standard speed winches are available.

Track Shoes

Some track shoes not available in all regions. Please consult your Cat dealer for details.

	Standard			LGP		Super LGP
	560 mm (22 in)	600 mm (24 in)	610 mm (24 in)	840 mm (33 in)	860 mm (34 in)	1070 mm (42 in)
Heavy Duty Extended Life (HDXL)						
Moderate Service	✓	✓ ²				✓
Extreme Service	✓ ³	✓ ¹		✓ ¹	✓	
Self-Cleaning					✓	✓
Cat Abrasion						
Moderate Service			✓ ²	✓		
Extreme Service	✓		✓ ¹	✓	✓	

¹Available as Center Hole


²Recommended for Fine Grading configuration

³Recommended for Fire Dozer configuration


D5 Track-Type Tractor Features

D5 Fine Grading Arrangement

The Fine Grading arrangement combines the features of a standard VPAT dozer with the longer undercarriage of an LGP machine. The result is a narrow transport width, without giving up low ground pressure. Machine stability and maneuverability are optimal. A folding blade is available to make transport even easier. See page 7 for specifications and dimensions.

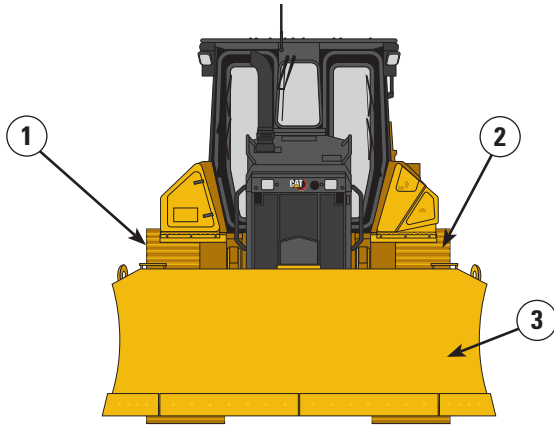


- 1) D5 VPAT Tractor – 1890 mm (74 in) gauge
- 2) Fine grading tracks – narrow shoes, 610 mm (24 in). 46 sections
- 3) 3272 mm (10.7 ft) VPAT blade or Foldable VPAT blade for shipping width under 3 m (9.85 ft)

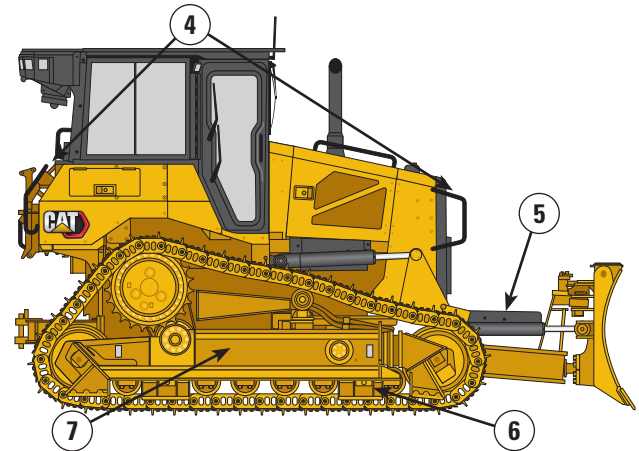


- 4) LGP Access Package (front handles/rear ladder)
- 5) LGP bulldozer (long C-frame)
- 6) Fine grading undercarriage:
 - 1890 mm (74.4 in)
 - 8-roller track roller frame
- 7) LGP compatible track guiding guards

D5 Super LGP

The Super LGP has a long history working in applications like agriculture and dredging, which require very low ground pressure combined with high drawbar pull. The Super LGP package equips the machine specifically for very soft underfoot conditions. See page 9 for specifications and dimensions.

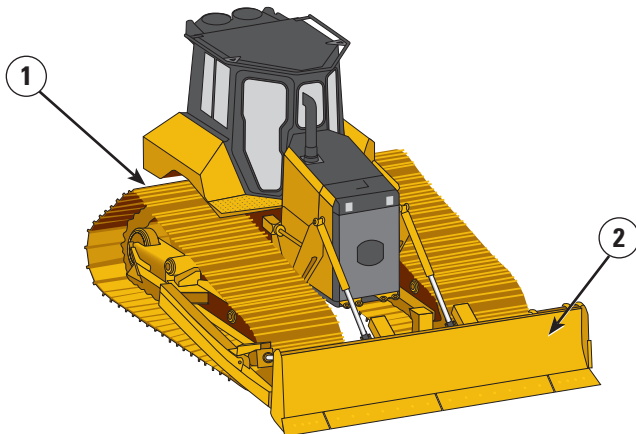

- 1) Super LGP undercarriage:
 - Track roller frame extended with nine rollers at front and rear for more track on the ground and better mass distribution
 - Center track guiding guard
 - Enlarged equalizer bar and pivot shafts
 - Heavy Duty Extended Life (HDXL) tracks equipped with 1070 mm (42 in) wide track pads either double grousers or self-cleaning.
- 2) Super LGP Bulldozer package:
 - Combines a VPAT lift cylinder system and push arms for optimized tractor mass
 - 4027 mm (13.2 ft) Straight blade
- 3) Rear guard – regular or heavy duty

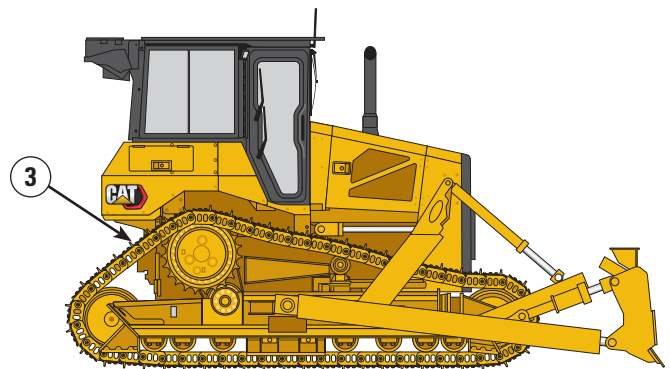

Dozer Technology Features

Assist technology features to help operators of varied experience levels get the job done faster and more accurately. Grade and Command offerings help further enhance your productivity, efficiency and job site safety.

The cab is Third Party Grade Control Ready, equipped with Controller Area Network (CAN) interface, harness pass throughs and mounting features to make it easier to install the grade control system of your choice.

Technology features apply to all configurations, except Super LGP and Fire Dozers. Fire Dozers only offer Cat Assist by default.

Cat Assist with ARO

Attachment Ready Option (ARO)	ARO provides wiring and mounting provisions for dealer installation of Grade with 3D, AccuGrade, Universal Total Station (UTS), or other grade control systems.
Cat Grade with Slope Assist™	Slope Assist automatically maintains pre-established blade position without a Global Navigation Satellite System (GNSS)/Global Positioning System (GPS) signal – no additional hardware or software needed. For machines with 3D, operators can easily switch back and forth from full 3D automatics to Slope Assist.
Steer Assist	Steer Assist automates track and blade tilt steering. Helps reduce operator fatigue by automatically maintaining straight travel with light loads or heavy loads on flat ground and cross slopes. No GNSS/GPS required.
Stable Blade	Stable Blade works seamlessly with operator inputs to help produce a smoother surface when operating manually.
Slope Indicate	Slope Indicate is included in the main machine display and shows side slope and uphill/downhill grades to help operators with slope work.
Blade Load Monitor	Blade Load Monitor gives you real-time feedback on current load versus the optimal blade load based on your ground conditions. Actively monitors machine load and track slip to help you reach optimal pushing capacity. ¹
Traction Control	Traction Control automatically reduces track slip to save you time, fuel and track wear. ¹
AutoCarry™	AutoCarry automates blade lift to help you maintain consistent blade load and help reduce track slip. ¹

Cat Grade 3D Ready (hardware only)

Includes all features from Cat Assist with ARO listed above, plus:

Cat Grade with 3D (hardware only)	Factory integrated Cat Grade with 3D uses GNSS/GPS to control the blade so you can get to design plan faster. Low profile antennas are integrated into the cab roof and GNSS/GPS receivers are mounted inside the cab for better protection. ²
Dedicated Touchscreen Grade Display	Full-color Grade operator interface is intuitive and easier to use. The 254 mm (10 in) touchscreen uses an Android OS platform and operates like a smart phone.

NOTE: Grade 3D Ready option requires additional license purchase and installation to upgrade to a fully functional Grade 3D system. Consult your Cat dealer for more information.

Cat Grade 3D with Assist

Includes all features from Cat Grade 3D Ready (hardware only) listed above, plus:

Steer Assist 3D	Automatically follow guidance lines from site design plans (or Infield designs) under light load or heavy load. ²
-----------------	--

NOTE: Includes required licenses and software.

Cat Command/Remote Control

Remote Control Ready Cab (Standard)	Cab is Remote Control Ready from the factory with external connector for dealer installation of the Cat Command remote control system.
Command for Dozing ² (Optional)	Cat Command remote control technology provides full dozer maneuverability from a safe distance.

¹ Feature not operational indoors or in areas where a GNSS/GPS signal is not available.

² Requires Software Enabled Attachment (SEA) installation when not configured from the factory.

Note: Grade and Assist technologies, except Slope Indicate, Blade Load Monitor and Traction Control, are not compatible with Angle blades or specialty blades from Cat Work Tools. Please consult with your Cat dealer for details.

D5 Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
POWER TRAIN			OPERATOR ENVIRONMENT		
Cat C7.1 diesel engine	✓		Fully redesigned cab, sound suppressed, with Integrated Roll Over Protective Structure (IROPS), screen ready	✓	
Fully-automatic 3-speed transmission:	✓		Full-color 254 mm (10 inch) liquid crystal touchscreen display	✓	
– Automatic directional and downshift			Integrated rearview camera	✓	
– Controlled throttle, load compensated			In-display key machine features	✓	
– Infinite ground speed adjustment			Application Profile	✓	
– Programmable/selectable bi-directional shifting			Operator ID/Operator ID with Security	✓	
Air-to-air aftercooler (ATAAC)	✓		Premium cab with adjustable armrests	✓	
Aluminum bar plate radiator	✓		Cloth seat	✓	
Automatic glowplugs	✓		Deluxe leather heated/ventilated seat		✓
Differential steering	✓		Electrohydraulic implement and steering controls	✓	
Engine air pre-cleaner	✓		Joystick control – ARO		✓
Engine air pre-cleaner with turbine/screen		✓	Fresh air filter	✓	
Engine idle shutdown	✓		Powered fresh air filter pre-cleaner		✓
Enhanced Power Train Control:	✓		Cab mounted modular Heating/Ventilation/Air Conditioning (HVAC) system	✓	
– Hill Decent Control			Rearview mirror	✓	
– Hill Hold			Retractable 76 mm (3 in) seatbelt	✓	
– Decel Brake Pedal			4-point seatbelt kit (dealer installed)		✓
– Steering Radius Control			Grab rails/tie offs on both sides of cab roof	✓	
Extended life coolant	✓		Communication radio ready		✓
Ether starting aid		✓	Radio, AM/FM/Auxiliary/USB/Bluetooth		✓
Final Drives – Waste, Super LGP or Fire Dozer		✓	Added storage areas	✓	
Final Drives – Standard or LGP	✓		Cup holders	✓	
Fuel priming pump	✓		Dash foot pads	✓	
Fuel water separator	✓		Glove box	✓	
Hydraulic demand fan	✓		Lunchbox storage	✓	
Hydraulic reversing fan		✓	Wipers	✓	
Sound suppression (EU only)		✓	High Debris/Waste cab with impact resistant polycarbonate doors, solid side windows		✓
Trash Resistant Radiator Cores		✓	Heavy Duty/Forestry cab with impact resistant polycarbonate doors, sliding side windows		✓
CAT TECHNOLOGY			Fire Dozer cab with sealed and tempered doors/windows, solid side windows, fan controls, additional switches		✓
Slope Indicate	✓				
Cat Assist with ARO*	✓				
Cat Grade 3D Ready (hardware only)*		✓			
Cat Grade 3D with Assist*		✓			
Third Party Grade Control Ready Cab	✓				
Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓				
Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓				
Product Link, Cellular	✓				
Product Link – Dual Cellular/Satellite		✓			
Remote Flash/Troubleshoot	✓				
Grade Connectivity		✓			
Operator ID	✓				
Machine Security – Passcode	✓				
Machine Security – Bluetooth®		✓			
Remote Control Ready	✓				
Cat Command for Dozing		✓			

*Refer to page 13 for technology package details.

(continued on next page)

Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
UNDERCARRIAGE			SERVICE AND MAINTENANCE		
Standard or Low Ground Pressure (LGP) undercarriage	✓		30-minute cab removal	✓	
Super LGP		✓	Adjustable pitch link (VPAT)	✓	
Heavy Duty (HDXL with DuraLink™) or Cat Abrasion undercarriage	✓		Centralized, remote mounted pressure taps	✓	
Fine grading undercarriage		✓	Ecology drains	✓	
Waste, fire dozer undercarriage		✓	Extended service intervals (1,000 hours engine, 1,000 hours power train)	✓	
Carrier rollers	✓		Fast fuel fill		✓
Hydraulic track adjusters	✓		Ground level service center (remote electrical disconnect, secondary shutdown switch, hour meter)	✓	
Lifetime lubricated track and rollers	✓		High-speed oil change		✓
Moderate service track shoes (see chart on page 11)	✓		Heavy duty perforated radiator doors, louvered and hinged	✓	
Extreme service track shoes (see chart on page 11)		✓	Rear access ladder	✓	
Redesigned track roller frame	✓		Rear work light		✓
Track roller frame guiding guards: center, partial or full		✓	Refilling fuel pump (EU only)		✓
NOTE: center guiding guards standard on LGP machine			Removable engine enclosures, perforated and hinged	✓	
BULLDOZERS			Scheduled Oil Sampling (S-O-S SM) ports	✓	
VPAT dozer package		✓	Shovel holder	✓	
SU dozer package		✓	Under hood work light		✓
BLADES			BATTERIES, STARTERS, ALTERNATORS AND COOLANT		
VPAT		✓	95 Amp alternator	✓	
Semi-Universal (SU)		✓	24 Volt starter	✓	
Straight Blade (S-LGP)		✓	Arctic engine coolant, – 51° C (–60° F)		✓
Foldable VPAT		✓	Engine coolant, –37° C (–35° F)	✓	
Waste/Landfill		✓	Cold Weather package: heavy duty battery, heavy duty starter, ether starting aid, jacket water heater		✓
Fire Dozer		✓	Two maintenance free 12-volt batteries (950 cca) (24-volt system)	✓	
HYDRAULICS			ATTACHMENTS		
Load sensing hydraulics	✓		Ripper-ready rear hydraulics		✓
Independent steering and implement pumps	✓		Dual ripper/winch control		✓
ELECTRICAL			Ripper with straight or curved shanks		✓
Upgraded lights – 6 LED light package	✓		Winch		✓
Premium lights – 12 LED light package		✓	Drawbar	✓	
Backup alarm	✓		Heavy Duty/Forestry, High Debris/Waste, Fire Dozer special arrangements		✓
Beacon warning light		✓	Open sweeps package		✓
Converter: one 15 Amp, 12V outlet	✓		Rear striker box with striker bar		✓
Forward warning horn	✓		GUARDING AND SCREENS		
			Bottom guards – standard or heavy duty		✓
			Fuel tank guards		✓
			Grab handles	✓	
			Guards for premium lights, front and side		✓
			Side and rear screens		✓

D5 Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

Engine

- The Cat® C7.1 engine meets U.S. EPA Tier 4 Final, EU Stage V, Japan 2014 (Tier 4 Final), and Korea Stage V emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 30% biodiesel.*

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.36 kg (2.99 lb) of refrigerant which has a CO₂ equivalent of 1.946 metric tonnes (2.145 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound Performance

For machines required to meet applicable regional regulations of Ukraine, United Kingdom, and Countries that adopt the "EU Directives."

Operator Sound Pressure Level (ISO 6396:2008) – 76 dB(A)

Exterior Sound Power Level (ISO 6395:1988) – 110 dB(A)

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Fully automatic 3-speed powershift transmission continuously adjusts for maximum efficiency and power to the ground.
 - Cut maintenance costs with extended maintenance intervals.
 - Assist technology features help operators work faster and more accurately to save time, materials and fuel.
 - Boost productivity with Cat technologies like Cat Grade with Slope Assist and Cat Grade with 3D.
 - Remote Flash and Remote Troubleshoot

Recycling

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage
Steel	78.81%
Iron	7.69%
Nonferrous Metal	3.39%
Mixed Metal	0.19%
Mixed-Metal and Nonmetal	2.14%
Plastic	0.63%
Rubber	0.64%
Mixed Nonmetallic	0.06%
Fluid	0.43%
Other	0.90%
Uncategorized	5.12%
Total	100%

- A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714:2008 (Earthmoving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused, or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714:2008 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following value in the table may vary.

Recyclability – 98%



D5

Waste Handler

Waste Handling package provides added features to help protect the machine and operator in harsh waste applications. Specialized guarding, striker bars and seals help protect the machine from impact, wrapping and airborne debris.

Next Generation Performance

- Harness more weight and horsepower than D6N to take on a wide range of waste handling tasks.
- Fully automatic 3-speed transmission gives you seamless acceleration, faster cycle times and more nimble movement around the site.
- No need to shift – just set your desired ground speed and the dozer adjusts for maximum fuel efficiency and power to the ground.
- Completely redesigned, more spacious cab for a whole new standard in comfort and productivity.
- More glass area, steeper hood angle provide better forward visibility than the previous model.

Added Machine Protection

- High debris cab with impact resistant polycarbonate doors and solid side windows for improved pressurization.
- Powered air pre-cleaner helps keep cab air cleaner and pressurized for greater operator comfort. A variety of optional filters are available from Cat Parts to customize filtration for the environment.
- Fuel tank/fuel tank cover guard and heavy duty bottom guards shield major machine components.
- Internal sealing keeps the trash away from the inner compartments.
- Rear striker bar helps protect against trash climbing up the tracks.
- Guarded final drives give added protection against wrapping and impact.
- 12 premium guarded LED lights illuminate the work area.

Ease of Maintenance

- Automatic reversing fan for easy cleanout access.
- Trash resistant radiator, with 6.4 fins per inch, helps reduce plugging.
- Quick access cab floor option offers tool-less access to the floor plate opening.
- Optional engine air cleaner with turbine/screen delivers cleaner air to the power train.



Equipped for the Job

- Landfill blades are equipped with a trash rack to increase productive capacity when machine works in lighter material like waste.
- Heavy Duty Extended Life (HDXL) undercarriage includes Kevlar® guarded, sealed idlers to help prevent debris such as wire, string or plastic bags from wrapping into seals.
- Center-hole track helps eject debris.

D5 Waste Handler Features

D5 Waste Handler Features

- 1) Trash resistant radiator, with 6.4 fins per inch, helps reduce plugging. Automatic reversing fan for easy cleanout access.
- 2) High debris cab has impact-resistant polycarbonate doors and solid side windows for improved pressurization.
- 3) Powered air pre-cleaner helps keep cab air cleaner and pressurized for greater operator comfort. A variety of optional filters are available from Cat Parts to customize filtration for the environment.
- 4) Fuel tank/fuel tank cover guard and heavy duty bottom guards shield major machine components. Internal sealing keeps the trash away from the inner compartments.
- 5) Rear striker bar helps protect against trash climbing up the tracks.
- 6) Guarded final drives give added protection against wrapping and impact.

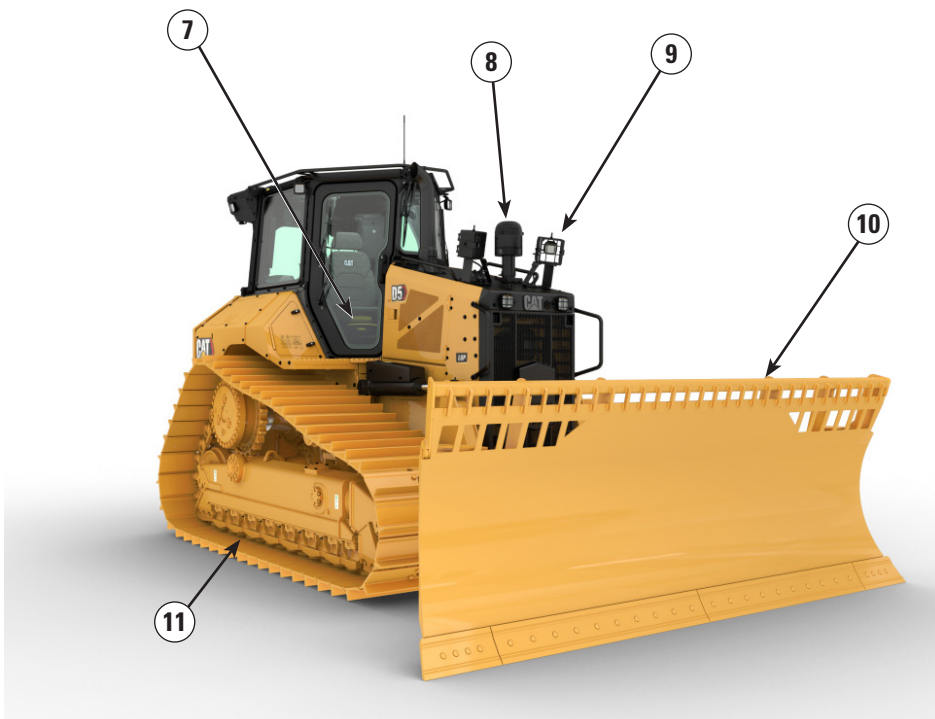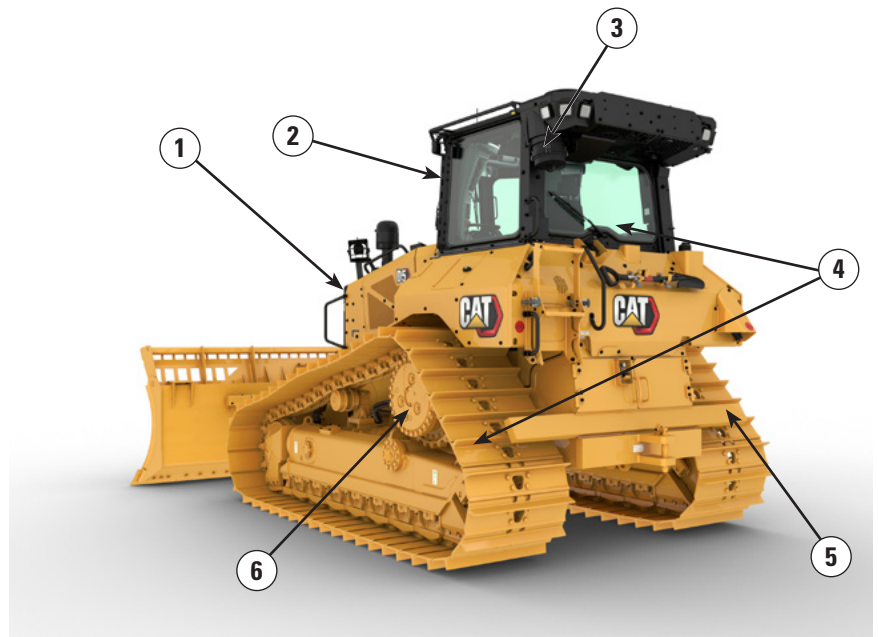

- 7) Quick access cab floor option offers tool-less access to the floor plate opening.
- 8) Optional engine air cleaner with turbine/screen delivers cleaner air to the power train.
- 9) 12 premium LED lights illuminate the work area.
- 10) Landfill Blades are equipped with a trash rack to increase productive capacity when machine works in lighter material like waste.

11) Waste Undercarriage

- Heavy Duty Extended Life (HDXL) undercarriage includes Kevlar guarded, sealed idlers to help prevent debris such as wire, string or plastic bags from wrapping into seals.
- Center-hole track helps eject debris.

D5 Waste Handler Specifications

Engine

Engine Model	Cat C7.1	
Emissions	U.S. EPA Tier 4 Final/ EU Stage V/Japan 2014/ Korea Stage V	
Power Train	Fully automatic 3-speed	
Net Power (1,770 rpm)		
ISO 9249/SAE J1349	127 kW	170 hp
ISO 9249 (DIN)	172 mhp	
Engine Power – Maximum (1,600 rpm)		
ISO 14396	148 kW	198 hp
ISO 14396 (DIN)	201 mhp	
Gross Power – Maximum (1,600 rpm)		
SAE J1995:2014	151 kW	202 hp
Bore	105 mm	4.1 in
Stroke	135 mm	5.3 in
Displacement	7.1 L	433.27 in ³

- Net power advertised is the power available at the engine flywheel when the engine is equipped with a fan, air cleaner, clean emissions module and alternator.
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- No derating required up to 3000 m (9,840 ft) altitude, beyond 3000 m (9,840 ft) automatic derating occurs.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 30% biodiesel.*

Fluid/Refill Capacities

Fuel Tank	315 L	83.2 gal
Diesel Exhaust Fluid (DEF) Tank	16 L	4.2 gal
Cooling System	36 L	9.5 gal
Engine Crankcase	18 L	4.8 gal
Power Train	160 L	42.3 gal
Final Drives (each)	8 L	2.1 gal
Roller Frames – Standard (each)	18 L	4.8 gal
Roller Frames – LGP (each)	27 L	7.1 gal
Hydraulic Tank	80 L	21.1 gal

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.36 kg (2.99 lb) of refrigerant which has a CO₂ equivalent of 1.946 metric tonnes (2.145 tons).


Transmission

0.5 Forward	2.5 km/h	1.55 mph
0.5 Forward (EU)	2.4 km/h	1.50 mph
1.0 Forward	3.3 km/h	2.03 mph
1.0 Forward (EU)	3.0 km/h	1.89 mph
1.5 Forward	4.4 km/h	2.71 mph
2.0 Forward	5.8 km/h	3.57 mph
2.5 Forward	7.6 km/h	4.69 mph
3.0 Forward	9.8 km/h	6.07 mph
0.5 Reverse	3.1 km/h	1.91 mph
0.5 Reverse (EU)	2.9 km/h	1.80 mph
1.0 Reverse	4.1 km/h	2.53 mph
1.0 Reverse (EU)	3.6 km/h	2.20 mph
1.5 Reverse	5.4 km/h	3.36 mph
2.0 Reverse	7.1 km/h	4.43 mph
2.5 Reverse	9.5 km/h	5.92 mph
3.0 Reverse	12.2 km/h	7.59 mph

Drawbar Pull

1.0 Forward	320 kN	71,939 lbf
2.0 Forward	198 kN	44,512 lbf
3.0 Forward	113 kN	25,403 lbf

Drawbar Pull

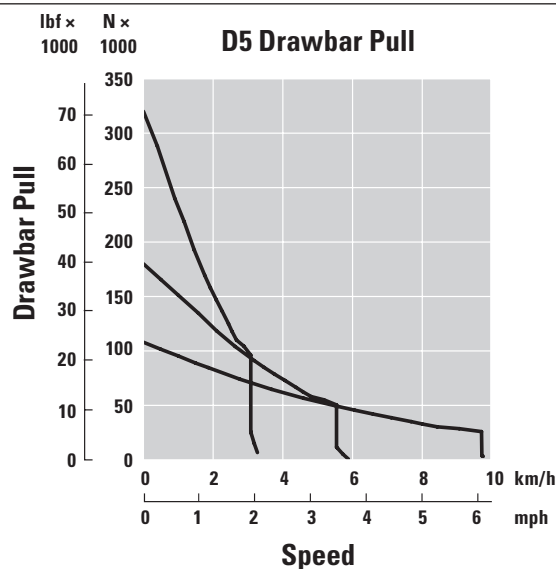

D5 Waste Handler Specifications

Hydraulic Controls

Maximum Operating Pressure

Implement	25 000 kPa	3,626 psi
Steering	45 000 kPa	6,527 psi

Pump

Pump Output (Steering)	165 L/min	43.6 gal/min
Pump Output (Implement)	127 L/min	33.5 gal/min
Pump Output (Fan)	49 L/min	12.9 gal/min
Lift Cylinder Flow	127 L/min	33.5 gal/min
Tilt Cylinder Flow	127 L/min	33.5 gal/min
Ripper Cylinder Flow	127 L/min	33.5 gal/min
Angle Cylinder Flow – VPAT	127 L/min	33.5 gal/min

Advanced Cabin Filtration

Operator Cabin

- Distributed HVAC ducting with automatic temperature control and blower speed provides ultimate operator comfort with less user input.
- Reduced maintenance of the condenser core with automatic reversing fans.
- Cat Advanced Cabin Filtration is standard.

Cat Advanced Cabin Filtration

- Operator protection from respirable particulate (0.3-10-micron size).
- Sustainably pressurized cab (U.S. Silica compliant).
- Reduced maintenance with longer life, high efficiency filters.
- Protection for all cabin components: electronics, etc.
- Helps meet U.S. Occupational Safety and Health Administration Silica Rule Table 1 requirements for operator cabs.
- Multi-tiered filter offerings for optional efficiency upgrades. Contact Cat dealer for availability.
 - MERV 16 – Standard Equipment
 - HEPA
 - Activated Carbon + HEPA
 - ABEK1 + HEPA

Standards

Sound Level Information

- Hearing protection may be needed when the machine is operated with an open operator station, in a noisy environment, with a cab that is not properly maintained, or when the doors and windows are open for extended periods of time.

Sound Level		Test Method
Operator Sound Pressure Level	76 dB(A)	"ISO 6396:2008" ⁽¹⁾
	76 dB(A) *	
Exterior Sound Pressure Level	110 dB(A)	"ISO 6395:2008" ⁽²⁾
	110 dB(A) *	"ISO 6395:1988" ⁽²⁾

*For machines required to meet applicable regional regulations of Ukraine, United Kingdom, and Countries that Adopt the "EU Directives".

⁽¹⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds. The measurement was conducted with the cab doors and the cab windows closed. The cab was properly installed and maintained.

⁽²⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.

- The sound levels listed above include both measurement uncertainty and uncertainty due to production variation.

Vibration Levels

Maximum Hand/Arm*

ISO 5349:2001	2.5 m/s ²
---------------	----------------------

Maximum Whole Body*

ISO/TR25398:2006	0.5 m/s ²
------------------	----------------------

Seat Transmissibility Factor

ISO 7096:2000 – spectral class EM6	<0.7
------------------------------------	------

*Values are for an experienced operator in a dozing application. Consult the Operating and Maintenance Manual (OMM) for further details.

Rollover Protective Structure (ROPS)/Falling Object Protective Structure (FOPS)/Operator Protective Structure (OPS)

- ROPS meets the following criteria: ISO 3471:2008.
- FOPS meets the following criteria: ISO 3449:2005 Level II.
- OPS screens meets OPS criteria per ISO 8084:2003 and WCB G604:2011.

Brakes

- Brakes meet the standard ISO 10265:2008.

D5 Waste Handler Specifications

D5 Waste Handler – LGP VPAT Dimensions

Operating Weight ¹	20 680 kg	45,592 lb
Shipping Weight ²	20 450 kg	45,085 lb
Ground Pressure (ISO 16754)	35.2 kPa	5.11 psi
Undercarriage (Standard)	46 Sections with 8 Bottom Rollers	
1 Track Gauge	2.16 m	7'1"
2 Width of Track Shoe (Standard)	840 mm	33.1 in
3 Width of Tractor	3.00 m	9'10"
4 Length of Track on Ground	3.116 m	10'3"
Ground Contact Area (ISO 16754)	5.8 m ²	204.8 ft ²
Grouser Height (Moderate Service)	66 mm	2.6 in
Ground Clearance	473 mm	18.6 in
5 Machine Height ³	3.2 m	10'6"
6 Length of Basic Tractor ⁴	5.012 m	16'5"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in
Ripper	1060 mm	41.7 in
Striker Box	152 mm	6.0 in
Winch	446 mm	17.6 in




All dimensions above with Cat HDXL undercarriage with Extreme Service shoes of maximum width for configuration, VPAT Landfill blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes Waste Handler package with landfill blade, lubricants, coolant, full fuel tank, ROPS/FOPS waste cab, cab air pressurizer, rear striker bar/box, waste undercarriage, guarded final drives, center hole track and 75 kg (165 lb) operator.

²Shipping weight includes full Waste Handler package, with landfill blade (aside), blade lift cylinders, C-frame, lubricants, coolant, 10% fuel, ROPS/FOPS waste cab, cab air pressurizer, rear striker bar/box, waste undercarriage, guarded final drives, center hole track.

³Machine height from tip of grouser to top of Product Link Antenna. When Cat Grade with 3D antennas are installed there is no added machine height.

⁴Length of Basic Tractor from the back of the drawbar to the tip of the C-Frame.

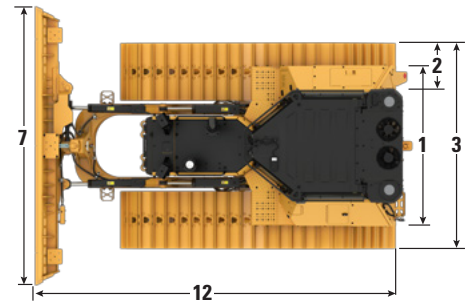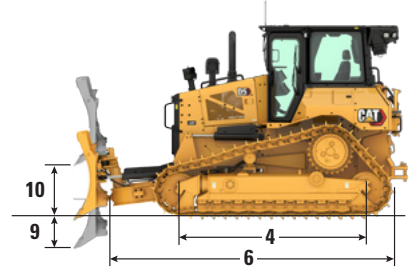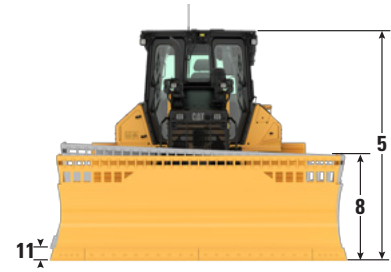

NOTE: LGP VPAT model shown.

Blade

Type	LGP VPAT Landfill	
Capacity (ISO 9246, Trash rack considered)	6.3 m ³	8.24 yd ³
7 Width across End bits	4080 mm	160.6 in
Width without End bits	3969 mm	156.3 in
Width across End bits (Blade Angled 24°)	3736 mm	147.1 in
Width without End bits (Blade Angled 24°)	3640 mm	143.3 in
8 Height	1473 mm	58.0 in
9 Dig Depth	580 mm	22.8 in
10 Lift Height	1051 mm	41.4 in
11 Maximum Tilt at Blade Corner	371 mm	14.6 in
Maximum Tilt Angle	8.5°	
Pitch Adjustment	60° (cutting edge/ground, nominal); -2°/+4°	
12 Length of Machine (Blade Straight)	5.52 m	18'1"
Length of Machine (Blade Angled 24°, without fuel tank guard)	6.524 m	21'5"
Blade Weight	1370 kg	3,020 lb

D5 Waste Handler Specifications

D5 Waste Handler – VPAT Dimensions

Operating Weight ¹	18 650 kg	41,116 lb
Shipping Weight ²	18 420 kg	40,609 lb
Ground Pressure (ISO 16754)	51.7 kPa	7.50 psi
Undercarriage (Standard)	40 Sections with 7 Bottom Rollers	
1 Track Gauge	1.89 m	6'2"
2 Width of Track Shoe (Standard)	610 mm	24.0 in
3 Width of Tractor	2.50 m	8'2"
4 Length of Track on Ground	2.562 m	8'5"
Ground Contact Area (ISO 16754)	3.5 m ²	123.6 ft ²
Grouser Height (Moderate Service)	66 mm	2.6 in
Ground Clearance	358 mm	14.1 in
5 Machine Height ³	3.085 m	10'1"
6 Length of Basic Tractor ⁴	4.644 m	15'3"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in
Ripper	1060 mm	41.7 in
Striker Box	152 mm	6.0 in
Winch	446 mm	17.6 in



All dimensions above with Cat HDXL undercarriage with Extreme Service shoes of maximum width for configuration, VPAT Landfill blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes full Waste Handler package, with landfill blade, lubricants, coolant, full fuel tank, ROPS/FOPS waste cab, cab air pressurizer, rear striker bar/box, waste undercarriage, guarded final drives, center hole track and 75 kg (165 lb) operator.

²Shipping weight includes full Waste Handler package, with landfill blade (aside), blade lift cylinders, C-frame, lubricants, coolant, 10% fuel, ROPS/FOPS waste cab, cab air pressurizer, rear striker bar/box, waste undercarriage, guarded final drives, center hole track.

³Machine height from tip of grouser to top of Product Link Antenna. When Cat Grade with 3D antennas are installed there is no added machine height.

⁴Length of Basic Tractor from the back of the drawbar to the tip of the C-Frame.

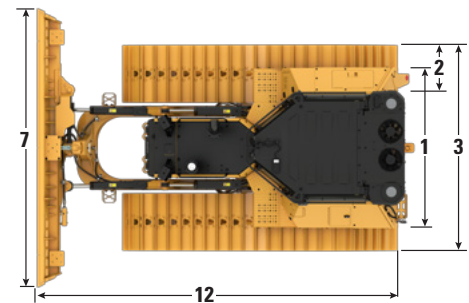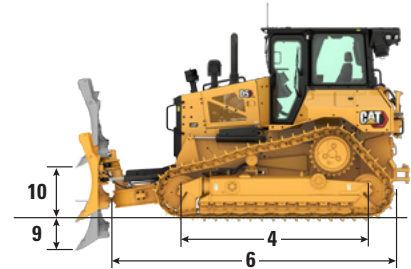

NOTE: Waste LGP VPAT model shown for reference.

Blade

Type	VPAT Landfill	
Capacity (ISO 9246, Trash rack considered)	6.8 m ³	8.89 yd ³
7 Width across End bits	3272 mm	128.8 in
Width without End bits	3159 mm	124.4 in
Width across End bits (Blade Angled 24°)	2998 mm	118.0 in
Width without End bits (Blade Angled 24°)	2908 mm	114.5 in
Maximum Blade Angle	24°	
8 Height	1687 mm	66.4 in
9 Dig Depth	559 mm	22.0 in
10 Lift Height	971 mm	38.2 in
11 Maximum Tilt at Blade Corner	257 mm	10.1 in
Maximum Tilt Angle	8.5°	
Pitch Adjustment	60° (cutting edge/ground, nominal); -2°/+4°	
12 Length of Machine (Blade Straight)	5.15 m	16'11"
Length of Machine (Blade Angled 24°, without fuel tank guard)	5.842 m	19'2"
Blade Weight	1265 kg	2,789 lb

D5 Waste Handler Specifications

D5 Waste Handler – SU Dimensions

Operating Weight ¹	18 860 kg	41,579 lb
Shipping Weight ²	18 630 kg	41,072 lb
Ground Pressure (ISO 16754)	52.4 kPa	7.60 psi
Undercarriage (Standard)	40 Sections with 7 Bottom Rollers	
1 Track Gauge	1.89 m	6'2"
2 Width of Track Shoe (Standard)	610 mm	24.0 in
3 Width of Tractor	2.50 m	8'2"
4 Length of Track on Ground	2.562 m	8'5"
Ground Contact Area (ISO 16754)	3.5 m ²	123.6 ft ²
Grouser Height (Moderate Service)	66 mm	2.6 in
Ground Clearance	358 mm	14.1 in
5 Machine Height ³	3.085 m	10'1"
6 Length of Basic Tractor ⁴	3.990 m	13'1"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in
Ripper	1060 mm	41.7 in
Striker Box	152 mm	6.0 in
Winch	446 mm	17.6 in




All dimensions above with Cat HDXL undercarriage with Extreme Service shoes of maximum width for configuration, SU Landfill blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes full Waste Handler package with landfill blade, lubricants, coolant, full fuel tank, ROPS/FOPS waste cab, cab air pressurizer, rear striker bar/box, waste undercarriage, guarded final drives, center hole track and 75 kg (165 lb) operator.

²Shipping weight includes full Waste Handler package, with landfill blade and push arms installation (aside), blade lift cylinders, C-frame, lubricants, coolant, 10% fuel, ROPS/FOPS waste cab, cab air pressurizer, rear striker bar/box, waste undercarriage, guarded final drives, center hole track.

³Machine height from tip of grouser to top of Product Link Antenna. When Cat Grade with 3D antennas are installed there is no added machine height.

⁴Length of Basic Tractor from the back of the drawbar to the tip of the retracted lift cylinders.

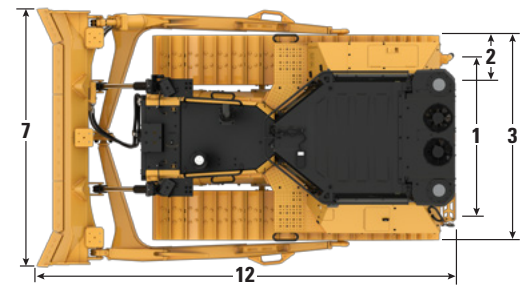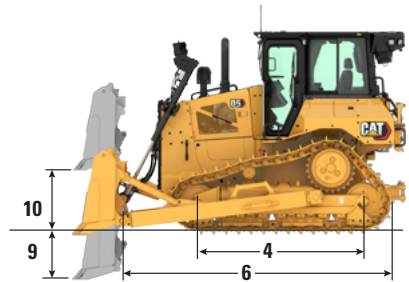

NOTE: Standard SU model shown for reference.



Blade

Type	SU Landfill	
Capacity (ISO 9246, Trash rack considered)	7.3 m ³	9.55 yd ³
7 Width across End bits	3164 mm	124.6 in
Width without End bits	3122 mm	122.9 in
8 Height	1703 mm	67.0 in
9 Dig Depth	544 mm	21.4 in
10 Lift Height	1104 mm	43.5 in
11 Maximum Tilt at Blade Corner	140 mm	5.5 in
Maximum Tilt Angle	8°	
Pitch Adjustment	±5.1°	
12 Length of Machine with SU Landfill Blade	5.24 m	17'2"
Blade Weight (Landfill blade + HD push arms installed)	2250 kg	4,960 lb

D5 Waste Handler Specifications

Ripper

Type	Fixed Parallelogram	
Weight	1393 kg	3,071 lb
1 Maximum Clearance, Raised (Shank Tip)		
D5 VPAT/Push Arms	404 mm	15.9 in
D5 LGP VPAT	518 mm	20.4 in
2 Maximum Penetration		
Standard	552 mm	21.7 in
LGP	437 mm	17.2 in
3 Pocket Spacing	1000 mm	39.4 in
4 Shank Gauge	2.0 m	78.7 in
Shank Section	73 mm × 176 mm	2.9 in × 6.9 in
Number of Pockets	3	
5 Overall Beam Width	2202 mm	86.7 in
Beam Cross Section	219 mm × 254 mm	8.6 in × 10.0 in
Maximum Penetration Force		
Standard	51.6 kN	11,600 lbf
LGP	43 kN	9,667 lbf
Maximum Pryout Force		
Standard	211.2 kN	47,480 lbf
LGP	170 kN	38,217 lbf

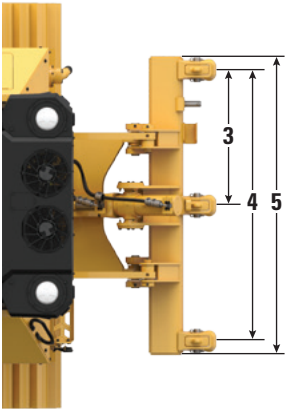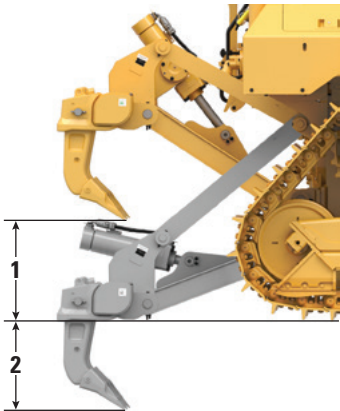

Winch

Model	PA55 Standard Speed		PA55 Slow Speed	
Weight*	1277 kg	2,815 lb	1277 kg	2,815 lb
Oil Capacity	73 L	19.3 gal	73 L	19.3 gal
Winch and Bracket Length	1145 mm	45.1 in	1145 mm	45.1 in
Winch Case Width	975 mm	38.4 in	975 mm	38.4 in
Drum Diameter	254 mm	10.0 in	254 mm	10.0 in
Drum Width	315 mm	12.4 in	315 mm	12.4 in
Flange Diameter	504 mm	19.8 in	504 mm	19.8 in
Drum Capacity – 22 mm (0.88 in)	88 m	288'9"	88 m	288'9"
Winch Drive	Mechanical		Mechanical	
Control	Electrical		Electrical	
Overall Width	975 mm	38.4 in	975 mm	38.4 in
Rope Diameter (recommended)	19 mm	0.75 in	19 mm	0.75 in
Cable Ferrule Size (O.D. × Length)	54 mm × 67 mm	2.1 in × 2.6 in	54 mm × 67 mm	2.1 in × 2.6 in
Maximum Bare Drum				
Line Pull	31 388 kg	69,200 lb	31 388 kg	69,200 lb
Line Speed	43 m/min	141 ft/min	16 m/min	53 ft/min
Maximum Full Drum				
Line Pull	23 359 kg	51,498 lb	31 388 kg	69,200 lb
Line Speed	66 m/min	210 ft/min	28 m/min	91 ft/min

*Weight: Includes pump, operator controls, oil, mounting brackets and spacers.

Slow and standard speed winches are available.

Track Shoes

Some track shoes not available in all regions. Please consult your Cat dealer for details.

Note: While a variety of track shoes are available, Center Hole track shoes are recommended for best performance in Waste/Landfill applications.

	Standard		LGP	
	560 mm (22 in)	600 mm (24 in)	840 mm (33 in)	860 mm (34 in)
Heavy Duty Extended Life (HDXL)				
Moderate Service	✓	✓		
Extreme Service	✓	✓*	✓*	✓

*Available as Center Hole

D5 Waste Handler Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
POWER TRAIN			OPERATOR ENVIRONMENT		
Fully-automatic 3-speed transmission:	✓		Fully redesigned cab, sound suppressed, with Integrated Roll Over Protective Structure (IROPS), screen ready	✓	
– Automatic directional and downshift			High Debris/Waste cab with impact resistant polycarbonate doors, solid side windows	+	
– Controlled throttle, load compensated			Full-color 254 mm (10 inch) liquid crystal touchscreen display	✓	
– Infinite ground speed adjustment			Integrated rearview camera	✓	
– Programmable/selectable bi-directional shifting			In-display key machine features	✓	
Air-to-air aftercooler (ATAAC)	✓		Application Profile	✓	
Debris resistant radiator cores 6.4 fins per inch	✓		Operator ID/Operator ID with Security	✓	
Automatic glowplugs	✓		Premium cab with adjustable armrests	✓	
Differential steering	✓		Cloth seat	✓	
Engine air pre-cleaner	✓		Deluxe leather heated/ventilated seat		✓
Engine air pre-cleaner with turbine/screen		^	Electrohydraulic implement and steering controls	✓	
Engine idle shutdown	✓		Joystick control – ARO		✓
Enhanced Power Train Control:	✓		Powered fresh air filter precleaner	+	
– Hill Decent Control			Cab mounted modular Heating/Ventilation/Air Conditioning (HVAC) system	✓	
– Hill Hold			Rearview mirror	✓	
– Decel Brake Pedal			Retractable 76 mm (3 in) seatbelt	✓	
– Steering Radius Control			4-point seatbelt kit (dealer installed)		✓
Extended life coolant	✓		Grab rails/tie offs on both sides of cab roof	✓	
Ether starting aid		✓	Communication radio ready		✓
Final Drives – Waste	+		Radio, AM/FM/Auxiliary/USB/Bluetooth		✓
Final Drives – Standard or LGP	✓		Added storage areas	✓	
Fuel priming pump	✓		Cup holders	✓	
Fuel water separator	✓		Dash foot pads	✓	
Hydraulic reversing fan	+		Glove box	✓	
Sound suppression (EU only)		✓	Lunchbox storage	✓	
CAT TECHNOLOGY			Wipers	✓	
Slope Indicate	✓		UNDERCARRIAGE		
Cat Assist with ARO*	✓		Standard or Low Ground Pressure (LGP) undercarriage	✓	
Cat Grade 3D Ready (hardware only)*		✓	Heavy Duty (HDXL with DuraLink)	+	
Cat Grade 3D with Assist*		✓	Waste undercarriage	+	
Third Party Grade Control Ready Cab	✓		Carrier rollers	✓	
Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓		Hydraulic track adjusters	✓	
Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓		Lifetime lubricated track and rollers	✓	
Product Link, Cellular	✓		Extreme service center hole track shoes (see chart on page 25)	+	
Product Link – Dual Cellular/Satellite		✓	Redesigned track roller frame	✓	
Remote Flash/Troubleshoot	✓		Track roller frame guiding guards: center, partial or full		✓
Grade Connectivity		✓	NOTE: center guiding guards standard on LGP machine		
Operator ID	✓				
Machine Security – Passcode	✓				
Machine Security – Bluetooth		✓			
Remote Control Ready	✓				
Cat Command for Dozing		✓			

*Refer to page 13 for technology package details.

+Included in Waste Handler Package

^Recommended for Waste Handler configuration

(continued on next page)

D5 Waste Handler Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BULLDOZERS			BATTERIES, STARTERS, ALTERNATORS AND COOLANT		
VPAT dozer package	✓		95 Amp alternator	✓	
SU heavy duty dozer package	✓		24 Volt starter	✓	
BLADES			Arctic engine coolant, – 51° C (–60° F)		✓
VPAT		✓	Engine coolant, –37° C (–35° F)	✓	
Semi-Universal (SU)		✓	Cold Weather package: heavy duty battery, heavy duty starter, ether starting aid, jacket water heater		✓
Foldable VPAT		✓	Two maintenance free 12-volt batteries (950 cca) (24-volt system)	✓	
Waste/Landfill – Semi-Universal		^	ATTACHMENTS		
Waste/Landfill – VPAT		^	Ripper-ready rear hydraulics		✓
HYDRAULICS			Dual ripper/winch control		✓
Load sensing hydraulics	✓		Ripper with straight or curved shanks		✓
Independent steering and implement pumps	✓		Winch		✓
ELECTRICAL			Drawbar		✓
Premium lights – 12 LED light package	+		Rear striker box with striker bar	+	
Backup alarm	✓		GUARDING AND SCREENS		
Beacon warning light	+		Bottom guards – standard or heavy duty	+	
Converter: one 15 Amp, 12V outlet	✓		Fuel tank guards	+	
Forward warning horn	✓		Grab handles	✓	
SERVICE AND MAINTENANCE			Guards for premium lights, front and side	+	
30-minute cab removal	✓		Side and rear screens		✓
Adjustable pitch link (VPAT)	✓		Heavy duty rear enclosures	+	
Centralized, remote mounted pressure taps	✓		Sealing throughout the machine for added debris protection	+	
Ecology drains	✓				
Extended service intervals (1,000 hours engine, 1,000 hours power train)	✓				
Fast fuel fill		✓			
Ground level service center (remote electrical disconnect, secondary shutdown switch, hour meter)	✓				
High-speed oil change		✓			
Heavy duty perforated radiator doors, louvered and hinged	✓				
Rear access ladder	✓				
Rear work light		✓			
Refilling fuel pump (EU only)		✓			
Removable engine enclosures, perforated and hinged	✓				
S·O·S ports	✓				
Shovel holder	✓				
Under hood work light		✓			

+Included in Waste Handler Package

^Recommended for Waste Handler configuration



D5

Heavy Duty/Forestry

Take on the demands of forestry and land clearing work with factory-installed equipment designed to help protect the operator and the machine in harsh applications.

Next Generation Performance



- Harness more weight and horsepower than D6N to take on a wide range of forestry and land clearing tasks.
- Fully automatic 3-speed transmission gives you seamless acceleration, faster cycle times and more nimble movement around the site.
- No need to shift – just set your desired ground speed and the dozer adjusts for maximum fuel efficiency and power to the ground.
- Completely redesigned, more spacious cab for a whole new standard in comfort and productivity.
- More glass area, steeper hood angle provide better forward visibility than the previous model.

Heavy Duty/Forestry

- High debris cab has impact-resistant polycarbonate doors.
- Includes rear/side window screens and sweeps to help protect the machine and operator from debris.
- Heavy duty guarding package with heavy duty bottom guards and fuel tank guard to help shield major machine components.
- Optional engine air cleaner with turbine/screen delivers cleaner air to the power train.
- 12 premium LED lights illuminate the work area.

D5 Heavy Duty/Forestry Features

- 1) Optional reversing fan helps remove debris with less maintenance time.
- 2) Optional engine air cleaner with turbine/screen delivers cleaner air to the power train.
- 3) High debris cab with impact-resistant polycarbonate doors.
- 4) Includes rear/side window screens and sweeps to help protect the machine and operator from debris.
- 5) Heavy duty guarding package with heavy duty bottom guards and fuel tank guard to help shield major machine components.

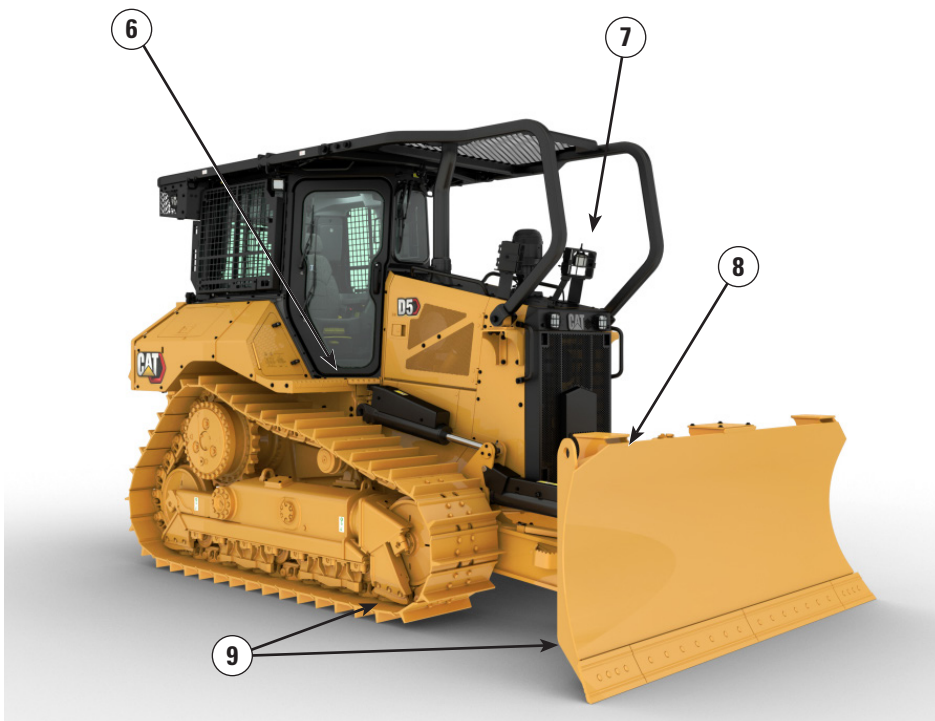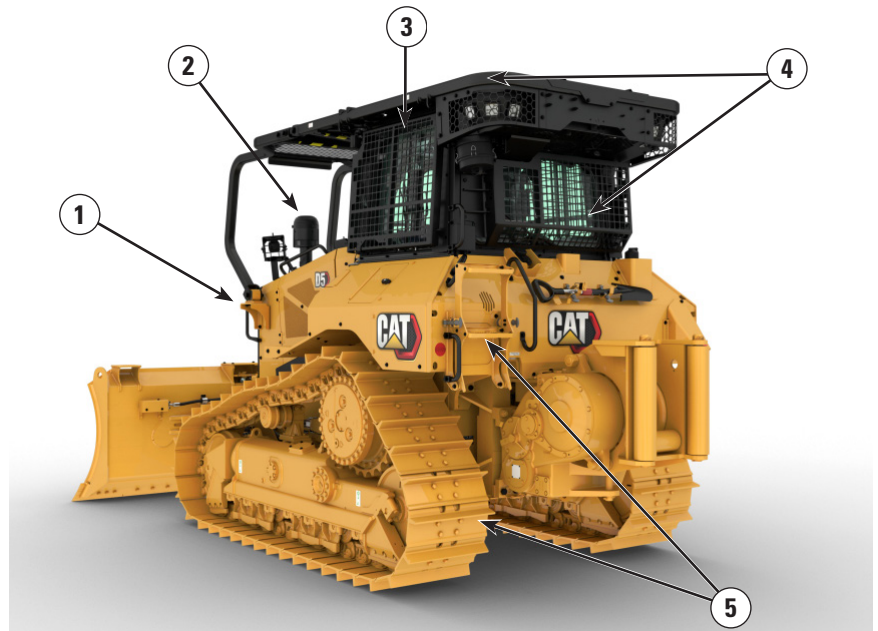

- 6) Quick access cab floor option offers tool-less access to the floor plate opening.
- 7) 12 premium LED lights illuminate the work area.
- 8) Heavy duty bulldozer package with guarding on lift and tilt lines.
- 9) Choose from a variety of blade and track shoe options to equip your dozer for the job.

D5 Heavy Duty/Forestry Specifications

Engine

Engine Model	Cat C7.1	
Emissions	U.S. EPA Tier 4 Final/ EU Stage V/Japan 2014/ Korea Stage V	
Power Train	Fully automatic 3-speed	
Net Power (1,770 rpm)		
ISO 9249/SAE J1349	127 kW	170 hp
ISO 9249 (DIN)	172 mhp	
Engine Power – Maximum (1,600 rpm)		
ISO 14396	148 kW	198 hp
ISO 14396 (DIN)	201 mhp	
Gross Power – Maximum (1,600 rpm)		
SAE J1995:2014	151 kW	202 hp
Bore	105 mm	4.1 in
Stroke	135 mm	5.3 in
Displacement	7.1 L	433.27 in ³

- Net power advertised is the power available at the engine flywheel when the engine is equipped with a fan, air cleaner, clean emissions module and alternator.
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- No derating required up to 3000 m (9,840 ft) altitude, beyond 3000 m (9,840 ft) automatic derating occurs.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 30% biodiesel.*

Fluid/Refill Capacities

Fuel Tank	315 L	83.2 gal
Diesel Exhaust Fluid (DEF) Tank	16 L	4.2 gal
Cooling System	36 L	9.5 gal
Engine Crankcase	18 L	4.8 gal
Power Train	160 L	42.3 gal
Final Drives (each)	8 L	2.1 gal
Roller Frames – Standard (each)	18 L	4.8 gal
Roller Frames – LGP (each)	27 L	7.1 gal
Hydraulic Tank	80 L	21.1 gal

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.36 kg (2.99 lb) of refrigerant which has a CO₂ equivalent of 1.946 metric tonnes (2.145 tons).


Transmission

0.5 Forward	2.5 km/h	1.55 mph
0.5 Forward (EU)	2.4 km/h	1.50 mph
1.0 Forward	3.3 km/h	2.03 mph
1.0 Forward (EU)	3.0 km/h	1.89 mph
1.5 Forward	4.4 km/h	2.71 mph
2.0 Forward	5.8 km/h	3.57 mph
2.5 Forward	7.6 km/h	4.69 mph
3.0 Forward	9.8 km/h	6.07 mph
0.5 Reverse	3.1 km/h	1.91 mph
0.5 Reverse (EU)	2.9 km/h	1.80 mph
1.0 Reverse	4.1 km/h	2.53 mph
1.0 Reverse (EU)	3.6 km/h	2.20 mph
1.5 Reverse	5.4 km/h	3.36 mph
2.0 Reverse	7.1 km/h	4.43 mph
2.5 Reverse	9.5 km/h	5.92 mph
3.0 Reverse	12.2 km/h	7.59 mph

Drawbar Pull

1.0 Forward	320 kN	71,939 lbf
2.0 Forward	198 kN	44,512 lbf
3.0 Forward	113 kN	25,403 lbf

Drawbar Pull

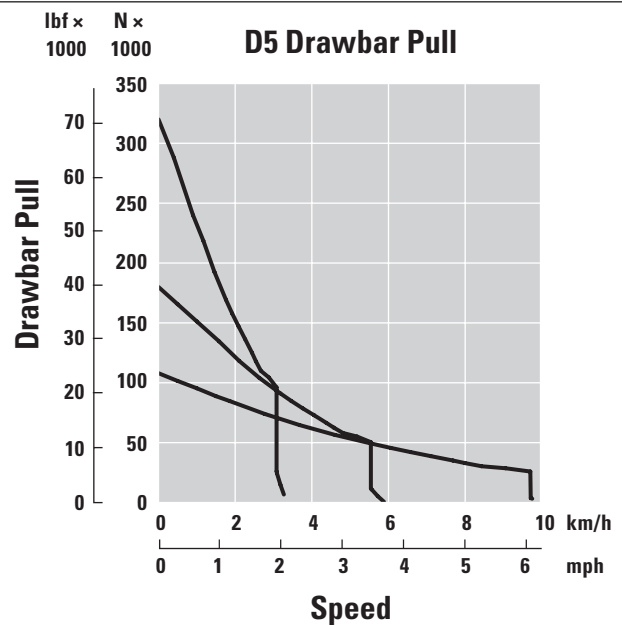

Hydraulic Controls

Maximum Operating Pressure

Implement	25 000 kPa	3,626 psi
Steering	45 000 kPa	6,527 psi

Pump

Pump Output (Steering)	165 L/min	43.6 gal/min
Pump Output (Implement)	127 L/min	33.5 gal/min
Pump Output (Fan)	49 L/min	12.9 gal/min
Lift Cylinder Flow	127 L/min	33.5 gal/min
Tilt Cylinder Flow	127 L/min	33.5 gal/min
Ripper Cylinder Flow	127 L/min	33.5 gal/min
Angle Cylinder Flow – VPAT	127 L/min	33.5 gal/min

Advanced Cabin Filtration

Operator Cabin

- Distributed HVAC ducting with automatic temperature control and blower speed provides ultimate operator comfort with less user input.
- Reduced maintenance of the condenser core with automatic reversing fans.
- Cat Advanced Cabin Filtration is standard.

Cat Advanced Cabin Filtration

- Operator protection from respirable particulate (0.3-10-micron size).
- Sustainably pressurized cab (U.S. Silica compliant).
- Reduced maintenance with longer life, high efficiency filters.
- Protection for all cabin components: electronics, etc.
- Helps meet U.S. Occupational Safety and Health Administration Silica Rule Table 1 requirements for operator cabs.
- Multi-tiered filter offerings for optional efficiency upgrades. Contact Cat dealer for availability.
 - MERV 16 – Standard Equipment
 - HEPA
 - Activated Carbon + HEPA
 - ABEK1 + HEPA

Standards

Sound Level Information

- Hearing protection may be needed when the machine is operated with an open operator station, in a noisy environment, with a cab that is not properly maintained, or when the doors and windows are open for extended periods of time.

Sound Level		Test Method
Operator Sound Pressure Level	76 dB(A)	"ISO 6396:2008" ⁽¹⁾
	76 dB(A) *	
Exterior Sound Pressure Level	110 dB(A)	"ISO 6395:2008" ⁽²⁾
	110 dB(A) *	"ISO 6395:1988" ⁽²⁾

*For machines required to meet applicable regional regulations of Ukraine, United Kingdom, and Countries that Adopt the "EU Directives".

⁽¹⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds. The measurement was conducted with the cab doors and the cab windows closed. The cab was properly installed and maintained.

⁽²⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.

- The sound levels listed above include both measurement uncertainty and uncertainty due to production variation.

Vibration Levels

Maximum Hand/Arm*

ISO 5349:2001	2.5 m/s ²
---------------	----------------------

Maximum Whole Body*

ISO/TR25398:2006	0.5 m/s ²
------------------	----------------------

Seat Transmissibility Factor

ISO 7096:2000 – spectral class EM6	<0.7
------------------------------------	------

*Values are for an experienced operator in a dozing application. Consult the Operating and Maintenance Manual (OMM) for further details.

Rollover Protective Structure (ROPS)/Falling Object Protective Structure (FOPS)/Operator Protective Structure (OPS)

- ROPS meets the following criteria: ISO 3471:2008.
- FOPS meets the following criteria: ISO 3449:2005 Level II.
- OPS screens meets OPS criteria per ISO 8084:2003 and WCB G604:2011.

Brakes

- Brakes meet the standard ISO 10265:2008.

D5 Heavy Duty/Forestry Specifications

D5 VPAT – Heavy Duty/Forestry Dimensions

Operating Weight ¹	18 180 kg	40,080 lb
Shipping Weight ²	17 950 kg	39,573 lb
Ground Pressure (ISO 16754)	50.4 kPa	7.31 psi
Undercarriage (Standard)	40 Sections with 7 Bottom Rollers	
1 Track Gauge	1.89 m	6'2"
2 Width of Track Shoe (Standard)	610 mm	24.0 in
3 Width of Tractor	2.50 m	8'2"
4 Length of Track on Ground	2.562 m	8'5"
Ground Contact Area (ISO 16754)	3.5 m ²	123.6 ft ²
Grouser Height (Moderate Service)	57 mm	2.2 in
Grouser Height (Extreme Service)	66 mm	2.6 in
Ground Clearance	358 mm	14.1 in
5 Machine Height ³	3.163 m	10'5"
6 Length of Basic Tractor ⁴	4.689 m	15'5"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in
Ripper	1060 mm	41.7 in
Striker Box	152 mm	6.0 in
Winch	446 mm	17.6 in



All dimensions above with Cat Abrasion undercarriage with Extreme Service shoes of maximum width for configuration, VPAT blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes full Heavy Duty/Forestry package, VPAT blade, lubricants, coolant, full fuel tank, ROPS/FOPS forestry cab, drawbar and 75 kg (165 lb) operator.

²Shipping weight includes full Heavy Duty/Forestry package with VPAT blade (aside), blade lift cylinders, C-Frame, lubricants, coolant, 10% fuel, ROPS/FOPS forestry cab, drawbar.

³Machine height from tip of grouser to top of Product Link Antenna installed on forestry sweeps. With Extreme Service, add 9 mm (0.4 in).

⁴Length of Basic Tractor from the back of the forestry sweeps to the tip of the C-Frame.

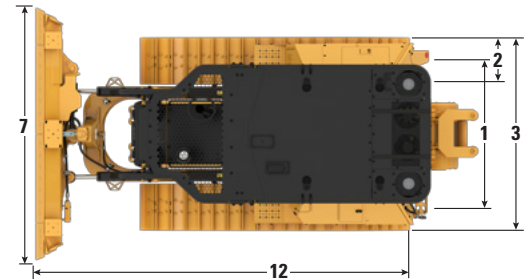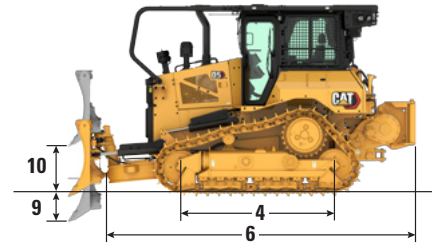

NOTE: Forestry/Heavy Duty VPAT model shown.

Blade

Type	VPAT	
Capacity (ISO 9246)	3.5 m ³	4.58 yd ³
7 Width across End bits	3272 mm	128.8 in
Width without End bits	3159 mm	124.4 in
Width across End bits (Blade Angled 24°)	2998 mm	118.0 in
Width without End bits (Blade Angled 24°)	2908 mm	114.5 in
Maximum Blade Angle	24°	
8 Height	1261 mm	49.6 in
9 Dig Depth	559 mm	22.0 in
10 Lift Height	971 mm	38.2 in
11 Maximum Tilt at Blade Corner	257 mm	10.1 in
Maximum Tilt Angle	8.5°	
Pitch Adjustment	60° (cutting edge/ground, nominal); -2°/+4°	
12 Length of Machine (Blade Straight)	5.081 m	16'8"
Length of Machine (Blade Angled 24°)	5.770 m	18'11"
Blade Weight	1090 kg	2,403 lb

D5 Heavy Duty/Forestry Specifications

D5 LGP VPAT – Heavy Duty/Forestry Dimensions

Operating Weight ¹	20 190 kg	44,511 lb
Shipping Weight ²	19 960 kg	44,004 lb
Ground Pressure (ISO 16754)	35.0 kPa	5.07 psi
Undercarriage (Standard)	46 Sections with 8 Bottom Rollers	
1 Track Gauge	2.16 m	7'1"
2 Width of Track Shoe (Standard)	840 mm	33.1 in
3 Width of Tractor	3.00 m	9'10"
4 Length of Track on Ground	3.116 m	10'3"
Ground Contact Area (ISO 16754)	5.8 m ²	204.8 ft ²
Grouser Height (Moderate Service)	57 mm	2.2 in
Grouser Height (Extreme Service)	66 mm	2.6 in
Ground Clearance	473 mm	18.6 in
5 Machine Height ³	3.265 m	10'9"
6 Length of Basic Tractor ⁴	5.06 m	16'7"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in
Ripper	1060 mm	41.7 in
Striker Box	152 mm	6.0 in
Winch	446 mm	17.6 in



All dimensions above with Cat Abrasion undercarriage with Extreme Service shoes of maximum width for configuration, VPAT blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes full Heavy Duty/Forestry package, VPAT blade, lubricants, coolant, full fuel tank, ROPS/FOPS forestry cab, drawbar and 75 kg (165 lb) operator.

²Shipping weight includes full Heavy Duty/Forestry package with VPAT blade (aside), blade lift cylinders, C-Frame, lubricants, coolant, 10% fuel, ROPS/FOPS forestry cab, drawbar.

³Machine height from tip of grouser to top of Product Link Antenna installed on forestry sweeps. With Extreme Service, add 9 mm (0.4 in).

⁴Length of Basic Tractor from the back of the forestry sweeps to the tip of the C-Frame.

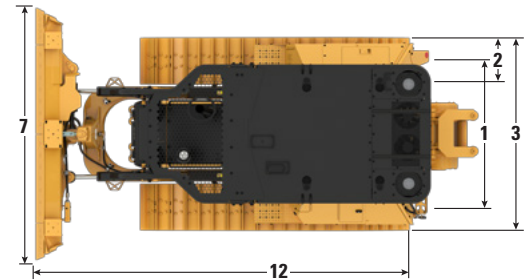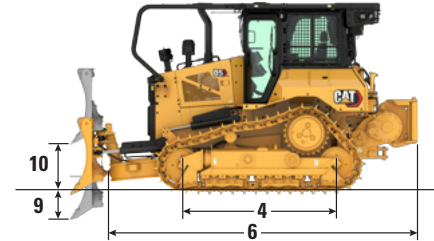

NOTE: Forestry/Heavy Duty VPAT model shown for reference.

Blade

Type	LGP VPAT	
Capacity (ISO 9246)	4.0 m ³	5.23 yd ³
Width across End bits	4080 mm	160.6 in
Width without End bits	3969 mm	156.3 in
Width across End bits (Blade Angled 24°)	3736 mm	147.1 in
Width without End bits (Blade Angled 24°)	3640 mm	143.3 in
Maximum Blade Angle	24°	
8 Height	1263 mm	49.7 in
9 Dig Depth	580 mm	22.8 in
10 Lift Height	1051 mm	41.4 in
11 Maximum Tilt at Blade Corner	371 mm	14.6 in
Maximum Tilt Angle	8.5°	
Pitch Adjustment	60° (cutting edge/ground, nominal); -2°/+4°	
12 Length of Machine (Blade Straight)	5.450 m	17'11"
Length of Machine (Blade Angled 24°)	6.235 m	20'5"
Blade Weight	1256 kg	2,769 lb

D5 Heavy Duty/Forestry Specifications

D5 SU – Heavy Duty/Forestry Dimensions

Operating Weight ¹	18 520 kg	40,830 lb
Shipping Weight ²	18 290 kg	40,323 lb
Ground Pressure (ISO 16754)	51.5 kPa	7.47 psi
Undercarriage (Standard)	40 Sections with 7 Bottom Rollers	
1 Track Gauge	1.89 m	6'2"
2 Width of Track Shoe (Standard)	610 mm	24.0 in
3 Width of Tractor	2.50 m	8'2"
4 Length of Track on Ground	2.562 m	8'5"
Ground Contact Area (ISO 16754)	3.5 m ²	123.6 ft ²
Grouser Height (Moderate Service)	57 mm	2.2 in
Grouser Height (Extreme Service)	66 mm	2.6 in
Ground Clearance	358 mm	14.1 in
5 Machine Height ³	3.163 m	10'5"
6 Length of Basic Tractor ⁴	4.095 m	13'5"
Add the following to the total length of the machine when these attachments are installed.		
Drawbar	16 mm	0.6 in
Ripper	1060 mm	41.7 in
Striker Box	152 mm	6.0 in
Winch	446 mm	17.6 in



All dimensions above with Cat Abrasion undercarriage with Extreme Service shoes of maximum width for configuration, SU blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes full Heavy Duty/Forestry package, SU blade and HD push arms installation, lubricants, coolant, full fuel tank, ROPS/FOPS forestry cab, drawbar and 75 kg (165 lb) operator.

²Shipping weight includes full Heavy Duty/Forestry package, with SU blade and HD push arms installation (aside), blade lift cylinders, lubricants, coolant, 10% fuel, ROPS/FOPS forestry cab, drawbar.

³Machine height from tip of grouser to top of Product Link Antenna installed on forestry sweeps. With Extreme Service, add 9 mm (0.4 in).

⁴Length of Basic Tractor from the back to the front of the forestry sweeps.

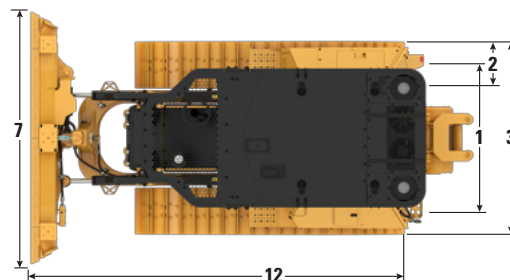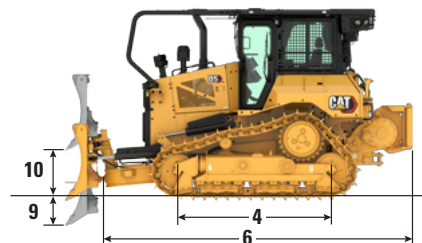

NOTE: Forestry/Heavy duty VPAT model shown for reference.



Blade

Type	SU	
Capacity (ISO 9246)	4.3 m ³	5.62 yd ³
7 Width across End bits	3164 mm	124.6 in
Width without End bits	3122 mm	122.9 in
8 Height	1338 mm	52.7 in
9 Dig Depth	544 mm	21.4 in
10 Lift Height	1104 mm	43.5 in
11 Maximum Tilt at Blade Corner	140 mm	5.5 in
Maximum Tilt Angle	8°	
12 Length of Machine with SU Blade	5.168 m	16'11"
Blade Weight	2050 kg	4,519 lb

D5 Heavy Duty/Forestry Specifications

Ripper

Type	Fixed Parallelogram	
Weight	1393 kg	3,071 lb
1 Maximum Clearance, Raised (Shank Tip)		
D5 VPAT/Push Arms	404 mm	15.9 in
D5 LGP VPAT	518 mm	20.4 in
2 Maximum Penetration		
Standard	552 mm	21.7 in
LGP	437 mm	17.2 in
3 Pocket Spacing	1000 mm	39.4 in
4 Shank Gauge	2.0 m	78.7 in
Shank Section	73 mm × 176 mm	2.9 in × 6.9 in
Number of Pockets	3	
5 Overall Beam Width	2202 mm	86.7 in
Beam Cross Section	219 mm × 254 mm	8.6 in × 10.0 in
Maximum Penetration Force		
Standard	51.6 kN	11,600 lbf
LGP	43 kN	9,667 lbf
Maximum Pryout Force		
Standard	211.2 kN	47,480 lbf
LGP	170 kN	38,217 lbf

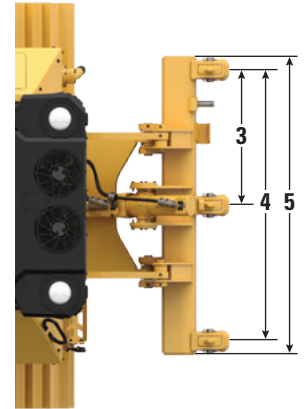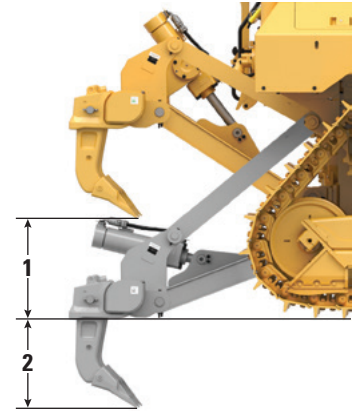

D5 Heavy Duty/Forestry Specifications

Winch

Model	PA55 Standard Speed		PA55 Slow Speed	
Weight*	1277 kg	2,815 lb	1277 kg	2,815 lb
Oil Capacity	73 L	19.3 gal	73 L	19.3 gal
Winch and Bracket Length	1145 mm	45.1 in	1145 mm	45.1 in
Winch Case Width	975 mm	38.4 in	975 mm	38.4 in
Drum Diameter	254 mm	10.0 in	254 mm	10.0 in
Drum Width	315 mm	12.4 in	315 mm	12.4 in
Flange Diameter	504 mm	19.8 in	504 mm	19.8 in
Drum Capacity – 22 mm (0.88 in)	88 m	288'9"	88 m	288'9"
Winch Drive	Mechanical		Mechanical	
Control	Electrical		Electrical	
Overall Width	975 mm	38.4 in	975 mm	38.4 in
Rope Diameter (recommended)	19 mm	0.75 in	19 mm	0.75 in
Cable Ferrule Size (O.D. × Length)	54 mm × 67 mm	2.1 in × 2.6 in	54 mm × 67 mm	2.1 in × 2.6 in
Maximum Bare Drum				
Line Pull	31 388 kg	69,200 lb	31 388 kg	69,200 lb
Line Speed	43 m/min	141 ft/min	16 m/min	53 ft/min
Maximum Full Drum				
Line Pull	23 359 kg	51,498 lb	31 388 kg	69,200 lb
Line Speed	66 m/min	210 ft/min	28 m/min	91 ft/min

*Weight: Includes pump, operator controls, oil, mounting brackets and spacers.

Slow and standard speed winches are available.

Track Shoes

Some track shoes not available in all regions. Please consult your Cat dealer for details.

	Standard			LGP	
	560 mm (22 in)	600 mm (24 in)	610 mm (24 in)	840 mm (33 in)	860 mm (34 in)
Heavy Duty Extended Life (HDXL)					
Moderate Service	✓	✓			
Extreme Service	✓	✓		✓	✓
Self-Cleaning					✓
Cat Abrasion					
Moderate Service			✓	✓	
Extreme Service	✓		✓	✓	✓

D5 Heavy Duty/Forestry Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
POWER TRAIN			OPERATOR ENVIRONMENT		
Cat C7.1 diesel engine	✓		Premium, Heavy Duty/Forestry cab with impact resistant polycarbonate doors, sliding side windows and adjustable armrests	+	
Fully-automatic 3-speed transmission:	✓		Full-color 254 mm (10 inch) liquid crystal touchscreen display	✓	
– Automatic directional and downshift			Integrated rearview camera	✓	
– Controlled throttle, load compensated			In-display key machine features	✓	
– Infinite ground speed adjustment			Application Profile	✓	
– Programmable/selectable bi-directional shifting			Cloth seat	✓	
Air-to-air aftercooler (ATAAC)	✓		Deluxe leather heated/ventilated seat		✓
Aluminum bar plate radiator	✓		Electrohydraulic implement and steering controls	✓	
Automatic glowplugs	✓		Joystick control – ARO		✓
Differential steering	✓		Fresh air filter	✓	
Engine air pre-cleaner	✓		Powered fresh air filter pre-cleaner		✓
Engine air pre-cleaner with turbine/screen		^	Cab mounted modular Heating/Ventilation/Air Conditioning (HVAC) system	✓	
Engine idle shutdown	✓		Rearview mirror	✓	
Enhanced Power Train Control:	✓		Retractable 76 mm (3 in) seatbelt	✓	
– Hill Decent Control			4-point seatbelt kit (dealer installed)		✓
– Hill Hold			Grab rails/tie offs on both sides of cab roof	✓	
– Decel Brake Pedal			Communication radio ready		✓
– Steering Radius Control			Radio, AM/FM/Auxiliary/USB/Bluetooth		✓
Extended life coolant	✓		Added storage areas	✓	
Ether starting aid		✓	Cup holders	✓	
Final Drives – Standard or LGP	✓		Dash foot pads	✓	
Fuel priming pump	✓		Glove box	✓	
Fuel water separator	✓		Lunchbox storage	✓	
Hydraulic demand fan	✓		Wipers		
Hydraulic reversing fan		✓			
Sound suppression (EU only)		✓			
Debris resistant radiator cores		✓			

+Included in Forestry Package

^ Recommended

(continued on next page)

D5 Heavy Duty/Forestry Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
GUARDING AND SCREENS			ELECTRICAL		
Front and cab sweeps with canopy	+		Premium lights – 12 LED light package with guarding	+	
Side and rear hinged screens	+		Backup alarm	✓	
Heavy duty guarding package with heavy duty bottom guards and fuel tank guard	+		Beacon warning light		✓
Fuel tank cover guard	+		Converter: one 15 Amp, 12V outlet	✓	
UNDERCARRIAGE			Forward warning horn	✓	
Standard or Low Ground Pressure (LGP) undercarriage	✓		SERVICE AND MAINTENANCE		
Heavy Duty (HDXL with DuraLink)		^	30-minute cab removal	✓	
Cat Abrasion Undercarriage		✓	Adjustable pitch link (VPAT)	✓	
Carrier rollers	✓		Centralized, remote mounted pressure taps	✓	
Hydraulic track adjusters	✓		Ecology drains	✓	
Lifetime lubricated track and rollers	✓		Extended service intervals (1000 hours engine, 1,000 hours power train)	✓	
Moderate service track shoes (see chart on page 36)	✓		Fast fuel fill		✓
Extreme service track shoes (see chart on page 36)		✓	Ground level service center (remote electrical disconnect, secondary shutdown switch, hour meter)	✓	
Redesigned track roller frame	✓		High-speed oil change		✓
Track roller frame guiding guards: center, partial or full (NOTE: center guiding guards standard on LGP machine)		✓	Heavy duty perforated radiator doors, louvered and hinged	✓	
BULLDOZERS			Rear access ladder	✓	
Heavy duty bulldozer package with guarding on tilt lines		✓	Rear work light		✓
VPAT dozer package	✓		Refilling fuel pump (EU only)		✓
SU dozer package		✓	Removable engine enclosures, perforated and hinged	✓	
BLADES			S-O-S ports	✓	
VPAT		✓	Shovel holder	✓	
Semi-Universal (SU)		✓	Under hood work light		✓
Foldable VPAT		✓			
HYDRAULICS					
Load sensing hydraulics	✓				
Independent steering and implement pumps	✓				

+Included in Forestry Package

^ Recommended

(continued on next page)

D5 Heavy Duty/Forestry Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BATTERIES, STARTERS, ALTERNATORS AND COOLANT			CAT TECHNOLOGY		
95 Amp alternator	✓		Slope Indicate	✓	
24 Volt starter	✓		Cat Assist with ARO*	✓	
Arctic engine coolant, – 51° C (–60° F)		✓	Cat Grade 3D Ready (hardware only)*		✓
Engine coolant, –37° C (–35° F)	✓		Cat Grade 3D with Assist*		✓
Cold Weather package: heavy duty battery, heavy duty starter, ether starting aid, jacket water heater		✓	Third Party Grade Control Ready Cab	✓	
Two maintenance free 12-volt batteries (950 cca) (24-volt system)	✓		Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓	
ATTACHMENTS			Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓	
Ripper-ready rear hydraulics		✓	Product Link, Cellular	✓	
Dual ripper/winch control		✓	Product Link – Dual Cellular/Satellite		✓
Ripper with straight or curved shanks		✓	Remote Flash/Troubleshoot	✓	
Winch		✓	Grade Connectivity		✓
Drawbar	✓		Operator ID	✓	
Rear striker box with striker bar		✓	Machine Security – Passcode	✓	
			Machine Security – Bluetooth		✓
			Remote Control Ready	✓	
			Cat Command for Dozing		✓

*Refer to page 13 for technology package details.



D5

Fire Suppression Dozer

Take on the demands of fire fighting and prevention with factory-installed equipment designed to help protect the operator and the machine in harsh applications.

Next Generation Performance

- Harness added weight and horsepower than D6N to take on a wide range of tasks.
- Fully automatic 3-speed transmission gives you seamless acceleration, faster cycle times and more nimble movement around the site.
- No need to shift – just set your desired ground speed and the dozer adjusts for maximum fuel efficiency and power to the ground.
- Completely redesigned, more spacious cab for a whole new standard in comfort and productivity.
- More glass area, steeper hood angle provide better forward visibility than the previous model.

Fire Suppression Dozer



- Fire Dozer cab with tempered/laminated glass, silicone sealing between cab and sheet metal, and enhanced cab air filtration.
- In-cab emergency fuel shut-off.
- Heavy duty guarding throughout, including full sweeps, screens and heavy duty bottom guards.
- Fire resistant, wrapped hydraulic hoses and harnesses.
- Heat insulated fuel, A/C, air, DEF lines.
- Muffler extension flush with sweeps top plate.
- Light packages:
 - 4 × 4200 lumens heat resistant lights (body and lens), plus insulated harness and switch provisions to add 12 lights (for customer customization).
 - Additional 8 × 4200 lumens heat resistant lights (body and lens).
 - Additional 4 × 3770 lumens amber heat resistant lights (body and lens) for enhanced vision in the smoke.
- XtraRear standard gauge undercarriage (43 shoes) with one roller added at back for increased stability on steep slopes.
- Brush guard blade equipped with blade to hardnose cables protecting C-frame lines.
- Quick access door on cab floor for easy cleanout and to quickly check power train compartment in case of fire.
- Hydraulic reversing fan.
- Choice of Standard engine or a special engine arrangement for emergency vehicles (U.S. State and Federal fire agencies only) compliant with 40 CFR 89-908.
- Fire resistant EcoSafe® oil.
- Built-in fire suppression ready system (includes water tank, pump and hose. Does not include belly guard sprinkling system).

For complete information, please see Standard/Optional equipment list on page 48.



D5 Fire Suppression Dozer Features

- 1) Fire Dozer cab with sealed and tempered/laminated doors/windows, solid side windows.
- 2) Fan controls, additional switches controlling 8 pairs of lights, in-cab emergency fuel shut-off.
- 3) Enhanced cab air filtration: equipped with an ember screen, turbine pre-cleaner with a HEPA filter (filters particles below 0.3 micro-meters). Combination of active carbon and HEPA filter available from Cat Parts.
- 4) Full sweeps with roof extension.
- 5) Silicone sealing between cab and sheet metal.
- 6) Heavy duty guarding package with heavy duty fenders, battery box, enclosure and fuel tank guard.
- 7) Dual control winch/ripper.
- 8) Heavy duty bottom guards, all three 16 mm (0.6 in) thick.
- 9) Built-in fire suppression ready system (includes water tank, pump and hose). Does not include belly guard sprinkling system).
- 10) Fire resistant, wrapped hydraulic hoses and harnesses. Heat insulated fuel, A/C, air and DEF lines.

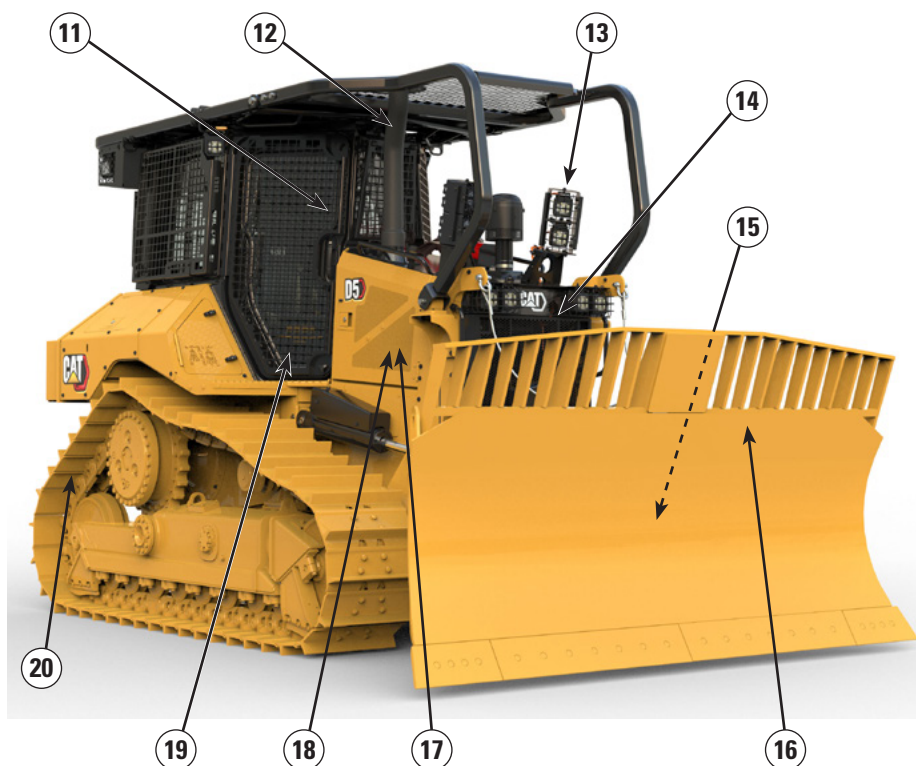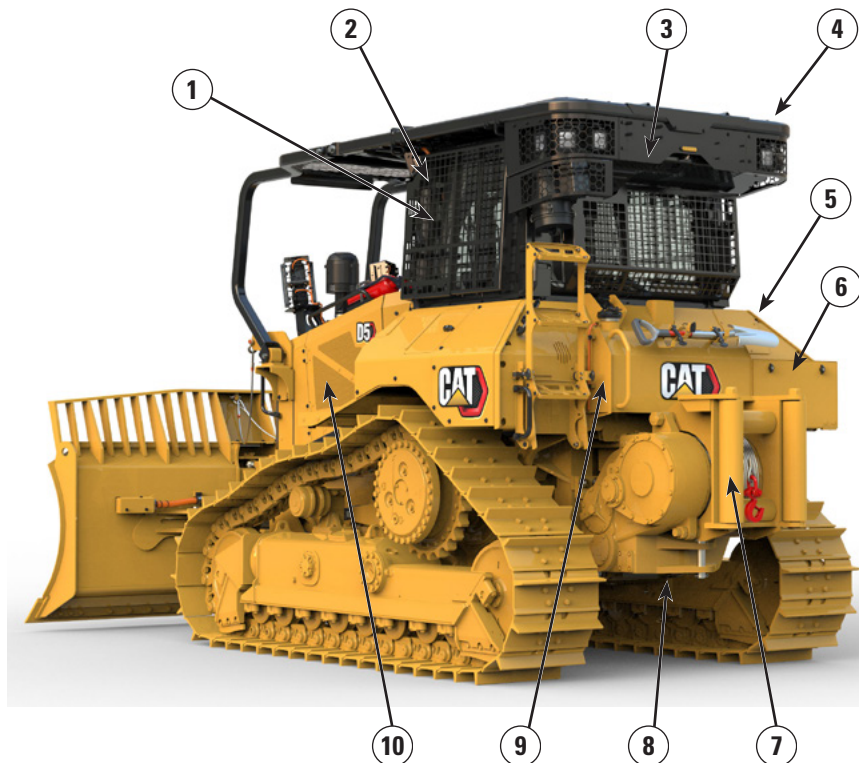

- 11) Front windshield and cab doors equipped with screens.
- 12) Muffler flush with roof extension.
- 13) Light packages:
 - 4 × 4200 lumens heat resistant lights (body and lens), plus insulated harness and switch provisions to add 12 lights (for customer customization).
 - Additional 8 × 4200 lumens heat resistant lights (body and lens).
 - Additional 4 × 3770 lumens amber heat resistant lights (body and lens) for enhanced vision in the smoke.
- 14) Hydraulic reversing fan.
- 15) Front towing eye.
- 16) Brush guard blade equipped with blade to hardnose cables protecting C-frame lines.
- 17) Special engine arrangement for emergency vehicles (U.S. only) compliant with 40 CFR 89-908.
- 18) Fire resistant EcoSafe oil.
- 19) Quick access door on cab floor.
- 20) XtraRear undercarriage combining a standard gauge and a track roller frame extended at rear with one roller added for unmatched stability on steep slopes and loose material when machine is configured with a winch.

D5 Fire Suppression Dozer Specifications

Engine

Engine Model	Cat C7.1	
Emissions	U.S. EPA Tier 4 Final/ EU Stage V/Japan 2014/ Korea Stage V	
Power Train	Fully automatic 3-speed	
Net Power (1,770 rpm)		
ISO 9249/SAE J1349	127 kW	170 hp
ISO 9249 (DIN)	172 mhp	
Engine Power – Maximum (1,600 rpm)		
ISO 14396	148 kW	198 hp
ISO 14396 (DIN)	201 mhp	
Gross Power – Maximum (1,600 rpm)		
SAE J1995:2014	151 kW	202 hp
Bore	105 mm	4.1 in
Stroke	135 mm	5.3 in
Displacement	7.1 L	433.27 in ³

- Net power advertised is the power available at the engine flywheel when the engine is equipped with a fan, air cleaner, clean emissions module and alternator.
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- No derating required up to 3000 m (9,840 ft) altitude, beyond 3000 m (9,840 ft) automatic derating occurs.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 30% biodiesel.*

Fluid/Refill Capacities

Fuel Tank	315 L	83.2 gal
Diesel Exhaust Fluid (DEF) Tank	16 L	4.2 gal
Cooling System	36 L	9.5 gal
Engine Crankcase	18 L	4.8 gal
Power Train	160 L	42.3 gal
Final Drives (each)	8 L	2.1 gal
Roller Frames – Standard (each)	18 L	4.8 gal
Roller Frames – LGP (each)	27 L	7.1 gal
Hydraulic Tank	80 L	21.1 gal

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.36 kg (2.99 lb) of refrigerant which has a CO₂ equivalent of 1.946 metric tonnes (2.145 tons).


Transmission

0.5 Forward	2.5 km/h	1.55 mph
0.5 Forward (EU)	2.4 km/h	1.50 mph
1.0 Forward	3.3 km/h	2.03 mph
1.0 Forward (EU)	3.0 km/h	1.89 mph
1.5 Forward	4.4 km/h	2.71 mph
2.0 Forward	5.8 km/h	3.57 mph
2.5 Forward	7.6 km/h	4.69 mph
3.0 Forward	9.8 km/h	6.07 mph
0.5 Reverse	3.1 km/h	1.91 mph
0.5 Reverse (EU)	2.9 km/h	1.80 mph
1.0 Reverse	4.1 km/h	2.53 mph
1.0 Reverse (EU)	3.6 km/h	2.20 mph
1.5 Reverse	5.4 km/h	3.36 mph
2.0 Reverse	7.1 km/h	4.43 mph
2.5 Reverse	9.5 km/h	5.92 mph
3.0 Reverse	12.2 km/h	7.59 mph

Drawbar Pull

1.0 Forward	320 kN	71,939 lbf
2.0 Forward	198 kN	44,512 lbf
3.0 Forward	113 kN	25,403 lbf

Drawbar Pull

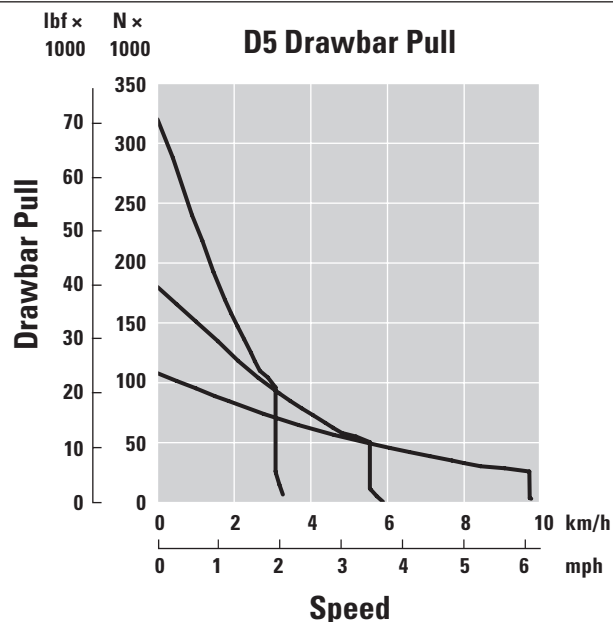

D5 Fire Suppression Dozer Specifications

Hydraulic Controls

Maximum Operating Pressure

Implement	25 000 kPa	3,626 psi
Steering	45 000 kPa	6,527 psi

Pump

Pump Output (Steering)	165 L/min	43.6 gal/min
Pump Output (Implement)	127 L/min	33.5 gal/min
Pump Output (Fan)	49 L/min	12.9 gal/min
Lift Cylinder Flow	127 L/min	33.5 gal/min
Tilt Cylinder Flow	127 L/min	33.5 gal/min
Ripper Cylinder Flow	127 L/min	33.5 gal/min
Angle Cylinder Flow – VPAT	127 L/min	33.5 gal/min

Advanced Cabin Filtration

Operator Cabin

- Distributed HVAC ducting with automatic temperature control and blower speed provides ultimate operator comfort with less user input.
- Reduced maintenance of the condenser core with automatic reversing fans.
- Cat Advanced Cabin Filtration is standard.

Cat Advanced Cabin Filtration

- Operator protection from respirable particulate (0.3-10-micron size).
- Sustainably pressurized cab (U.S. Silica compliant).
- Reduced maintenance with longer life, high efficiency filters.
- Protection for all cabin components: electronics, etc.
- Helps meet U.S. Occupational Safety and Health Administration Silica Rule Table 1 requirements for operator cabs.
- Multi-tiered filter offerings for optional efficiency upgrades. Contact Cat dealer for availability.
 - MERV 16 – Standard Equipment
 - HEPA
 - Activated Carbon + HEPA
 - ABEK1 + HEPA

Standards

Sound Level Information

- Hearing protection may be needed when the machine is operated with an open operator station, in a noisy environment, with a cab that is not properly maintained, or when the doors and windows are open for extended periods of time.

Sound Level		Test Method
Operator Sound Pressure Level	76 dB(A)	"ISO 6396:2008" ⁽¹⁾
	76 dB(A) *	
Exterior Sound Pressure Level	110 dB(A)	"ISO 6395:2008" ⁽²⁾
	110 dB(A) *	"ISO 6395:1988" ⁽²⁾

*For machines required to meet applicable regional regulations of Ukraine, United Kingdom, and Countries that Adopt the "EU Directives".

⁽¹⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds. The measurement was conducted with the cab doors and the cab windows closed. The cab was properly installed and maintained.

⁽²⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.

- The sound levels listed above include both measurement uncertainty and uncertainty due to production variation.

Vibration Levels

Maximum Hand/Arm*

ISO 5349:2001	2.5 m/s ²
---------------	----------------------

Maximum Whole Body*

ISO/TR25398:2006	0.5 m/s ²
------------------	----------------------

Seat Transmissibility Factor

ISO 7096:2000 – spectral class EM6	<0.7
------------------------------------	------

*Values are for an experienced operator in a dozing application. Consult the Operating and Maintenance Manual (OMM) for further details.

Rollover Protective Structure (ROPS)/Falling Object Protective Structure (FOPS)/Operator Protective Structure (OPS)

- ROPS meets the following criteria: ISO 3471:2008.
- FOPS meets the following criteria: ISO 3449:2005 Level II.
- OPS screens meets OPS criteria per ISO 8084:2003 and WCB G604:2011.

Brakes

- Brakes meet the standard ISO 10265:2008.

D5 Fire Suppression Dozer Specifications

D5 LGP VPAT – Fire Suppression


Operating Weight ¹	22 621 kg	49,871 lb
Shipping Weight ²	20 656 kg	45,539 lb
Ground Pressure (ISO 16754)	38.9 kPa	5.64 psi
Undercarriage (Standard)	46 Sections with 8 Bottom Rollers	
1 Track Gauge	2.16 m	7'1"
2 Width of Track Shoe (Standard)	840 mm	33.1 in
3 Width of Tractor	3.00 m	9'10"
4 Length of Track on Ground	3.116 m	10'3"
Ground Contact Area (ISO 16754)	5.7 m ²	201.3 ft ²
Grouser Height (Moderate Service)	66 mm	2.6 in
Ground Clearance	473 mm	18.6 in
5 Machine Height ³	3.265 m	10'9"
6 Length of Tractor (from winch and fairlead to front of C-Frame)	5.680 m	18'8"

All dimensions above with Cat Abrasion undercarriage with Extreme Service shoes of maximum width for configuration, VPAT blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes lubricants, coolant, full fuel tank, ROPS/FOPS cab, Fire dozer guarding including sweeps and grills on all windows but cab doors and front windshield, fire suppression ready system, enhanced cab air filtration, engine pre-cleaner, blade with brush guard, winch and 75 kg (165 lb) operator.

²Shipping weight includes lubricants, coolant, full fuel tank, ROPS/FOPS cab, Fire dozer guarding including sweeps and grills on all windows but cab doors and front windshield, fire suppression ready system, enhanced cab air filtration, engine pre-cleaner, winch and 10% fuel.

³Machine height from tip of grouser to top of Product Link Antenna. With Extreme Service, add 9 mm (0.4 in).

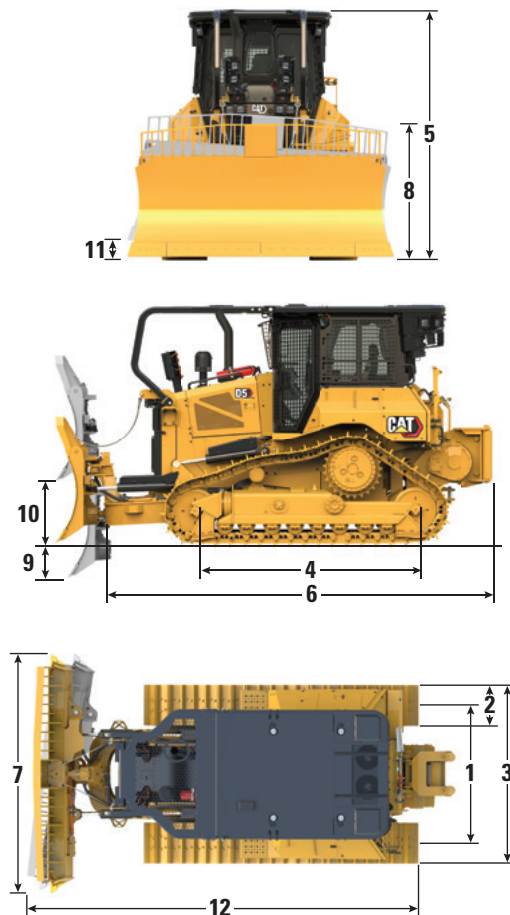

NOTE: D5 VPAT FSD with XR undercarriage shown.

Blade

Type	LGP VPAT with Brush Rack	
Capacity (ISO 9246, Brush rack considered)	6.31 m ³	8.25 yd ³
7 Width across End bits	4080 mm	160.6 in
Width without End bits	3969 mm	156.3 in
Width across End bits (Blade Angled 24°)	3736 mm	147.1 in
Width without End bits (Blade Angled 24°)	3640 mm	143.3 in
Width across End Bits (Blade Angled 33° for transportation purpose only)	—	
Maximum Blade Angle	24°	
8 Height	1465 mm	57.7 in
9 Dig Depth	580 mm	22.8 in
10 Lift Height	1051 mm	41.4 in
11 Maximum Tilt at Blade Corner	371 mm	14.6 in
Maximum Tilt Angle	8.5°	
Pitch Adjustment	60° (cutting edge/ground, nominal); -2°/+4°	
12 Length of Machine (Blade Straight)	6.070 m	19'11"
Length of Machine (Blade Angled 24°)	6.855 m	22'6"
Blade Weight	1462 kg	3,223 lb

D5 Fire Suppression Dozer Specifications

D5 VPAT – Fire Suppression Dimensions

Machine equipped with a standard undercarriage:

Operating Weight ¹	20 356 kg	44,877 lb
Shipping Weight ²	19 017 kg	41,925 lb
Undercarriage (Standard)	40 Section with 7 Bottom Rollers	
Ground Pressure (ISO 16754)	57.5 kPa	8.34 psi
4 Length of Track on Ground	2.562 m	8'5"
Ground Contact Area (ISO 16754)	3.5 m ²	123.6 ft ²

Machine equipped with XtraRear undercarriage:

Operating Weight ⁴	20 627 kg	45,475 lb
Shipping Weight ²	19 288 kg	42,523 lb
Undercarriage (Standard)	43 Section with 8 Bottom Rollers	
Ground Pressure (ISO 16754)	57.5 kPa	8.34 psi
4 Length of Track on Ground	3.659 m	12'0"
Ground Contact Area (ISO 16754)	3.52 m ²	124.3 ft ²
1 Track Gauge	1.89 m	6'2"
2 Width of Track Shoe (Standard)	610 mm	24.0 in
3 Width of Tractor	2.50 m	8'2"
Ground Contact Area (ISO 16754)	5.7 m ²	201.3 ft ²
Grouser Height (Moderate Service)	57 mm	2.2 in
5 Ground Clearance	358 mm	14.1 in
6 Machine Height ³	3.163 m	10'5"
Length of Tractor (from winch and fairlead to front of C-Frame)	5.310 m	17'5"



All dimensions above with Cat Abrasion undercarriage with Extreme Service shoes of maximum width for configuration, VPAT blade, and calculated per ISO 16754 unless otherwise specified.

¹Operating weight includes lubricants, coolant, full fuel tank, ROPS/FOPS cab, Fire dozer guarding including sweeps and grills on all windows but cab doors and front windshield, fire suppression ready system, enhanced cab air filtration, engine pre-cleaner, blade with brush guard, winch and 75 kg (165 lb) operator.

²Shipping weight includes lubricants, coolant, full fuel tank, ROPS/FOPS cab, Fire dozer guarding including sweeps and grills on all windows but cab doors and front windshield, fire suppression ready system, enhanced cab air filtration, engine pre-cleaner, winch and 10% fuel.

³Machine height from tip of grouser to top of Product Link Antenna. With Extreme Service, add 9 mm (0.4 in).

⁴Operating weight includes lubricants, coolant, full fuel tank, ROPS/FOPS cab, Fire dozer guarding including sweeps and grills on all windows but cab doors and front windshield, XtraRear U/C, fire suppression ready system, enhanced cab air filtration, engine pre-cleaner, blade with brush guard, winch and 75 kg (165 lb) operator.

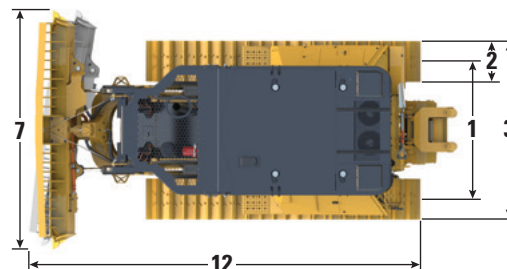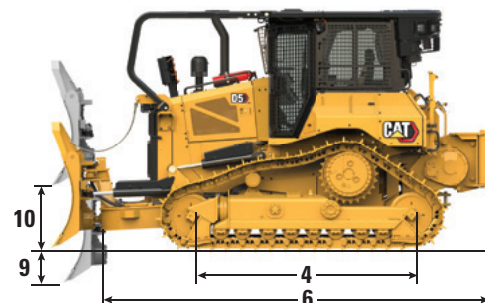

NOTE: D5 FSD with XR undercarriage shown.



D5 Fire Suppression Dozer Specifications

Blade

Type	LGP VPAT with Brush Rock	
Capacity (ISO 9246, Brush rack considered)	6.15 m ³	8.04 yd ³
7 Width across End bits	3272 mm	128.8 in
Width without End bits	3159 mm	124.4 in
Width across End bits (Blade Angled 24°)	2998 mm	118.0 in
Width without End bits (Blade Angled 24°)	2908 mm	114.5 in
Maximum Blade Angle	24°	
8 Height	1626 mm	64.0 in
9 Dig Depth	559 mm	22.0 in
10 Lift Height	971 mm	38.2 in
11 Maximum Tilt at Blade Corner	257 mm	10.1 in
Maximum Tilt Angle	8.5°	
Pitch Adjustment	60° (cutting edge/ground, nominal); -2°/+4°	
12 Length of Machine (Blade Straight)	5.735 m	18'10"
Length of Machine (Blade Angled 24°)	6.330 m	20'9"
Blade Weight	1292 kg	2,848 lb

Ripper

Type	Fixed Parallelogram	
Weight	1393 kg	3,071 lb
1 Maximum Clearance, Raised (Shank Tip)		
D5 VPAT/Push Arms	404 mm	15.9 in
D5 LGP VPAT	518 mm	20.4 in
2 Maximum Penetration		
Standard	552 mm	21.7 in
LGP	437 mm	17.2 in
3 Pocket Spacing	1000 mm	39.4 in
4 Shank Gauge	2.0 m	78.7 in
Shank Section	73 mm × 176 mm	2.9 in × 6.9 in
Number of Pockets	3	
5 Overall Beam Width	2202 mm	86.7 in
Beam Cross Section	219 mm × 254 mm	8.6 in × 10.0 in
Maximum Penetration Force		
Standard	51.6 kN	11,600 lbf
LGP	43 kN	9,667 lbf
Maximum Pryout Force		
Standard	211.2 kN	47,480 lbf
LGP	170 kN	38,217 lbf

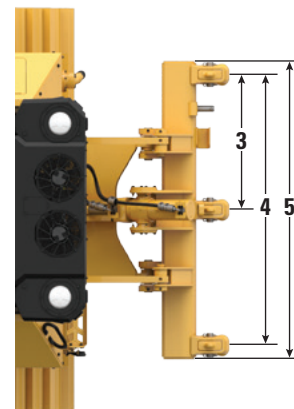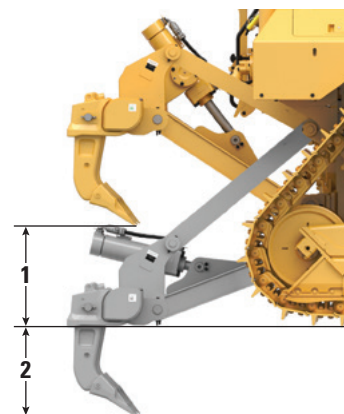

D5 Fire Suppression Dozer Specifications

Winch

Model	PA55 Standard Speed		PA55 Slow Speed	
Weight*	1277 kg	2,815 lb	1277 kg	2,815 lb
Oil Capacity	73 L	19.3 gal	73 L	19.3 gal
Winch and Bracket Length	1145 mm	45.1 in	1145 mm	45.1 in
Winch Case Width	975 mm	38.4 in	975 mm	38.4 in
Drum Diameter	254 mm	10.0 in	254 mm	10.0 in
Drum Width	315 mm	12.4 in	315 mm	12.4 in
Flange Diameter	504 mm	19.8 in	504 mm	19.8 in
Drum Capacity – 22 mm (0.88 in)	88 m	288'9"	88 m	288'9"
Winch Drive	Mechanical		Mechanical	
Control	Electrical		Electrical	
Overall Width	975 mm	38.4 in	975 mm	38.4 in
Rope Diameter (recommended)	19 mm	0.75 in	19 mm	0.75 in
Cable Ferrule Size (O.D. × Length)	54 mm × 67 mm	2.1 in × 2.6 in	54 mm × 67 mm	2.1 in × 2.6 in
Maximum Bare Drum				
Line Pull	31 388 kg	69,200 lb	31 388 kg	69,200 lb
Line Speed	43 m/min	141 ft/min	16 m/min	53 ft/min
Maximum Full Drum				
Line Pull	23 359 kg	51,498 lb	31 388 kg	69,200 lb
Line Speed	66 m/min	210 ft/min	28 m/min	91 ft/min

*Weight: Includes pump, operator controls, oil, mounting brackets and spacers.

Slow and standard speed winches are available.

Track Shoes

Some track shoes not available in all regions. Please consult your Cat dealer for details.

	Standard		LGP	
	560 mm (22 in)	600 mm (24 in)	840 mm (33 in)	860 mm (34 in)
Heavy Duty Extended Life (HDXL)				
Moderate Service	✓	✓		
Extreme Service	✓	✓	✓	✓

D5 Fire Suppression Dozer Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
POWER TRAIN			OPERATOR ENVIRONMENT		
Cat C7.1 diesel engine	✓		Fire Dozer cab with sealed and tempered doors/windows, solid side windows, emergency fuel shut-off inside cab, hinged rear and side screens, rear sweeps with roof top, eight dashboard switches to control lights, beacon/strobe light ready.	+	
Fully-automatic 3-speed transmission:	✓		Laminated safety glass – all windows		✓
– Automatic directional and downshift			Silicone sealing between cab and fenders	+	
– Controlled throttle, load compensated			Fresh air filter	✓	
– Infinite ground speed adjustment			Powered fresh air filter pre-cleaner		✓
– Programmable/selectable bi-directional shifting			Enhanced cab air filtration: equipped with an ember screen, turbine pre-cleaner with a HEPA filter (filters particles below 0.3 micro-meters).		^
Air-to-air aftercooler (ATAAC)	✓		Enhanced cab air filtration: combination of active carbon and HEPA filter. (Available from Cat Parts)		^
Aluminum bar plate radiator	✓		Full-color 254 mm (10 inch) liquid crystal touchscreen display	✓	
Automatic glowplugs	✓		Integrated rearview camera	✓	
Differential steering	✓		In-display key machine features	✓	
Engine air pre-cleaner	✓		Application Profile	✓	
Engine air pre-cleaner with turbine/screen		✓	Cloth seat	✓	
Engine idle shutdown	✓		Deluxe leather heated/ventilated seat		✓
Enhanced Power Train Control:	✓		Electrohydraulic implement and steering controls	✓	
– Hill Decent Control			Cab mounted modular Heating/Ventilation/Air Conditioning (HVAC) system	✓	
– Hill Hold			Rearview mirror	✓	
– Decel Brake Pedal			Retractable 76 mm (3 in) seatbelt	✓	
– Steering Radius Control			4-point seatbelt kit (dealer installed)		✓
Extended life coolant	✓		Grab rails/tie offs on both sides of cab roof	✓	
Ether starting aid		✓	Communication radio ready		✓
Final Drives – Standard or LGP	✓		Radio, AM/FM/Aux/USB/Bluetooth		✓
Fuel priming pump	✓		Added storage areas	✓	
Fuel water separator	✓		Cup holders	✓	
Hydraulic demand fan	✓		Dash foot pads	✓	
Hydraulic reversing fan	+		Glove box	✓	
Sound suppression (EU only)		✓	Lunchbox storage	✓	
Debris resistant radiator cores		✓	Wipers	✓	
Emergency vehicle engine arrangement: compliant with EPA (40 CFR 89-908) and CARB requirements with overheat protection and DEF level check permanently deactivated. Available U.S. only, to Governmental customers working full time in emergency situations.		✓			

+Included in Fire Suppression package

^Recommended

(continued on next page)

D5 Fire Suppression Dozer Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
GUARDING AND SCREENS			BULLDOZERS		
Heavy duty bottom guards for fire dozers (all bottom guards including the front are 16 mm/0.6" thick)	+		VPAT dozer package		✓
Heavy duty fenders, battery box, enclosure and fuel tank guard	+		Fire suppression bulldozer package – lift and tilt lines equipped with thermal and abrasion wrap	+	
Wrapped, fire-resistant fluid lines, wiring harnesses and battery cables	+		BLADES		
Full sweeps	+		VPAT		✓
Front windshield and cab door hinged screens		✓	Foldable VPAT		✓
Muffler extension flush with sweeps top plate	+		VPAT blade equipped with brush guard and two cables protecting the front hydraulic lines and cylinder rods		^
Grab handles		✓	HYDRAULICS		
UNDERCARRIAGE			Load sensing hydraulics	✓	
Standard or Low Ground Pressure (LGP) undercarriage	✓		Independent steering and implement pumps	✓	
Heavy Duty (HDXL with DuraLink)		^	ELECTRICAL		
XtraRear undercarriage (43 shoes) with one roller added at back for added stability on steep slopes. Recommended only in mountainous areas and dozer crawling on loose material. Standard gauge only.		✓	Base light package: 4 × 4, 200 lumens heat resistant lights (casing and lens), plus insulated harness. Two forward mounted, two rear facing	+	
Carrier rollers	✓		Optional light package: additional 8 × 4,200 lumens bright heat resistant lights (body and glass) + 4 × 3, 370 lumens amber heat resistant lights (body and glass)		^
Hydraulic track adjusters	✓		Wiring harnesses heat insulated to connect up to 8 pairs of lights independently	+	
Lifetime lubricated track and rollers	✓		Backup alarm	✓	
Moderate service track shoes (see chart on page 47)	✓		Beacon warning light		✓
Extreme service track shoes (see chart on page 47)		✓	Converter: one 15 Amp, 12V outlet	✓	
Redesigned track roller frame	✓		Forward warning horn	✓	
Track roller frame guiding guards: center, partial or full (NOTE: center guiding guards standard on LGP machine)		✓			

+Included in Fire Suppression package

^Recommended

(continued on next page)

D5 Fire Suppression Dozer Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
SERVICE AND MAINTENANCE			ATTACHMENTS		
Quick access cab floor	+		Dual control winch/ripper heat insulated	+	
30-minute cab removal	✓		Winch		✓
Adjustable pitch link (VPAT)	✓		Drawbar		✓
Centralized, remote mounted pressure taps	✓		One front towing eye and 6 tie-downs	+	
Ecology drains	✓		On-board fire suppression ready system equipped with 84 liter (22 gal) stainless steel tank, pump activated from operator seat, hose with hand spray nozzle and valve ready to plug in a sprinkling system. System can be further customized by dealer or customer.		^
Extended service intervals (1,000 hours engine, 1,000 hours power train)	✓		CAT TECHNOLOGY		
Fast fuel fill		✓	Slope Indicate	✓	
Fire retardant EcoSafe oil		✓	Cat Assist with ARO*	+	
Ground level service center (remote electrical disconnect, secondary shutdown switch, hour meter)	✓		Third Party Grade Control Ready Cab	✓	
High-speed oil change		✓	Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓	
Heavy duty perforated radiator doors, louvered and hinged	✓		Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓	
Rear access ladder	✓		Product Link, Cellular	✓	
Refilling fuel pump (EU only)		✓	Product Link – Dual Cellular/Satellite		✓
Removable engine enclosures, perforated and hinged	✓		Remote Flash/Troubleshoot	✓	
S·O·S ports	✓		Grade Connectivity		✓
Shovel holder	✓		Operator ID	✓	
Under hood work light		✓	Machine Security – Passcode	✓	
BATTERIES, STARTERS, ALTERNATORS AND COOLANT			Machine Security – Bluetooth		✓
95 Amp alternator	✓		Remote Control Ready	✓	
24 Volt starter	✓		Cat Command for Dozing		✓
Arctic engine coolant, – 51° C (–60° F)		✓	*Refer to page 13 for technology package details.		
Engine coolant, –37° C (–35° F)	✓				
Two maintenance free 12-volt batteries (950 cca) (24-volt system)	✓				

+Included in Fire Suppression package

*Recommended



オフロード法2014年
基準適合

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2024 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. VisionLink is a trademark of Caterpillar Inc., registered in the United States and in other countries.

Based on the Labor, Safety and Health Laws in Japan, employer of small construction equipment are required to provide specific training for all operators on machines with machine weight less than 3 metric ton. For machines greater than 3 metric ton, operator needs to obtain operator license certification from a Government approved registered training school.

AEXQ3750-00 (09-2024)
Build Number: 17C
(Aus-NZ, Chile, Colombia, Europe,
Japan, N Am, S Korea, Türkiye)

