



320

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	2
Standards	2
Sound Performance	2
Operating Weight and Ground Pressure	3
Major Component Weights	3
Dimensions	4
Working Ranges	5
Reach Boom Lift Capacities – Counterweight: 4.2 mt (9,300 lb)	7
HD Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,400 lb)	8
Super Long Reach (SLR) Boom Lift Capacities – Counterweight: 4.7 mt (10,400 lb)	9
Bucket Specifications and Compatibility	11
Attachments Offering Guide	14
Thumb Specifications	18
Standard and Optional Equipment	19
Dealer Installed Kit and Attachments	22
320 Environmental Declaration	23

320 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C4.4	
Net Power		
ISO 9249	128.5 kW	172 hp
ISO 9249 (DIN)	175 hp (metric)	
Engine Power		
ISO 14396	129.4 kW	174 hp
ISO 14396 (DIN)	176 hp (metric)	
Bore	105 mm	4 in
Stroke	127 mm	5 in
Displacement	4.4 L	269 in ³
Biodiesel capability	Up to B20 ⁽¹⁾	

- Meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator.
- Engine speed at 2,200 rpm.

⁽¹⁾Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) and are compatible* with ULSD blended with the following lower-carbon intensity fuels** up to:

- ✓ 20% biodiesel FAME (fatty acid methyl ester)***
- ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

* While Cat engines are compatible with these alternative fuels, some regions may not allow their use.

** Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.

*** Engines with no aftertreatment devices are compatible with higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).

Swing Mechanism

Swing Speed	11.25 rpm	
Maximum Swing Torque	82 kN·m	60,300 lbf·ft

Weights

Operating Weight	22 600 kg	49,800 lb
------------------	-----------	-----------

- Reach boom, R2.9 (9'6") stick, Heavy Duty (HD) 1.19 m³ (1.56 yd³) bucket 790 mm (31 in) triple grouser shoes, 4.2 mt (10,400 lb) counterweight.

Track

Track Shoe Width	790 mm	31 in
Number of Shoes (each side)	49	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Gradeability	35°/70%	
Maximum Travel Speed	5.7 km/h	3.5 mph
Maximum Drawbar Pull – Long Undercarriage	205 kN	45,996 lbf

Hydraulic System

Main System – Maximum Flow – Implement	429 L/min (214.5 × 2 pumps)	113 gal/min (56.5 × 2 pumps)
Maximum Pressure – Equipment – Normal	35 000 kPa	5,075 psi
Maximum Pressure – Equipment – Heavy Lift Mode/Auto Dig Boost	38 000 kPa	5,510 psi
Maximum Pressure – Travel	34 300 kPa	4,974 psi
Maximum Pressure – Swing	27 500 kPa	3,998 psi
Boom Cylinder – Bore	120 mm	4.7 in
Boom Cylinder – Stroke	1260 mm	49.6 in
Stick Cylinder – Bore	140 mm	5.5 in
Stick Cylinder – Stroke	1504 mm	59.2 in
Bucket Cylinder – Bore	120 mm	4.7 in
Bucket Cylinder – Stroke	1104 mm	43.5 in

Service Refill Capacities

Fuel Tank Capacity	345 L	91.1 gal
Cooling System	25 L	6.6 gal
Engine Oil	15 L	4.0 gal
Swing Drive (each)	6 L	1.6 gal
Final Drive (each)	4 L	1.1 gal
Hydraulic System (including tank)	234 L	61.8 gal
Hydraulic Tank	115 L	30.4 gal
Diesel Exhaust Fluid (DEF) Tank	39 L	10.3 gal

Standards

Brakes	ISO 10265:2008
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008
Cab/Operator Protective Guard (OPG) (optional)	ISO 10262:1998 Level II

Sound Performance

ISO 6395:2008 (external)	99 dB(A)
ISO 6396:2008 (inside cab)	70 dB(A)

- External Sound – The spectator sound power level is measured according to the test procedures and conditions specified in ISO 6395:2008 for a Cat machine that is properly equipped and maintained. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Internal Sound – The operator sound pressure level is measured according to the test procedures and conditions specified in ISO 6396:2008 for a cab offered by Caterpillar, when properly installed and maintained and tested with the door and windows closed. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained for doors windows open) for extended periods or in noisy environment(s).

320 Hydraulic Excavator Specifications

Operating Weight and Ground Pressure

Base Machine Configurations	790 mm (31 in) Triple Grouser Shoes			
	Weight		Ground Pressure	
Base Frame with Track Rollers and Carrier Rollers				
4.2 mt (9,300 lb) Counterweight + Long Undercarriage Base Machine				
Reach Boom + R2.9 (9'6") Stick + 1.19 m ³ (1.56 yd ³) HD Bucket	22 600 kg	49,800 lb	35.7 kPa	5.2 psi
4.7 mt (10,400 lb) Counterweight + Long Undercarriage Base Machine				
HD Reach Boom + HD R2.9 (9'6") Thumb Ready Stick + 1.19 m ³ (1.56 yd ³) HD Bucket	24 300 kg	53,600 lb	38.4 kPa	5.6 psi

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.


Major Component Weights

	kg	lb
Base Machine (with 4.2 mt [9,300 lb] counterweight, semi-HD swing frame, standard base frame with HD track rollers and standard carrier rollers for long undercarriage – does not include boom, stick, bucket, boom cylinders, stick cylinder, bucket cylinder, tracks, 90% fuel tank and 75 kg [165 lb] operator)	14 800	32,600
Base Machine (with 4.7 mt [10,400 lb] counterweight, HD swing frame, HD base frame with SD track rollers and SD carrier rollers for long undercarriage – does not include boom, stick, bucket, boom cylinders, stick cylinder, bucket cylinder, tracks, 90% fuel tank and 75 kg [165 lb] operator)	16 000	35,300
Track Shoes:		
790 mm (31 in) Width, 10 mm (0.39 in) Thick Triple Grouser Track Shoes with Step Extension	3370	7,400
Two Boom Cylinders	340	700
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	310	700
Counterweights:		
4.2 mt (9,300 lb) Counterweight	4200	9,300
4.7 mt (10,400 lb) Counterweight	4700	10,400
Swing Frame:		
Semi-HD Swing Frame	1910	4,210
Undercarriage:		
Standard Base Frame with HD Track Rollers and Standard Carrier Rollers	4390	9,700
Booms (including lines, pins, stick cylinder):		
Reach Boom 5.7 m (18'8")	1710	3,800
HD Reach Boom 5.7 m (18'8")	2010	4,400
Super Long Reach (SLR) Boom 8.85 m (29'0")	2170	4,800
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick R2.9B1 (9'6")	1080	2,400
HD Thumb Ready Reach Stick R2.9B1 (9'6")	1300	2,900
Super Long Reach Stick 6.28A (20'7")	1340	3,000
Buckets (without linkage):		
1.19 m ³ (1.56 yd ³) HD	960	2,100
0.53 m ³ (0.69 yd ³) General Duty (GD)	410	900
0.57 m ³ (0.75 yd ³) Ditch Cleaning (DC)	390	900
Quick Couplers:		
Pin Grabber	390	900
Universal	230	500

320 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

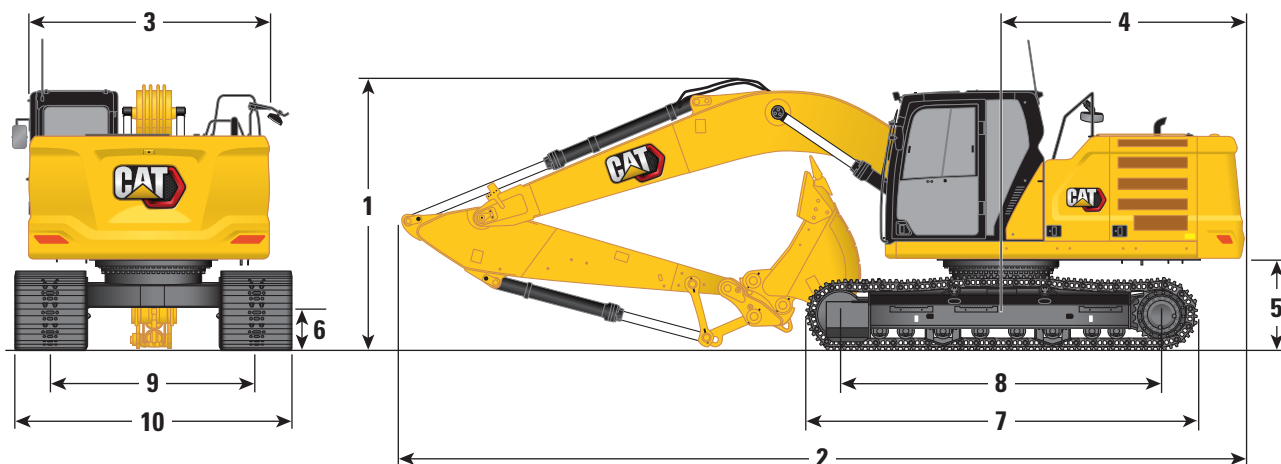

Boom Options

Reach/HD Reach Boom
5.7 m (18'8")

SLR Boom
8.85 m (29'0")

Stick Options

Reach/HD TR Reach Stick
R2.9B1 (9'6")

SLR Stick
6.28A (20'7")

1 Machine Height:

Top of Cab Height	2960 mm	9'9"	2960 mm	9'9"
Top of GNSS Antenna Height (if installed)	3000 mm	9'10"	3000 mm	9'10"
Top of OPG Height	3100 mm	10'2"	3100 mm	10'2"
Handrail Height	2950 mm	9'8"	2950 mm	9'8"
With Boom/Stick/Bucket Installed	3160 mm	10'4"	3190 mm	10'6"
With Boom/Stick Installed	2910 mm	9'7"	3070 mm	10'1"
With Boom Installed	2480 mm	8'2"	2650 mm	8'8"

2 Machine Length:

With Boom/Stick/Bucket Installed	9530 mm	31'3"	12 750 mm	41'10"
With Boom/Stick Installed	9500 mm	31'2"	12 760 mm	41'10"
With Boom Installed	8450 mm	27'9"	8920 mm	29'3"

3 Upperframe Width

2780 mm	9'1"	2780 mm	9'1"
---------	------	---------	------

4 Tail Swing Radius

2830 mm	9'3"	2830 mm	9'3"
---------	------	---------	------

5 Counterweight Clearance

1050 mm	3'5"	1050 mm	3'5"
---------	------	---------	------

6 Ground Clearance

470 mm	1'7"	470 mm	1'7"
--------	------	--------	------

7 Track Length

4450 mm	14'7"	4450 mm	14'7"
---------	-------	---------	-------

8 Length to Center of Rollers

3650 mm	12'0"	3650 mm	12'0"
---------	-------	---------	-------

9 Track Gauge

2380 mm	7'9"	2380 mm	7'9"
---------	------	---------	------

10 Undercarriage Width:

790 mm (31 in) Shoes	3170 mm	10'5"	3170 mm	10'5"
----------------------	---------	-------	---------	-------

Bucket Type

HD


DC

Bucket Capacity	1.19 m ³	1.56 yd ³	0.57 m ³	0.75 yd ³
Bucket Tip Radius	1570 mm	5'2"	1070 mm	3'6"

320 Hydraulic Excavator Specifications

Working Ranges

All dimensions are approximate and may vary depending on bucket selection.

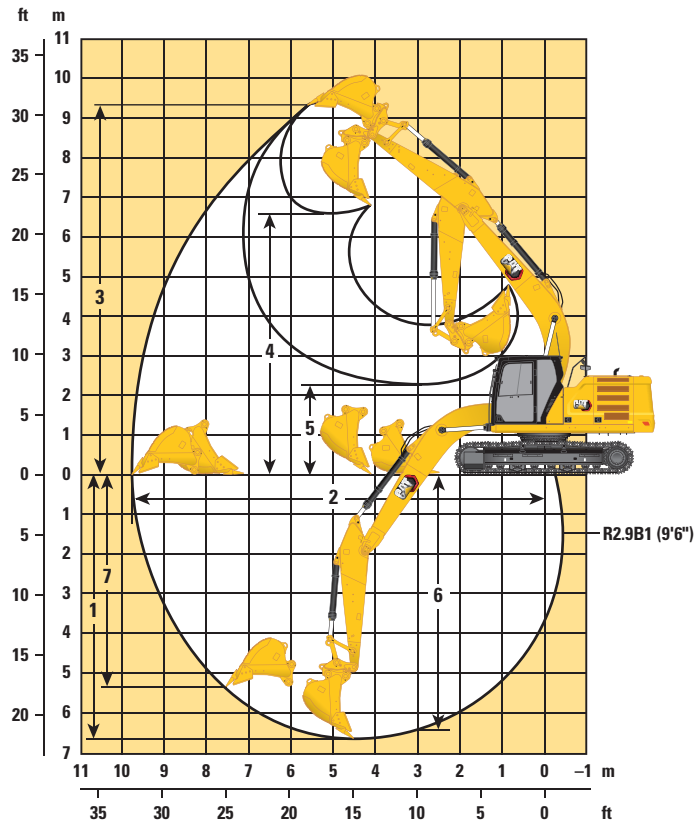

Boom Option

Reach/HD Reach Boom
5.7 m (18'8")

Stick Option


Reach/HD TR Reach Stick
R2.9B1 (9'6")

1 Maximum Digging Depth	6730 mm	22'1"
2 Maximum Reach at Ground Line	9870 mm	32'5"
3 Maximum Cutting Height	9450 mm	31'0"
4 Maximum Loading Height	6480 mm	21'3"
5 Minimum Loading Height	2160 mm	7'1"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	6560 mm	21'6"
7 Maximum Vertical Wall Digging Depth	5740 mm	18'10"
Bucket Digging Force (ISO)	150 kN	33,811 lbf
Stick Digging Force (ISO)	106 kN	23,920 lbf
Bucket Digging Force (ISO) – Auto Dig Boost	163 kN	36,709 lbf
Stick Digging Force (ISO) – Auto Dig Boost	116 kN	25,970 lbf
Bucket Type	HD	
Bucket Capacity	1.19 m ³	1.56 yd ³
Bucket Tip Radius	1570 mm	5'2"

320 Hydraulic Excavator Specifications

Working Ranges (continued)

All dimensions are approximate and may vary depending on bucket selection.

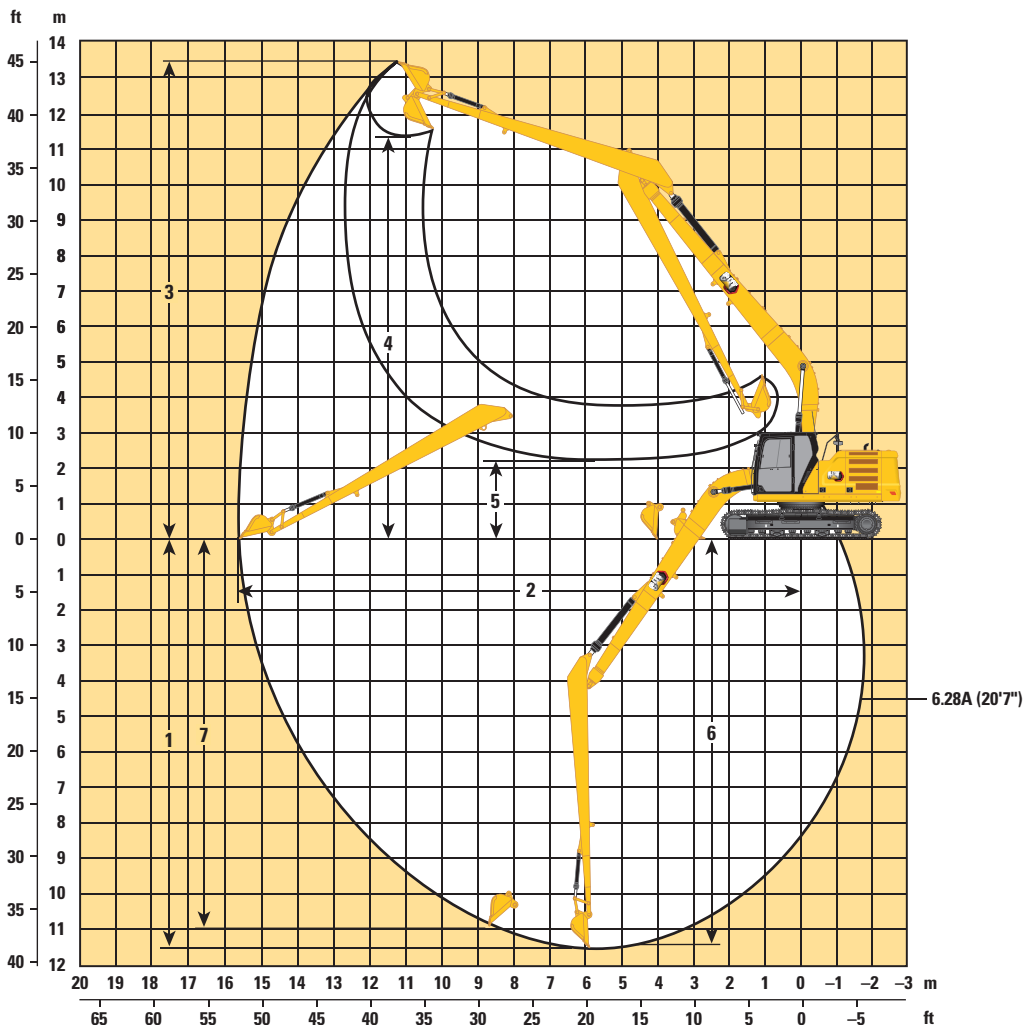

Boom Option

SLR Boom
8.85 m (29'0")




Stick Option










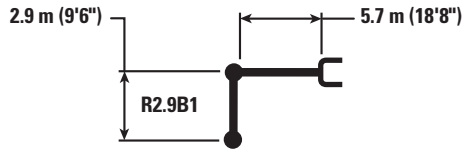




SLR Stick
6.28A (20'7")

1 Maximum Digging Depth	11 540 mm	37'10"
2 Maximum Reach at Ground Line	15 570 mm	51'1"
3 Maximum Cutting Height	13 540 mm	44'5"
4 Maximum Loading Height	11 440 mm	37'6"
5 Minimum Loading Height	2240 mm	7'4"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	11 440 mm	37'6"
7 Maximum Vertical Wall Digging Depth	11 020 mm	36'2"
Bucket Digging Force (ISO)	62 kN	13,841 lbf
Stick Digging Force (ISO)	49 kN	10,966 lbf
Bucket Type	DC	
Bucket Capacity	0.57 m ³	0.75 yd ³
Bucket Tip Radius	1070 mm	3'6"

320 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.2 mt (9,300 lb) – without Bucket, Heavy Lift: On



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft
														
7.5 m 25.0 ft	kg lb							*4950	*4950			*4300 *9,550	*4300 *9,550	6.15 20.00
6.0 m 20.0 ft	kg lb							*5450 *11,950	*5450 11,900			*4000 *8,800	*4000 *8,800	7.29 24.17
4.5 m 15.0 ft	kg lb							*6000 *13,000	5400 11,600	*5650 *12,350	3800 8,200	*3900 *8,600	3450 7,600	7.99 23.67
3.0 m 10.0 ft	kg lb					*8700 *18,750	7850 16,850	*6850 *14,900	5150 11,100	5750 12,300	3700 8,000	*4000 *8,800	3150 6,950	8.36 27.50
1.5 m 5.0 ft	kg lb					*10 550 *22,800	7350 15,800	*7800 16,800	4900 10,600	5600 12,050	3600 7,750	*4250 *9,350	3050 6,700	8.45 28.33
0 m 0 ft	kg lb			*6600 *15,200	*6600 *15,200	*11 600 *25,050	7050 15,200	7600 16,400	4750 10,250	5500 11,850	3500 7,600	*4700 *10,350	3100 6,800	8.26 27.50
-1.5 m -5.0 ft	kg lb	*7100 *15,800	*7100 *15,800	*11 400 *25,900	*11 400 *25,900	*11 700 *25,350	6950 15,000	7550 16,200	4700 10,050	5500 11,800	3500 7,550	5250 11,500	3350 7,350	7.78 25.83
-3.0 m -10.0 ft	kg lb	*12 100 *27,150	*12 100 *27,150	*15 500 *33,600	13 550 29,050	*10 950 *23,700	7050 15,150	7600 16,300	4700 10,150			6150 13,650	3900 8,700	6.95 23.33
-4.5 m -15.0 ft	kg lb			*12 400 *26,550	*12 400 *26,550	*8950 *19,000	7250 15,600					*6750 *14,850	5400 12,100	5.60 18.33



ISO 10567:2007






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

320 Hydraulic Excavator Specifications

HD Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,400 lb) – without Bucket, Heavy Lift: On

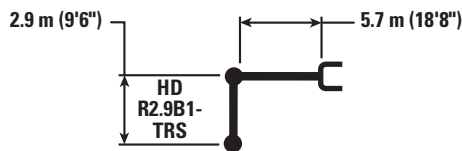

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft
7.5 m 25.0 ft	kg lb							*4900	*4900			*4250 *9,400	*4250 *9,400	6.15 20.00
6.0 m 20.0 ft	kg lb							*5350 *11,750	*5350 *11,750			*3900 *8,650	*3900 *8,650	7.29 24.17
4.5 m 15.0 ft	kg lb							*5900 *12,800	5700 12,200	*5500 *12,100	4000 8,600	*3850 *8,450	3600 8,000	7.99 26.67
3.0 m 10.0 ft	kg lb					*8600 *18,500	8300 17,850	*6750 *14,650	5450 11,700	*5900 *12,850	3900 8,400	*3950 *8,600	3300 7,250	8.36 27.50
1.5 m 5.0 ft	kg lb					*10 400 *22,450	7750 16,650	*7650 *16,600	5200 11,150	5900 12,650	3800 8,150	*4150 *9,150	3200 7,000	8.45 28.33
0 m 0 ft	kg lb			*6750 *15,450	*6750 *15,450	*11 400 *24,700	7450 16,000	8000 17,200	5000 10,750	5750 12,400	3700 7,950	*4600 *10,150	3250 7,100	8.26 27.50
-1.5 m -5.0 ft	kg lb	*7200 *16,050	*7200 *16,050	*11 650 *26,450	*11 650 *26,450	*11 500 *24,950	7350 15,800	7900 17,000	4900 10,600	5750 12,350	3650 7,900	*5400 *11,950	3500 7,700	7.78 25.83
-3.0 m -10.0 ft	kg lb	*12 350 *27,750	*12 350 *27,750	*15 300 *33,100	14 300 30,650	*10 800 *23,300	7400 15,950	7950 17,100	4950 10,650			6450 14,300	4100 9,100	6.95 23.33
-4.5 m -15.0 ft	kg lb			*12 150 *26,050	*12 150 *26,050	*8750 *18,600	7650 16,450					*6600 *14,500	5650 12,700	5.60 18.33



ISO 10567:2007






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.










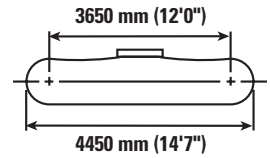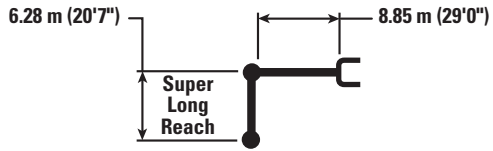




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

320 Hydraulic Excavator Specifications

Super Long Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,400 lb) – without Bucket



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft
														
12.0 m 40.0 ft	kg lb											*1450 *3,200	*1450 *3,200	10.35 33.25
10.5 m 35.0 ft	kg lb											*1350 *2,950	*1350 *2,950	11.66 37.75
9.0 m 30.0 ft	kg lb											*1300 *2,850	*1300 *2,850	12.66 41.17
7.5 m 25.0 ft	kg lb											*1250 *2,800	*1250 *2,800	13.41 43.75
6.0 m 20.0 ft	kg lb											*1250 *2,750	*1250 *2,750	13.97 45.67
4.5 m 15.0 ft	kg lb											*1300 *2,800	1250 2,700	14.34 46.92
3.0 m 10.0 ft	kg lb			*4700 *11,800	*4700 *11,800	*6050 *12,900	*6050 *12,900	*4450 *9,550	*4450 *9,550	*3600 *7,800	*3600 *7,800	*1300 *2,900	1150 2,550	14.55 47.67
1.5 m 5.0 ft	kg lb					*6750 *15,950	6500 14,100	*5250 *11,300	4500 9,700	*4100 *8,850	3350 7,200	*1400 *3,000	1150 2,450	14.60 47.83
0 m 0 ft	kg lb			*2000 *4,550	*2000 *4,550	*4650 *10,700	*4650 *10,700	*5900 *12,700	4050 8,750	*4550 *9,800	3050 6,550	*1450 *3,200	1100 2,400	14.49 47.50
-1.5 m -5.0 ft	kg lb	*2100 *4,600	*2100 *4,600	*2700 *6,050	*2700 *6,050	*4650 *10,500	*4650 *10,500	*6250 *13,550	3800 8,150	*4850 *10,450	2850 6,100	*1550 *3,450	1100 2,450	14.23 46.58
-3.0 m -10.0 ft	kg lb	*2850 *6,350	*2850 *6,350	*3500 *7,850	*3500 *7,850	*5200 *11,700	*5200 *11,700	*6400 *13,900	3650 7,850	4750 10,150	2700 5,800	*1750 *3,800	1150 2,550	13.79 45.17
-4.5 m -15.0 ft	kg lb	*3650 *8,150	*3650 *8,150	*4400 *9,900	*4400 *9,900	*6050 *13,700	5500 11,750	*6400 *13,800	3600 7,750	4650 10,050	2650 5,700	*1950 *4,300	1250 2,750	13.17 43.08
-6.0 m -20.0 ft	kg lb	*4550 *10,100	*4550 *10,100	*5400 *12,150	*5400 *12,150	*7200 *16,300	5600 12,000	*6150 *13,250	3650 7,850	4700 10,050	2650 5,750	*2300 *5,100	1400 3,050	12.34 40.25
-7.5 m -25.0 ft	kg lb	*5500 *12,250	*5500 *12,250	*6550 *14,800	*6550 *14,800	*7300 *15,650	5800 12,450	*5650 *12,150	3750 8,100	*4550 *9,750	2750 5,900	*2700 *5,950	1650 3,650	11.24 36.50
-9.0 m -30.0 ft	kg lb			*7950 *17,450	*7950 *17,450	*6150 *13,100	6050 *13,100	*4850 *10,350	3950 8,500	*3900 *8,300	2900 6,250	*2700 *5,900	2050 4,650	9.80 31.58



ISO 10567:2007



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with $\pm 5\%$ for all available track shoes.













Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

320 Hydraulic Excavator Specifications

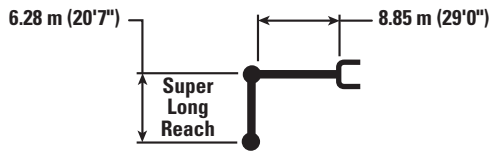Super Long Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,400 lb) – without Bucket *(continued)*



		9.0 m/30.0 ft		10.5 m/35.0 ft		12.0 m/40.0 ft		13.5 m/45.0 ft				
												m ft
12.0 m 40.0 ft	kg lb									*1450 *3,200	*1450 *3,200	10.35 33.25
10.5 m 35.0 ft	kg lb			*2200 *4,850	*2200 *4,850					*1350 *2,950	*1350 *2,950	11.66 37.75
9.0 m 30.0 ft	kg lb			*2200 *4,800	*2200 *4,800	*2200 *4,200	1950 4,150			*1300 *2,850	*1300 *2,850	12.66 41.17
7.5 m 25.0 ft	kg lb			*2250 *4,900	*2250 *4,900	*2200 *4,850	1950 4,150			*1250 *2,800	*1250 *2,800	13.41 43.75
6.0 m 20.0 ft	kg lb			*2400 *5,200	*2400 *5,200	*2300 *5,000	1900 4,050	*2100 *3,700	1450 3,100	*1250 *2,750	*1250 *2,750	13.97 45.67
4.5 m 15.0 ft	kg lb	*2800 *6,050	*2800 *6,050	*2550 *5,550	2300 4,950	*2400 *5,200	1800 3,850	*2300 5,000	1450 3,000	*1300 *2,800	1250 2,700	14.34 46.92
3.0 m 10.0 ft	kg lb	*3100 *6,750	2800 6,000	*2800 *6,000	2200 4,650	*2550 *5,500	1700 3,650	2300 4,900	1350 2,900	*1300 *2,900	1150 2,550	14.55 47.67
1.5 m 5.0 ft	kg lb	*3450 *7,400	2550 5,500	*3000 *6,450	2050 4,350	*2700 5,750	1650 3,450	2250 4,750	1300 2,800	*1400 *3,000	1150 2,450	14.60 47.83
0 m 0 ft	kg lb	*3700 *8,050	2400 5,100	3150 6,800	1900 4,050	2600 5,550	1550 3,300	2150 4,650	1250 2,650	*1450 *3,200	1100 2,400	14.49 47.50
-1.5 m -5.0 ft	kg lb	3800 8,150	2250 4,750	3050 6,550	1800 3,850	2500 5,400	1450 3,150	2150 4,550	1200 2,600	*1550 *3,450	1100 2,450	14.23 46.58
-3.0 m -10.0 ft	kg lb	3700 7,900	2150 4,550	3000 6,400	1700 3,700	2500 5,300	1400 3,050	2100 *4,200	1200 2,550	*1750 *3,800	1150 2,550	13.79 45.17
-4.5 m -15.0 ft	kg lb	3650 7,800	2100 4,450	2950 6,300	1700 3,600	2450 5,300	1400 3,000			*1950 *4,300	1250 2,750	13.17 43.08
-6.0 m -20.0 ft	kg lb	3650 7,800	2100 4,500	2950 6,350	1700 3,650	2500 5,350	1450 3,100			*2300 *5,100	1400 3,050	12.34 40.25
-7.5 m -25.0 ft	kg lb	3700 7,950	2150 4,600	3000 *6,450	1750 3,800					*2700 *5,950	1650 3,650	11.24 36.50
-9.0 m -30.0 ft	kg lb	*3150 *6,500	2300 4,950							*2700 *5,900	2050 4,650	9.80 31.58



ISO 10567:2007



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

320 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility

Counterweight									4.2 mt (9,300 lb)	4.7 mt (10,400 lb)	
	Linkage	Width		Capacity		Weight		Fill	Reach Boom	HD Reach Boom	SLR Boom
		mm	in	m³	yd³	kg	lb	%	R2.9 (9'6")	HD R2.9 (9'6") TRS	6.28A (20'7")
Pin-On (No Quick Coupler)											
General Duty Capacity	B	600	24	0.55	0.72	620	1,366	100	●	⊙	
	B	750	30	0.75	0.98	717	1,580	100	●	●	
	B	900	36	0.95	1.24	793	1,747	100	●	●	
	B	1050	42	1.16	1.52	848	1,869	100	⊙	●	
	B	1200	48	1.38	1.80	924	2,038	100	⊖	●	
	B	1350	54	1.59	2.08	1002	2,210	100	○	⊖	
General Duty Capacity – Wide Tip	B	600	24	0.55	0.72	617	1,360	100	●	○	
	B	750	30	0.75	0.98	715	1,576	100	●	●	
	B	900	36	0.95	1.24	791	1,743	100	●	●	
	B	1050	42	1.16	1.52	861	1,899	100	⊙	●	
	B	1200	48	1.38	1.80	938	2,069	100	⊖	●	
	B	1350	54	1.59	2.08	1016	2,241	100	○	⊖	
Heavy Duty	B	600	24	0.46	0.60	647	1,426	100	●	○	
	B	750	30	0.64	0.84	752	1,658	100	●	●	
	B	900	36	0.81	1.06	835	1,841	100	●	●	
	B	1050	42	1.00	1.31	892	1,967	100	●	●	
	B	1200	48	1.19	1.56	975	2,150	100	⊙	●	
	B	1350	54	1.38	1.81	1060	2,336	100	X	⊙	
Heavy Duty Power	B	1050	42	0.96	1.26	898	1,980	100	●	⊖	
	B	1200	48	1.14	1.49	983	2,167	100	X	●	
Severe Duty	B	600	24	0.46	0.61	683	1,506	90	●	⊙	
	B	750	30	0.64	0.84	795	1,753	90	●	●	
	B	900	36	0.81	1.06	885	1,950	90	●	●	
	B	1050	42	1.00	1.31	948	2,091	90	●	●	
	B	1200	48	1.19	1.56	1038	2,289	90	⊙	●	
	B	900	36	0.79	1.03	853	1,881	90	●	●	
Clean Up	B	1800	72	1.60	2.09	979	2,157	100	○	●	
	B	2000	78	1.76	2.31	1045	2,303	100	○	⊖	
Ditch Cleaning	B	1500	60	1.01	1.32	651	1,436	100	●	●	
	B	1800	72	1.24	1.62	739	1,630	100	⊙	⊙	
Ditch Cleaning Tilt	B	1500	60	0.90	1.18	948	2,090	100	●	●	
	B	1800	72	1.11	1.45	1063	2,344	100	⊙	⊙	
	B	1800	72	1.40	1.83	1105	2,437	100	○	⊖	
	B	2000	79	1.23	1.61	1132	2,496	100	⊖	⊖	
Tamping	B	2200	86	0.72	0.94	868	1,913	100	●	●	
	B	2200	86	0.90	1.18	891	1,965	100	●	●	
General Duty	312, A	900	36	0.53	0.69	403	888	100			◇
Ditch Cleaning	312, A	1200	48	0.57	0.74	386	851	100			◇
Maximum load with pin-on (payload + bucket)								kg	3010	3209	800
								lb	6,636	7,075	1,764

The above loads are in compliance with hydraulic excavator standard EN474-5:2022/AC:2022, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

320 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility *(continued)*

Counterweight									4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
	Linkage	Width		Capacity		Weight		Fill	Reach Boom	HD Reach Boom
		mm	in	m³	yd³	kg	lb	%	R2.9 (9'6")	HD R2.9 (9'6") TRS
With Cat Pin Grabber Coupler										
General Duty - Capacity (GDC)	B	600	24	0.55	0.72	620	1,366	100	●	●
	B	750	30	0.75	0.98	717	1,580	100	●	●
	B	900	36	0.95	1.24	793	1,747	100	⊙	●
	B	1050	42	1.16	1.52	848	1,869	100	⊖	⊖
	B	1200	48	1.38	1.80	924	2,038	100	○	○
	B	1350	54	1.59	2.08	1002	2,210	100	◇	◇
General Duty - Capacity (GDC) - Wide Tip	B	600	24	0.55	0.72	617	1,360	100	●	●
	B	750	30	0.75	0.98	715	1,576	100	●	●
	B	900	36	0.95	1.24	791	1,743	100	⊙	●
	B	1050	42	1.16	1.52	861	1,899	100	⊖	⊖
	B	1200	48	1.38	1.80	938	2,069	100	○	○
	B	1350	54	1.59	2.08	1016	2,241	100	◇	◇
Heavy Duty (HD)	B	600	24	0.46	0.60	647	1,426	100	●	●
	B	750	30	0.64	0.84	752	1,658	100	●	●
	B	900	36	0.81	1.06	835	1,841	100	●	●
	B	1050	42	1.00	1.31	892	1,967	100	⊙	⊙
	B	1200	48	1.19	1.56	975	2,150	100	○	⊖
	B	1350	54	1.38	1.81	1060	2,336	100	◇	○
Heavy Duty - Power (HDP)	B	1050	42	0.96	1.26	898	1,980	100	⊙	⊙
	B	1200	48	1.14	1.49	983	2,167	100	⊖	⊖
Heavy Duty - Pin Grabber Performance (HD-PGP)	B	600	24	0.44	0.57	682	1,503	100	●	●
	B	750	30	0.60	0.79	787	1,735	100	●	●
	B	900	36	0.76	1.00	876	1,931	100	●	●
	B	1050	42	0.93	1.22	940	2,072	100	⊙	⊙
	B	1200	48	1.11	1.45	1031	2,272	100	⊖	⊖
	B	1350	54	1.28	1.67	1122	2,474	100	○	○
Severe Duty - Power (SD)	B	600	24	0.46	0.61	683	1,506	90	●	●
	B	750	30	0.64	0.84	795	1,753	90	●	●
	B	900	36	0.81	1.06	885	1,950	90	●	●
	B	1050	42	1.00	1.31	948	2,091	90	⊙	●
	B	1200	48	1.19	1.56	1038	2,289	90	⊖	⊖
	B	900	36	0.79	1.03	853	1,881	90	●	●
Mud/Cleanup (M/CU) - N America	B	1800	72	1.60	2.09	979	2,157	100	◇	◇
	B	2000	78	1.76	2.31	1045	2,303	100	◇	◇
Ditch Cleaning (DC)	B	1500	60	1.01	1.32	651	1,436	100	⊙	●
	B	1800	72	1.24	1.62	739	1,630	100	⊖	⊖
Ditch Cleaning - Tilt (DCT)	B	1500	60	0.90	1.18	948	2,090	100	●	●
	B	1800	72	1.11	1.45	1063	2,344	100	⊙	⊖
	B	1800	72	1.40	1.83	1105	2,437	100	○	○
	B	2000	79	1.23	1.61	1132	2,496	100	○	○
Maximum load with coupler (payload + bucket)								kg	2636	2788
								lb	5,811	6,146

The above loads are in compliance with hydraulic excavator standard EN474-5:2022/AC:2022, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

320 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility (continued)

Counterweight									4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
	Linkage	Width		Capacity		Weight		Fill	Reach Boom	HD Reach Boom
		mm	in	m³	yd³	kg	lb	%	R2.9 (9'6")	HD R2.9 (9'6") TRS
Pin-On, TRS20 S70										
Heavy Duty - Grading	B	1600	63	1.00	1.31	691	1,523	100	⊖	⊙
	B	1800	71	1.10	1.44	758	1,671	100	○	⊖
Heavy Duty - Digging	B	1150	45	0.90	1.18	778	1,715	100	⊖	⊙
	B	1280	49	1.10	1.44	850	1,874	100	○	⊖
	B	910	36	0.81	1.06	920	2,028	100	⊖	●
	B	1070	42	1.00	1.31	993	2,189	100	○	●
	B	1220	48	1.19	1.56	1077	2,374	100	◇	⊙
	B	1370	54	1.38	1.81	1162	2,562	100	X	⊖
Heavy Duty - Trenching	B	610	24	0.46	0.60	692	1,525	100	●	○
	B	600	24	0.55	0.72	460	1,014	100	●	◇
Maximum load with pin-on (payload + bucket)								kg	2255	2454
								lb	4,971	5,410

Counterweight									4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
	Linkage	Width		Capacity		Weight		Fill	Reach Boom	HD Reach Boom
		mm	in	m³	yd³	kg	lb	%	R2.9 (9'6")	HD R2.9 (9'6") TRS
With HCS70, TRS20 HCS70										
Heavy Duty - Grading	B	1600	63	1.00	1.31	691	1,523	100	○	○
	B	1800	71	1.10	1.44	758	1,671	100	◇	○
Heavy Duty - Digging	B	1150	45	0.90	1.18	778	1,715	100	○	⊖
	B	1280	49	1.10	1.44	850	1,874	100	◇	◇
	B	910	36	0.81	1.06	920	2,028	100	○	○
	B	1070	42	1.00	1.31	993	2,189	100	◇	◇
	B	1220	48	1.19	1.56	1077	2,374	100	X	X
	B	1370	54	1.38	1.81	1162	2,562	100	X	X
	B	610	24	0.46	0.60	692	1,525	100	●	⊙
Heavy Duty - Trenching	B	600	24	0.55	0.72	460	1,014	100	●	⊙
	Maximum load with pin-on (payload + bucket)								kg	1873
lb									4,129	4,568

The above loads are in compliance with hydraulic excavator standard EN474-5:2022/AC:2022, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

320 Hydraulic Excavator Specifications

Attachments Offering Guide

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ † Allowed usage on machine less than 50%
 ☐ No Match
 ☒ 1800 kg/m³ (3,000 lb/yd³)
 ☐ 1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS

Counterweight		4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
Boom Type		Reach	HD Reach
Stick Length		R2.9 (9'6")	HD R2.9 (9'6") TRS
Hydraulic Hammers	H115 GC S	✓	✓
	H115 S	✓	✓
	H120 GC	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 GC		✓
	H130 GC S		✓
	H130 S	✓†	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
Demolition and Sorting Grapples	G318	✓	✓
	G318 WH-800	✓	✓
	G318 WH-1100	✓	✓
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P318 Primary Pulverizer	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
Mulchers	HM4015	✓	✓
	HM4815	✓	✓
Orange Peel Grapples	GSH420-500	●	●
	GSH420-600	●	●
	GSH420-750	●	●
	GSH425-750	○	●
	GSH425-950	○	○
	GSH520-500	●	●
	GSH520-600	●	●
	GSH520-750	●	●
	GSH525-750	○	○

(continued on next page)

320 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ † Allowed usage on machine less than 50%
 ☐ No Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Counterweight		4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
Boom Type		Reach	HD Reach
Stick Length		R2.9 (9'6")	HD R2.9 (9'6") TRS
Hydraulic Hammers	H115 GC S	✓	✓
	H115 S	✓	✓
	H120 GC	✓†	✓
	H120 GC S	✓†	✓
	H120 S	✓†	✓
	H130 GC	✓†*	✓
	H130 GC S	✓†	✓
	H130 S	✓†	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓*	✓
	MP318 Shear Jaw	✓	✓
	MP318 Tank Sheer Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
Demolition and Sorting Grapples	G318	✓	✓
	G318 WH-800	✓	✓
	G318 WH-1100	✓*	✓*
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓*	
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P318 Primary Pulverizer	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
Mulchers	HM4015	✓	✓
	HM4815	✓	✓

S70 DEDICATED COUPLER ATTACHMENTS

Counterweight		4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
Boom Type		Reach	HD Reach
Stick Length		R2.9 (9'6")	HD R2.9 (9'6") TRS
Hydraulic Hammers	H115 GC S	✓	✓
	H115 S	✓	✓
	H120 GC S	✓†	✓
	H120 S	✓†	✓
	H130 S	✓†	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
Demolition and Sorting Grapples	G318	✓	✓
	G318 WH-800	✓	✓
	G318 WH-1100	✓	✓
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓*	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P318 Primary Pulverizer	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓

(continued on next page)

320 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ † Allowed usage on machine less than 50%
 ☐ No Match

HCS70 DEDICATED COUPLER ATTACHMENTS

Counterweight		4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
Boom Type		Reach	HD Reach
Stick Length		R2.9 (9'6")	HD R2.9 (9'6") TRS
Hydraulic Hammers	H115 S	✓	✓
	H120 S	✓†	✓
	H130 S	✓†	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Tank Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
Demolition and Sorting Grapples	G318	✓	✓
	G318 WH-800	✓	✓
	G318 WH-1100	✓*	✓*
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P318 Primary Pulverizer	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓

HCS70/55 DEDICATED COUPLER ATTACHMENTS

Counterweight		4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
Boom Type		Reach	HD Reach
Stick Length		R2.9 (9'6")	HD R2.9 (9'6") TRS
Hydraulic Hammers	H115 S	✓	✓
	H120 S	✓†	✓
	H130 S	✓†	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓*	✓
	MP318 Shear Jaw	✓	✓
	MP318 Tank Shear Jaw	✓*	✓
	MP318 Universal Jaw	✓	✓
Demolition and Sorting Grapples	G318	✓	✓
	G318 WH-800	✓	✓
	G318 WH-1100	✓*	✓
Pulverizers	P218 Secondary Pulverizer	✓*	✓
	P318 Primary Pulverizer	✓*	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓

(continued on next page)

320 Hydraulic Excavator Specifications

Attachments Offering Guide (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match
 ☐ * Working range front only
 ☐ † Allowed usage on machine less than 50%
 ☐ No Match

TRS20 (S70 TOP / S70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
Boom Type		Reach	Reach HD
Stick Length		R2.9 (9'6")	HD R2.9 (9'6") TRS
Hydraulic Hammers	H115 S	✓	✓
	H120 S	✓†	✓†

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

The TRS18 has been replaced by TRS20. For legacy machines or work tool attachments, please consult the appropriate compatibility guide to ensure accurate matching and performance.

TRS20 (PIN-ON TOP / S70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
Boom Type		Reach	Reach HD
Stick Length		R2.9 (9'6")	HD R2.9 (9'6") TRS
Hydraulic Hammers	H115 GC S	✓	✓
	H115 S	✓	✓
	H120 GC S	✓†	✓
	H120 S	✓†	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

The TRS18 has been replaced by TRS20. For legacy machines or work tool attachments, please consult the appropriate compatibility guide to ensure accurate matching and performance.

BOOM-MOUNT ATTACHMENTS

Counterweight		4.2 mt (9,300 lb)	4.7 mt (10,400 lb)
Boom Type		Reach	HD Reach
Mobile Scrap and Demolition Shears	S2050	✓	✓
	S3035 Flat Top	✓	✓

320 Hydraulic Excavator Specifications

Thumb Specifications



Match



No Match

Bucket Type	Tooth Quantity	Width		Pro Plus		Pro		Stiff Link		Utility	
		mm	in	Pin-on	Cat Pin Grabber	Pin-on	Cat Pin Grabber	Pin-on	Cat Pin Grabber	Pin-on	Cat Pin Grabber
General Duty	5	902	36	✓	✓	✓	✓	✓	✓	✓	✓
	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	6	1208	48	✓	✓	✓	✓	✓	✓	✓	✓
	7	1350	54	✓	✓	✓	✓	✓	✓	✓	✓
Heavy Duty	5	902	36	✓	✓	✓	✓	✓	✓	✓	✓
	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	6	1208	48	✓	✓	✓	✓	✓	✓	✓	✓
	7	1350	54	✓	✓	✓	✓	✓	✓	✓	✓
Heavy Duty Power	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	6	1208	48				✓	✓	✓	✓	✓
Severe Duty	5	902	36	✓	✓	✓	✓	✓	✓	✓	✓
	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	6	1208	48	✓	✓	✓	✓	✓	✓	✓	✓
Pin Grabber Performance Buckets	5	902	36		✓					✓	✓
	5	1056	42		✓		✓			✓	✓
	6	1208	48		✓					✓	✓
	7	1350	54							✓	✓

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat® dealer for details.

	Standard	Optional		Standard	Optional
CAB			ENGINE		
Rollover Protective Structure (ROPS)	✓		Cat C4.4 twin turbo diesel engine	✓	
Operator Protective Guard (OPG)		✓	Three selectable power modes: Power, Smart, Eco	✓	
High-resolution 254 mm (10") LCD touchscreen monitor	✓		Auto engine speed control	✓	
Auto bi-level air conditioner	✓		Auto engine idle shutdown	✓	
Jog dial and shortcut keys for monitor control	✓		Work up to 3000 m (9,842.5 ft) above sea level without engine power de-rating	✓	
Keyless push-to-start engine control	✓		52° C (125° F) high-ambient cooling capacity	✓	
Height-adjustable console	✓		Cold starting capability for -32° C (-25° F)	✓	
Tilt-up left-side console	✓		Double element air filter with integrated pre-cleaner	✓	
Heated air-suspension seat	✓		Electric fuel priming pump	✓	
51 mm (2") seat belt	✓		Electric cooling fans with auto-reverse function	✓	
Monitor integrated Bluetooth® radio with USB/Auxiliary ports	✓		HYDRAULIC SYSTEM		
12V DC outlets	✓		Boom and stick regeneration circuits	✓	
Document storage	✓		Electronic main control valve	✓	
Overhead storage and rear storage with nets	✓		Auto hydraulic oil warm up	✓	
Beverage holder	✓		Auto Dig Boost	✓ ¹	
Cup holder	✓		Auto heavy lift	✓ ²	
Openable two-piece front window	✓		Auto two-speed travel	✓	
Rear window emergency exit	✓		Boom and stick drift reduction valve	✓	
Radial wiper with washer	✓		Element type main hydraulic filter	✓	
Openable polycarbonate skylight hatch	✓		Slider joysticks	✓	
LED dome light	✓		Tandem type electronic main pump	✓	
Floor welcome light	✓		Medium pressure auxiliary circuit		✓
Roof sunscreen	✓		Hydraulic efficiency monitoring		✓
Roller front sunscreen	✓		Advanced tool control		✓
Roller rear sunscreen		✓	Quick coupler circuit for Cat pin grabber		✓
Washable floor mat	✓		Fine swing control		✓
Beacon ready	✓				
Cat Stick Steer		✓			

¹Requires heavy lift valve; not available for Super Long Reach.

²Not available for Super Long Reach.

(continued on next page)

320 Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
UNDERCARRIAGE AND STRUCTURES			CAT TECHNOLOGY		
790 mm (31 in) triple grouser track shoes	✓		Cat Equipment Management:		
Tie-down points on base frame	✓		VisionLink™	✓ ³	
Segmented track guiding guards	✓		Remote Flash	✓	
Full-length track guiding guards		✓	Remote Troubleshoot	✓	
Bottom guards	✓		Work tool recognition and tracking (PL161)	✓	
HD bottom guards		✓	Operator Coaching		✓ ⁴
Swivel guard	✓		Cat Grade:		
Travel motor guards	✓		Cat Grade with 2D	✓ ⁵	
HD travel motor guards		✓	Cat Grade with 2D with Attachment Ready Option (ARO)		✓
Grease lubricated track links	✓		Laser catcher		✓
4.2 mt (9,300 lb) counterweight	✓		Cat Grade with 3D (single or dual GNSS)		✓
4.7 mt (10,400 lb) counterweight for Super Long Reach		✓	Compatible with 3D grade systems from Trimble, Topcon, and Leica	✓	
Semi-HD swing frame	✓		Cat Grade 3D Ready		✓
Base frame with HD track rollers and standard carrier rollers	✓		Cat Grade Connectivity		✓ ⁶
Storage tray in pump compartment	✓		Cat Assist: ⁵		
BOOM, STICKS AND LINKAGES			Grade Assist	✓	
5.7 m (18'8") Reach boom		✓	Boom Assist	✓	
5.7 m (18'8") HD Reach boom		✓	Bucket Assist	✓	
2.9 m (9'6") Reach stick		✓	Swing Assist	✓	
2.9 m (9'6") HD Thumb Ready Reach stick		✓	Lift Assist	✓	
8.85 m (29'0") Super Long Reach boom		✓	Cat Payload: ⁵		
6.28 m (20'7") Super Long Reach stick		✓	On-the-go weighing	✓	
Bucket linkage, B1-family with lifting eye, Cat Grade	✓		Semiautomatic calibration	✓	
Bucket linkage, A-family with lifting eye, SLR		✓	Payload/cycle information	✓	
ELECTRICAL SYSTEM			VisionLink back office reporting		✓ ⁶
1,000 CCA maintenance-free batteries (×2)	✓		Cat Advanced Payload:		
Centralized electrical disconnect switch	✓		Daily totals		✓
Programmable time-delay LED working lights	✓		Custom lists		✓
LED chassis light, left-hand (LH) and right hand (RH) boom lights for Reach and SLR, cab lights	✓		Smart weight target		✓
Premium surround lighting package		✓	E-ticket Integration		✓ ⁶
			Other:		
			Cat Tiltrotator (TRS) integration		✓

³Provides core telematics data to manage health, maintenance insights, and condition monitoring. Other plans available for more comprehensive data reporting. Consult your Cat dealer for details.

⁴VisionLink subscription required for back office reporting. Consult your Cat dealer for details.

⁵Optional on machines equipped with a Super Long Reach boom and stick.

⁶VisionLink subscription required. Consult your Cat dealer for details.

(continued on next page)

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
SERVICE AND MAINTENANCE			SAFETY AND SECURITY		
S·O·S SM ports	✓		Cat Command (remote control)		✓
QuickEvac TM maintenance ready		✓	2D E-Fence:	✓ ⁵	
Grouped location for engine oil and fuel filters	✓		– E-ceiling		
Ground-level second dipstick for engine oil	✓		– E-floor		
Radiator screen		✓	– E-swing		
Integrated vehicle health management system	✓		– E-wall		
			– E-cab avoidance		
			Auto hammer stop	✓	
			Rearview and right-side-view cameras	✓	
			360° visibility		✓
			Neutral lever (lock out) for all controls	✓	
			Anti-skid plate and countersunk bolts on service platform	✓	
			Ground-level accessible secondary engine shutoff switch in cab	✓	
			Lockable disconnect switch	✓	
			RH handrail and handhold	✓	
			Travel alarm	✓	
			Swing alarm		✓
			Inspection lighting		✓

⁵Optional on machines equipped with a Super Long Reach boom and stick.

Dealer Installed Kit and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Lower radial wiper
- Rain protector plus cab light cover
- Laminated P5A glass front windshield
- LH/RH electrical pedal for tool control
- Armrest kit
- Seat with 4-point seatbelt capability
- Dual exit rear window kit
- 75 mm (3") retractable seat belt
- Auxiliary relay

ELECTRICAL

- Premium surround working lights

GUARDS

- Swivel guard
- Side rubber bumper guard
- Operator Protective Guards
- Mesh guard full front
- Mesh guard half front
- Full protecting vandalism guard

MAINTENANCE

- Jump start wiring
- Duct ready kit

SAFETY AND SECURITY

- Cat Detect – People Detection
- Cat Command – Remote control kit
- Seat belt indicator
- Bluetooth receiver
- Bluetooth key fob

OTHER ATTACHMENTS

- Delayed engine shutdown kit
- Upper cover for antennae
- Removable mast for antennae
- Power clam kit
- Grease gun holder

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

Engine

- The Cat® C4.4 engine meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
 - Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) and are compatible* with ULSD blended with the following lower-carbon intensity fuels** up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)***
 - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels
- Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.
- * While Cat engines are compatible with these alternative fuels, some regions may not allow their use.
- ** Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.
- *** Engines with no aftertreatment devices are compatible with higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a or R1234yf. See the label or instruction manual for identification of the gas.
 - If equipped with R134a (Global Warming Potential = 1430), the system contains 0.85 kg (1.9 lb) of refrigerant which has a CO₂ equivalent of 1.216 metric tonnes (1.340 tons).
 - If equipped with R1234yf (Global Warming Potential = 0.501), the system contains 0.75 kg (1.7 lb) of refrigerant which has a CO₂ equivalent of 0.001 metric tonnes (0.001 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound Performance

ISO 6395:2008 (external) – 99 dB(A)

ISO 6396:2008 (inside cab) – 70 dB(A)

- External Sound – The spectator sound power level is measured according to the test procedures and conditions specified in ISO 6395:2008 for a Cat machine that is properly equipped and maintained. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Internal Sound – The operator sound pressure level is measured according to the test procedures and conditions specified in ISO 6396:2008 for a cab offered by Caterpillar, when properly installed and maintained and tested with the door and windows closed. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained for doors/windows open) for extended periods or in noisy environment(s).

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Advanced hydraulic systems balance power and efficiency
 - Smart mode matches machine power to digging requirements automatically
 - Eco mode supports reduced fuel consumption for light applications
 - Utilizing Cat technologies can help increase operating efficiencies
 - Extended service intervals help decrease maintenance costs
 - The latest hydraulic oil filter provides longer life with a 3,000-hour replacement interval

Recycling

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage
Steel	82.98%
Iron	5.36%
Nonferrous Metal	2.57%
Mixed Metal	1.57%
Mixed-Metal and Nonmetal	1.02%
Plastic	1.29%
Rubber	0.19%
Mixed Nonmetallic	0.22%
Fluid	3.18%
Other	1.62%
Uncategorized	0.00%
Total	100%

- A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714:2008 (Earthmoving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714:2008 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following value in the table may vary.

Recyclability – 97%

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2025 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, VisionLink, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ3758-01 (11-2025)
Replaces: AEXQ3758-00
Build Number: 07H
(N Am)

