



323

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	2
Standards	3
Sound Performance	3
Operating Weights and Ground Pressures	3
Major Component Weights	4
Dimensions	5
Working Ranges	6
Heavy Duty (HD) Reach Boom Lift Capacities – Counterweight: 4.2 mt (9,260 lb)	8
HD Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb)	9
Super Long Reach (SLR) Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb)	13
Bucket Specifications and Compatibility:	
Chile, Colombia	15
Türkiye	16
Attachments Offering Guide:	
Chile, Colombia	17
Türkiye	24
Thumb Specifications	23
Standard and Optional Equipment	29
Dealer Installed Kit and Attachments	31
Cab Options	32
323 Environmental Declaration	33

323 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C7.1	
Net Power		
ISO 9249:2007	128.5 kW	172 hp
ISO 9249:2007 (DIN)	175 hp (metric)	
Engine Power		
ISO 14396:2002	129.4 kW	174 hp
ISO 14396:2002 (DIN)	176 hp (metric)	
Bore	105 mm	4 in
Stroke	135 mm	5 in
Displacement	7.01 L	428 in ³
Biodiesel Capability	Up to B20 ⁽¹⁾	

- Meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator.
- Engine speed at 2,200 rpm.

⁽¹⁾Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:

- ✓ 20% biodiesel FAME (fatty acid methyl ester)*
- ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).*

***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

Swing Mechanism

Swing Speed*	11.25 rpm	
Maximum Swing Torque	82 kN·m	60,300 lbf·ft

*For CE-marked machine default value may be set lower.

Weights

Operating Weight	24 600 kg	54,200 lb
• Long undercarriage, 5.7 m (18'8") Heavy Duty (HD) Reach boom, HD R2.9 (9'6") stick, 1.30 m ³ (1.71 yd ³) HD bucket, 600 mm (24") HD triple grouser shoes and 5.4 mt (11,900 lb) counterweight.		
Operating Weight	25 000 kg	55,100 lb
• Long undercarriage, 5.7 m (18'8") HD Reach boom, HD R2.9 (9'6") stick, 1.30 m ³ (1.71 yd ³) HD bucket, 700 mm (28") HD triple grouser shoes and 5.4 mt (11,900 lb) counterweight.		

Track

Optional Track Shoe Width	600 mm	24 in
Optional Track Shoe Width	700 mm	28 in
Optional Track Shoe Width	790 mm	31 in
Number of Shoes (each side)	49	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Gradeability	35°/70%	
Maximum Travel Speed	5.7 km/h	3.5 mph
Maximum Drawbar Pull	203 kN	45,614 lbf

Hydraulic System

Main System – Maximum Flow – Implement	429 L/min (215 × 2 pumps)	113 gal/min (57 × 2 pumps)
Maximum Pressure – Equipment – Normal	35 000 kPa	5,075 psi
Maximum Pressure – Equipment – Heavy Lift Mode/Auto Dig Boost	38 000 kPa	5,510 psi
Maximum Pressure – Travel	34 300 kPa	4,974 psi
Maximum Pressure – Swing	27 500 kPa	3,998 psi
Boom Cylinder – Bore	120 mm	5 in
Boom Cylinder – Stroke	1260 mm	50 in
Boom Cylinder – Bore – Heavy Lift Mode*	125 mm	5 in
Boom Cylinder – Stroke – Heavy Lift Mode*	1260 mm	50 in
Stick Cylinder – Bore	140 mm	6 in
Stick Cylinder – Stroke	1504 mm	59 in
Bucket Cylinder – Bore	120 mm	5 in
Bucket Cylinder – Stroke	1104 mm	43 in

*For use with 5.4 mt counterweight only.

Service Refill Capacities

Fuel Tank Capacity	345 L	86.6 gal
Cooling System	25 L	6.6 gal
Engine Oil	25 L	6.6 gal
Swing Drive	6 L	1.6 gal
Final Drive	5 L	1.3 gal
Hydraulic System (including tank)	234 L	61.8 gal
Hydraulic Tank	115 L	30.4 gal
Diesel Exhaust Fluid (DEF) Tank	41 L	10.8 gal

323 Hydraulic Excavator Specifications

Standards

Brakes	ISO 10265:2008
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008
Cab/Operator Protective Guards (OPG)(optional)	ISO 10262-2:1998 Level II

Sound Performance

ISO 6395:2008 (external)	100 dB(A)
ISO 6396:2008 (inside cab)	70 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Operating Weights and Ground Pressures

	600 mm (24") HD Triple Grouser Shoes				600 mm (24") Double Grouser Shoes			
	Weight		Ground Pressure		Weight		Ground Pressure	
Base Machine Configurations	kg	lb	kPa	psi	kg	lb	kPa	psi
Base Frame with Track Rollers and Carrier Rollers								
5.4 mt (11,900 lb) Counterweight + Long Undercarriage Base Machine								
HD Reach Boom + HD R2.9 (9'6") Stick + 1.30 m ³ (1.71 yd ³) HD Bucket	24 600	(54,200)	51.2	(7.4)	24 600	(54,200)	51.2	(7.4)

	700 mm (28") HD Triple Grouser Shoes				790 mm (31") HD Triple Grouser Shoes			
	Weight		Ground Pressure		Weight		Ground Pressure	
Base Machine Configurations	kg	lb	kPa	psi	kg	lb	kPa	psi
Base Frame with Track Rollers and Carrier Rollers								
5.4 mt (11,900 lb) Counterweight + Long Undercarriage Base Machine								
HD Reach Boom + HD R2.9 (9'6") Stick + 1.30 m ³ (1.71 yd ³) HD Bucket	25 000	(55,100)	44.6	(6.5)	25 300	(55,800)	40.0	(5.8)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

323 Hydraulic Excavator Specifications


Major Component Weights

	kg	lb
Base Machine (with 4.2 mt [9,260 lb] counterweight, semi-HD swing frame, standard base frame with HD track rollers and standard carrier rollers for long undercarriage, – does not include boom, stick, bucket, boom cylinders, stick cylinder, bucket cylinder, tracks, 90% fuel tank and 75 kg [165 lb] operator).	14 800	32,600
Base Machine (with 5.4 mt [11,900 lb] counterweight, HD swing frame, HD base frame with SD track rollers and standard carrier rollers for long undercarriage, – does not include boom, stick, bucket, boom cylinders, stick cylinder, bucket cylinder, tracks, 90% fuel tank and 75 kg [165 lb] operator).	16 700	36,800
Track Shoes:		
600 mm (24") Width, 12.5 mm (0.49") Thick, HD Triple Grouser Track Shoes	3080	6,800
600 mm (24") Width, 13 mm (0.51") Thick, Double Grouser Track Shoes	3080	6,800
700 mm (28") Width, 12.5 mm (0.49") Thick, HD Triple Grouser Track Shoes	3490	7,700
790 mm (31") Width, 12.5 mm (0.49") Thick, HD Triple Grouser Track Shoes with Step Extension	3800	8,400
Boom Cylinders	340	750
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	310	680
Counterweights:		
4.2 mt (9,260 lb) Counterweight	4200	9,300
5.4 mt (11,900 lb) Counterweight	5400	11,900
Swing Frames:		
Semi-HD Swing Frame	1910	4,210
HD Swing Frame	2090	4,600
Undercarriage:		
HD Base Frame with SD Track Rollers and Standard Carrier Rollers	4470	9,900
Booms (including lines, pins, stick cylinder):		
HD Reach Boom 5.7 m (18'8")	2010	4,400
Super Long Reach (SLR) Boom 8.85 m (29'0")	2170	4,780
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
HD Reach Stick R2.9B1 (9'6")	1210	2,700
HD Reach Stick R2.5B1 (8'2")	1180	2,600
Super Long Reach Stick 6.28A (20'7")	1340	2,950
Buckets (without linkage):		
1.30 m ³ (1.71 yd ³) HD	960	2,100
0.57 m ³ (0.75 yd ³) Ditch Cleaning (DC)	390	850
0.53 m ³ (0.69 yd ³) General Duty (GD)	410	900
Quick Couplers:		
Universal	230	500
Pin Grabber	390	850

323 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

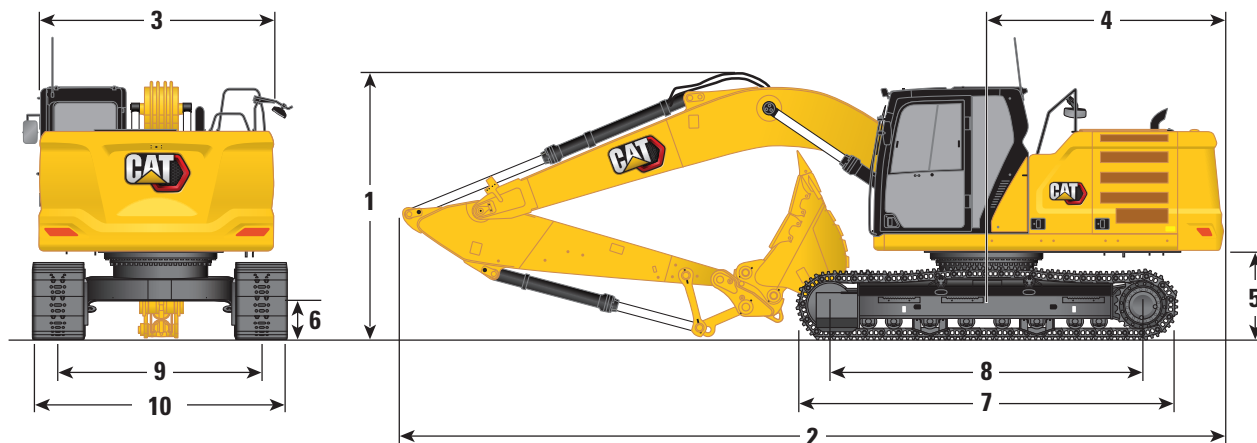


Boom Options	HD Reach Boom 5.7 m (18'8")		Super Long Reach Boom 8.85 m (29'0")			
Stick Options	HD Reach Sticks		Super Long Reach Stick			
	R2.9B1 (9'6")	R2.5B1 (8'2")	6.28A (20'7")			
1 Machine Height:						
Top of Cab Height	2960 mm	9'9"	2960 mm	9'9"	2960 mm	9'9"
Top of GNSS Antenna Height (if installed)	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
Top of OPG Height	3100 mm	10'2"	3100 mm	10'2"	3100 mm	10'2"
Handrail Height	2950 mm	9'8"	2950 mm	9'8"	2950 mm	9'8"
With Boom/Stick/Bucket Installed	3160 mm	10'4"	3080 mm	10'1"	3190 mm	10'6"
With Boom/Stick Installed	2910 mm	9'7"	2910 mm	9'7"	3070 mm	10'1"
With Boom Installed	2480 mm	8'2"	2480 mm	8'2"	2650 mm	8'8"
2 Machine Length:						
With Boom/Stick/Bucket Installed	9530 mm	31'3"	9530 mm	31'3"	12 750 mm	41'10"
With Boom/Stick Installed	9500 mm	31'2"	9500 mm	31'2"	12 760 mm	41'10"
With Boom Installed	8450 mm	27'9"	8450 mm	27'9"	8920 mm	29'3"
3 Upperframe Width						
	2780 mm	9'1"	2780 mm	9'1"	2780 mm	9'1"
4 Tail Swing Radius						
	2830 mm	9'3"	2830 mm	9'3"	2830 mm	9'3"
5 Counterweight Clearance						
	1050 mm	3'5"	1050 mm	3'5"	1050 mm	3'5"
6 Ground Clearance						
	470 mm	1'7"	470 mm	1'7"	470 mm	1'7"
7 Track Length						
	4450 mm	14'7"	4450 mm	14'7"	4450 mm	14'7"
8 Length to Center of Rollers						
	3650 mm	12'0"	3650 mm	12'0"	3650 mm	12'0"
9 Track Gauge						
	2380 mm	7'10"	2380 mm	7'10"	2380 mm	7'10"
10 Undercarriage Width:						
600 mm (24") Shoes	2980 mm	9'9"	2980 mm	9'9"	2980 mm	9'9"
700 mm (28") Shoes	3080 mm	10'1"	3080 mm	10'1"	3080 mm	10'1"
790 mm (31") Shoes	3170 mm	10'4"	3170 mm	10'4"	3170 mm	10'4"
Bucket Type	HD		HD		DC*	
Bucket Capacity	1.30 m ³	1.71 yd ³	1.30 m ³	1.71 yd ³	0.57 m ³	0.75 yd ³
Bucket Tip Radius	1580 mm	5'2"	1580 mm	5'2"	1073 mm	3'5"

*SLR has same data with 0.53 m³ (0.69 yd³) GC bucket/1224 mm (4.0 ft) bucket tip radius.

323 Hydraulic Excavator Specifications

Working Ranges

All dimensions are approximate and may vary depending on bucket selection.

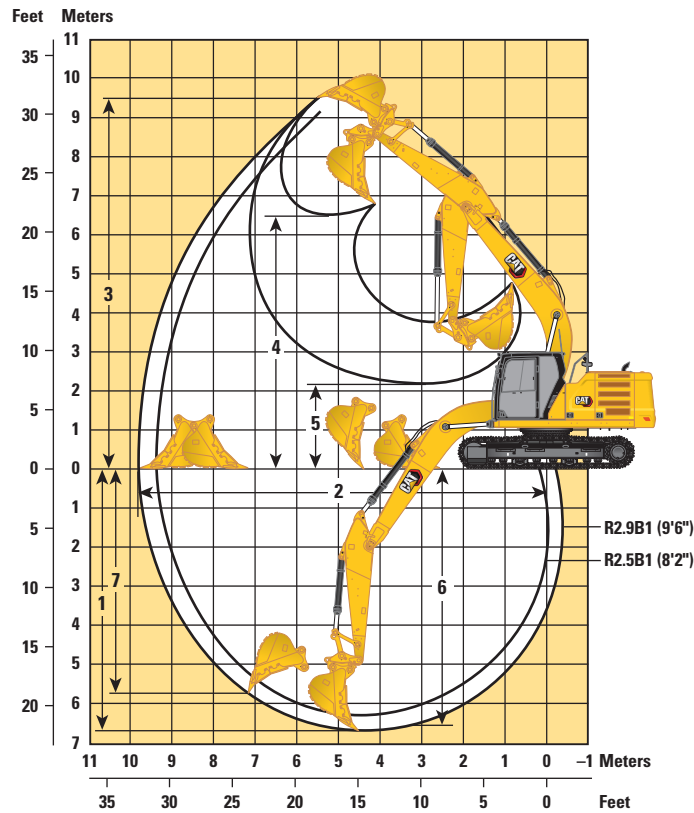

Boom Options

HD Reach Boom
5.7 m (18'8")

Stick Options

HD Reach Sticks

R2.9B1 (9'6")


R2.5B1 (8'2")

	R2.9B1 (9'6")		R2.5B1 (8'2")
1 Maximum Digging Depth	6730 mm	22'1"	6310 mm
2 Maximum Reach at Ground Line	9870 mm	32'4"	9470 mm
3 Maximum Cutting Height	9450 mm	31'0"	9250 mm
4 Maximum Loading Height	6480 mm	21'3"	6280 mm
5 Minimum Loading Height	2160 mm	7'1"	2580 mm
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	6560 mm	21'6"	6120 mm
7 Maximum Vertical Wall Digging Depth	5740 mm	18'9"	5340 mm
Bucket Digging Force (ISO)	140 kN	34,308 lbf	140 kN
Stick Digging Force (ISO)	107 kN	26,094 lbf	118 kN
Bucket Digging Force (ISO) – Auto Dig Boost	152 kN	37,248 lbf	152 kN
Stick Digging Force (ISO) – Auto Dig Boost	116 kN	28,331 lbf	128 kN
Bucket Type	HD		HD
Bucket Capacity	1.30 m ³	1.70 yd ³	1.30 m ³
Bucket Tip Radius	1580 mm	5'2"	1580 mm

323 Hydraulic Excavator Specifications

Working Ranges




All dimensions are approximate and may vary depending on bucket selection.

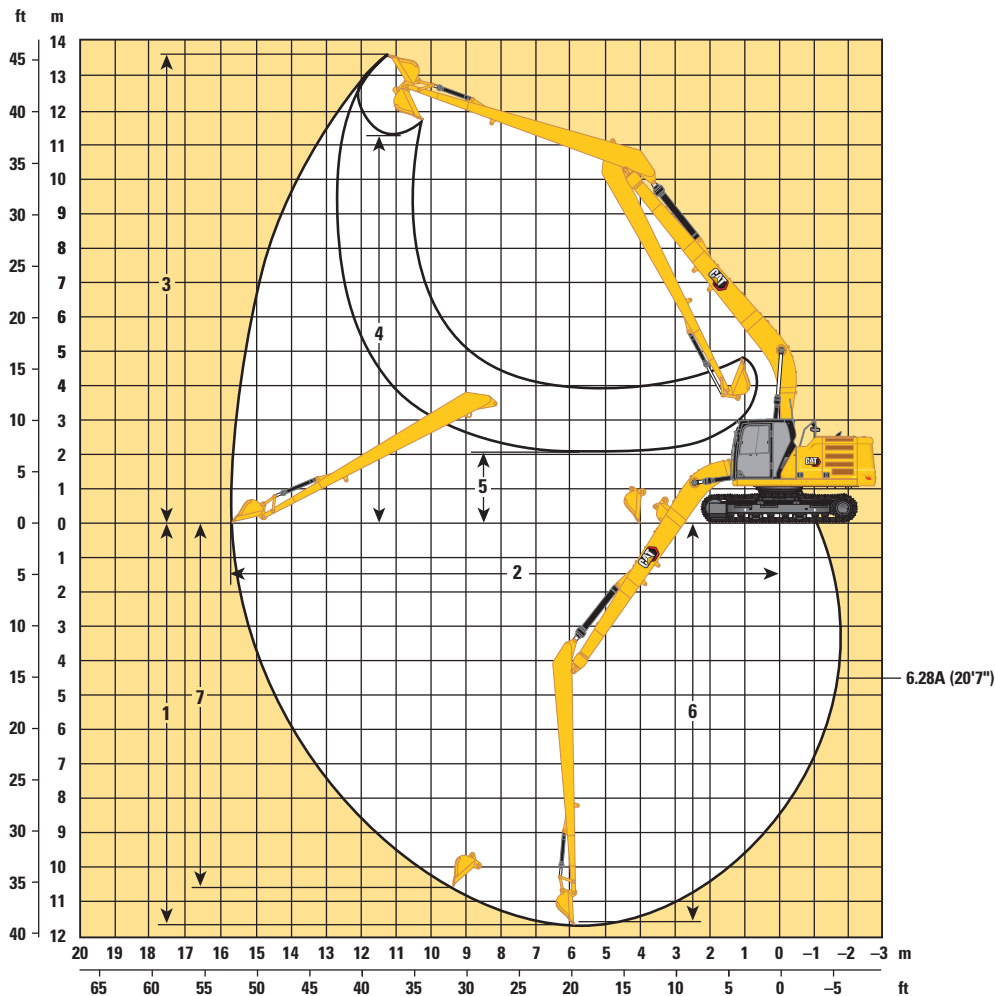

Boom Option	Super Long Reach Boom 8.85 m (29'0")			
Stick Options	Super Long Reach Stick 6.28A (20'7")			
1 Maximum Digging Depth	11 540 mm	37'10"	11 690 mm	38'4"
2 Maximum Reach at Ground Line	15 570 mm	51'1"	15 730 mm	51'7"
3 Maximum Cutting Height	13 540 mm	44'5"	13 610 mm	44'8"
4 Maximum Loading Height	11 440 mm	37'6"	11 290 mm	37'0"
5 Minimum Loading Height	2240 mm	7'4"	2080 mm	6'10"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	11 440 mm	37'6"	11 590 mm	38'0"
7 Maximum Vertical Wall Digging Depth	11 020 mm	36'2"	10 560 mm	34'8"
Bucket Digging Force (ISO)	62 kN	13,841 lbf	60 kN	13,549 lbf
Stick Digging Force (ISO)	49 kN	10,966 lbf	49 kN	10,935 lbf
Bucket Type	DC		GD	
Bucket Capacity	0.57 m ³	0.75 yd ³	0.5 m ³	0.69 yd ³
Bucket Tip Radius	1070 mm	3'6"	1230 mm	4'0"




323 Hydraulic Excavator Specifications

HD Reach Boom Lift Capacities – Counterweight: 4.2 mt (9,260 lb) – without Bucket – Heavy Lift: On



Reach mm in	kg lb	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb							*4900	*4900			*4250 *9,400	*4250 *9,400	6150 240
6000 mm 240 in	kg lb							*5300 *11,650	*5300 *11,650			*3900 *8,650	*3900 *8,650	7290 290
4500 mm 180 in	kg lb							*5850 *12,700	5350 11,550	*5500 *12,000	3750 8,050	*3850 *8,450	3400 7,500	7990 320
3000 mm 120 in	kg lb					*8550 *18,350	7800 16,800	*6700 *14,500	5100 11,000	5700 12,200	3650 7,850	*3950 *8,650	3100 6,750	8360 330
1500 mm 60 in	kg lb					*10 350 *22,250	7250 15,600	*7600 *16,450	4850 10,400	5550 11,900	3550 7,550	*4150 *9,150	2950 6,500	8450 340
0 mm 0 in	kg lb			*6550 *15,050	*6550 *15,050	*11 300 *24,450	6950 14,900	7550 16,200	4650 10,000	5450 11,700	3450 7,350	*4600 *10,150	3000 6,600	8260 330
-1500 mm -60 in	kg lb	*7000 *15,650	*7000 *15,650	*11 350 *25,750	*11 350 *25,750	*11 400 *24,700	6850 14,700	7450 16,000	4550 9,800	5400 11,650	3400 7,300	5150 11,350	3250 7,150	7780 310
-3000 mm -120 in	kg lb	*12 050 *27,000	*12 050 *27,000	*15 150 *32,750	13 350 28,600	*10 700 *23,050	6900 14,850	7500 16,100	4600 9,900			6100 13,500	3800 8,450	6950 280
-4500 mm -180 in	kg lb			*12 050 *25,750	*12 050 *25,750	*8650 *18,400	7100 15,350					*6550 *14,350	5300 11,900	5600 220

HD Reach Boom Lift Capacities – Counterweight: 4.2 mt (9,260 lb) – without Bucket – Heavy Lift: On



Reach mm in	kg lb	3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb									*5100 *11,350	*5100 *11,350	5600 220
6000 mm 240 in	kg lb					*5750 *12,600	5450 11,700			*4700 *10,350	4400 9,750	6830 270
4500 mm 180 in	kg lb			*7250 *15,600	*7250 *15,600	*6200 *13,500	5300 11,350	*5150	3700	*4600 *10,100	3650 8,050	7570 300
3000 mm 120 in	kg lb			*9100 *19,600	7650 16,500	*7000 *15,200	5050 10,850	5650 12,100	3600 7,750	*4700 *10,350	3300 7,250	7960 320
1500 mm 60 in	kg lb			*10 750 *23,150	7150 15,350	7700 16,550	4800 10,300	5500 11,850	3500 7,500	4950 10,950	3150 6,950	8050 320
0 mm 0 in	kg lb			*11 450 *24,750	6900 14,800	7500 16,150	4650 9,950	5450 11,700	3400 7,350	5100 11,200	3200 7,050	7860 310
-1500 mm -60 in	kg lb	*11 950 *27,150	*11 950 *27,150	*11 300 *24,450	6850 14,700	7450 16,050	4600 9,850			5600 12,300	3500 7,750	7350 290
-3000 mm -120 in	kg lb	*14 150 *30,650	13 500 28,900	*10 250 *22,200	6950 14,950	7550 *16,200	4650 10,050			*6800 *14,900	4250 9,400	6470 260
-4500 mm -180 in	kg lb			*7650 *16,000	7250 15,650					*6600 *14,500	6300 14,300	4980 200



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




There may be local regulations and/or government regulations that govern the use of excavators for lifting heavy objects. Obey all local and government regulations.

Regional regulations may require the use of an overload warning device and boom and stick lowering control valves during object handling applications.

Contact your Cat dealer for additional information.




323 Hydraulic Excavator Specifications

HD Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb) – without Bucket – Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb							*4900	*4900			*4250 *9,400	*4250 *9,400	6150 240
6000 mm 240 in	kg lb							*5300 *11,650	*5300 *11,650			*3900 *8,650	*3900 *8,650	7290 290
4500 mm 180 in	kg lb							*5850 *12,700	*5850 *12,700	*5500 9,400	4400	*3850 *8,450	*3850 *8,450	7990 320
3000 mm 120 in	kg lb					*8550 *18,350	*8550 *18,350	*6700 *14,500	5950 12,800	*5850 *12,700	4300 9,200	*3950 *8,650	3650 8,000	8360 330
1500 mm 60 in	kg lb					*10 350 *22,250	8450 18,200	*7600 *16,450	5650 12,200	*6300 *13,650	4150 8,950	*4150 *9,150	3500 7,700	8450 340
0 mm 0 in	kg lb			*6550 *15,050	*6550 *15,050	*11 300 *24,450	8150 17,500	*8250 *17,850	5500 11,800	6250 13,450	4050 8,750	*4600 *10,150	3550 7,850	8260 330
-1500 mm -60 in	kg lb	*7000 *15,650	*7000 *15,650	*11 350 *25,750	*11 350 *25,750	*11 400 *24,700	8050 17,300	*8450 *18,250	5400 11,600	6200 13,400	4000 8,650	*5400 *11,950	3850 8,450	7780 310
-3000 mm -120 in	kg lb	*12 050 *27,000	*12 050 *27,000	*15 150 *32,750	*15 150 *32,750	*10 700 *23,050	8100 17,450	*7900 *17,050	5450 11,700			*6500 *14,250	4500 10,000	6950 280
-4500 mm -180 in	kg lb			*12 050 *25,750	*12 050 *25,750	*8650 *18,400	8350 17,950					*6550 *14,350	6200 13,900	5600 220

HD Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb) – without Bucket – Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb							*4900	*4900			*4250 *9,400	*4250 *9,400	6150 240
6000 mm 240 in	kg lb							*5300 *11,650	*5300 *11,650			*3900 *8,650	*3900 *8,650	7290 290
4500 mm 180 in	kg lb							*5850 *12,700	*5850 *12,700	*5500 9,400	4400	*3850 *8,450	*3850 *8,450	7990 320
3000 mm 120 in	kg lb					*8550 *18,350	*8550 *18,350	*6700 *14,500	5950 12,750	*5850 *12,700	4300 9,200	*3950 *8,650	3650 8,000	8360 330
1500 mm 60 in	kg lb					*10 350 *22,250	8450 18,200	*7600 *16,450	5650 12,200	*6300 *13,650	4150 8,900	*4150 *9,150	3500 7,700	8450 340
0 mm 0 in	kg lb			*6550 *15,050	*6550 *15,050	*11 300 *24,450	8150 17,500	*8250 *17,850	5450 11,800	6250 13,400	4050 8,700	*4600 *10,150	3550 7,800	8260 330
-1500 mm -60 in	kg lb	*7000 *15,650	*7000 *15,650	*11 350 *25,750	*11 350 *25,750	*11 400 *24,700	8050 17,300	*8450 *18,250	5400 11,600	6200 13,350	4000 8,650	*5400 *11,950	3850 8,450	7780 310
-3000 mm -120 in	kg lb	*12 050 *27,000	*12 050 *27,000	*15 150 *32,750	*15 150 *32,750	*10 700 *23,050	8100 17,400	*7900 *17,050	5400 11,700			*6500 *14,250	4500 9,950	6950 280
-4500 mm -180 in	kg lb			*12 050 *25,750	*12 050 *25,750	*8650 *18,400	8350 17,950					*6550 *14,350	6150 13,900	5600 220



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




There may be local regulations and/or government regulations that govern the use of excavators for lifting heavy objects. Obey all local and government regulations.

Regional regulations may require the use of an overload warning device and boom and stick lowering control valves during object handling applications.

Contact your Cat dealer for additional information.




323 Hydraulic Excavator Specifications

HD Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb) – without Bucket – Heavy Lift: On



Reach mm in	kg lb	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in								*4900	*4900			*4250 *9,400	*4250 *9,400	6150 240
6000 mm 240 in								*5300 *11,650	*5300 *11,650			*3900 *8,650	*3900 *8,650	7290 290
4500 mm 180 in								*5850 *12,700	*5850 *12,700	*5500 12,000	4450 9,550	*3850 *8,450	*3850 *8,450	7990 320
3000 mm 120 in						*8550 *18,350	*8550 *18,350	*6700 *14,500	6000 12,900	*5850 *12,700	4350 9,300	*3950 *8,950	*3700 *8,100	8360 330
1500 mm 60 in						*10 350 *22,250	8550 18,450	*7600 *16,450	5750 12,350	*6300 *13,650	4200 9,050	*4150 *9,150	3550 7,800	8450 340
0 mm 0 in				*6550 *15,050	*6550 *15,050	*11 300 *24,450	8250 17,750	*8250 *17,850	5550 11,950	6350 13,650	4100 8,850	*4600 *10,150	3600 7,950	8260 330
-1500 mm -60 in		*7000 *15,650	*7000 *15,650	*11 350 *25,750	*11 350 *25,750	*11 400 *24,700	8150 17,550	*8450 *18,250	5450 11,750	6300 13,550	4100 8,800	*5400 *11,950	3900 8,600	7780 310
-3000 mm -120 in		*12 050 *27,000	*12 050 *27,000	*15 150 *32,750	*15 150 *32,750	*10 700 *23,050	8200 17,700	*7900 *17,050	5500 11,850			*6500 *14,250	4550 10,100	6950 280
-4500 mm -180 in				*12 050 *25,750	*12 050 *25,750	*8650 *18,400	8450 18,200					*6550 *14,350	6250 14,100	5600 220

HD Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb) – without Bucket – Heavy Lift: On



Reach mm in	kg lb	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in								*4900	*4900			*4250 *9,400	*4250 *9,400	6150 240
6000 mm 240 in								*5300 *11,650	*5300 *11,650			*3900 *8,650	*3900 *8,650	7290 290
4500 mm 180 in								*5850 *12,700	*5850 *12,700	*5500 12,000	4500 9,650	*3850 *8,450	*3850 *8,450	7990 320
3000 mm 120 in						*8550 *18,350	*8550 *18,350	*6700 *14,500	6050 13,100	*5850 *12,700	4400 9,450	*3950 *8,650	*3700 *8,200	8360 330
1500 mm 60 in						*10 350 *22,250	8650 18,650	*7600 *16,450	5800 12,500	*6300 *13,650	4250 9,150	*4150 *9,150	3600 7,900	8450 340
0 mm 0 in				*6550 *15,050	*6550 *15,050	*11 300 *24,450	8350 17,950	*8250 *17,850	5600 12,100	6400 13,800	4150 8,950	*4600 *10,150	3650 8,050	8260 330
-1500 mm -60 in		*7000 *15,650	*7000 *15,650	*11 350 *25,750	*11 350 *25,750	*11 400 *24,700	8250 17,750	*8450 *18,250	5550 11,900	6400 13,750	4150 8,900	*5400 *11,950	3950 8,700	7780 310
-3000 mm -120 in		*12 050 *27,000	*12 050 *27,000	*15 150 *32,750	*15 150 *32,750	*10 700 *23,050	8300 17,900	*7900 *17,050	5550 12,000			*6500 *14,250	4600 10,250	6950 280
-4500 mm -180 in				*12 050 *25,750	*12 050 *25,750	*8650 *18,400	8550 18,400					*6550 *14,350	6350 14,250	5600 220



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




There may be local regulations and/or government regulations that govern the use of excavators for lifting heavy objects. Obey all local and government regulations.

Regional regulations may require the use of an overload warning device and boom and stick lowering control valves during object handling applications.

Contact your Cat dealer for additional information.




323 Hydraulic Excavator Specifications

HD Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb) – without Bucket – Heavy Lift: On



Reach mm in	kg lb	3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb									*5100 *11,350	*5100 *11,350	5600 220
6000 mm 240 in	kg lb					*5750 *12,600	*5750 *12,600			*4700 *10,350	*4700 *10,350	6830 270
4500 mm 180 in	kg lb			*7250 *15,600	*7250 *15,600	*6200 *13,500	6100 13,150	*5150	4350	*4600 *10,100	4250 9,450	7570 300
3000 mm 120 in	kg lb			*9100 *19,600	8850 19,100	*7000 *15,200	5850 12,650	*6100 *13,250	4250 9,100	*4700 *10,350	3900 8,500	7960 320
1500 mm 60 in	kg lb			*10 750 *23,150	8350 18,000	*7850 *16,950	5600 12,100	6350 13,600	4150 8,900	*5000 *11,000	3750 8,200	8050 320
0 mm 0 in	kg lb			*11 450 *24,750	8100 17,450	*8350 *18,100	5450 11,750	6250 13,450	4050 8,700	*5600 *12,350	3800 8,400	7860 310
-1500 mm -60 in	kg lb	*11 950 *27,150	*11 950 *27,150	*11 300 *24,450	8050 17,350	*8400 *18,150	5400 11,650			6400 14,150	4150 9,150	7350 290
-3000 mm -120 in	kg lb	*14 150 *30,650	*14 150 *30,650	*10 250 *22,200	8150 17,550	*7600 *16,200	5500 11,800			*6800 *14,900	5000 11,100	6470 260
-4500 mm -180 in	kg lb			*7650 *16,000	*7650 *16,000					*6600 *14,500	*6600 *14,500	4980 200

HD Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb) – without Bucket – Heavy Lift: On



Reach mm in	kg lb	3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb									*5100 *11,350	*5100 *11,350	5600 220
6000 mm 240 in	kg lb					*5750 *12,600	*5750 *12,600			*4700 *10,350	*4700 *10,350	6830 270
4500 mm 180 in	kg lb			*7250 *15,600	*7250 *15,600	*6200 *13,500	6100 13,150	*5150	4300	*4600 *10,100	4250 9,400	7570 300
3000 mm 120 in	kg lb			*9100 *19,600	8850 19,050	*7000 *15,200	5850 12,600	*6100 *13,250	4250 9,100	*4700 *10,350	3850 8,500	7960 320
1500 mm 60 in	kg lb			*10 750 *23,150	8350 17,950	*7850 *16,950	5600 12,100	6300 13,600	4150 8,850	*5000 *11,000	3750 8,200	8050 320
0 mm 0 in	kg lb			*11 450 *24,750	8100 17,400	*8350 *18,100	5450 11,750	6250 13,400	4050 8,700	*5600 *12,350	3800 8,350	7860 310
-1500 mm -60 in	kg lb	*11 950 *27,150	*11 950 *27,150	*11 300 *24,450	8050 17,300	*8400 *18,150	5400 11,600			6400 14,150	4150 9,150	7350 290
-3000 mm -120 in	kg lb	*14 150 *30,650	*14 150 *30,650	*10 250 *22,200	8150 17,550	*7600 *16,200	5450 11,800			*6800 *14,900	5000 11,050	6470 260
-4500 mm -180 in	kg lb			*7650 *16,000	*7650 *16,000					*6600 *14,500	*6600 *14,500	4980 200



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




There may be local regulations and/or government regulations that govern the use of excavators for lifting heavy objects. Obey all local and government regulations.

Regional regulations may require the use of an overload warning device and boom and stick lowering control valves during object handling applications.

Contact your Cat dealer for additional information.




323 Hydraulic Excavator Specifications

HD Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb) – without Bucket – Heavy Lift: On



Reach mm in	kg lb	3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb									*5100 *11,350	*5100 *11,350	5600 220
6000 mm 240 in	kg lb					*5750 *12,600	*5750 *12,600			*4700 *10,350	*4700 *10,350	6830 270
4500 mm 180 in	kg lb			*7250 *15,600	*7250 *15,600	*6200 *13,500	6200 13,350	*5150	4400	*4600 *10,100	4300 9,550	7570 300
3000 mm 120 in	kg lb			*9100 *19,600	8950 19,350	*7000 *15,200	5950 12,800	*6100 *13,250	4300 9,250	*4700 *10,350	3950 8,650	7960 320
1500 mm 60 in	kg lb			*10 750 *23,150	8450 18,200	*7850 *16,950	5700 12,250	6400 13,800	4200 9,000	*5000 *11,000	3800 8,350	8050 320
0 mm 0 in	kg lb			*11 450 *24,750	8200 17,650	*8350 *18,100	5550 11,900	6350 13,650	4100 8,850	*5600 *12,350	3850 8,500	7860 310
-1500 mm -60 in	kg lb	*11 950 *27,150	*11 950 *27,150	*11 300 *24,450	8150 17,550	*8400 *18,150	5500 11,800			6500 14,350	4200 9,300	7350 290
-3000 mm -120 in	kg lb	*14 150 *30,650	*14 150 *30,650	*10 250 *22,200	8250 17,800	*7600 *16,200	5550 12,000			*6800 *14,900	5050 11,250	6470 260
-4500 mm -180 in	kg lb			*7650 *16,000	*7650 *16,000					*6600 *14,500	*6600 *14,500	4980 200

HD Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb) – without Bucket – Heavy Lift: On



Reach mm in	kg lb	3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb									*5100 *11,350	*5100 *11,350	5600 220
6000 mm 240 in	kg lb					*5750 *12,600	*5750 *12,600			*4700 *10,350	*4700 *10,350	6830 270
4500 mm 180 in	kg lb			*7250 *15,600	*7250 *15,600	*6200 *13,500	6200 13,450	*5150	4450	*4600 *10,100	4350 9,650	7570 300
3000 mm 120 in	kg lb			*9100 *19,600	9050 19,550	*7000 *15,200	6000 12,950	*6100 *13,250	4350 9,350	*4700 *10,350	3950 8,750	7960 320
1500 mm 60 in	kg lb			*10 750 *23,150	8550 18,400	*7850 *16,950	5750 12,400	*6450 *13,950	4250 9,100	*5000 *11,000	3850 8,400	8050 320
0 mm 0 in	kg lb			*11 450 *24,750	8300 17,850	*8350 *18,100	5600 12,050	6400 13,800	4150 8,950	*5600 *12,350	3900 8,600	7860 310
-1500 mm -60 in	kg lb	*11 950 *27,150	*11 950 *27,150	*11 300 *24,450	8250 17,750	*8400 *18,150	5550 11,950			*6600 *14,500	4250 9,400	7350 290
-3000 mm -120 in	kg lb	*14 150 *30,650	*14 150 *30,650	*10 250 *22,200	8350 18,000	*7600 *16,200	5600 12,100			*6800 *14,900	5100 11,350	6470 260
-4500 mm -180 in	kg lb			*7650 *16,000	*7650 *16,000					*6600 *14,500	*6600 *14,500	4980 200



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

There may be local regulations and/or government regulations that govern the use of excavators for lifting heavy objects. Obey all local and government regulations.

Regional regulations may require the use of an overload warning device and boom and stick lowering control valves during object handling applications.

Contact your Cat dealer for additional information.


323 Hydraulic Excavator Specifications

Super Long Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb) – without Bucket


8.85 m (29'0") 6.28 m (20'7")



600 mm (24") HD Triple Grouser Shoes



3650 mm (12'0")



	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in	
	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb		
12 000 480												*1450 *3,200	*1450 *3,200	10 350 400
10 500 420												*1350 *2,950	*1350 *2,950	11 660 460
9000 360												*1300 *2,850	*1300 *2,850	12 660 500
7500 300												*1250 *2,800	*1250 *2,800	13 410 530
6000 240												*1250 *2,750	*1250 *2,750	13 970 550
4500 180												*1300 *2,800	*1300 *2,800	14 340 570
3000 120			*4700 *11,800	*4700 *11,800	*6050 *12,900	*6050 *12,900	*4450 *9,550	*4450 *9,550	*3600 *7,800	*3600 *7,800	*1300 *2,900	*1300 *2,900	14 550 580	
1500 60					*6750 *15,950	*6750 *15,950	*5250 *11,300	4950 10,700	*4100 *8,850	3700 7,950	*1400 *3,000	1300 2,800	14 600 580	
0 0			*2000 *4,550	*2000 *4,550	*4650 *10,700	*4650 *10,700	*5900 *12,700	4500 9,750	*4550 *9,800	3400 7,300	*1450 *3,200	1300 2,800	14 490 570	
-1500 -60	*2100 *4,600	*2100 *4,600	*2700 *6,050	*2700 *6,050	*4650 *10,500	*4650 *10,500	*6250 *13,550	4250 9,150	*4850 *10,450	3200 6,850	*1550 *3,450	1300 2,800	14 230 560	
-3000 -120	*2850 *6,350	*2850 *6,350	*3500 *7,850	*3500 *7,850	*5200 *11,700	*5200 *11,700	*6400 *13,900	4100 8,850	*5000 *10,800	3050 6,600	*1750 *3,800	1350 2,950	13 790 550	
-4500 -180	*3650 *8,150	*3650 *8,150	*4400 *9,900	*4400 *9,900	*6050 *13,700	*6050 *13,250	*6400 *13,800	4050 8,750	*5050 *10,850	3000 6,450	*1950 *4,300	1450 3,150	13 170 520	
-6000 -240	*4550 *10,100	*4550 *10,100	*5400 *12,150	*5400 *12,150	*7200 *16,300	6250 13,500	*6150 *13,250	4100 8,850	*4900 *10,550	3050 6,500	*2300 *5,100	1600 3,500	12 340 490	
-7500 -300	*5500 *12,250	*5500 *12,250	*6550 *14,800	*6550 *14,800	*7300 *15,650	6450 13,900	*5650 *12,150	4200 9,100	*4550 *9,750	3100 6,650	*2700 *5,950	1850 4,150	11 240 440	
-9000 -360			*7950 *17,450	*7950 *17,450	*6150 *13,100	*6150 *13,100	*4850 *10,350	4400 9,550	*3900 *8,300	3250 7,000	*2700 *5,900	2350 5,250	9800 380	



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

There may be local regulations and/or government regulations that govern the use of excavators for lifting heavy objects. Obey all local and government regulations.

Regional regulations may require the use of an overload warning device and boom and stick lowering control valves during object handling applications.

Contact your Cat dealer for additional information.

323 Hydraulic Excavator Specifications


Super Long Reach Boom Lift Capacities – Counterweight: 5.4 mt (11,900 lb) – without Bucket

8.85 m (29'0")




6.28 m (20'7")

600 mm (24") HD Triple Grouser Shoes














2380 mm (7'9")

3650 mm (12'0")



4450 mm (14'7")

		9000 mm/360 in		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/520 in				mm in
												
12 000 480	kg lb									*1450 *3,200	*1450 *3,200	10 350 400
10 500 420	kg lb			*2200 *4,850	*2200 *4,850					*1350 *2,950	*1350 *2,950	11 660 460
9000 360	kg lb			*2200 *4,800	*2200 *4,800	*2200 *4,200	2150 *4,200			*1300 *2,850	*1300 *2,850	12 660 500
7500 300	kg lb			*2250 *4,900	*2250 *4,900	*2200 *4,850	2150 4,600			*1250 *2,800	*1250 *2,800	13 410 530
6000 240	kg lb			*2400 *5,200	*2400 *5,200	*2300 *5,000	2100 4,450	*2100 *3,700	1650 3,500	*1250 *2,750	*1250 *2,750	13 970 550
4500 180	kg lb	*2800 *6,050	*2800 *6,050	*2550 *5,550	2550 5,450	*2400 *5,200	2000 4,300	*2300 *5,000	1600 3,400	*1300 *2,800	*1300 *2,800	14 340 570
3000 120	kg lb	*3100 *6,750	*3100 6,600	*2800 *6,000	2400 5,150	*2550 *5,500	1950 4,100	*2400 *5,150	1550 3,300	*1300 *2,900	*1300 *2,900	14 550 580
1500 60	kg lb	*3450 *7,400	2850 6,150	*3000 *6,450	2250 4,850	*2700 *5,800	1850 3,900	2450 5,200	1500 3,150	*1400 *3,000	1300 2,800	14 600 580
0 0	kg lb	*3700 *8,050	2650 5,700	*3200 *6,900	2150 4,600	*2800 6,100	1750 3,700	2400 5,100	1450 3,050	*1450 *3,200	1300 2,800	14 490 570
-1500 -60	kg lb	*3950 *8,550	2500 5,400	3350 7,200	2050 4,350	2750 5,950	1650 3,550	2350 5,000	1400 3,000	*1550 *3,450	1300 2,800	14 230 560
-3000 -120	kg lb	4050 8,650	2400 5,200	3250 7,000	1950 4,200	2700 5,850	1650 3,500	2300 *4,200	1400 2,950	*1750 *3,800	1350 2,950	13 790 550
-4500 -180	kg lb	4000 8,550	2350 5,100	3250 6,950	1950 4,150	2700 5,800	1600 3,450			*1950 *4,300	1450 3,150	13 170 520
-6000 -240	kg lb	4000 8,550	2350 5,100	3250 7,000	1950 4,150	2750 *5,900	1650 3,550			*2300 *5,100	1600 3,500	12 340 490
-7500 -300	kg lb	*3750 *7,950	2450 5,250	*3050 *6,450	2000 4,350					*2700 *5,950	1850 4,150	11 240 440
-9000 -360	kg lb	*3150 *6,500	2550 5,550							*2700 *5,900	2350 5,250	9800 380



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

There may be local regulations and/or government regulations that govern the use of excavators for lifting heavy objects. Obey all local and government regulations.

Regional regulations may require the use of an overload warning device and boom and stick lowering control valves during object handling applications.

Contact your Cat dealer for additional information.

323 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Chile, Colombia

	Linkage	Width		Capacity		Weight		Fill	Counterweight 5.4 mt (11,900 lb)			
		mm	in	m ³	yd ³	kg	lb		%	HD Reach Boom		SLR
										HD R2.9 (9'6")	HD R2.5 (8'2")	SLR 6.28A (20'7")
Pin-On (No Quick Coupler)												
General Duty	B	1050	42	1.00	1.31	737	1,624	100	●	●		
	B	1050	42	1.16	1.52	848	1,869	100	●	●		
Heavy Duty	B	1050	42	1.00	1.31	892	1,967	100	●	●		
	B	1200	48	1.19	1.56	928	2,046	100	●	●		
Heavy Duty Spade	B	1350	54	1.40	1.83	1025	2,260	100	⊙	●		
Severe Duty	B	1200	48	1.19	1.56	1038	2,289	90	●	●		
Severe Duty Spade	B	1200	48	1.20	1.57	1011	2,229	90	●	●		
	B	1350	54	1.56	2.04	1213	2,674	90	⊖	⊙		
General Duty	312, A	900	36	0.53	0.69	403	888	100			○	
Ditch Cleaning	312, A	1200	48	0.57	0.74	386	851	100			○	
Maximum load with pin-on (payload + bucket)								kg	3555	3825	1140	
								lb	7,837	8,433	2,513	
Pin-On (No Quick Coupler)												
General Duty	B	1050	42	1.00	1.31	737	1,624	100	●	●		
	B	1050	42	1.16	1.52	848	1,869	100	●	●		
Heavy Duty	B	1050	42	1.00	1.31	892	1,967	100	●	●		
	B	1200	48	1.19	1.56	928	2,046	100	⊙	●		
Heavy Duty Spade	B	1350	54	1.40	1.83	1025	2,260	100	⊖	⊙		
Severe Duty	B	1200	48	1.19	1.56	1038	2,289	90	●	●		
Severe Duty Spade	B	1200	48	1.20	1.57	1011	2,229	90	●	●		
	B	1350	54	1.56	2.04	1213	2,674	90	⊖	⊖		
Maximum load with coupler (payload + bucket)								kg	3248	3526	—	
								lb	7,160	7,773	—	

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

323 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Türkiye

	Linkage	Width		Capacity		Weight		Fill	Counterweight				
		mm	in	m ³	yd ³	kg	lb		%	4.2 mt (9,260 lb)		5.4 mt (11,900 lb)	
										HD Reach Boom			
		HD R2.9 (9'6")	HD R2.5 (8'2")	HD R2.9 (9'6")	HD R2.5 (8'2")	SLR (6.28A/20'7")							
Pin-On (No Quick Coupler)													
General Duty	B	600	24	0.46	0.61	555	1,223	100	●	●	●	●	
	B	750	30	0.64	0.84	626	1,380	100	●	●	●	●	
	B	1200	48	1.19	1.56	812	1,789	100	⊙	●	●	●	
	B	1300	51	1.30	1.70	835	1,841	100	⊖	⊙	●	●	
	B	1400	55	1.43	1.87	879	1,937	100	⊖	⊖	⊙	●	
Heavy Duty	B	1050	42	1.00	1.31	892	1,967	100	●	●	●	●	
	B	1200	48	1.19	1.56	917	2,022	100	⊙	⊙	●	●	
	B	1300	52	1.30	1.70	974	2,148	100	⊖	⊙	●	●	
Severe Duty	B	1050	42	1.00	1.31	948	2,091	90	●	●	●	●	
Severe Duty Spade	B	1200	48	1.20	1.57	1011	2,229	90	⊙	●	●	●	
General Duty	312, A	900	36	0.53	0.69	403	888	100					○
Ditch Cleaning	312, A	1200	48	0.57	0.74	386	851	100					○
Maximum load with pin-on (payload + bucket)								kg	2935	3170	3555	3825	1140
								lb	6,471	6,989	7,837	8,433	2,513
	Linkage	Width		Capacity		Weight		Fill	Counterweight				
		mm	in	m ³	yd ³	kg	lb		%	4.2 mt (9,260 lb)		5.4 mt (11,900 lb)	
										HD Reach Boom			
		HD R2.9 (9'6")	HD R2.5 (8'2")	HD R2.9 (9'6")	HD R2.5 (8'2")	SLR (6.28A/20'7")							
With Cat Pin Grabber Coupler													
General Duty	B	600	24	0.46	0.61	555	1,223	100	●	●	●	●	
	B	750	30	0.64	0.84	626	1,380	100	●	●	●	●	
	B	1200	48	1.19	1.56	812	1,789	100	⊖	⊙	●	●	
	B	1300	51	1.30	1.70	835	1,841	100	○	⊖	⊙	●	
	B	1400	55	1.43	1.87	879	1,937	100	○	○	⊖	⊙	
Heavy Duty	B	1050	42	1.00	1.31	892	1,967	100	⊖	⊙	●	●	
	B	1200	48	1.19	1.56	917	2,022	100	○	⊖	⊙	●	
	B	1300	52	1.30	1.70	974	2,148	100	○	⊖	⊙	⊙	
Severe Duty	B	1050	42	1.00	1.31	948	2,091	90	⊙	●	●	●	
Severe Duty Spade	B	1200	48	1.20	1.57	1011	2,229	90	⊖	⊖	●	●	
Maximum load with coupler (payload + bucket)								kg	2572	2855	3248	3526	
								lb	5,671	6,293	7,160	7,773	

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Chile, Colombia

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match No Match

PIN-ON ATTACHMENTS

		5.4 mt (11,900 lb)	
		HD Reach	
Counterweight		HD R2.9 (9'6")	HD R2.5 (8'2")
Boom Type			
Stick Length			
Hydraulic Hammers	H115 GC	✓	✓
	H115 GC S	✓	✓
	H120 GC	✓	✓
	H120 GC Side Mount	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 GC	✓	✓
	H130 GC S	✓	✓
	H130 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw	✓	✓
	MP324 Demolition Jaw	✓	✓
	MP324 Pulverizer Jaw		✓
	MP324 Shear Jaw	✓	✓
	MP324 Tank Shear Jaw	✓	✓
	MP324 Universal Jaw	✓	✓
Demolition and Sorting Grapples	G318	✓	✓
	G324	✓	✓
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P224 Secondary Pulverizer		✓
	P318 Primary Pulverizer	✓	✓
	P324 Primary Pulverizer		✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
Mulchers	HM4015	✓	✓
	HM4815	✓	✓

(continued on next page)

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Chile, Colombia *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

1800 kg/m³ (3,000 lb/yd³)
 1200 kg/m³ (2,000 lb/yd³)
 No Match

PIN-ON ATTACHMENTS *(continued)*

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Orange Peel Grapples	GSH420-500	●	●
	GSH420-600	●	●
	GSH420-750	●	●
	GSH425-750	●	●
	GSH425-950	●	●
	GSH425-1150	○	○
	GSH520-500	●	●
	GSH520-600	●	●
	GSH520-750	●	●
	GSH525-750	●	●
	GSH525-950	○	○
	GSH525-1150		○

(continued on next page)

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Chile, Colombia (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match No Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 GC	✓	✓
	H115 GC S	✓	✓
	H120 GC	✓	✓
	H120 GC Side Mount	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 GC	✓	✓
	H130 GC S	✓	✓
	H130 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw		✓
	MP324 Demolition Jaw		✓
	MP324 Shear Jaw		✓
Demolition and Sorting Grapples	G318	✓	✓
	G324		✓
Mobile Scrap and Demolition Shears	S3025 Flat Top		✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P318 Primary Pulverizer	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓
Mulchers	HM4015	✓	✓
	HM4815	✓	✓

(continued on next page)

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Chile, Colombia (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match No Match

S70 DEDICATED COUPLER ATTACHMENTS

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 GC	✓	✓
	H115 GC S	✓	✓
	H120 GC	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
	H130 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw		✓
	MP324 Demolition Jaw		✓
	MP324 Shear Jaw		✓
	MP324 Tank Shear Jaw		✓
MP324 Universal Jaw		✓	
Demolition and Sorting Grapples	G318	✓	✓
	G324		✓
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P318 Primary Pulverizer	✓	✓
	P324 Primary Pulverizer		✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓

HCS70 DEDICATED COUPLER ATTACHMENTS

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H120 GC	✓	✓
	H120 S	✓	✓
	H130 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw		✓
	MP324 Demolition Jaw		✓
MP324 Shear Jaw		✓	
Demolition and Sorting Grapples	G318	✓	✓
	G324		✓
Mobile Scrap and Demolition Shears	S3025 Flat Top		✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P318 Primary Pulverizer	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓

(continued on next page)

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Chile, Colombia (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match No Match

HCS70/55 DEDICATED COUPLER ATTACHMENTS

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H120 GC	✓	✓
	H120 S	✓	✓
	H130 S	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓
	MP318 Demolition Jaw	✓	✓
	MP318 Pulverizer Jaw	✓	✓
	MP318 Shear Jaw	✓	✓
	MP318 Universal Jaw	✓	✓
	MP324 Concrete Cutter Jaw		✓
	MP324 Shear Jaw		✓
Demolition and Sorting Grapples	G318	✓	✓
	G324		✓
Mobile Scrap and Demolition Shears	S3025 Flat Top		✓
Pulverizers	P218 Secondary Pulverizer	✓	✓
	P318 Primary Pulverizer	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Rotary Cutters	RC20	✓	✓

TRS18 (PIN-ON TOP/S70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 GC	✓	✓
	H115 GC S	✓	✓
	H115 S	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓
	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

TRS18 (S70 TOP/S70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 GC	✓	✓
	H115 GC S	✓	✓
	H115 S	✓	✓
	H120 GC S	✓	✓
	H120 S	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓
	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Chile, Colombia *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

TRS18 (PIN-ON TOP/HCS70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 S	✓	✓
	H120 S	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓
	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

TRS18 (HCS70 TOP/HCS70 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 S	✓	✓
	H120 S	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓
	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

TRS18 (PIN-ON TOP/HCS70/55 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 S	✓	✓
	H120 S	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓
	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Chile, Colombia (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match No Match

TRS18 (HCS70/55 TOP/HCS70/55 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 S	✓	✓
	H120 S		✓
Compactors (Vibratory Plate)	CVP75	✓	✓
	CVP110	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

BOOM-MOUNT ATTACHMENTS

Counterweight		5.4 mt (11,900 lb)	
Boom Type		HD Reach	
Mobile Scrap and Demolition Shears	S2050	✓	
	S3035 Flat Top	✓	

Thumb Specifications

Thumb Available Not Available

Bucket Type	Tooth Quantity	Width		Pro Plus		Pro		Stiff Link		Utility	
		mm	in	Pin-on	Cat Pin Grabber	Pin-on	Cat Pin Grabber	Pin-on	Cat Pin Grabber	Pin-on	Cat Pin Grabber
General Duty	5	902	36	✓	✓	✓	✓	✓	✓	✓	✓
	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	6	1208	48	✓	✓	✓	✓	✓	✓	✓	✓
	7	1350	54	✓	✓	✓	✓	✓	✓	✓	✓
Heavy Duty	5	902	36	✓	✓	✓	✓	✓	✓	✓	✓
	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	6	1208	48	✓	✓	✓	✓	✓	✓	✓	✓
	7	1350	54	✓	✓	✓	✓	✓	✓	✓	✓
Heavy Duty Power	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	6	1208	48				✓	✓	✓	✓	✓
Severe Duty	5	902	36	✓	✓	✓	✓	✓	✓	✓	✓
	5	1056	42	✓	✓	✓	✓	✓	✓	✓	✓
	6	1208	48	✓	✓	✓	✓	✓	✓	✓	✓
Pin Grabber Performance Buckets	5	902	36		✓					✓	✓
	5	1056	42		✓		✓			✓	✓
	6	1208	48		✓					✓	✓
	7	1350	54							✓	✓

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Türkiye

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.



Match



* Working range front only



No Match

PIN-ON ATTACHMENTS

		4.2 mt (9,260 lb)		5.4 mt (11,900 lb)		
		HD Reach		HD Reach		
Counterweight	Boom Type	HD R2.9 (9'6")	HD R2.5 (8'2")	HD R2.9 (9'6")	HD R2.5 (8'2")	
Stick Length	Hydraulic Hammers	H115 GC	✓	✓	✓	✓
		H115 GC S	✓	✓	✓	✓
		H120 GC	✓	✓	✓	✓
		H120 GC Side Mount	✓	✓	✓	✓
		H120 GC S	✓	✓	✓	✓
		H120 S	✓	✓	✓	✓
		H130 GC	✓	✓	✓	✓
		H130 GC S	✓	✓	✓	✓
		H130 S	✓	✓	✓	✓
		Multi-Processors		MP318 Concrete Cutter Jaw	✓	✓
MP318 Demolition Jaw	✓			✓	✓	✓
MP318 Pulverizer Jaw	✓			✓	✓	✓
MP318 Shear Jaw	✓			✓	✓	✓
MP318 Universal Jaw	✓			✓	✓	✓
MP324 Concrete Cutter Jaw	✓			✓	✓	
MP324 Demolition Jaw				✓*	✓	✓
MP324 Pulverizer Jaw				✓*		✓
MP324 Shear Jaw	✓*			✓	✓	✓
MP324 Tank Shear Jaw				✓*	✓	✓
MP324 Universal Jaw				✓*	✓	✓
Demolition and Sorting Grapples				G317 GC	✓	✓
		G318	✓	✓	✓	✓
		G318 WH-800	✓	✓	✓	✓
		G318 WH-1100	✓	✓	✓	✓
		G324		✓*	✓	✓
		G324 WH-1500		✓*	✓	✓
		G324 WH-1800				✓
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓	✓	✓	✓	
Pulverizers		P218 Secondary Pulverizer	✓	✓	✓	✓
		P224 Secondary Pulverizer		✓*		✓
		P318 Primary Pulverizer	✓	✓	✓	✓
		P324 Primary Pulverizer		✓*		✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	

(continued on next page)

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Türkiye (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

<input checked="" type="checkbox"/> 1800 kg/m ³ (3,000 lb/yd ³)	<input type="checkbox"/> 1200 kg/m ³ (2,000 lb/yd ³)	<input type="checkbox"/> 600 kg/m ³ (1,000 lb/yd ³)	<input type="checkbox"/> No Match
--	---	--	-----------------------------------

PIN-ON ATTACHMENTS (continued)

Counterweight		4.2 mt (9,260 lb)		5.4 mt (11,900 lb)	
Boom Type		HD Reach		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")	HD R2.9 (9'6")	HD R2.5 (8'2")
Orange Peel Grapples	GSH420-500	●	●	●	●
	GSH420-600	●	●	●	●
	GSH420-750	●	●	●	●
	GSH425-750	○	●	●	●
	GSH425-950	○	○	●	●
	GSH425-1150			○	○
	GSH520-500	●	●	●	●
	GSH520-600	●	●	●	●
	GSH520-750	●	●	●	●
	GSH525-750	○	○	●	●
	GSH525-950			○	○
	GSH525-1150				○
	GSV420-400	●	●	●	●
	GSV420-500	●	●	●	●
	GSV420-600	●	●	●	●
	GSV420-750	●	●	●	●
	GSV420-1250	◇	◇	◇	◇
	GSV425-600	●	●	●	●
	GSV425-750	○	●	●	●
	GSV425-950	○	○	●	●
	GSV425-1150		○	○	○
	GSV425-1550	◇	◇	◇	◇
	GSV520-400	●	●	●	●
	GSV520-500	●	●	●	●
	GSV520-600	●	●	●	●
	GSV520-750	●	●	●	●
	GSV520-1250	◇	◇	◇	◇
	GSV525-600	●	●	●	●
	GSV525-750	○	○	●	●
	GSV525-950		○	○	●
	GSV525-1150			○	○
	GSV525-1550		◇	◇	◇
	Clamshell Grapples	CTV15-1000	○	○	●
CTV15-1200		○	○	○	●
CTV15-1500				○	○
CTV15-1700					○

(continued on next page)

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Türkiye (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match * Working range front only No Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Counterweight		4.2 mt (9,260 lb)		5.4 mt (11,900 lb)	
Boom Type		HD Reach		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")	HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 GC	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓
	H120 GC	✓	✓	✓	✓
	H120 GC Side Mount	✓	✓	✓	✓
	H120 GC S	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓
	H130 GC	✓*	✓	✓	✓
	H130 GC S	✓*	✓	✓	✓
	H130 S	✓	✓	✓	✓
	Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓	✓
MP318 Demolition Jaw		✓	✓	✓	✓
MP318 Pulverizer Jaw		✓*	✓	✓	✓
MP318 Shear Jaw		✓	✓	✓	✓
MP318 Universal Jaw		✓	✓	✓	✓
MP324 Concrete Cutter Jaw					✓
MP324 Demolition Jaw					✓
MP324 Shear Jaw					✓
Demolition and Sorting Grapples	G317 GC	✓	✓	✓	✓
	G318	✓	✓	✓	✓
	G318 WH-800	✓	✓	✓	✓
	G318 WH-1100	✓*	✓	✓	✓
	G324				✓
Mobile Scrap and Demolition Shears	S3025 Flat Top		✓*		✓
Pulverizers	P218 Secondary Pulverizer	✓*	✓	✓	✓
	P318 Primary Pulverizer	✓*	✓	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓

(continued on next page)

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Türkiye (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match * Working range front only No Match

CW-40s DEDICATED COUPLER ATTACHMENTS

Counterweight		4.2 mt (9,260 lb)		5.4 mt (11,900 lb)	
Boom Type		HD Reach		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")	HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 GC	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓
	H120 GC	✓	✓	✓	✓
	H120 GC S	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓
	H130 S	✓	✓	✓	✓
	Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓	✓
MP318 Demolition Jaw		✓	✓	✓	✓
MP318 Pulverizer Jaw		✓	✓	✓	✓
MP318 Shear Jaw		✓	✓	✓	✓
MP318 Universal Jaw		✓	✓	✓	✓
MP324 Concrete Cutter Jaw					✓
MP324 Demolition Jaw					✓
MP324 Pulverizer Jaw					✓
MP324 Shear Jaw			✓*		✓
MP324 Tank Shear Jaw					✓
MP324 Universal Jaw					✓
Demolition and Sorting Grapples	G317 GC	✓	✓	✓	✓
	G318	✓	✓	✓	✓
	G318 WH-800	✓	✓	✓	✓
	G318 WH-1100	✓	✓	✓	✓
	G324				✓
	G324 WH-1500				✓
	Mobile Scrap and Demolition Shears	S3025 Flat Top	✓*	✓	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓	✓	✓
	P318 Primary Pulverizer	✓	✓	✓	✓
	P324 Primary Pulverizer				✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓

(continued on next page)

323 Hydraulic Excavator Specifications

Attachments Offering Guide – Türkiye (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CW-40 DEDICATED COUPLER ATTACHMENTS

Counterweight		4.2 mt (9,260 lb)	5.4 mt (11,900 lb)		
Boom Type		HD Reach		HD Reach	
Stick Length		HD R2.9 (9'6")	HD R2.5 (8'2")	HD R2.9 (9'6")	HD R2.5 (8'2")
Hydraulic Hammers	H115 GC	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓
	H120 GC	✓	✓	✓	✓
	H120 GC S	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓
	H130 GC	✓*	✓	✓	✓
	H130 GC S	✓	✓	✓	✓
	H130 S	✓	✓	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓	✓	✓
	MP318 Demolition Jaw	✓	✓	✓	✓
	MP318 Pulverizer Jaw	✓	✓	✓	✓
	MP318 Shear Jaw	✓	✓	✓	✓
	MP318 Universal Jaw	✓	✓	✓	✓
	MP324 Concrete Cutter Jaw				✓
	MP324 Demolition Jaw				✓
	MP324 Pulverizer Jaw				✓
	MP324 Shear Jaw		✓*		✓
	MP324 Tank Shear Jaw				✓
	MP324 Universal Jaw				✓
Demolition and Sorting Grapples	G317 GC	✓	✓	✓	✓
	G317 GC fixed CAN	✓	✓	✓	✓
	G318	✓	✓	✓	✓
	G318 fixed CAN	✓	✓	✓	✓
	G318 WH-800	✓	✓	✓	✓
	G318 WH-1100	✓	✓	✓	✓
	G324				✓
	G324 WH-1500				✓
Mobile Scrap and Demolition Shears	S3025 Flat Top	✓*	✓	✓	✓
Pulverizers	P218 Secondary Pulverizer	✓	✓	✓	✓
	P224 Secondary Pulverizer				✓
	P318 Primary Pulverizer	✓	✓	✓	✓
	P324 Primary Pulverizer				✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓

BOOM-MOUNT ATTACHMENTS

Counterweight		4.2 mt (9,260 lb)	5.4 mt (11,900 lb)		
Boom Type		HD Reach		HD Reach	
Mobile Scrap and Demolition Shears	S2050	✓		✓	
	S3035 Flat Top	✓		✓	

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
ENGINE			UNDERCARRIAGE AND STRUCTURES		
Cat® C7.1 single turbo diesel engine	✓		600 mm (24") HD triple grouser track shoes		✓ ²
Three selectable power modes	✓		600 mm (24") HD double grouser track shoes		✓ ³
Automatic engine speed control	✓		700 mm (28") HD triple grouser track shoes		✓ ³
Automatic engine idle shutdown	✓		790 mm (31") HD triple grouser track shoes		✓ ³
Work up to 3000 m (9,840 ft) above sea level without engine power de-rating	✓		Tie-down points on base frame	✓	
52° C (125° F) high-ambient cooling capacity	✓		Segmented track guiding guards	✓	
-18° C (0° F) cold start capability	✓		Full-length track guiding guards		✓
-32° C (-25° F) cold start capability		✓	HD bottom guard	✓	
Double element air filter with integrated pre-cleaner	✓		Swivel guard	✓	
Electric fuel priming pump	✓		HD travel motor guards	✓	
Reversible electric cooling fans	✓		Grease lubricated track links	✓	
HYDRAULIC SYSTEM			4.2 mt (9,260 lb) counterweight		✓ ⁴
Boom and stick regeneration circuits	✓		5.4 mt (11,900 lb) counterweight		✓ ³
Heavy lift configuration		✓	BOOMS, STICKS AND LINKAGES		
Electronic main control valve	✓		5.7 m (18'8") HD Reach boom	✓	
Auto Dig Boost		✓ ¹	8.85 m (29'0") Super Long Reach boom		✓
Automatic warm up	✓		2.9 m (9'6") HD Reach stick	✓	
Automatic two-speed travel	✓		2.5 m (8'2") HD Reach stick		✓
Boom and stick drift reduction valve	✓		6.28 m (20'7") Super Long Reach stick		✓
Element type main hydraulic filter	✓		Bucket linkage, without lifting eye	✓ ⁴	
Slider joysticks	✓		Bucket linkage, with lifting eye	✓ ³	
Tandem type electronic main pump	✓		ELECTRICAL SYSTEM		
Hammer return filter circuit		✓	1,000 CCA maintenance-free batteries (×2)	✓	
Hydraulic efficiency monitoring		✓	1,000 CCA maintenance-free batteries (×4)		✓
Combined flow/high pressure auxiliary circuit		✓	Centralized electrical disconnect switch	✓	
			Programmable time-delay LED working lights	✓	
			LED chassis light, Left Hand (LH) and Right Hand (RH) boom lights for Reach, cab lights	✓	
			Premium surround lighting package		✓

¹Not available for Super Long Reach.

²Standard Türkiye

³Chile, Colombia only

⁴Türkiye only

⁵Standard Chile, Colombia

(continued on next page)

323 Standard and Optional Equipment

Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
CAT TECHNOLOGY			SERVICE AND MAINTENANCE		
Cat Equipment Management:			Scheduled Oil Sampling (S·O·S SM) ports	✓	
– VisionLink [®]	✓ ⁶		QuickEvac [™] maintenance ready		✓
– VisionLink Productivity		✓ ⁷	Grouped location for engine oil and fuel filters	✓	
– Remote Flash	✓		Ground-level second dipstick for engine oil	✓	
– Remote Troubleshoot	✓		Radiator screen		✓
– Work tool recognition and tracking (PL161)	✓ ⁸		Integrated vehicle health management system	✓	
– Operator Coaching		✓ ⁹	SAFETY AND SECURITY		
Cat Grade:			Cat Command (remote control)		✓
– Cat Grade with 2D	✓ ¹⁰		2D E-Fence:	✓ ¹⁰	
– Cat Grade with 2D with Attachment Ready Option (ARO)		✓	– E-ceiling		
– Laser catcher		✓	– E-floor		
– Cat Grade with 3D (single or dual GNSS)		✓	– E-swing		
– Compatible with 3D grade systems from Trimble, Topcon, and Leica	✓		– E-wall		
– Cat Grade 3D Ready		✓	– E-cab avoidance		
Cat Assist: ¹⁰			Auto hammer stop	✓	
– Grade Assist	✓		Rearview camera	✓	
– Boom Assist	✓		Right-hand-sideview mirror		✓ ³
– Bucket Assist	✓		Right-hand-sideview camera		✓
– Swing Assist	✓		360° visibility		✓
– Lift Assist	✓		Neutral lever (lock out) for all controls	✓	
Cat Payload: ¹⁰			Anti-skid plate and countersunk bolts on service platform	✓	
– On-the-go weighing	✓		Ground-level accessible secondary engine shutoff switch in cab	✓	
– Semiautomatic calibration	✓		Lockable disconnect switch	✓	
– Payload/cycle information	✓		Swing alarm		✓
– VisionLink Productivity back office reporting		✓ ⁸	RH handrail and hand hold	✓	
Cat Advanced Payload:			Travel alarm		✓
– Daily totals		✓	Cab mirror for RH side track edge		✓
– Custom lists		✓	Inspection lighting		✓
– Smart weight target		✓			
– E-ticket Integration		✓ ⁸			
Other:					
Cat Tiltrotator (TRS) integration		✓			

³Chile, Colombia only

⁶Provides core telematics data to manage health, maintenance insights, and condition monitoring. Other plans available for more comprehensive data reporting. Consult your Cat dealer for details.

⁷VisionLink subscription required. Consult your Cat dealer for details.

⁸Requires PL161 attachment locator on work tool and Bluetooth[®] receiver on machine.

⁹VisionLink subscription required for back office reporting. Consult your Cat dealer for details.

¹⁰Optional on machines equipped with a Super Long Reach boom and stick.

Dealer Installed Kit and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Lower radial wiper
- Rain protector plus cab light cover
- Polycarbonate roof hatch (Comfort cab only)
- Sun visor, slider (Comfort cab only)
- Laminated P5A glass front windshield
- LH/RH electrical pedal for tool control
- Armrest kit
- Seat with 4-point seatbelt capability
- Dual exit rear window kit
- Tool box
- Auxiliary relay

ELECTRICAL

- Premium surround working lights

GUARDS

- Swivel guard
- Side rubber bumper guard
- Operator Protective Guards
- Mesh guard full front
- Mesh guard half front

MAINTENANCE

- Jump start wiring
- Duct ready kit

SAFETY AND SECURITY

- Cat Detect – People Detection
- Cat Command – Remote control kit
- Seat belt indicator
- Bluetooth receiver
- Bluetooth key fob

OTHER ATTACHMENTS

- Delayed engine shutdown kit
- Upper cover for antennae
- Removable mast for antennae
- Power clam kit

323 Cab Options

	Comfort*	Deluxe
ROPS	●	●
OPG	○	○
High-resolution 203 mm (8") LCD touchscreen monitor	●	X
High-resolution 254 mm (10") LCD touchscreen monitor	○	●
Auto bi-level air conditioner	●	●
Jog dial and shortcut keys for monitor control	●	●
Keyless push-to-start engine control	●	●
Height-adjustable console	X	●
Height-adjustable console, three steps with tool	●	X
Tilt-up left-side console	X	●
Fixed left-side console	●	X
Mechanical-suspension seat	●	X
Heated air-suspension seat	X	●
51 mm (2") seat belt	●	●
Monitor integrated Bluetooth radio with USB/Auxiliary ports	●	●
12V DC outlets	●	●
Document storage	●	●
Overhead storage and rear storage with nets	X	●
Beverage holder	●	●
Cup holder	●	●
Openable two-piece front window	●	●
Rear window emergency exit	●	●
Radial wiper with washer	●	●
Openable polycarbonate skylight hatch	X	●
Openable steel hatch	●	X
LED dome light	●	●
Roof sunscreen	X	●
Roller front sunscreen	●	●
Roller rear sunscreen	○	○
Washable floor mat	●	●
Beacon ready	●	●

● Standard

○ Optional

X Not available

* Chile, Colombia only

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

Engine

- The Cat® C7.1 engine meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).*

***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.85 kg (1.9 lb) of refrigerant which has a CO₂ equivalent of 1.216 metric tonnes (1.340 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound Performance

ISO 6395:2008 (external) – 100 dB(A)

ISO 6396:2008 (inside cab) – 70 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Advanced hydraulic systems balance power and efficiency
 - Smart mode matches machine power to digging requirements automatically
 - Eco mode supports reduced fuel consumption for light applications
 - Utilizing Cat technologies can help increase operating efficiencies
 - Extended service intervals help decrease maintenance costs
 - The latest hydraulic oil filter provides longer life with a 3,000-hour replacement interval

Recycling

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage
Steel	84.28%
Iron	4.95%
Nonferrous Metal	2.37%
Mixed Metal	1.45%
Mixed-Metal and Nonmetal	0.94%
Plastic	1.19%
Rubber	0.17%
Mixed Nonmetallic	0.21%
Fluid	2.94%
Other	1.50%
Uncategorized	0.00%
Total	100%

- A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714:2008 (Earthmoving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused, or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714:2008 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following value in the table may vary.

Recyclability – 98%

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2024 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. VisionLink is a trademark of Caterpillar Inc., registered in the United States and in other countries.

AEXQ3982-00 (10-2024)
Build Number: 07H
(Chile, Colombia, Türkiye)

