



# 352

## Hydraulic Excavator

# Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

### Table of Contents

<b>Specifications</b>	<b>2</b>
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	2
Standards	3
Sound Performance	3
Air Conditioning System	3
Operating Weights and Ground Pressures	4
Major Component Weights	5
Dimensions	6
Working Ranges and Forces	10
Reach Boom Lift Capacities	12
Mass Boom Lift Capacities	18
Bucket Specifications and Compatibility	23
Attachments Offering Guide	24
Typical Pass Match Guide	28
<b>Standard and Optional Equipment</b>	<b>29</b>
<b>Cab Options</b>	<b>31</b>
<b>Dealer Installed Kit and Attachments</b>	<b>32</b>
<b>352 Environmental Declaration</b>	<b>33</b>

# 352 Hydraulic Excavator Specifications

## Engine

Engine Model	C13B	
Net Power		
ISO 9249	330 kW	443 hp
ISO 9249 (DIN)	449 hp (metric)	
Engine Power		
ISO 14396	332 kW	445 hp
ISO 14396 (DIN)	451 hp (metric)	
Bore	130 mm	5 in
Stroke	157 mm	6 in
Displacement	12.5 L	763 in <sup>3</sup>
Biodiesel capability	Up to B20 <sup>(1)</sup>	

- Meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 2600 m (8,530 ft).
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator.
- Engine speed at 1,700 rpm.

<sup>(1)</sup>Cat® diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) and are compatible\* with ULSD blended with the following lower-carbon intensity fuels\*\* up to:
 

- ✓ 20% biodiesel FAME (fatty acid methyl ester)\*\*\*
- ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

\* While Cat engines are compatible with these alternative fuels, some regions may not allow their use.

\*\* Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.

\*\*\*Engines with no aftertreatment devices are compatible with higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).

## Track

Standard Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	750 mm	30 in
Optional Track Shoes Width	900 mm	35 in
Number of Shoes (each side)	52	
Number of Track Rollers (each side)	9	
Number of Carrier Rollers (each side)	3	

## Drive

Maximum Gradeability	35°/70%	
Maximum Travel Speed	4.5 km/h	2.8 mph
Maximum Drawbar Pull	351 kN	78,908 lbf

## Hydraulic System

Main System – Maximum Flow (Implement)	779 L/min (389 × 2 pumps)	206 gal/min (103 × 2 pumps)
Maximum Pressure – Equipment – Implement	35 000 kPa	5,076 psi
Maximum Pressure – Equipment – Lift Mode	38 000 kPa	5,511 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	26 000 kPa	3,771 psi
Boom Cylinder – Bore	170 mm	7 in
Boom Cylinder – Stroke	1524 mm	60 in
Stick Cylinder – Bore	190 mm	7 in
Stick Cylinder – Stroke	1758 mm	69 in
TB Bucket Cylinder – Bore	160 mm	6 in
TB Bucket Cylinder – Stroke	1356 mm	53 in
UB Bucket Cylinder – Bore	170 mm	7 in
UB Bucket Cylinder – Stroke	1396 mm	55 in

## Service Refill Capacities

Fuel Tank Capacity	715 L	188.9 gal
Cooling System	52 L	13.7 gal
Engine Oil (with filter)	40 L	10.6 gal
Swing Drive	10.5 L	2.8 gal
Final Drive (each)	9.5 L	2.5 gal
Hydraulic System (including tank)	550 L	145.3 gal
Hydraulic Tank (including suction pipe)	217 L	57.3 gal
Diesel Exhaust Fluid (DEF) Tank	80 L	21.1 gal

## Swing Mechanism

Swing Speed*	8.3 rpm
Maximum Swing Torque	189 kN·m 139,000 lbf·ft

\*For CE-marked machine default value may be set lower.

## Weights

Operating Weight	51 500 kg	113,500 lb
• Variable gauge undercarriage, Reach boom, R2.9TB (9'6") stick, Severe Duty (SD) 2.5 m <sup>3</sup> (3.27 yd <sup>3</sup> ) bucket, and 600 mm (24") triple grouser shoes, 9.8 mt (21,605 lb) counterweight.		

## Standards

Brakes	ISO 10265:2008
Cab/Operator Protective Guards (OPG) (optional)	ISO 10262:1998 Level II
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008

## Sound Performance

ISO 6395:2008 (external)	108 dB(A)
ISO 6396:2008 (inside cab)	73 dB(A)

- External Sound – The labeled spectator sound power level represents the Guaranteed Value per 2000/14/EC amended by 2005/88/EC, when properly equipped, and is measured according to the test procedures and conditions specified in ISO 6395:2008. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Internal Sound – The operator sound pressure level is measured according to the test procedures and conditions specified in ISO 6396:2008 for a cab offered by Caterpillar, when properly installed and maintained and tested with the door and windows closed. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained for doors windows open) for extended periods or in noisy environment(s).

## Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a or R1234yf. See the label or instruction manual for identification of the gas.

- If equipped with R134a (Global Warming Potential = 1430), the system contains 1.0 kg (2.2 lb) of refrigerant which has a CO<sub>2</sub> equivalent of 1.430 metric tonnes (1.576 tons).
- If equipped with R1234yf (Global Warming Potential = 0.501), the system contains 0.85 kg (1.87 lb) of refrigerant which has a CO<sub>2</sub> equivalent of 0.001 metric tonnes (0.001 tons).

# 352 Hydraulic Excavator Specifications

## Operating Weights and Ground Pressures

Base Machine Configurations	600 mm (24") Triple Grouser Shoes		600 mm (24") Double Grouser Shoes		750 mm (30") Triple Grouser Shoes		900 mm (35") Triple Grouser Shoes	
	Weight	Ground Pressure						
	kg (lb)	kPa (psi)						
<b>Base Frame with Single Frange Track Rollers and Carrier Rollers for Variable Gauge Long Undercarriage</b>								
<b>9.8 mt (21,605 lb) Counterweight</b>								
Reach Boom + R3.35 m (11'0") TB Stick + 3.30 m <sup>3</sup> (4.32 yd <sup>3</sup> ) GDC Bucket	51 300 (113,200)	89.9 (13.0)	51 500 (113,400)	89.8 (13.0)	52 100 (114,900)	73.0 (10.6)	52 800 (116,500)	61.7 (8.9)
Reach Boom + R2.9 m (9'6") TB Stick + 3.30 m <sup>3</sup> (4.32 yd <sup>3</sup> ) GDC Bucket	51 300 (113,000)	89.8 (13.0)	51 400 (113,300)	89.7 (13.0)	52 000 (114,700)	72.9 (10.6)	52 800 (116,300)	61.6 (8.9)
Mass Boom + M3.0 m (9'1") UB Stick + 3.5 m <sup>3</sup> (4.58 yd <sup>3</sup> ) GD Bucket	52 800 (116,400)	92.4 (13.4)	52 900 (116,600)	92.3 (13.4)	53 500 (118,000)	75.0 (10.9)	54 300 (119,700)	63.4 (9.2)
<b>Base Frame with Double Frange Track Rollers and Carrier Rollers for Variable Gauge Long Undercarriage</b>								
<b>9.8 mt (21,605 lb) Counterweight</b>								
Reach Boom + R3.35 m (11'0") TB Stick + 2.5 m <sup>3</sup> (3.27 yd <sup>3</sup> ) SD Bucket	51 600 (113,700)	84.9 (12.3)	51 700 (113,900)	84.9 (12.3)	52 300 (115,300)	69.0 (10.0)	53 100 (117,000)	58.4 (8.5)
Reach Boom + R2.9 m (9'6") TB Stick + 2.5 m <sup>3</sup> (3.27 yd <sup>3</sup> ) SD Bucket	51 500 (113,500)	84.8 (12.3)	51 600 (113,700)	84.7 (12.3)	52 200 (115,100)	68.9 (10.0)	53 000 (116,800)	58.3 (8.5)
Mass Boom + M3.0 m (9'1") UB Stick + 3.6 m <sup>3</sup> (4.71 yd <sup>3</sup> ) SD Bucket	53 100 (117,100)	87.7 (12.7)	53 200 (117,400)	87.6 (12.7)	53 900 (118,800)	71.2 (10.3)	54 600 (120,500)	60.2 (8.7)
Mass Boom + M2.5 m (8'2") UB Stick + 3.6 m <sup>3</sup> (4.71 yd <sup>3</sup> ) SD Bucket	53 000 (116,700)	87.4 (12.7)	53 100 (117,000)	87.3 (12.7)	53 700 (118,400)	71.0 (10.3)	54 500 (120,100)	60.0 (8.7)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

# 352 Hydraulic Excavator Specifications


## Major Component Weights

	<b>kg</b>	<b>lb</b>
Base Machine with 9.8 mt (21,605 lb) Counterweight, Standard Swing Frame, Base Frame with Single Frange Track Rollers and Carrier Rollers for Variable Gauge Long Undercarriage	35 710	78,720
Base Machine with 9.8 mt (21,605 lb) Counterweight, Standard Swing Frame, Base Frame with Double Frange Track Rollers and Carrier Rollers for Variable Gauge Long Undercarriage	36 010	79,380
Track Shoes:		
600 mm (24") Width, Thick, Triple Grouser Track Shoes for Fixed Gauge and Variable Gauge Long Undercarriage	5290	11,660
600 mm (24") Width, Thick, Double Grouser Track Shoes for Fixed Gauge and Variable Gauge Long Undercarriage	5400	11,900
750 mm (30") Width, Thick, Triple Grouser Track Shoes for Fixed Gauge and Variable Gauge Long Undercarriage	6040	13,320
900 mm (35") Width, Thick, Triple Grouser Track Shoes for Fixed Gauge and Variable Gauge Long Undercarriage	6790	14,970
Two Boom Cylinders	920	2,020
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	630	1,380
Counterweight:		
9.8 mt (21,605 lb) Counterweight	9800	21,610
Swing Frame:		
Standard Swing Frame	4290	9,450
Fixed Gauge (FG) and Variable Gauge (VG) Long Undercarriages:		
Base Frame with Single Frange Track Rollers and Carrier Rollers for Variable Gauge Long Undercarriage	13 230	29,170
Base Frame with Double Frange Track Rollers and Carrier Rollers for Variable Gauge Long Undercarriage	13 270	29,250
Booms (including lines, pins, stick cylinder):		
Reach Boom 6.9 m (22'8")	4520	9,960
Mass Boom 6.55 m (21'6")	4800	10,590
Stick (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick R3.35TB (11'0")	2520	5,560
Reach Stick R2.9TB (9'6")	2440	5,380
Mass Stick M3.0UB (9'1")	2970	6,550
Mass Stick M2.5UB (8'2")	2790	6,160
Buckets (without linkage):		
2.5 m <sup>3</sup> (3.27 yd <sup>3</sup> ) SD for TB	2590	5,720
3.6 m <sup>3</sup> (4.71 yd <sup>3</sup> ) Severe Duty Spade (SDS) for UB	3430	7,570
Quick Couplers (QC):		
CW Dedicated QC	770	1,690
Pin Grabber QC	1060	2,340

# 352 Hydraulic Excavator Specifications

## Dimensions

All dimensions are approximate and may vary depending on bucket selection.

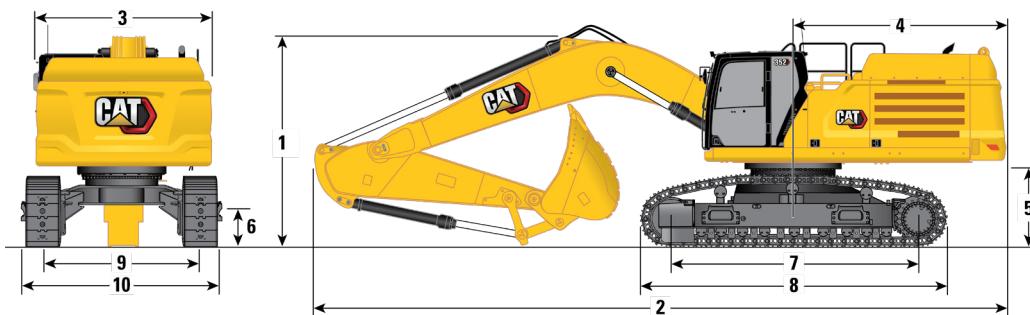

### Boom Option

### Stick Options

	R3.35TB (11'0")	R2.9TB (9'6")	Variable Gauge	Variable Gauge
<b>Undercarriage Option</b>				
<b>1 Machine Height:</b>				
Cab Height	3380 mm	11'1"	3380 mm	11'1"
OPG Height	3530 mm	11'7"	3530 mm	11'7"
Guardrails/Handrails Height	3530 mm	11'7"	3530 mm	11'7"
With Boom/Stick/Bucket Installed	3570 mm	11'9"	3720 mm	12'2"
With Boom/Stick Installed	3620 mm	11'11"	3560 mm	11'8"
With Boom Installed	3190 mm	10'6"	3190 mm	10'6"
With Boom/Stick/Bucket Installed (with auxiliary lines)	3600 mm	11'10"	3730 mm	12'3"
With Boom/Stick Installed (with auxiliary lines)	3640 mm	11'11"	3590 mm	11'9"
With Boom Installed (with auxiliary lines)	3230 mm	10'7"	3730 mm	12'3"
<b>2 Machine Length:</b>				
With Boom/Stick/Bucket Installed	11 820 mm	38'9"	11 860 mm	38'11"
With Boom/Stick Installed	11 840 mm	38'10"	11 800 mm	38'9"
With Boom Installed	10 590 mm	34'9"	10 590 mm	34'9"
With Boom/Stick/Bucket Installed (with auxiliary lines)	11 820 mm	38'9"	11 860 mm	38'11"
With Boom/Stick Installed (with auxiliary lines)	11 840 mm	38'10"	11 800 mm	38'9"
With Boom Installed (with auxiliary lines)	10 590 mm	34'9"	10 590 mm	34'9"
<b>3 Upperframe Width without Walkways</b>	3020 mm	9'11"	3020 mm	9'11"
<b>4 Tail Swing Radius</b>	3760 mm	12'4"	3760 mm	12'4"
<b>5 Counterweight Clearance VG Undercarriage (without shoe lug)</b>	1435 mm	4'8"	1435 mm	4'8"
<b>6 Ground Clearance VG Undercarriage (without shoe lug)</b>	710 mm	2'4"	710 mm	2'4"
<b>7 Length to Center of Rollers VG Undercarriage</b>	4340 mm	14'3"	4340 mm	14'3"
Bucket Type	SD		SD	
Bucket Capacity	2.50 m <sup>3</sup>	3.27 yd <sup>3</sup>	2.50 m <sup>3</sup>	3.27 yd <sup>3</sup>
Bucket Tip Radius	1912 mm	6'3"	1912 mm	6'3"

(continued on next page)

# 352 Hydraulic Excavator Specifications

## Dimensions (continued)

All dimensions are approximate and may vary depending on bucket selection.



### Boom Option

### Stick Options


	R3.35TB (11'0")	R2.9TB (9'6")		
Undercarriage Option	Variable Gauge	Variable Gauge		
<b>8</b> Track Length				
VG Undercarriage with Triple Grouser Shoe	5350 mm	17'7"	5350 mm	17'7"
<b>9</b> Track Gauge				
Retracted with Triple Grouser Shoe (VG Undercarriage)	2390 mm	7'10"	2390 mm	7'10"
Extended (VG Undercarriage)	2890 mm	9'6"	2890 mm	9'6"
Track Width: VG Undercarriage Retracted				
600 mm (24") Shoes (VG Undercarriage)	2990 mm	9'10"	2990 mm	9'10"
750 mm (30") Shoes (VG Undercarriage)	3140 mm	10'4"	3140 mm	10'4"
900 mm (35") Shoes (VG Undercarriage)	3540 mm	11'7"	3540 mm	11'7"
Track Width: VG Undercarriage Extended				
600 mm (24") Shoes (VG Undercarriage)	3490 mm	11'5"	3490 mm	11'5"
750 mm (30") Shoes (VG Undercarriage)	3640 mm	11'11"	3640 mm	11'11"
900 mm (35") Shoes (VG Undercarriage)	3790 mm	12'5"	3790 mm	12'5"
<b>10</b> Undercarriage Width (with steps): VG Undercarriage Extended				
600 mm (24") Shoes (VG Undercarriage)	3680 mm	12'1"	3680 mm	12'1"
750 mm (30") Shoes (VG Undercarriage)	3680 mm	12'1"	3680 mm	12'1"
900 mm (35") Shoes (VG Undercarriage)	3790 mm	12'5"	3790 mm	12'5"
Undercarriage Width (with steps): VG Undercarriage Retracted				
600 mm (24") Shoes (VG Undercarriage)	3180 mm	10'5"	3180 mm	10'5"
750 mm (30") Shoes (VG Undercarriage)	3180 mm	10'5"	3180 mm	10'5"
900 mm (35") Shoes (VG Undercarriage)	3540 mm	11'7"	3540 mm	11'7"
Bucket Type	SD	SD		
Bucket Capacity	2.50 m <sup>3</sup>	3.27 yd <sup>3</sup>	2.50 m <sup>3</sup>	3.27 yd <sup>3</sup>
Bucket Tip Radius	1912 mm	6'3"	1912 mm	6'3"

(continued on next page)

# 352 Hydraulic Excavator Specifications

## Dimensions (continued)

All dimensions are approximate and may vary depending on bucket selection.

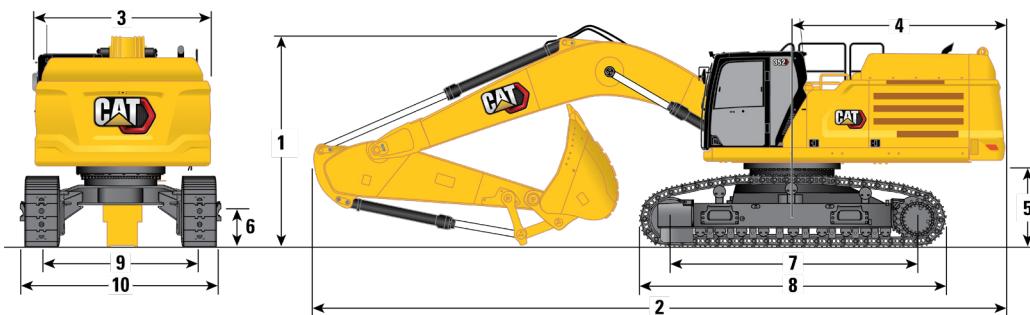

### Boom Option

**Mass Boom 6.55 m (21'6")**

### Stick Options

**Mass Stick**

**M3.0UB (9'10")**

**M2.5UB (8'2")**

### Undercarriage Option

### Variable Gauge

### Variable Gauge

#### 1 Machine Height:

Cab Height	3380 mm	11'1"	3380 mm	11'1"
OPG Height	3530 mm	11'7"	3530 mm	11'7"
Guardrails/Handrails Height	3530 mm	11'7"	3530 mm	11'7"
With Boom/Stick/Bucket Installed	4080 mm	13'5"	4050 mm	13'3"
With Boom/Stick Installed	3860 mm	12'8"	3830 mm	12'7"
With Boom Installed	3250 mm	10'8"	3250 mm	10'8"
With Boom/Stick/Bucket Installed (with auxiliary lines)	4080 mm	13'5"	4050 mm	13'3"
With Boom/Stick Installed (with auxiliary lines)	3860 mm	12'8"	3830 mm	12'7"
With Boom Installed (with auxiliary lines)	3280 mm	10'9"	3280 mm	10'9"

#### 2 Machine Length:

With Boom/Stick/Bucket Installed	11 550 mm	37'11"	11 630 mm	38'2"
With Boom/Stick Installed	11 490 mm	37'8"	11 550 mm	37'11"
With Boom Installed	10 220 mm	33'6"	10 220 mm	33'6"
With Boom/Stick/Bucket Installed (with auxiliary lines)	11 550 mm	37'11"	11 630 mm	38'2"
With Boom/Stick Installed (with auxiliary lines)	11 490 mm	37'8"	11 550 mm	37'11"
With Boom Installed (with auxiliary lines)	10 220 mm	33'6"	10 220 mm	33'6"

#### 3 Upperframe Width without Walkways

3020 mm	9'11"	3020 mm	9'11"
---------	-------	---------	-------

#### 4 Tail Swing Radius

3760 mm	12'4"	3760 mm	12'4"
---------	-------	---------	-------

#### 5 Counterweight Clearance VG Undercarriage (without shoe lug)

1435 mm	4'8"	1435 mm	4'8"
---------	------	---------	------

#### 6 Ground Clearance VG Undercarriage (without shoe lug)

710 mm	2'4"	710 mm	2'4"
--------	------	--------	------

#### 7 Length to Center of Rollers VG Undercarriage

4340 mm	14'3"	4340 mm	14'3"
---------	-------	---------	-------

#### Bucket Type

SD SD

Bucket Capacity	3.50 m <sup>3</sup>	4.58 yd <sup>3</sup>	3.50 m <sup>3</sup>	4.58 yd <sup>3</sup>
-----------------	---------------------	----------------------	---------------------	----------------------

Bucket Tip Radius	2106 mm	6'10"	2106 mm	6'10"
-------------------	---------	-------	---------	-------

(continued on next page)

# 352 Hydraulic Excavator Specifications

## Dimensions (continued)

All dimensions are approximate and may vary depending on bucket selection.




Boom Option	Mass Boom 6.55 m (21'6")			
Stick Options	Mass Stick			
Undercarriage Option	M3.0UB (9'10")	M2.5UB (8'2")	Variable Gauge	
<b>8</b> Track Length				
VG Undercarriage with Triple Grouser Shoe	5350 mm	17'7"	5350 mm	17'7"
<b>9</b> Track Gauge				
Retracted with Triple Grouser Shoe (VG Undercarriage)	2390 mm	7'10"	2390 mm	7'10"
Extended (VG Undercarriage)	2890 mm	9'6"	2890 mm	9'6"
Track Width: VG Undercarriage Retracted				
600 mm (24") Shoes (VG Undercarriage)	2990 mm	9'10"	2990 mm	9'10"
750 mm (30") Shoes (VG Undercarriage)	3140 mm	10'4"	3140 mm	10'4"
900 mm (35") Shoes (VG Undercarriage)	3540 mm	11'7"	3540 mm	11'7"
Track Width: VG Undercarriage Extended				
600 mm (24") Shoes (VG Undercarriage)	3490 mm	11'5"	3490 mm	11'5"
750 mm (30") Shoes (VG Undercarriage)	3640 mm	11'11"	3640 mm	11'11"
900 mm (35") Shoes (VG Undercarriage)	3790 mm	12'5"	3790 mm	12'5"
<b>10</b> Undercarriage Width (with steps): VG Undercarriage Extended				
600 mm (24") Shoes (VG Undercarriage)	3680 mm	12'1"	3680 mm	12'1"
750 mm (30") Shoes (VG Undercarriage)	3680 mm	12'1"	3680 mm	12'1"
900 mm (35") Shoes (VG Undercarriage)	3790 mm	12'5"	3790 mm	12'5"
Undercarriage Width (with steps): VG Undercarriage Retracted				
600 mm (24") Shoes (VG Undercarriage)	3180 mm	10'5"	3180 mm	10'5"
750 mm (30") Shoes (VG Undercarriage)	3180 mm	10'5"	3180 mm	10'5"
900 mm (35") Shoes (VG Undercarriage)	3540 mm	11'7"	3540 mm	11'7"
Bucket Type	SD		SD	
Bucket Capacity	3.50 m <sup>3</sup>	4.58 yd <sup>3</sup>	3.50 m <sup>3</sup>	4.58 yd <sup>3</sup>
Bucket Tip Radius	2106 mm	6'10"	2106 mm	6'10"

# 352 Hydraulic Excavator Specifications

## Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

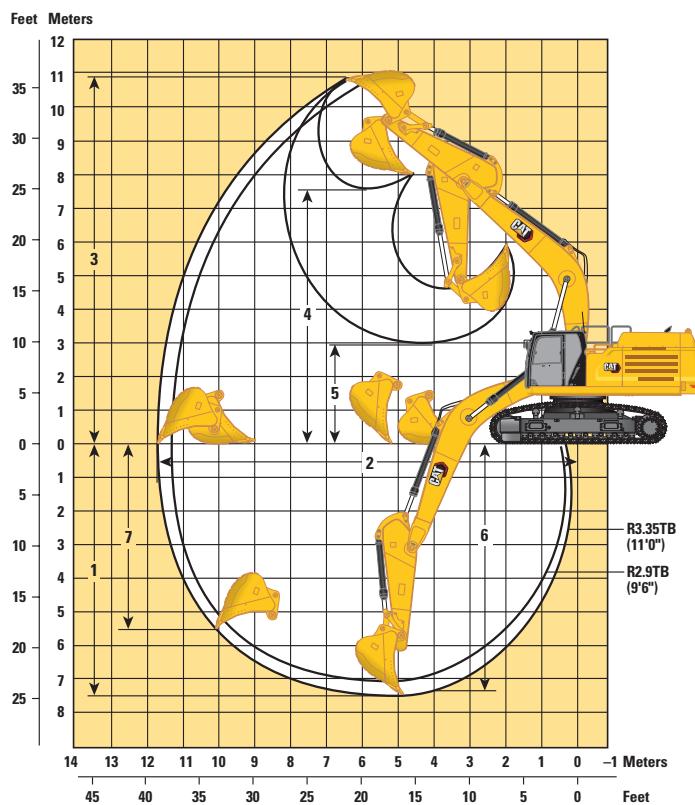

### Boom Option

### Reach Boom 6.9 m (22'8")

### Stick Option


### Reach Stick

	R3.35TB (11'0")	R2.9TB (9'6")	
Undercarriage Option	Variable Gauge	Variable Gauge	
1 Maximum Digging Depth	7530 mm	24'8"	7080 mm
2 Maximum Reach at Ground Line	11 730 mm	38'6"	11 310 mm
3 Maximum Cutting Height	10 870 mm	35'8"	10 690 mm
4 Maximum Loading Height	7560 mm	24'10"	7380 mm
5 Minimum Loading Height	2880 mm	9'5"	3330 mm
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	7380 mm	24'3"	6920 mm
7 Maximum Vertical Wall Digging Depth	5150 mm	16'11"	4750 mm
Bucket Digging Force (ISO)	264 kN	59,300 lbf	264 kN
Stick Digging Force (ISO)	200 kN	45,000 lbf	220 kN
Bucket Type	SD	SD	
Bucket Capacity	2.50 m <sup>3</sup>	3.27 yd <sup>3</sup>	2.50 m <sup>3</sup>
Bucket Tip Radius	1912 mm	6'3"	1912 mm
			6'3"

(continued on next page)

## Working Ranges and Forces (continued)




All dimensions are approximate and may vary depending on bucket selection.

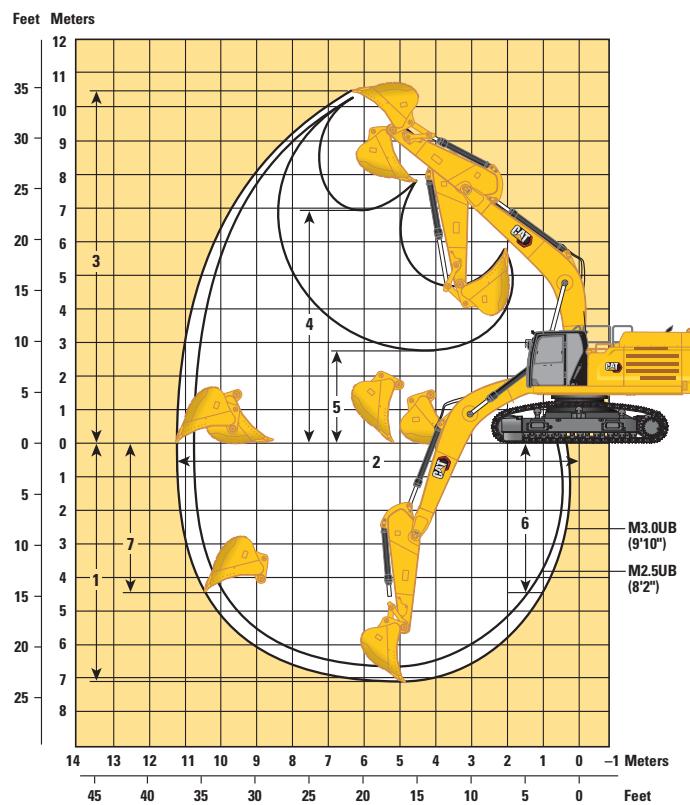

Boom Option	Mass Boom 6.55 m (21'6")		
Stick Option	Mass Stick		
Undercarriage Option	M3.0UB (9'10")		M2.5UB (8'2")
1 Maximum Digging Depth	7140 mm	23'5"	6640 mm
2 Maximum Reach at Ground Line	11 230 mm	36'10"	10 760 mm
3 Maximum Cutting Height	10 450 mm	34'3"	10 250 mm
4 Maximum Loading Height	6910 mm	22'8"	6720 mm
5 Minimum Loading Height	2740 mm	9'0"	3240 mm
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	6990 mm	14'7"	6470 mm
7 Maximum Vertical Wall Digging Depth	4450 mm	14'7"	4020 mm
Bucket Digging Force (ISO)	292 kN	65,600 lbf	292 kN
Stick Digging Force (ISO)	211 kN	47,400 lbf	240 kN
Bucket Type	SD		SD
Bucket Capacity	3.50 m <sup>3</sup>	4.58 yd <sup>3</sup>	3.50 m <sup>3</sup>
Bucket Tip Radius	2106 mm	6'10"	2106 mm
			6'10"

# 352 Hydraulic Excavator Specifications

## Reach Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				
												mm	ft/in	
9000 mm 30'0"	kg lb											*8900 *19,750	*8900 *19,750	7450 23'11"
7500 mm 25'0"	kg lb							*11 900 *26,150	*11 900 *26,150			*8400 *18,600	*8400 *18,600	8580 27'10"
6000 mm 20'0"	kg lb							*12 550 *27,300	12 400 26,650	*11 150 *21,500	9200 19,800	*8300 *18,250	*8300 *18,250	9340 30'5"
4500 mm 15'0"	kg lb			*21 200 *45,400	*21 200 *45,400	*16 150 *34,900	*16 150 *34,900	*13 650 *29,650	11 950 25,750	*12 200 *26,650	9050 19,450	*8450 *18,550	7850 17,400	9800 32'1"
3000 mm 10'0"	kg lb			*26 050 *55,950	23 950 51,650	*18 500 *40,000	15 800 34,050	*14 900 *32,300	11 500 24,750	*12 850 *27,900	8800 18,900	*8800 *19,350	7450 16,450	10 020 32'10"
1500 mm 5'0"	kg lb			*18 450 *43,950	*18 450 *43,950	*20 300 *43,900	15 050 32,500	*15 950 *34,550	11 050 23,850	12 900 27,750	8550 18,400	*9450 *20,750	7350 16,150	10 010 32'9"
0 mm 0'0"	kg lb			*21 450 *49,750	*21 450 *48,050	*21 050 *45,600	14 650 31,550	*16 500 *35,650	10 750 23,200	12 700 27,350	8400 18,050	*10 500 *23,100	7500 16,550	9760 32'0"
-1500 mm -5'0"	kg lb	*15 750 *35,500	*15 750 *35,500	*27 400 *59,450	22 350 47,950	*20 750 *44,950	14 500 31,200	*16 350 *35,350	10 650 22,900	12 650 27,250	8350 18,000	12 150 26,850	8050 17,700	9270 30'4"
-3000 mm -10'0"	kg lb	*24 800 *56,050	*24 800 *56,050	*24 900 *53,950	22 550 48,400	*19 300 *41,700	14 550 31,350	*15 150 *32,600	10 700 23,050			*12 700 *27,950	9100 20,200	8470 27'8"
-4500 mm -15'0"	kg lb	*26 450 *56,950	*26 450 *56,950	*20 750 *44,550	*20 750 *44,550	*16 150 *34,550	14 850 32,000					*12 400 *27,250	11 400 25,500	7290 23'7"



ISO 10567:2007




\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with  $\pm 5\%$  for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 352 Hydraulic Excavator Specifications

## Reach Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"			
												mm	ft/in
9000 mm 30'0"	kg lb											*8900 *19,750	7450 23'11"
7500 mm 25'0"	kg lb							*11 900 *26,150	*11 900 *26,150			*8400 *18,600	8580 27'10"
6000 mm 20'0"	kg lb							*12 550 *27,300	12 400 26,700	*11 150 *21,500	9250 19,850	*8300 *18,250	9340 30'5"
4500 mm 15'0"	kg lb			*21 200 *45,400	*21 200 *45,400	*16 150 *34,900	*16 150 *34,900	*13 650 *29,650	12 000 25,800	*12 200 *26,650	9050 19,500	*8450 *18,550	9800 32'1"
3000 mm 10'0"	kg lb			*26 050 *55,950	24 000 51,800	*18 500 *40,000	15 850 34,150	*14 900 *32,300	11 500 24,800	*12 850 *27,900	8800 19,000	*8800 *19,350	7500 16,500
1500 mm 5'0"	kg lb			*18 450 *43,950	*18 450 *43,950	*20 300 *43,900	15 100 32,600	*15 950 *34,550	11 100 23,900	12 950 27,850	8600 18,500	*9450 *20,750	7350 16,200
0 mm 0'0"	kg lb			*21 450 *49,750	*21 450 *48,200	*21 050 *45,600	14 700 31,650	*16 500 *35,800	10 800 23,250	12 750 27,450	8400 18,150	*10 500 *23,100	7550 16,600
-1500 mm -5'0"	kg lb	*15 750 *35,500	*15 750 *35,500	*27 400 *59,450	22 400 48,100	*20 750 *44,950	14 550 31,300	*16 350 *35,400	10 650 23,000	12 700 27,350	8350 18,050	12 200 26,900	8050 17,750
-3000 mm -10'0"	kg lb	*24 800 *56,050	*24 800 *56,050	*24 900 *53,950	22 600 48,550	*19 300 *41,700	14 600 31,450	*15 150 *32,600	10 700 23,100			*12 700 *27,950	9150 20,250
-4500 mm -15'0"	kg lb	*26 450 *56,950	*26 450 *56,950	*20 750 *44,550	*20 750 *44,550	*16 150 *34,550	14 900 32,100					*12 400 *27,250	11 450 25,600
		*											

ISO 10567:2007

\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with  $\pm 5\%$  for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



# 352 Hydraulic Excavator Specifications

## Reach Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				
9000 mm 30'0"	kg lb											*8900 *19,750	*8900 *19,750	7450 23'11"
7500 mm 25'0"	kg lb							*11 900 *26,150	*11 900 *26,150			*8400 *18,600	*8400 *18,600	8580 27'10"
6000 mm 20'0"	kg lb							*12 550 *27,300	12 400 26,700	*11 150 *21,500	9250 19,850	*8300 *18,250	*8300 *18,250	9340 30'5"
4500 mm 15'0"	kg lb			*21 200 *45,400	*21 200 *45,400	*16 150 *34,900	*16 150 *34,900	*13 650 *29,650	12 000 25,800	*12 200 *26,650	9050 19,500	*8450 *18,550	7900 17,450	9800 32'1"
3000 mm 10'0"	kg lb			*26 050 *55,950	24 000 51,800	*18 500 *40,000	15 850 34,150	*14 900 *32,300	11 500 24,800	*12 850 *27,900	8800 19,000	*8800 *19,350	7500 16,500	10 020 32'10"
1500 mm 5'0"	kg lb			*18 450 *43,950	*18 450 *43,950	*20 300 *43,900	15 100 32,600	*15 950 *34,550	11 100 23,900	12 950 27,850	8600 18,500	*9450 *20,750	7350 16,200	10 010 32'9"
0 mm 0'0"	kg lb			*21 450 *49,750	*21 450 *48,200	*21 050 *45,600	14 700 31,650	*16 500 *35,800	10 800 23,250	12 750 27,450	8400 18,150	*10 500 *23,100	7550 16,600	9760 32'0"
-1500 mm -5'0"	kg lb	*15 750 *35,500	*15 750 *35,500	*27 400 *59,450	22 400 48,100	*20 750 *44,950	14 550 31,300	*16 350 *35,400	10 650 23,000	12 700 27,350	8350 18,050	12 200 26,900	8050 17,750	9270 30'4"
-3000 mm -10'0"	kg lb	*24 800 *56,050	*24 800 *56,050	*24 900 *53,950	22 600 48,550	*19 300 *41,700	14 600 31,450	*15 150 *32,600	10 700 23,100			*12 700 *27,950	9150 20,250	8470 27'8"
-4500 mm -15'0"	kg lb	*26 450 *56,950	*26 450 *56,950	*20 750 *44,550	*20 750 *44,550	*16 150 *34,550	14 900 32,100					*12 400 *27,250	11 450 25,600	7290 23'7"



ISO 10567:2007






\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with  $\pm 5\%$  for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 352 Hydraulic Excavator Specifications

## Reach Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"			
9000 mm 30'0"	kg lb											*10 600 *23,600	*10 600 *23,600
7500 mm 25'0"	kg lb							*12 700 *27,900	12 400 26,600			*10 000 *22,050	*10 000 *22,050
6000 mm 20'0"	kg lb					*14 900 *32,200	*14 900 *32,200	*13 200 *28,750	12 150 26,200			*9 850 *21,650	9250 20,500
4500 mm 15'0"	kg lb			*22 850 *48,900	*22 850 *48,900	*17 000 *36,750	16 350 35,300	*14 250 *30,900	11 750 25,350	*12 700 *27,700	8900 19,150	*10 000 *22,000	8350 18,400
3000 mm 10'0"	kg lb			*17 450 *45,350	*17 450 *45,350	*19 250 *41,500	15 500 33,450	*15 400 *33,350	11 300 24,400	13 000 27,950	8700 18,700	*10 500 *23,000	7900 17,350
1500 mm 5'0"	kg lb			*13 950 *34,000	*13 950 *34,000	*20 750 *44,850	14 850 32,050	*16 300 *35,300	10 950 23,600	12 800 27,500	8500 18,300	*11 300 *24,850	7750 17,050
0 mm 0'0"	kg lb			*20 300 *47,200	*20 300 *47,200	*21 150 *45,850	14 550 31,300	16 450 35,400	10 700 23,050	12 650 27,200	8350 18,000	12 000 26,450	7950 17,550
-1500 mm -5'0"	kg lb	*16 150 *36,600	*16 150 *36,600	*26 550 *57,700	22 300 47,900	*20 500 *44,450	14 450 31,100	*16 200 *35,050	10 600 22,850			13 000 28,700	8600 18,950
-3000 mm -10'0"	kg lb	*27 650 *62,600	*27 650 *62,600	*23 650 *51,300	22 550 48,450	*18 650 *40,250	14 550 31,350	*14 550 *31,050	10 700 23,150			*13 150 *29,000	9900 22,000
-4500 mm -15'0"	kg lb			*18 900 *40,550	*18 900 *40,550	*14 750 *31,250	*14 750 *31,250					*12 550 *27,500	*12 550 *27,500
		*											

\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with  $\pm 5\%$  for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

ISO 10567:2007

# 352 Hydraulic Excavator Specifications

## Reach Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"			
												mm ft/in	
9000 mm 30'0"	kg lb											*10 600 *23,600	*10 600 *23,600
7500 mm 25'0"	kg lb							*12 700 *27,900	12 500 26,850			*10 000 *22,050	*10 000 *22,050
6000 mm 20'0"	kg lb					*14 900 *32,200	*14 900 *32,200	*13 200 *28,750	12 300 26,450			*9850 *21,650	9350 20,750
4500 mm 15'0"	kg lb			*22 850 *48,900	*22 850 *48,900	*17 000 *36,750	16 550 35,650	*14 250 *30,900	11 900 25,600	*12 700 *27,700	9000 19,350	*10 000 *22,000	8450 18,650
3000 mm 10'0"	kg lb			*17 450 *45,350	*17 450 *45,350	*19 250 *41,500	15 650 33,800	*15 400 *33,350	11 450 24,650	13 150 28,300	8800 18,900	*10 500 *23,000	7950 17,550
1500 mm 5'0"	kg lb			*13 950 *34,000	*13 950 *34,000	*20 750 *44,850	15 050 32,400	*16 300 *35,300	11 050 23,850	12 950 27,850	8600 18,500	*11 300 *24,850	7850 17,300
0 mm 0'0"	kg lb			*20 300 *47,200	*20 300 *47,200	*21 150 *45,850	14 700 31,650	16 650 35,800	10 800 23,300	12 800 27,550	8450 18,250	12 150 26,750	8050 17,750
-1500 mm -5'0"	kg lb	*16 150 *36,600	*16 150 *36,600	*26 550 *57,700	22 550 48,400	*20 500 *44,450	14 600 31,450	*16 200 *35,050	10 750 23,150			13 150 *29,000	8700 19,150
-3000 mm -10'0"	kg lb	*27 650 *62,600	*27 650 *62,600	*23 650 *51,300	22 800 49,000	*18 650 *40,250	14 750 31,750	*14 550 *31,050	10 850 23,400			*13 150 *29,000	10 050 22,250
-4500 mm -15'0"	kg lb			*18 900 *40,550	*18 900 *40,550	*14 750 *31,250	*14 750 *31,250					*12 550 *27,500	*12 550 *27,500
													6700 21'8"



ISO 10567:2007




\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with  $\pm 5\%$  for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 352 Hydraulic Excavator Specifications

## Reach Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"			
												mm	ft/in
9000 mm 30'0"	kg lb											*10 600 *23,600	*10 600 *23,600
7500 mm 25'0"	kg lb							*12 700 *27,900	12 650 27,150			*10 000 *22,050	*10 000 *22,050
6000 mm 20'0"	kg lb					*14 900 *32,200	*14 900 *32,200	*13 200 *28,750	12 450 26,750			*9850 *21,650	9450 21,000
4500 mm 15'0"	kg lb			*22 850 *48,900	*22 850 *48,900	*17 000 *36,750	16 750 36,100	*14 250 *30,900	12 050 25,950	*12 700 *27,700	9150 19,600	*10 000 *22,000	8550 18,900
3000 mm 10'0"	kg lb			*17 450 *45,350	*17 450 *45,350	*19 250 *41,500	15 850 34,250	*15 400 *33,350	11 600 25,000	*13 200 28,700	8900 19,150	*10 500 *23,000	8100 17,800
1500 mm 5'0"	kg lb			*13 950 *34,000	*13 950 *34,000	*20 750 *44,850	15 250 32,850	*16 300 *35,300	11 200 24,150	13 100 28,200	8700 18,750	*11 300 *24,850	7950 17,500
0 mm 0'0"	kg lb			*20 300 *47,200	*20 300 *47,200	*21 150 *45,850	14 900 32,100	*16 650 *36,050	10 950 23,650	12 950 27,950	8600 18,500	12 350 27,150	8150 18,000
-1500 mm -5'0"	kg lb	*16 150 *36,600	*16 150 *36,600	*26 550 *57,700	22 850 49,050	*20 500 *44,450	14 800 31,900	*16 200 *35,050	10 900 23,450			*13 150 *29,000	8800 19,450
-3000 mm -10'0"	kg lb	*27 650 *62,600	*27 650 *62,600	*23 650 *51,300	23 100 49,650	*18 650 *40,250	14 950 32,150	*14 550 *31,050	11 000 23,750			*13 150 *29,000	10 150 22,550
-4500 mm -15'0"	kg lb			*18 900 *40,550	*18 900 *40,550	*14 750 *31,250	*14 750 *31,250					*12 550 *27,500	*12 550 *27,500
		*											

\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with  $\pm 5\%$  for all available track shoes.



Always refer to the appropriate Operation and Maintenance Manual for specific product information.

ISO 10567:2007



# 352 Hydraulic Excavator Specifications

## Mass Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				
												mm	ft/in	
9000 mm 30'0"	kg lb											*10 700	*10 700	6500
7500 mm 25'0"	kg lb							*12 300 *23,500	12250 *23,500			*9900 *21,950	*9900 *21,950	7780 25'2"
6000 mm 20'0"	kg lb					*31,050	*31,050	*12 950 *28,250	12 100 25,950			*9700 *21,350	9550 21,300	8610 28'0"
4500 mm 15'0"	kg lb			*21 250 *45,500	*21 250 *45,500	*16 300 *35,200	*16 300 *35,200	*13 850 *30,100	11 650 25,100	*11 300	8700	*9850 *21,600	8550 18,900	9110 29'9"
3000 mm 10'0"	kg lb			*25 850 *55,500	23 600 50,950	*18 500 *39,900	15 500 33,450	*14 950 *32,400	11 200 24,100	12 850 27,650	8500 18,250	*10 300 *22,600	8000 17,650	9340 30'7"
1500 mm 5'0"	kg lb			*22 700 *54,400	22 400 48,200	*20 100 *43,500	14 750 31,850	*15 850 *34,350	10 800 23,200	12 650 27,200	8300 17,850	*11 100 *24,450	7850 17,300	9330 30'7"
0 mm 0'0"	kg lb			*26 650 *61,000	22 000 47,250	*20 700 *44,850	14 350 30,900	*16 250 35,150	10 500 22,600	12 500	8150	12 400 27,250	8100 17,800	9070 29'8"
-1500 mm -5'0"	kg lb	*18 950 *42,800	*18 950 *42,800	*26 600 *57,700	22 000 47,200	*20 150 *43,650	14 200 30,550	*15 800 *34,100	10 400 22,400			*13 300 *29,250	8750 19,350	8530 27'11"
-3000 mm -10'0"	kg lb	*30 650 *66,600	*30 650 *66,600	*23 600 *51,100	22 250 47,750	*18 250 *39,300	14 300 30,850	*13 800	10 550			*13 300 *29,250	10 250 22,750	7660 24'11"
-4500 mm -15'0"	kg lb			*18 350 *39,200	*18 350 *39,200	*13 700 *28,650	*13 700 *28,650					*12 600 *27,550	*12 600 *27,550	6310 20'5"



ISO 10567:2007




\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with  $\pm 5\%$  for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 352 Hydraulic Excavator Specifications

## Mass Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				
												mm	ft/in	
9000 mm 30'0"	kg lb											*10 700	*10 700	6500
7500 mm 25'0"	kg lb							*12 300 *23,500	12 300 *23,500			*9900 *21,950	*9900 *21,950	7780 25'2"
6000 mm 20'0"	kg lb					*31,050	*31,050	*12 950 *28,250	12 100 26,000			*9700 *21,350	9600 21,350	8610 28'0"
4500 mm 15'0"	kg lb			*21 250 *45,500	*21 250 *45,500	*16 300 *35,200	*16 300 *35,200	*13 850 *30,100	11 700 25,200	*11 300	8750	*9850 *21,600	8550 18,950	9110 29'9"
3000 mm 10'0"	kg lb			*25 850 *55,500	23 700 51,100	*18 500 *39,900	15 550 33,550	*14 950 *32,400	11 250 24,200	12 900 27,750	8550 18,350	*10 300 *22,600	8050 17,750	9340 30'7"
1500 mm 5'0"	kg lb			*22 700 *54,400	22 450 48,350	*20 100 *43,500	14 800 31,950	*15 850 *34,350	10 800 23,300	12 700 27,300	8300 17,900	*11 100 *24,450	7900 17,350	9330 30'7"
0 mm 0'0"	kg lb			*26 650 *61,000	22 050 47,400	*20 700 *44,850	14 400 31,000	*16 250 *35,150	10 550 22,700	12 550	8200	12 400 27,350	8100 17,850	9070 29'8"
-1500 mm -5'0"	kg lb	*18 950 *42,800	*18 950 *42,800	*26 600 *57,700	22 050 47,350	*20 150 *43,650	14 250 30,650	*15 800 *34,100	10 450 22,450			*13 300 *29,250	8800 19,400	8530 27'11"
-3000 mm -10'0"	kg lb	*30 650 *66,600	*30 650 *66,600	*23 600 *51,100	22 300 47,900	*18 250 *39,300	14 350 30,950	*13 800	10 550			*13 300 *29,250	10 300 22,850	7660 24'11"
-4500 mm -15'0"	kg lb			*18 350 *39,200	*18 350 *39,200	*13 700 *28,650	*13 700 *28,650					*12 600 *27,550	*12 600 *27,550	6310 20'5"



ISO 10567:2007




\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with  $\pm 5\%$  for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 352 Hydraulic Excavator Specifications

## Mass Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				
												mm	ft/in	
9000 mm 30'0"	kg lb											*10 700	*10 700	6500
7500 mm 25'0"	kg lb							*12 300 *23,500	*12 300 *23,500			*9900 *21,950	*9900 *21,950	7780 25'2"
6000 mm 20'0"	kg lb					*31,050	*31,050	*12 950 *28,250	12 250 26,350			*9700 *21,350	*9700 *21,350	8610 28'0"
4500 mm 15'0"	kg lb			*21 250 *45,500	*21 250 *45,500	*16 300 *35,200	*16 300 *35,200	*13 850 *30,100	11 850 25,500	*11 300	8850	*9850 *21,600	8700 19,200	9110 29'9"
3000 mm 10'0"	kg lb			*25 850 *55,500	24 000 51,750	*18 500 *39,900	15 750 33,950	*14 950 *32,400	11 400 24,500	*12 950 28,150	8650 18,600	*10 300 *22,600	8150 17,950	9340 30'7"
1500 mm 5'0"	kg lb			*22 700 *54,400	*22 700 49,000	*20 100 *43,500	15 000 32,350	*15 850 *34,350	10 950 23,600	12 850 27,650	8450 18,150	*11 100 *24,450	8000 17,600	9330 30'7"
0 mm 0'0"	kg lb			*26 650 *61,000	22 350 48,050	*20 700 *44,850	14 600 31,400	*16 250 *35,150	10 700 23,000	12 700	8300	*12 550 *27,600	8250 18,100	9070 29'8"
-1500 mm -5'0"	kg lb	*18 950 *42,800	*18 950 *42,800	*26 600 *57,700	22 350 48,000	*20 150 *43,650	14 450 31,100	*15 800 *34,100	10 550 22,800			*13 300 *29,250	8900 19,700	8530 27'11"
-3000 mm -10'0"	kg lb	*30 650 *66,600	*30 650 *66,600	*23 600 *51,100	22 600 48,550	*18 250 *39,300	14 550 31,350	*13 800	10 700			*13 300 *29,250	10 450 23,150	7660 24'11"
-4500 mm -15'0"	kg lb			*18 350 *39,200	*18 350 *39,200	*13 700 *28,650	*13 700 *28,650					*12 600 *27,550	*12 600 *27,550	6310 20'5"



ISO 10567:2007




\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with  $\pm 5\%$  for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 352 Hydraulic Excavator Specifications

## Mass Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On




600 mm (24") Double Grouser, HD Double Grouser,  
Triple Grouser, HD Triple Grouser Shoes  
Variable Gauge Long Undercarriage  
2890 mm (9'6")

4340 mm (14'3")  
5350 mm (17'7")

		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"			
		L	W	L	W	L	W	L	W	mm	ft/in
7500 mm 25'0"	kg lb									*13 000 *28,700	12 800 *28,700
6000 mm 20'0"	kg lb					*15 350 *33,300	*15 350 *33,300	*13 750 *30,100	11 900 25,500	*12 700 *27,950	10 400 23,200
4500 mm 15'0"	kg lb			*23 050 *49,350	*23 050 *49,350	*17 250 *37,300	16 150 34,800	*14 550 *31,600	11 500 24,800	*12 900 *28,300	9,200 20,350
3000 mm 10'0"	kg lb					*19 300 *41,650	15 250 32,900	*15 500 *33,650	11 100 23,900	13 000 28,700	8600 19,000
1500 mm 5'0"	kg lb			*39,850	*39,850	*20 600 *44,600	14 600 31,500	*16 250 *35,200	10 700 23,100	12 850 28,300	8450 18,600
0 mm 0'0"	kg lb					*25 150 *58,950	21 950 47,200	*20 850 *45,150	14 300 30,800	16 250 35,000	10 500 22,600
-1500 mm -5'0"	kg lb	*19 650 *44,650	*19 650 *44,650	*25 650 *55,700	*22 050 47,400	*19 850 *43,000	14 250 30,650	*15 500 *33,350	10 450 22,550	*14 050 *30,950	9600 21,150
-3000 mm -10'0"	kg lb	*26 950 *58,750	*26 950 *58,750	*22 100 *47,900	*22 100 *47,900	*17 300 *37,200	14 450 31,150			*13 850 *30,450	11 550 25,600
											7090 23'1"

## Mass Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



750 mm (30") Triple Grouser Shoes  
Variable Gauge Long Undercarriage  
2890 mm (9'6")

4340 mm (14'3")  
5350 mm (17'7")

		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"			
		L	W	L	W	L	W	L	W	mm	ft/in
7500 mm 25'0"	kg lb									*13 000 *28,700	12 900 *28,700
6000 mm 20'0"	kg lb					*15 350 *33,300	*15 350 *33,300	*13 750 *30,100	12 000 25,800	*12 700 *27,950	10 550 23,450
4500 mm 15'0"	kg lb			*23 050 *49,350	*23 050 *49,350	*17 250 *37,300	16 300 35,150	*14 550 *31,600	11 650 25,050	*12 900 *28,300	9300 20,600
3000 mm 10'0"	kg lb					*19 300 *41,650	15 450 33,300	*15 500 *33,650	11 200 24,150	13 200 29,050	8700 19,200
1500 mm 5'0"	kg lb			*39,850	*39,850	*20 600 *44,600	14 800 31,900	*16 250 *35,200	10 850 23,350	13 000 28,650	8550 18,850
0 mm 0'0"	kg lb					*25 150 *58,950	22 200 47,700	*20 850 *45,150	14 450 31,150	10 600 22,900	13 500 29,800
-1500 mm -5'0"	kg lb	*19 650 *44,650	*19 650 *44,650	*25 650 *55,700	*22 050 47,900	*19 850 *43,000	14 400 31,050	*15 500 *33,350	10 600 22,850	*14 050 *30,950	9700 21,450
-3000 mm -10'0"	kg lb	*26 950 *58,750	*26 950 *58,750	*22 100 *47,900	*22 100 *47,900	*17 300 *37,200	14 600 31,500			*13 850 *30,450	11 650 25,900
											7090 23'1"



ISO 10567:2007




\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 352 Hydraulic Excavator Specifications

## Mass Boom Lift Capacities – Counterweight: 9.8 mt (21,605 lb) – without Bucket, Heavy Lift: On



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		mm ft/in
7500 mm 25'0"	kg lb									*13 000 *28,700
6000 mm 20'0"	kg lb					*15 350 *33,300	*15 350 *33,300	*13 750 *30,100	12 150 26,100	*12 700 *27,950
4500 mm 15'0"	kg lb			*23 050 *49,350	*23 050 *49,350	*17 250 *37,300	16 500 35,550	*14 550 *31,600	11 800 25,400	*12 900 *28,300
3000 mm 10'0"	kg lb					*19 300 *41,650	15 650 33,700	*15 500 *33,650	11 350 24,450	13 350 29,450
1500 mm 5'0"	kg lb			*39,850	*39,850	*20 600 *44,600	15 000 32,300	*16 250 *35,200	11 000 23,700	13 200 29,100
0 mm 0'0"	kg lb					*25 150 *58,950	22 500 48,350	*20 850 *45,150	14 650 31,550	*16 350 *35,450
-1500 mm -5'0"	kg lb	*19 650 *44,650	*19 650 *44,650	*25 650 *55,700	22 600 48,550	*19 850 *43,000	14 600 31,450	*15 500 *33,350	10 750 23,150	*14 050 *30,950
-3000 mm -10'0"	kg lb	*26 950 *58,750	*26 950 *58,750	*22 100 *47,900	*22 100 *47,900	*17 300 *37,200	14 800 31,950			*13 850 *30,450
										11 850 26,250
										7090 23'1"



ISO 10567:2007



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with  $\pm 5\%$  for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 352 Hydraulic Excavator Specifications

## Bucket Specifications and Compatibility

Linkage	Width	Capacity	Weight	Fill	Long Variable Gauge Undercarriage			
					9.8 mt (21,605 lb)/9.4 mt (20,723 lb) with CTWT RMVL			
					Reach Boom 6.9 m (22'8")		Mass Boom 6.55 m (21'6")	
Pin-On (No Quick Coupler)	mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb	%	R2.9 (9'6") R3.35 (11'0") M2.5 (8'2") M3.0 (9'10")
<b>Severe Duty Spade</b>								
Severe Duty Spade	TB	1700	67	2.50	3.27	2408	5,309	90 ● ●
Heavy Duty	UB	1750	69	3.00	3.92	2845	6,271	100
	CW55-UB	1950	77	3.50	4.58	2799	6,170	100
	UB	2000	79	3.60	4.71	3102	6,838	100
Severe Duty Spade	UB	1950	77	3.50	4.58	3091	6,814	90
	CW55-UB	1950	77	3.50	4.58	3014	6,644	90
	UB	2000	79	3.60	4.71	3187	7,026	90
Maximum load with pin-on (payload + bucket)						kg 8370	7780	9060 8230
						lb 18,453	17,152	19,974 18,144
<b>With Pin Grabber Coupler</b>								
Severe Duty Spade	TB	1700	67	2.50	3.27	2408	5,309	90 ● ○
Maximum load with pin-on (payload + bucket)						kg 7345	6755	8035 7205
						lb 16,193	14,893	17,715 15,885
<b>With CW Coupler</b>								
Heavy Duty	UB	1750	69	3.00	3.92	2845	6,271	100 ○ ⊖
	CW55-UB	1950	77	3.50	4.58	2799	6,170	100 ○ ○
	UB	2000	79	3.60	4.71	3102	6,838	100 ○ ○
Severe Duty Spade	UB	1950	77	3.50	4.58	3091	6,814	90 ○ ○
	CW55-UB	1950	77	3.50	4.58	3014	6,644	90 ○ ○
	UB	2000	79	3.60	4.71	3187	7,026	90 ○ ○
Maximum load with coupler (payload + bucket)						kg 7591	7001	8281 7451
						lb 16,736	15,435	18,257 16,427

The above loads are in compliance with hydraulic excavator standard EN474-5:2022/AC:2022, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

### Maximum Material Density:

- 2100 kg/m<sup>3</sup> (3,500 lb/yd<sup>3</sup>)
- 1800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>)
- ⊖ 1500 kg/m<sup>3</sup> (2,500 lb/yd<sup>3</sup>)
- ⊖ 1200 kg/m<sup>3</sup> (2,000 lb/yd<sup>3</sup>)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

# 352 Hydraulic Excavator Specifications

## Attachments Offering Guide

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

No Match

### PIN-ON ATTACHMENTS

		L-VG	9.8 mt (21,605 lb)	Reach	ME
		2.9 m (9'6")	3.35 m (11'0")	2.5 m (8'2")	3.0 m (9'10")
<b>Undercarriage</b>					
<b>Counterweight</b>					
<b>Boom Type</b>					
<b>Stick Length</b>					
Hydraulic Hammers	H160 S	✓	✓	✓	✓
	H180 GC S	✓	✓	✓	✓
	H180 S	✓	✓	✓	✓
	H190 S	✓	✓	✓	✓
Multi-Processors	MP332 Concrete Cutter Jaw	✓	✓		
	MP332 Demolition Jaw	✓	✓		
	MP332 Pulverizer Jaw	✓	✓		
	MP332 Shear Jaw	✓	✓		
	MP332 Tank Shear Jaw	✓	✓		
	MP332 Universal Jaw	✓	✓		
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓		
	MP332 Demolition Jaw-Flat Top	✓	✓		
	MP332 Pulverizer Jaw-Flat Top	✓	✓		
	MP332 Shear Jaw-Flat Top	✓	✓		
	MP332 Tank Shear Jaw-Flat Top	✓	✓		
	MP332 Universal Jaw-Flat Top	✓	✓		
	MP345 Concrete Cutter Jaw	✓	✓	✓	✓
	MP345 Demolition Jaw	✓	✓	✓	✓
	MP345 Pulverizer Jaw	✓	✓	✓	✓
	MP345 Shear Jaw	✓	✓	✓	✓
	MP345 Concrete Cutter Jaw-Flat Top	✓	✓	✓	✓
	MP345 Demolition Jaw-Flat Top	✓	✓	✓	✓
	MP345 Pulverizer Jaw-Flat Top	✓	✓	✓	✓
	MP345 Shear Jaw-Flat Top	✓	✓	✓	✓
	MP365 Concrete Cutter Jaw	✓	✓		
	MP365 Demolition Jaw	✓			
	MP365 Pulverizer Jaw	✓			
	MP365 Shear Jaw	✓			
Demolition and Sorting Grapples	G345	✓	✓	✓	✓
	G345 Flat Top	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3050 Flat Top	✓	✓	✓	✓
Pulverizers	P232 Secondary Pulverizer	✓	✓		
	P245 Secondary Pulverizer	✓	✓	✓	✓
	P332 Primary Pulverizer	✓	✓		
	P332 Primary Pulverizer-Flat Top	✓	✓		
	P345 Primary Pulverizer	✓	✓	✓	✓
	P345 Primary Pulverizer-Flat Top	✓	✓	✓	✓
	P365 Primary Pulverizer	✓		✓	✓

(continued on next page)

# 352 Hydraulic Excavator Specifications

## Attachments Offering Guide (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

No Match

1800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>)

1200 kg/m<sup>3</sup> (2,000 lb/yd<sup>3</sup>)

## PIN-ON ATTACHMENTS (continued)

		L-VG	ME
		Reach	9.8 mt (21,605 lb)
<b>Undercarriage</b>			
<b>Counterweight</b>			
<b>Boom Type</b>			
<b>Stick Length</b>		2.9 m (9'6") 3.35 m (11'0") 2.5 m (8'2") 3.0 m (9'10")	
Orange Peel Grapples	GSH455-1000	●	●
	GSH455-1500	●	●
	GSH455-2000	●	●
	GSH555-1000	●	●
	GSH555-1500	●	●
	GSM50-1000	●	●
	GSM50-1250	●	●
	GSM50-1500	●	●
	GSM50-2000	●	●
	GSM60-1250	●	●
	GSM60-1500	●	●
	GSM60-2000	○	○
	GSM60-2500	○	○
Clamshell Grapples	CTV30-1700	●	●
	CTV30-1900	●	●
	CTV30-2300	●	●
	CTV30-2700	●	○
	CTV30-2900	○	○
	CTV30-3100	○	○
	CTV40-3500		○
Rotary Cutters	RC50	✓	✓
		✓	✓

(continued on next page)

# 352 Hydraulic Excavator Specifications

## Attachments Offering Guide (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

† Allowed usage on machine less than 50%

No Match

### CAT PIN GRABBER COUPLER ATTACHMENTS

		L-VG			
		9.8 mt (21,605 lb)			
		Reach		ME	
Stick Length		2.9 m (9'6")		3.35 m (11'0")	2.5 m (8'2")
		3.0 m (9'10")			
Hydraulic Hammers	H160 S	✓	✓	✓	✓
	H180 GC S	✓	✓	✓	✓
	H180 S	✓†	✓†	✓	✓
	H190 S	✓†		✓	✓
Multi-Processors	MP332 Concrete Cutter Jaw	✓	✓		
	MP332 Demolition Jaw	✓	✓		
	MP332 Pulverizer Jaw	✓	✓		
	MP332 Shear Jaw	✓	✓		
	MP332 Tank Shear Jaw	✓	✓		
	MP332 Universal Jaw	✓	✓		
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓		
	MP332 Demolition Jaw-Flat Top	✓	✓		
	MP332 Pulverizer Jaw-Flat Top	✓	✓		
	MP332 Shear Jaw-Flat Top	✓	✓		
	MP332 Tank Shear Jaw-Flat Top	✓	✓		
	MP332 Universal Jaw-Flat Top	✓	✓		
	MP345 Concrete Cutter Jaw	✓	✓	✓	✓
	MP345 Demolition Jaw	✓	✓	✓	✓
	MP345 Pulverizer Jaw	✓	✓	✓	✓
	MP345 Shear Jaw	✓	✓	✓	✓
	MP345 Concrete Cutter Jaw-Flat Top	✓	✓	✓	✓
	MP345 Demolition Jaw-Flat Top	✓		✓	✓
	MP345 Pulverizer Jaw-Flat Top	✓		✓	✓
	MP345 Shear Jaw-Flat Top	✓	✓	✓	✓
Demolition and Sorting Grapples	G345	✓	✓†	✓	✓
	G345 Flat Top	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3050 Flat Top	✓		✓	
Pulverizers	P232 Secondary Pulverizer	✓	✓		
	P245 Secondary Pulverizer	✓		✓	
	P332 Primary Pulverizer	✓	✓		
	P332 Primary Pulverizer-Flat Top	✓	✓		
	P345 Primary Pulverizer	✓	✓	✓	✓
	P345 Primary Pulverizer-Flat Top	✓		✓	✓*
Rotary Cutters	RC50	✓	✓	✓	✓

(continued on next page)

# 352 Hydraulic Excavator Specifications

## Attachments Offering Guide (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

No Match

### CW-55 DEDICATED COUPLER ATTACHMENTS

		L-VG	9.8 mt (21,605 lb)	ME
		Reach	2.9 m (9'6") 3.35 m (11'0") 2.5 m (8'2") 3.0 m (9'10")	ME
<b>Undercarriage</b>				
<b>Counterweight</b>			✓	
<b>Boom Type</b>				
<b>Stick Length</b>				
Hydraulic Hammers	H160 S	✓	✓	✓
	H180 GC S	✓	✓	✓
	H180 S	✓	✓	✓
	H190 S	✓	✓	✓
Multi-Processors	MP332 Concrete Cutter Jaw	✓	✓	
	MP332 Demolition Jaw	✓	✓	
	MP332 Pulverizer Jaw	✓	✓	
	MP332 Shear Jaw	✓	✓	
	MP332 Tank Shear Jaw	✓	✓	
	MP332 Universal Jaw	✓	✓	
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	
	MP332 Demolition Jaw-Flat Top	✓	✓	
	MP332 Pulverizer Jaw-Flat Top	✓	✓	
	MP332 Shear Jaw-Flat Top	✓	✓	
	MP332 Tank Shear Jaw-Flat Top	✓	✓	
	MP332 Universal Jaw-Flat Top	✓	✓	
	MP345 Concrete Cutter Jaw	✓	✓	✓
	MP345 Demolition Jaw	✓	✓	✓
	MP345 Pulverizer Jaw	✓	✓	✓
	MP345 Shear Jaw	✓	✓	✓
	MP345 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP345 Demolition Jaw-Flat Top	✓	✓	✓
	MP345 Pulverizer Jaw-Flat Top	✓	✓	✓
	MP345 Shear Jaw-Flat Top	✓	✓	✓
	MP365 Concrete Cutter Jaw	✓*	✓	✓*
	MP365 Demolition Jaw		✓*	
	MP365 Pulverizer Jaw		✓*	
	MP365 Shear Jaw		✓	
Demolition and Sorting Grapples	G345	✓	✓	✓
	G345 Flat Top	✓	✓	✓
Mobile Scrap and Demolition Shears	S3050 Flat Top	✓		✓
Pulverizers	P232 Secondary Pulverizer	✓	✓	
	P245 Secondary Pulverizer	✓		✓
	P332 Primary Pulverizer	✓	✓	
	P332 Primary Pulverizer-Flat Top	✓	✓	
	P345 Primary Pulverizer	✓	✓	✓
	P345 Primary Pulverizer-Flat Top	✓		✓
Rotary Cutters	RC50	✓	✓	✓

(continued on next page)

# 352 Hydraulic Excavator Specifications

## Attachments Offering Guide (*continued*)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

No Match

### BOOM-MOUNT ATTACHMENTS

Undercarriage	L-VG	
Counterweight	9.8 mt (21,605 lb)	
Boom Type	Reach	ME
Mobile Scrap and Demolition Shears	S2090	✓
	S3070 Flat Top	✓
	S3090 Flat Top	✓

### Typical Pass Match Guide

For maximum production and efficiency, we recommend that loading and hauling machines are matched to achieve optimal performance.

#### Configuration\*:

Long Variable Gauge undercarriage, Reach boom, R2.9TB (9'6") stick, SD 2.5 m<sup>3</sup> (3.27 yd<sup>3</sup>) bucket, 600 mm (24") triple grouser shoes and 9.8 mt (21,605 lb) counterweight.

#### Passes Required to Fill Trucks to Rated Capacity

Material Type	Material Density	Cat Articulated Trucks			
		725	730 EJ	730	735
Earth	1600 kg/m <sup>3</sup> (2,700 lb/yd <sup>3</sup> )	6	7	7	8
Limestone	1540 kg/m <sup>3</sup> (2,600 lb/yd <sup>3</sup> )		8	8	

\*The indicated pass match reflects the machine configuration, fill factor, and typical material density shown. Changes to machine configurations, fill factors, or material density as well as jobsite-specific factors may influence exact pass match recommendations for your application. Consult your Cat dealer for more information.

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional	Standard	Optional
<b>BOOMS, STICKS AND LINKAGES</b>				
6.55 m (21'6") Mass boom		✓		
6.9 m (22'8") Reach boom		✓		
2.5 m (8'2") Mass stick		✓		
3.0 m (9'10") Mass stick		✓		
2.9 m (9'6") Reach stick		✓		
3.35 m (11'0") Reach stick		✓		
TB family bucket linkage		✓		
UB family bucket linkage		✓		
<b>CAT® TECHNOLOGY</b>				
Cat Equipment Management:				
– VisionLink™		✓ <sup>1</sup>		
– Remote Flash		✓		
– Remote Troubleshoot		✓		
– Work tool recognition and tracking (PL161)		✓		
– Operator Coaching		✓ <sup>2</sup>		
Cat Grade:				
– Cat Grade with 2D		✓		
– Cat Grade with 2D with Attachment Ready Option (ARO)		✓		
– Laser catcher		✓		
– Cat Grade with 3D (single or dual Global Navigation Satellite System [GNSS])		✓		
– Compatible with 3D grade systems from Trimble, Topcon, and Leica		✓		
– Cat Grade 3D Ready		✓		
– Cat Grade Connectivity		✓ <sup>2</sup>		
Cat Assist:				
– Grade Assist		✓		
– Boom Assist		✓		
– Bucket Assist		✓		
– Swing Assist		✓		
– Lift Assist		✓		
Cat Payload:				
– On-the-go weighing		✓		
– Semiautomatic calibration		✓		
– Payload/cycle information		✓		
– VisionLink back office reporting		✓ <sup>2</sup>		
Cat Advanced Payload:				
– Daily totals		✓		
– Custom lists		✓		
– Smart weight target		✓		
– E-ticket Integration		✓ <sup>2</sup>		
Other:				
Cat Tiltrotator (TRS) integration		✓		
<b>ELECTRICAL SYSTEM</b>				
Maintenance-free 1,000 CCA batteries (×4)			✓	
Centralized electrical disconnect switch			✓	
LED exterior chassis and boom lights			✓	
Premium surround working lights				✓
<b>ENGINE</b>				
115 Amp alternator			✓	
Cold start block heaters				✓
Three selectable modes: Power, Smart, Eco			✓	
Auto engine speed control			✓	
52° C (126° F) high-ambient cooling			✓	
Hydraulic reverse fan			✓	
–18° C (0° F) cold start capability			✓	
–32° C (–25° F) cold start capability				✓
Double element air filter with integrated pre-cleaner			✓	
Dual stage four micron main filter			✓	
Inlet air heater				✓
Engine oil sensor				✓
10 micron primary filter with water separator			✓	
Electric fuel priming pump			✓	
Secure start with PIN code			✓	
Remote disable			✓	
<b>HYDRAULIC SYSTEM</b>				
Boom and stick regeneration circuit			✓	
Electronic main control valve			✓	
Auto dig boost			✓	
Auto heavy lift			✓	
Auto hydraulic oil warmup			✓	
Bio hydraulic oil capability			✓	
Fine swing			✓	
Reverse swing damping valve			✓	
Auto swing parking brake			✓	
High performance hydraulic return filter			✓	
Two speed travel			✓	
Combined two-way auxiliary circuit				✓
Medium-pressure auxiliary circuit				✓
Quick coupler circuit for CW dedicated				✓
Hydraulic efficiency monitoring				✓

<sup>1</sup>Provides core telematics data to manage health, maintenance insights, and condition monitoring. Other plans available for more comprehensive data reporting. Consult your Cat dealer for details.

<sup>2</sup>VisionLink subscription required. Consult your Cat dealer for details.

(continued on next page)

# 352 Standard and Optional Equipment

## Standard and Optional Equipment (*continued*)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional	Standard	Optional
<b>SAFETY AND SECURITY</b>				
Caterpillar One Key security system	✓		Integrated vehicle health management system	✓
2D E-Fence:	✓		Grouped engine oil and fuel filters	✓
– E-ceiling			Scheduled Oil Sampling (S-O-S <sup>SM</sup> ) ports	✓
– E-floor			QuickEvac <sup>TM</sup> maintenance ready	✓
– E-swing			Electric refueling pump with auto shutoff	✓
– E-wall				
– E-cab avoidance				
Auto hammer stop	✓			
Lockable external tool/storage box	✓			
Lockable door, fuel, and hydraulic tank locks	✓			
Lockable fuel drain compartment	✓			
Service platform with anti-skid plate and recessed bolts	✓			
Right Hand (RH) handrail and handhold	✓			
Signaling/warning horn	✓			
Travel alarm	✓			
Swing alarm	✓			
Ground-level secondary engine shutoff switch	✓			
Lockable disconnect switch	✓			
Boom lowering check valve	✓			
Stick lowering check valve	✓			
Rear and right-hand-sideview cameras	✓			
360° visibility	✓			
Inspection lighting	✓			
<b>SERVICE AND MAINTENANCE</b>				
Integrated vehicle health management system			Grouped engine oil and fuel filters	✓
Scheduled Oil Sampling (S-O-S <sup>SM</sup> ) ports			QuickEvac <sup>TM</sup> maintenance ready	✓
Electric refueling pump with auto shutoff				
<b>UNDERCARRIAGE AND STRUCTURES</b>				
Towing eye on base frame			Towing eye on base frame	✓
Full-length track guiding guards			Full-length track guiding guards	✓
Segmented three-piece track guiding guards			Segmented three-piece track guiding guards	✓
Swivel guard			Swivel guard	✓
HD bottom guard			HD bottom guard	✓
HD travel motor guards			HD travel motor guards	✓
HD rollers			HD rollers	✓
Grease lubricated track			Grease lubricated track	✓
HD swing frame			HD swing frame	✓
HD swing bearing			HD swing bearing	✓
9.8 mt (21,605 lb) counterweight			9.8 mt (21,605 lb) counterweight	✓
600 mm (24") HD double grouser shoes			600 mm (24") HD double grouser shoes	✓
600 mm (24") triple grouser shoes			600 mm (24") triple grouser shoes	✓
750 mm (30") triple grouser track shoes			750 mm (30") triple grouser track shoes	✓
900 mm (35") triple grouser track shoes			900 mm (35") triple grouser track shoes	✓

## Cab Options

	Deluxe	Premium (2P)	Premium (1P)
ROPS	●	●	●
Operator Protective Guards (OPG)	○	○	○
High-resolution 203 mm (8") LCD touchscreen monitor	●	X	X
High-resolution 254 mm (10") LCD touchscreen monitor	○	●	●
Auto bi-level air conditioner	●	●	●
Jog dial and shortcut keys for monitor control	●	●	●
Keyless push-to-start engine control	●	●	●
Height-adjustable console	●	●	●
Tilt-up left-side console	●	●	●
Heated air-suspension seat	●	X	X
Heated and ventilated air-suspension seat	X	●	●
51 mm (2") seat belt	●	●	●
Monitor integrated Bluetooth® radio with USB/Auxiliary ports	●	●	●
12V DC outlets	●	●	●
Document storage	●	●	●
Overhead storage and rear storage with nets	●	●	●
Beverage holder	●	●	●
Cup holder	●	●	●
Openable two-piece front window	●	●	○
One piece front windshield	X	○	●
Rear window emergency exit	●	●	●
Radial wiper with washer	●	X	X
Parallel wiper	X	●	●
Openable polycarbonate skylight hatch	●	●	X
Laminated roof glass	X	X	●
LED dome light	●	●	●
Floor welcome light	●	●	●
Roof sunscreen	●	●	●
Roller front sunscreen	●	●	●
Roller rear sunscreen	○	●	●
Washable floor mat	●	●	●
Beacon ready	●	●	●
Cat Stick Steer	○	○	○
Auxiliary relay	○	○	○

● Standard

○ Optional

X Not available

## Dealer Installed Kit and Attachments

Attachments may vary. Consult your Cat dealer for details.

### CAB

- Radial lower wiper
- Left Hand (LH)/RH electrical pedal for tool control
- Horizontal slider joysticks
- Rain protector plus cab light cover
- 75 mm (3") retractable seat belt

### ELECTRICAL

- Premium surround working lights

### GUARDS

- Mesh guard full front
- Mesh guard lower half front
- Full protecting vandalism guard

### SAFETY AND SECURITY

- Bluetooth receiver kit
- Bluetooth key fob

Operator Protective Guards

- Cat Detect – People Detection
- Cat Command – Remote control kit

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

## Engine

- Meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- Cat® diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) and are compatible\* with ULSD blended with the following lower-carbon intensity fuels\*\* up to:
  - ✓ 20% biodiesel FAME (fatty acid methyl ester)\*\*\*
  - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels
- Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.
- \* While Cat engines are compatible with these alternative fuels, some regions may not allow their use.
- \*\* Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.
- \*\*\* Engines with no aftertreatment devices are compatible with higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).

## Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a or R1234yf. See the label or instruction manual for identification of the gas.

- If equipped with R134a (Global Warming Potential = 1430), the system contains 1.0 kg (2.2 lb) of refrigerant which has a CO<sub>2</sub> equivalent of 1.430 metric tonnes (1.576 tons).
- If equipped with R1234yf (Global Warming Potential = 0.501), the system contains 0.85 kg (1.87 lb) of refrigerant which has a CO<sub>2</sub> equivalent of 0.001 metric tonnes (0.001 tons).

## Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
  - Barium < 0.01%
  - Cadmium < 0.01%
  - Chromium < 0.01%
  - Lead < 0.01%

## Sound Performance

ISO 6395:2008 (external) – 108 dB(A)

ISO 6396:2008 (inside cab) – 73 dB(A)

- External Sound – The labeled spectator sound power level represents the Guaranteed Value per 2000/14/EC amended by 2005/88/EC, when properly equipped, and is measured according to the test procedures and conditions specified in ISO 6395:2008. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Internal Sound – The operator sound pressure level is measured according to the test procedures and conditions specified in ISO 6396:2008 for a cab offered by Caterpillar, when properly installed and maintained and tested with the door and windows closed. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained for doors windows open) for extended periods or in noisy environment(s).

## Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDOL™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

## Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
  - Smart mode matches machine power to digging requirements automatically
  - Eco mode supports reduced fuel consumption for light applications
  - Utilizing Cat technologies can help increase operating efficiencies.
  - Reduce fuel consumption with the high-efficiency hydraulic fan that cools the engine on demand
  - Extended service intervals help decrease maintenance costs

## Recycling

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage
Steel	83.09%
Iron	8.97%
Nonferrous Metal	1.66%
Mixed Metal	0.04%
Mixed-Metal and Nonmetal	0.72%
Plastic	0.62%
Rubber	0.16%
Mixed Nonmetallic	0.13%
Fluid	2.97%
Other	1.64%
Uncategorized	0.00%
Total	100%

- A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714:2007 (Earthmoving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused, or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714:2007 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following value in the table may vary.

Recyclability – 98%

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2025 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, VisionLink, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ4060-01 (12-2025)  
Replaces: AEXQ4060-00  
Build Number: 08D  
(Europe)

