

320 GC HYDRAULIC EXCAVATOR

The Cat® 320 GC excavator balances productivity with easy-to-use technology features, a comfortable cab, reduced fuel consumption, and longer maintenance intervals reducing maintenance costs to bring you a durable, low-cost-per-hour excavator for light-to medium-duty applications.



LOW FUEL CONSUMPTION

A precise combination of low engine speed and a large hydraulic pump deliver top performance, helping to burn less fuel.

IMPROVED RELIABILITY AND EFFICIENCY

An advanced electro-hydraulic system provides the optimum balance of power and efficiency while giving you the control you need for precise digging requirements.

LOWER MAINTENANCE COSTS

Extended and synchronized maintenance intervals help you get more done at a lower cost compared to the previous model.

LATEST FEATURES



Cab Monitor Improvements

- Continuously improved user interface allows for intuitive navigation, minimizing performance interruption with the easy-to-use touchscreen menu.
- Smaller app tiles to view more apps in one screen.
- When navigating the menu, scroll position will be remembered.
- While menu is shown and lever is moved, camera view will be shown.
- Use the in-monitor QR code to learn about machine and technology features through a full suite of how-to videos.

Not all features are available in all regions. Please check with your local Cat dealer for specific offering availability in your area. Build Number: 07H

PERFORMANCE WITH LESS FUEL

- Match the excavator to the job using power modes; let Smart mode automatically match engine and hydraulic power to your digging conditions.
- The advanced hydraulic system provides the optimum balance of power and efficiency while giving you the control you need for precise digging requirements.
- Valve priority puts hydraulic pressure and flow where you command it to go for fast light- to medium-load cycle times.
- Meets Brazil MAR-1 emission standards, equivalent to U.S. EPA Tier 3 and EU Stage IIIA.
- Add auxiliary hydraulics to do more work with a range of Cat attachments.
- Don't let the temperature stop you from working. The excavator has a standard high ambient temperature capability of 52° C (125° F) and cold start capability of -32° C (-25° F).





- Expect lower maintenance costs compared to the 320D2 GC.
- Do all daily maintenance inspections at ground level.
- Boost productivity with proactive service reminders. The integrated vehicle health management system alerts the operator with stepby-step service guidance along with parts needed so you don't experience any unnecessary downtime.
- Check engine oil level quickly and safely with the ground-level engine oil dipstick; fill and check engine oil on top of the machine with a conveniently located second dipstick.
- Track your excavator's filter life and maintenance intervals via the in-cab monitor.
- No required maintenance on the Cat Clean Emissions Module.
- Using Cat genuine oil and filters and doing your typical $S \cdot O \cdot S^{\text{SM}}$ monitoring will extend the current service interval to 1,000 hours, giving you greater uptime to do more work.
- The latest hydraulic oil filter offers high-quality filtration performance, features anti-drain valves to keep the oil clean when the filter is replaced, and provides an extended 3,000-hour replacement interval for efficiency and convenience.
- The high-efficiency electric cooling fans only run when needed and reverse to keep cores free from debris.
- S·O·S ports simplify maintenance and allow for quick, easy extraction of samples for fluid analysis.

RELIABILITY YOU CAN COUNT ON

- Work up to 3000 m (9,840 ft) above sea level without de-rating.
- Standard high-ambient temperature capability is 52° C (125° F) with cold start capability at -32° C (-25° F).
- Auto warm up speeds up hydraulic oil warming in cold temperatures and helps prolong the life of components.
- Three levels of fuel filtration protect the engine from dirty diesel fuel.
- Grease sealed between track pins and bushings reduces travel noise and prevents debris from entering to increase undercarriage life.
- The center track guiding guard helps keep the excavator track aligned when traveling and working on slopes.
- The sloped track frame prevents mud and debris accumulation, helping reduce risk of track damage.






- Access 100% of daily maintenance inspection points from ground level no need for you to climb on top of the excavator.
- Keep your excavator secure with Operator ID. Use your PIN code on the monitor to enable the pushbutton starting feature.
- The standard Rollover Protective Structure (ROPS) cab meets ISO 12117-2:2008 requirements.
- Enjoy great visibility into the trench, in each swing direction, and behind you with the help of smaller cab posts and larger windows.
- A rear view camera is standard, and a right-side-view camera is optional.
- The latest right-hand service platform design provides easy, safe, and quick access to upper service platform; the service platform steps use anti-skid punch plate to prevent slipping.
- The handrails comply with ISO 2867:2011 requirements.
- The lower frame meets ISO 15818:2017 lifting and tie-down requirements.
- Enhance jobsite safety. Add a swing alarm to alert people when you're rotating from trench to stockpile and back again.
- Make service work easier with optional inspection lighting. With the flip of a switch, lights will illuminate the engine, pump, battery, and radiator compartments to enhance visibility.

SIMPLE TO OPERATE

- Start the engine with a push button; use a Bluetooth® key fob, or the unique Operator ID function.
- Program each joystick button, including response and pattern, using Operator ID; it will also remember climate control fan and radio settings.
- Navigate quickly on the standard high-resolution 203 mm (8 in) touchscreen monitor or with the aid of the jog dial control.
- Continuously improved user interface allows for intuitive navigation, minimizing performance interruption with the easy-to-use touchscreen menu.
- Use the in-monitor QR code to learn about machine and technology features through a full suite of how-to videos.
- Protect your hammer tool from overheating and rapid wear. Auto hammer stop warns you after 15 seconds of continuous firing and then automatically shuts it off after 30 seconds – all to extend the tool's service life.
- Not sure how a function works or how to maintain the excavator?
 Always have the operator's manual at your fingertips in the touchscreen monitor.



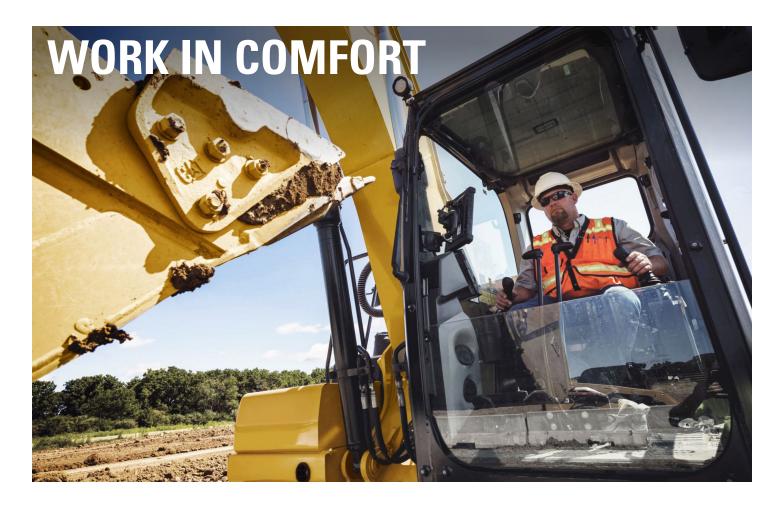


- The Comfort cab has a wide seat that adjusts for operators of all sizes.
- Control the excavator comfortably with easy-to-reach controls all located in front of you.
- Standard automatic climate control keeps you at the right temperature all shift long.
- Advanced viscous mounts reduce cab vibration.
- Stow your gear with plenty of in-cab storage beneath and behind the seat, overhead, and in the consoles. A cup holder, document holder, bottle holder, and coat hook are also provided.
- Use the standard radio's USB ports and Bluetooth technology to connect to personal devices.



TAKE THE GUESSWORK OUT OF MANAGING YOUR EQUIPMENT

- VisionLinkTM provides actionable data insights for all assets regardless of fleet size or equipment manufacturer.* Review equipment data from your desktop or mobile device to maximize uptime and optimize assets. Equipment management features provide up-to-date asset tracking of your entire fleet. You can track asset location, operating hours, fuel level, health issues, and overall utilization. Monitor equipment health with fault codes, fluid analysis, and inspection due dates. It's all about making informed, data-based decisions to help reduce operating costs. Productivity management features enable you to analyze overall jobsite performance. You'll be able to track tonnage moved, production targets, and payload, as well as Grade 3D and compaction data. These vital metrics help you to reduce costs and improve jobsite operational efficiency.
- Remote Flash is a mobile application that allows you to update onboard software without a technician being present, allowing you to initiate software updates when convenient, increasing your overall operating efficiency.

*Data field availability can vary by equipment manufacturer.

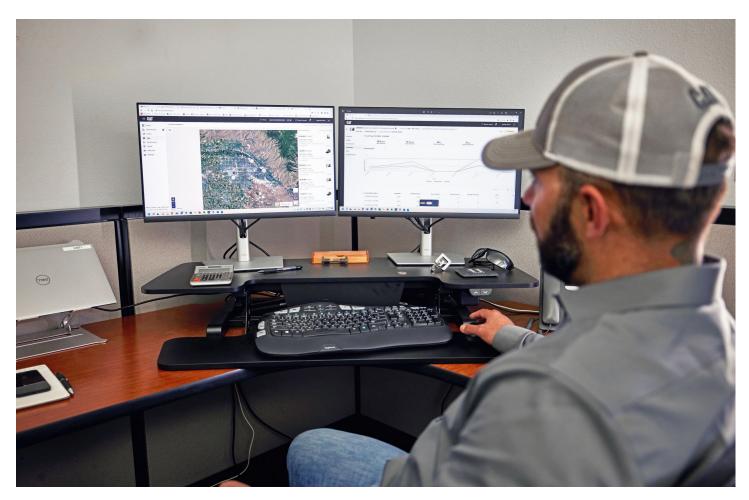

FORESTRY CONFIGURATION

- The Cat 320 GC Forestry Configuration provides premium performance and operating efficiency.
- The Cat C4.4 engine lowers fuel consumption.
- Longer maintenance intervals help reduce operating costs.
- The Severe Duty undercarriage features an 8-roller bottom, double supported carrier rollers, and 600 mm (24") double grouser track shoes.
- The ROPS comfort cab is fitted with 19 mm (3/4") polycarbonate front window and 13 mm (1/2") side polycarbonate side windows.
- Enjoy great visibility to the stem, in each swing direction, and behind you with the help of smaller cab pillars, larger windows, and a flat engine hood design.

The forestry configuration is available in Brazil only.



MORE THAN MACHINES

BUILT AROUND YOUR SUCCESS

When you buy Cat equipment, you get so much more than the machine. You also get the support of a world-class dealer network, backed by a range of flexible solutions, technology, tools, and more.



CUSTOMER VALUE AGREEMENTS

A Customer Value Agreement (CVA) from your Cat dealer helps you do more and worry less. A CVA simplifies machine ownership and maintenance, adds the security of expert dealer support, and gives you the peace of mind from effective equipment health management.

GENUINE CAT PARTS

Genuine Cat parts deliver the highest level of reliability and productivity. Order direct from your Cat dealer or shop online at parts.cat.com.

REPAIR OPTIONS

A broad range of repair options gives you choices that work with your needs, budget, and timeline. Every repair is performed by expert Cat technicians. You'll receive smart repair advice, a timely, accurate quote, and service that gets your machine back into action quickly.

FINANCIAL SERVICES

Count on Cat Financial to provide the best finance and extended protection solutions for your business. For more than 30 years, we have helped our customers succeed through financial service excellence.



60









DOZERS

SKID STEERS

MATERIAL HANDLERS

EXCAVATORS

WHEEL LOADERS

TRACK LOADERS

INCREASE YOUR PRODUCTIVITY AND PROFIT

WITH CAT ATTACHMENTS

You can easily expand the performance of your machine by utilizing any of the variety of Cat attachments. Each Cat attachment is designed to fit the weight and horsepower of Cat excavators for improved performance, safety, and stability.

BUCKETS



GRAPPLES



HYDRAULIC HAMMERS



PREVENT HAMMER WEAR AND TEAR

Protect your hammer tool from overheating and rapid wear. Auto hammer stop warns you after 15 seconds of continuous firing and then automatically shuts it off after 30 seconds – all to extend the tool's service life.

MULTI-PROCESSORS



QUICK COUPLERS



RIPPERS



TRACKING

MADE EASY

ATTACHMENT

The Cat® PL161 attachment locator allows you to track attachments across all worksites, helping to reduce the number of lost attachments and plan for attachment maintenance and replacement.



VIBRATORY PLATE COMPACTORS



TECHNICAL SPECIFICATIONS

See cat.com for complete specifications.

	ENGINE		
Net Power – ISO 9249	107 kW	143 hp	
Net Power – ISO 9249 (DIN)	145 hp	(metric)	
Engine Model	Cat	® C4.4	
Engine Power – ISO 14396	108 kW	145 hp	
Engine Power – ISO 14396 (DIN)	147 hp	147 hp (metric)	
Bore	105 mm	4 in	
Stroke	127 mm	5 in	
Displacement	4.4 L	269 in ³	
Biodiesel Capability	Up t	Up to B201	
Emissions	Meets Brazil MAR-1 emission standards, equivalent to U.S. EPA Tier 3 and EU Stage IIIA.		

Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system, and alternator with engine speed at 2,000 rpm. Advertised power is tested per the specified standard in effect at the time of manufacture.

 ^{1}Cat engines are compatible with diesel fuel blended with the following lower-carbon intensity fuels** up to:

- 100% biodiesel FAME (fatty acid methyl ester)*
- 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels.

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

*For use of blends higher than 20% biodiesel, consult your Cat dealer.
**Tailpipe greenhouse gas emissions from lower-carbon intensity fuels
are essentially the same as traditional fuels.

HYDRAULIC SYSTEM			
Main System – Maximum Flow	429 L/min (113 gal/min)		
Maximum Pressure – Equipment	35 000 kPa	5,075 psi	
Maximum Pressure – Travel	34 300 kPa	4,974 psi	
Maximum Pressure – Swing	25 000 kPa	3,625 psi	

SWIN	G MECHANISM		
Swing Speed	11.25 r/min		
Maximum Swing Torque	74.4 kN·m	54,900 lbf-ft	

WEIGHTS			
Operating Weight	20 400 kg	45,000 lb	
Medium undercarriage, Reach boom, R2.9 (9'6") stick, General Duty (GD) 1.0 m³ (1.31 yd³) bucket, 600 mm (24") triple grouser shoes and 3700 kg (8,200 lb) counterweight.			

SERVICE REFILL CAPACITIES			
Fuel Tank Capacity	345 L	91.1 gal	
Cooling System	25 L	6.6 gal	
Engine Oil	15 L	4 gal	
Swing Drive – Each	12 L	3.2 gal	
Final Drive – Each	4 L	1.1 gal	
Hydraulic System – Including Tank	234 L	61.8 gal	
Hydraulic Tank	115 L	30.4 gal	

DIMENSIONS			
Boom	Reach 5.7 m (18'8")		
Stick	Reach 2.9 m	(9'6")	
Bucket	1.0 m³ (1.31	l yd³)	
Shipping Height – Top of Cab	2960 mm	9.9 ft	
Handrail Height	2950 mm	9.8 ft	
Shipping Length	9530 mm	31.3 ft	
Tail Swing Radius	2830 mm	9.3 ft	
Counterweight Clearance	1050 mm	3.5 ft	
Ground Clearance	470 mm	1.7 ft	
Track Length	4250 mm	13.11 ft	
Length to Center of Rollers	3450 mm	11.4 ft	
Track Gauge	2380 mm	7.9 ft	
Transport Width	2980 mm	9.9 ft	

WORKING RANGES	S AND FORCES	3	
Boom	Reach 5.7	m (18'8")	
Stick	Reach 2.9 m (9'6")		
Bucket	1.0 m³ (1.31 yd³)		
Maximum Digging Depth	6630 mm	21.8 ft	
Maximum Reach at Ground Level	9770 mm	32 ft	
Maximum Cutting Height	9440 mm	31 ft	
Maximum Loading Height	6580 mm	21.5 ft	
Minimum Loading Height	2260 mm	7.4 ft	
Maximum Depth Cut for 2440 mm (8 ft) Level Bottom	6460 mm	21.2 ft	
Maximum Vertical Wall Digging Depth	6010 mm	19.7 ft	
Bucket Digging Force – ISO	129 kN	29,007 lbf	
Stick Digging Force – ISO	99 kN	22,301 lbf	

STANDARD AND OPTIONAL EQUIPMENT

Standard and optional equipment may vary. Consult your Cat® dealer for details.

BOOM AND STICKS	STANDARD	OPTIONAL
5.7 m (18'8") HD Reach boom	•	
2.9 m (9'6") HD Reach stick	•	
UNDERCARRIAGE AND STRUCTURES	STANDARD	OPTIONAL
Medium undercarriage	•	
3700 kg (8,150 lb) counterweight	•	
Tie-down points on base frame	•	
600 mm (24") triple grouser shoes		•
790 mm (31") triple grouser shoes		•
CAT® TECHNOLOGY	STANDARD	OPTIONAL
VisionLink	•	
Remote Flash	•	
САВ	STANDARD	OPTIONAL
Rollover protective structure (ROPS)	•	
Mechanical-suspension seat	•	
High-resolution 203 mm (8 in) LCD touchscreen monitor	•	
Operator Protective Guards (OPG)		•
OTHER OPTIONAL CONFIGURATIONS	STANDARD	OPTIONAL
Forestry (Brazil only)		•
ENGINE	STANDARD	OPTIONAL
Cat C4.4 single turbo diesel engine	•	
Two selectable power modes	•	
Auto engine speed control	•	
Auto engine idle shutdown	•	
52° C (125° F) high-ambient cooling capacity	•	
-32° C (-25° F) cold start capability	•	
Double element air filter with integrated pre-cleaner	•	

ELECTRICAL SYSTEM	STANDARD	OPTIONAL
Two 1,000 CCA maintenance-free batteries	•	
Programmable time-delay LED working lights	•	
LED chassis light, left-hand boom lights	•	
LED chassis light, left-hand/right-hand boom lights, cab lights		•
SERVICE AND MAINTENANCE	STANDARD	OPTIONAL
Integrated vehicle health management system	•	
$S \cdot O \cdot S^{SM}$ ports	•	
Ground- and platform-level engine oil dipsticks	•	
HYDRAULIC SYSTEM	STANDARD	OPTIONAL
Boom and stick regeneration circuits	•	
Auto two-speed travel	•	
Boom and stick drift reduction valve	•	
Three button joysticks	•	
Auto warm up		•
Hammer return filter circuit		•
Slider joysticks		•
Tool Control (two pump, one/two way high- pressure flow)		•
Basic Tool Control (one pump, one way high-pressure flow)		•
Quick coupler circuit		•
SAFETY AND SECURITY	STANDARD	OPTIONAL
Auto hammer stop	•	-
Rearview camera	•	
Right-hand-side mirror	•	
Ground-level engine shutoff switch	•	
Lockable disconnect switch	•	
Right-hand handrail and hand hold	•	
Signaling/warning horn	•	
Right-side-view camera		•
Swing alarm		•
Inspection lighting		•



AEXQ4153-01 (10-2025) Replaces: AEXQ4153-00 Build Number: 07H (S Am [except Chile, Colombia])

For more complete information on Cat products, dealer services and industry solutions, visit us on the web at www.cat.com.

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

© 2025 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, VisionLink, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

www.cat.com www.caterpillar.com

