

M316

Wheel Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications 2

Engine 2
Transmission 2
Service Refill Capacities 2
Swing Mechanism 2
Undercarriage 2
Operating Weights 2
Major Component Weights 3
Hydraulic System 3
Tires 3
Dozer Blade 4
Vibration Levels 4
Standards 4
Sound Performance 4
Air Conditioning System 4
Dimensions 5
Undercarriage Dimensions 6
Working Ranges 7
Lift Capacities:
Variable Adjustable Boom (VAB) (5205 mm), 2.2 m Stick 8
Variable Adjustable Boom (17'1"), 7'3" Stick 9
Variable Adjustable Boom (5205 mm), 2.5 m Stick 10
Variable Adjustable Boom (17'1"), 8'2" Stick 11
Bucket Specifications and Compatibility 20
Attachments Offering Guide 25

Standard and Optional Equipment 30
Dealer Installed Kits and Attachments 32
Cab Options 33
M316 Environmental Declaration 34

M316 Wheel Excavator Specifications

Engine

Engine Model	Cat® 4.4	
Engine Power		
ISO 14396	110 kW	148 hp
ISO 14396 (metric)	150 hp (PS)	
Net Power		
ISO 9249	104.9 kW	141 hp
ISO 9249 (metric)	143 hp (PS)	
Bore	105 mm	4.1 in
Stroke	127 mm	5 in
Displacement	4.4 L	268.5 in^3
Biodiesel Capability	Up to B20(1)	
Number of Cylinders	4	

- Meets U.S. EPA Tier 4 Final and EU Stage V emission standards.
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when engine is equipped with fan, air cleaner, CEM exhaust gas aftertreatment, alternator, and cooling fan running at intermediate speed.
- Recommended for use up to 3000 m (9,843 ft) altitude with engine power derate above 3000 m (9,843 ft).
- Rated speed 2,000 rpm.

(1)Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) and are compatible* with ULSD blended with the following lower-carbon intensity fuels** up to:

✓ 20% biodiesel FAME (fatty acid methyl ester)***

✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

**While Caterpillar engines are compatible with these alternative fuels, some regions may not allow their use.*

***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

****Engines with no aftertreatment devices are compatible with higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).*

Transmission

Forward/Reverse		
1st Gear	10 km/h	6.2 mph
2nd Gear	35 km/h	21.7 mph
Creeper Speed		
1st Gear	5.5 km/h	3.4 mph
2nd Gear	15 km/h	9.3 mph
Drawbar Pull	102 kN	22,931 lbf
Maximum Gradeability at (17 300 kg/38,140 lb)	73.0%	

Service Refill Capacities

Fuel Tank (total capacity)	350 L	92.5 gal
Diesel Exhaust Fluid Tank	20 L	5.3 gal
Cooling System	24 L	6.3 gal
Engine Oil	13 L	3.4 gal
Hydraulic Tank	120 L	31.7 gal
Hydraulic System (including tank)	260 L	68.7 gal
Rear Axle Housing (differential)	14 L	4 gal
Front Steering Axle (differential)	10.5 L	2.8 gal
Final Drive (each)	2.5 L	0.7 gal
Powershift Transmission	2.5 L	0.7 gal

Swing Mechanism

Maximum Swing Speed*	10.2 rpm	
Maximum Swing Torque	43.8 kN·m	32,305 lbf·ft

*For CE-marked machine default value may be set lower.

Undercarriage

Ground Clearance	365 mm	14.4 in
Maximum Steering Angle	35°	
Oscillation Axle Angle	± 8.5°	
Minimum Turning Radius		
Outside of Tire	6300 mm	20.7 ft
Outside of Tire (plastic fender)	7550 mm	24.8 ft
End of VA Boom	7300 mm	23.9 ft
Undercarriage steps for parallel blade		
Standard	2545 mm	8.3 ft
Wide	2720 mm	8.9 ft
Plastic type fenders for front and rear tires, for parallel blade		
Standard	2550 mm	8.4 ft
Wide	2720 mm	8.9 ft

Operating Weights*

Minimum	17 000 kg	37,480 lb
Maximum	18 400 kg	40,560 lb
Typical configurations		
Variable Adjustable Boom**		
Rear Blade Only	17 200 kg	37,920 lb
Blade and Outriggers	18 150 kg	40,010 lb
Front and Rear Outriggers	18 400 kg	40,560 lb

*Operating weight includes full fuel tank, operator, bucket 700 kg (1,543 lb) and dual pneumatic tires. Weight varies depending on configuration.

**Typical configurations include 2.5 m (8'2") stick, 3300 kg (7,280 lb) counterweight, bucket and 220 kg (485 lb) quick coupler.

Major Component Weights

Booms (including VAB and stick cylinder, pins and standard hydraulic lines)		
Variable Adjustable Boom 5205 mm (17'1")	2200 kg	4,850 lb
Sticks (including cylinder, bucket linkage, pins and standard hydraulic lines)		
Stick 2200 mm (7'3")	790 kg	1,740 lb
Stick 2500 mm (8'2")	810 kg	1,790 lb
Counterweight		
3300 kg (7,280 lb)	3300 kg	7,280 lb
Undercarriage (including axles, standard tires and steps)		
Rear Blade	4450 kg	9,810 lb
Rear Blade/Front Outrigger	5400 kg	11,900 lb
Rear Outrigger/Front Blade	5400 kg	11,900 lb
Rear Outrigger/Front Outrigger	5650 kg	12,460 lb
Rear Blade Parallel	4960 kg	10,934 lb
Rear Blade Parallel with Trailer	5025 kg	11,078 lb
Front Blade/Rear Outrigger	5965 kg	13,151 lb
Front Blade/Rear Outrigger with Trailer:	6030 kg	13,294 lb
Buckets		
Pin-On Bucket General Duty (GD) 1200 mm (47"), 0.80 m^3 (1.05 yd^3)	680 kg	1,500 lb
Pin-On Bucket GD 1200 mm (47"), 0.91 m^3 (1.19 yd^3)	700 kg	1,540 lb
CW Bucket GD 1200 mm (47"), 0.91 m^3 (1.19 yd^3)	680 kg	1,500 lb
Quick Couplers		
CW30 Dedicated Quick Coupler	220 kg	490 lb
Pin Grabber Quick Coupler	300 kg	660 lb

Hydraulic System

Maximum Pressure – Implement Circuit		
Normal	35 000 kPa	5,076 psi
Heavy Lift	37 000 kPa	5,366 psi
Travel Circuit	35 000 kPa	5,076 psi
Maximum Pressure – Auxiliary Circuit		
High Pressure	35 000 kPa	5,076 psi
Medium Pressure	17 000 kPa	2,466 psi
Swing Mechanism	35 000 kPa	5,076 psi
Maximum Flow		
Implements	275 L/min	73 gal/min
Travel Circuit	190 L/min	50 gal/min
Auxiliary Circuit		
High Pressure	250 L/min	66 gal/min
Medium Pressure	55 L/min	14.5 gal/min
Swing Mechanism	106 L/min	28.0 gal/min
Cylinders		
Boom Cylinder – Bore	115 mm	5"
Boom Cylinder – Stroke	916 mm	3'0"
VAB Cylinder – Bore	140 mm	6"
VAB Cylinder – Stroke	743 mm	2'5"
Stick Cylinder – Bore	115 mm	5"
Stick Cylinder – Stroke	1147 mm	3'9"
Bucket Cylinder – Bore	100 mm	4"
Bucket Cylinder – Stroke	1055 mm	3'6"

Tires

Standard	10.00-20 (dual pneumatic)
Optional	11.00-20 (dual pneumatic) 315/70R22.5 (dual pneumatic spacerless) 445/70/R19.5 TL XF (single pneumatic) 300-80-22.5 (dual pneumatic, spacerless)

M316 Wheel Excavator Specifications

Dozer Blade

Blade Type	Radial		Parallel	
Width	2540 mm	8'4"	2540 mm	8'4"
Blade Roll-Over Height	540 mm	1'9"	560 mm	1'10"
Blade Total Height	580 mm	1'11"	610 mm	2'0"
Maximum Lowering Depth From Ground	120 mm	5"	120 mm	0'5"
Maximum Raising Height Above Ground	475 mm	1'7"	470 mm	1'7"

Vibration Levels

Maximum Hand/Arm (ISO 5349-2001)	<2.5 m/s²	<8.2
Maximum Whole Body (ISO/TR 25398:2006)	<0.5 m/s²	<1.6
Seat Transmissibility Factor (ISO 7096:2020-spectral class EM6)	<0.7	

Standards

Brakes	ISO 3450:2011
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008
Operator Protective Guards (OPG) (optional)	ISO 10262:1998 Level II
Cab/Sound Levels	Meets appropriate standards as listed below

Sound Performance

ISO 6396:2008 internal	70 dB(A)
ISO 6395:2008 external	102 dB(A)

- External Sound – The labelled spectator sound power level represents the Guaranteed Value per 2000/14/EC, when properly equipped, and is measured according to the test procedures and conditions specified in ISO 6395:2008. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Internal Sound – The operator sound pressure level is measured according to the test procedures and conditions specified in ISO 6396:2008 for a cab offered by Caterpillar, when properly installed and maintained and tested with the door and windows closed. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained for doors/windows open) for extended periods or in noisy environment(s).

Air Conditioning System


The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a or R1234yf. See the label or instruction manual for identification of the gas.

– If equipped with R134a (Global Warming Potential = 1430), the system contains 0.9 kg (2.0 lb) of refrigerant which has a CO_2 equivalent of 1.287 metric tonnes (1.418 tons).


– If equipped with R1234yf (Global Warming Potential = 0.5), the system contains 0.75 kg (1.65 lb) of refrigerant which has a CO_2 equivalent of 0.0004 metric tonnes (0.0004 tons).


Dimensions

All dimensions are approximate. Values are with 10.00-20 dual pneumatic tires.

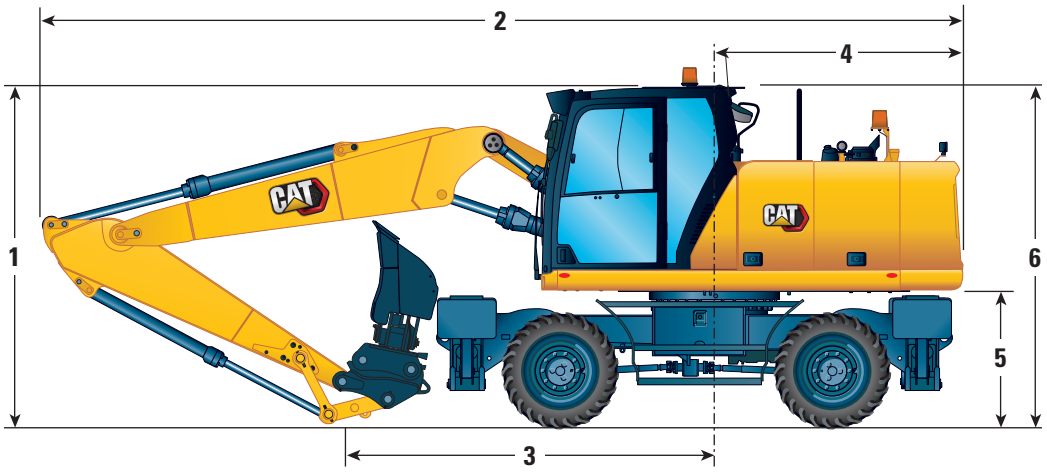

Boom Option	Variable Adjustable Boom 5205 mm (17'1")	
Stick Options	**2.2 m (7'3")**	**2.5 m (8'2")**
1 Shipping Height with Operator Protective Guards (highest point between boom and cab)	3300 mm (10'10")	3300 mm (10'10")
Shipping Height without OPG	3180 mm (10'5")	3210 mm (10'6")
2 Shipping Length	8640 mm (28'4")	8710 mm (28'7")
3 Support Point	3870 mm (12'8")	3530 mm (11'7")
4 Tail Swing Radius	2350 mm (7'9")	2350 mm (7'9")
5 Counterweight Clearance	1301 mm (4'3")	1301 mm (4'3")
6 Cab Height		
No OPG	3180 mm (10'5")	3180 mm (10'5")
With OPG	3300 mm (10'10")	3300 mm (10'10")
Overall Machine Width		
Width with Outriggers on Ground	3800 mm (12'6")	3800 mm (12'6")
Width with Outriggers Up	2540 mm (8'4")	2540 mm (8'4")
Width with Blade	2540 mm (8'4")	2540 mm (8'4")
7 Width with Outriggers Fully Down	3645 mm (12'0")	3645 mm (12'0")
23 Enclosure Height (doors)	2500 mm (8'2")	2500 mm (8'2")
8 Upperframe Width	2540 mm (8'4")	2540 mm (8'4")
Roading Position		
9 Steering Wheel to Linkage in Roading Position	2880 mm (9'5")	2870 mm (9'5")
10 Height in Roading Position	3930 mm (12'11")	3950 mm (13'0")



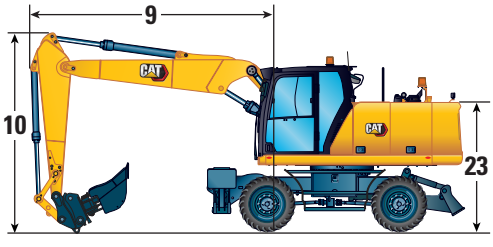

M316 Wheel Excavator Specifications


Undercarriage Dimensions

All dimensions are approximate. Values are with 10.00-20 dual pneumatic tires.


Undercarriage	Rear Blade	Rear Blade/ Front Outrigger	Rear Outrigger/ Front Blade	Rear Outrigger/ Front Outrigger
11 Overall Undercarriage Length	4360 mm (14'4")	4970 mm (16'4")	4970 mm (16'4")	4805 mm (15'9")
12 Wheel Base	2550 mm (8'4")	2550 mm (8'4")	2550 mm (8'4")	2550 mm (8'4")
13 Swing Bearing Center to Rear Axle Center	1100 mm (3'7")	1100 mm (3'7")	1100 mm (3'7")	1100 mm (3'7")
14 Swing Bearing Center to Front Axle Center	1450 mm (4'9")	1450 mm (4'9")	1450 mm (4'9")	1450 mm (4'9")
15 Rear Axle to Rear Outrigger (mid)	—	—	830 mm (2'9")	830 mm (2'9")
16 Front Axle to Front Outrigger (mid)	—	925 mm (3'0")	—	925 mm (3'0")
17 Rear Axle to Blade (end)	1270 mm (4'2")	1270 mm (4'2")	—	—
Front Axle to Blade (end)	—	—	1315 mm (4'4")	—
18 Maximum Outrigger Depth	—	115 mm (5")	115 mm (5")	115 mm (5")
19 Blade Width	2540 mm (8'4")	2540 mm (8'4")	2540 mm (8'4")	—
Maximum Blade Depth Below Ground	120 mm (5")	120 mm (5")	120 mm (5")	—
Ground Clearance				
Lowest Step Clearance	395 mm (1'4")	395 mm (1'4")	395 mm (1'4")	395 mm (1'4")
20 Outrigger Clearance	335 mm (1'1")	335 mm (1'1")	335 mm (1'1")	335 mm (1'1")
21 Blade Clearance	475 mm (8'4")	475 mm (8'4")	475 mm (8'4")	475 mm (8'4")
22 Axle Clearance	365 mm (1'2")	365 mm (1'2")	365 mm (1'2")	365 mm (1'2")

*Maximum tire clearance with outrigger fully down







Undercarriage with dozer only



Undercarriage with 2 sets of outriggers




Undercarriage with 1 set of outriggers and dozer



Working Ranges

All Dimensions are approximate. Values are with 10.00-20 Dual Pneumatic Tires.

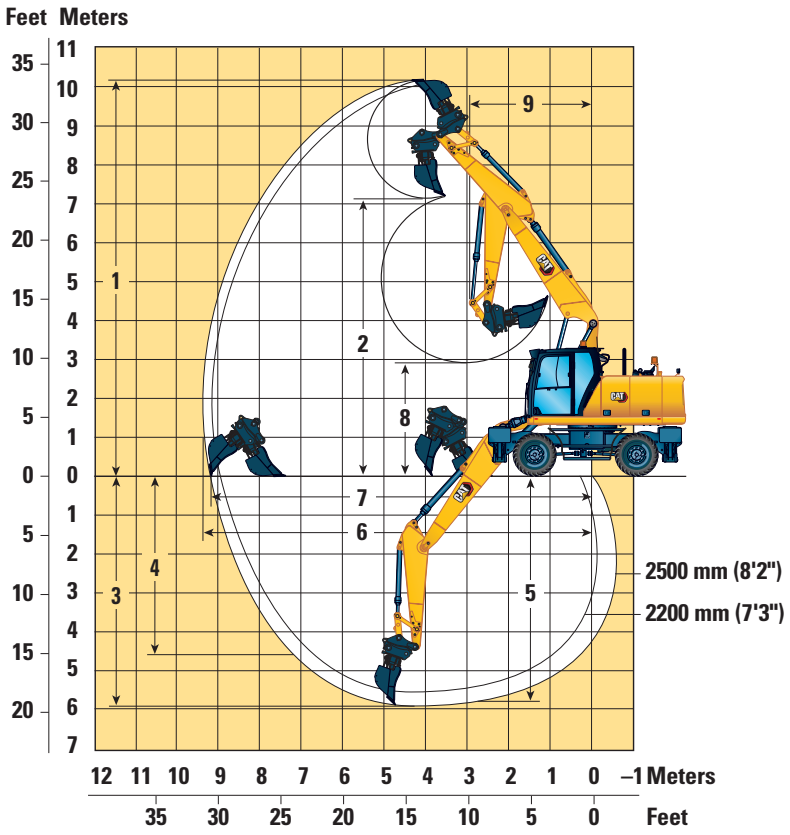

Boom Option	Variable Adjustable Boom 5205 mm (17'1")	
Stick Options	**2.2 m (7'3")**	**2.5 m (8'2")**
1 Maximum Cutting Height	10 110 mm (33'2")	10 240 mm (33'7")
2 Maximum Loading Height	7140 mm (23'5")	7280 mm (23'11")
3 Maximum Digging Depth	5630 mm (18'6")	5920 mm (19'5")
4 Maximum Vertical Wall Digging Depth	4410 mm (14'6")	4620 mm (15'2")
5 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	5520 mm (18'1")	5810 mm (19'1")
6 Maximum Reach	9140 mm (30'0")	9390 mm (30'10")
7 Maximum Reach at Ground Line	8970 mm (29'5")	9220 mm (30'3")
8 Minimum Loading Height	3290 mm (10'10")	2940 mm (9'8")
9 Minimum Front Swing Radius	2950 mm (9'8")	2900 mm (9'6")
Bucket Forces (ISO)	119 kN (26,752 lbf)	119 kN (26,752 lbf)
Stick Forces (ISO)	75 kN (16,861 lbf)	69 kN (15,512 lbf)
Bucket Type	GD	GD
Bucket Capacity	0.8 m^3 (1.05 yd^3)	0.8 m^3 (1.05 yd^3)
Bucket Tip Radius (Pin-On)	1378 mm (4'6")	1378 mm (4'6")
Bucket Tip Radius (QC)	1484 mm (4'10")	1484 mm (4'10")

Range values are with dual pneumatic tires (10.00-20).
Range values are calculated with a GD bucket (CW) and CW-30 quick coupler with a tip radius of 1484 mm (4'10").
Force values are calculated with heavy lift on, a GD bucket (pin-on) and a tip radius of 1378 mm (4'6").

M316 Wheel Excavator Specifications

Lift Capacities – Variable Adjustable Boom (5205 mm), 2.2 m Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 3300 kg, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)

 Load over front

 Load over rear

 Load over side

 Load point height

	Undercarriage configuration	3000 mm			4500 mm			6000 mm			7500 mm						mm
																	
7500 mm	Front empty – rear radial dozer – raised				*4950	4750	4250							*3800	*3800	3650	4890
	Front empty – rear radial dozer – lowered				*4950	*4950	4800							*3800	*3800	*3800	
	Wide Axle – Front empty – rear radial dozer – raised				*4950	4800	4700							*3800	*3800	*3800	
	Wide Axle – Front empty – rear radial dozer – lowered				*4950	*4950	*4950							*3800	*3800	*3800	
6000 mm	Front empty – rear radial dozer – raised				*4950	4800	4300	4300	2950	2650				*3100	2650	2400	6310
	Front empty – rear radial dozer – lowered				*4950	*4950	4800	4300	*4450	2950				*3100	*3100	2650	
	Wide Axle – Front empty – rear radial dozer – raised				*4950	4800	4750	4350	2950	2900				*3100	2650	2650	
	Wide Axle – Front empty – rear radial dozer – lowered				*4950	*4950	*4950	4300	*4450	3250				*3100	*3100	2950	
4500 mm	Front empty – rear radial dozer – raised				*5950	4550	4050	4250	2900	2600				*2900	2100	1900	7130
	Front empty – rear radial dozer – lowered				*5950	*5950	4550	4250	*5000	2900				*2900	*2900	2150	
	Wide Axle – Front empty – rear radial dozer – raised				*5950	4600	4500	4250	2900	2850				*2900	2150	2100	
	Wide Axle – Front empty – rear radial dozer – lowered				*5950	*5950	5050	4250	*5000	3200				*2900	*2900	2350	
3000 mm	Front empty – rear radial dozer – raised				6350	4150	3700	4100	2750	2450	2850	1900	1700	*2800	1850	1650	7560
	Front empty – rear radial dozer – lowered				6300	*7150	4200	4050	*5300	2750	2850	*3400	1900	2800	*2800	1900	
	Wide Axle – Front empty – rear radial dozer – raised				6400	4200	4100	4100	2750	2700	2900	1900	1900	*2800	1900	1850	
	Wide Axle – Front empty – rear radial dozer – lowered				6350	*7150	4650	4100	*5300	3050	2900	*3400	2150	*2800	*2800	2100	
1500 mm	Front empty – rear radial dozer – raised				5950	3850	3350	3900	2550	2300	2800	1850	1650	2700	1800	1600	7660
	Front empty – rear radial dozer – lowered				5950	*7800	3850	3900	*5650	2600	2800	4200	1850	2700	*2900	1800	
	Wide Axle – Front empty – rear radial dozer – raised				6000	3850	3800	3950	2600	2550	2850	1850	1850	2750	1800	1800	
	Wide Axle – Front empty – rear radial dozer – lowered				6000	*7800	4300	3900	*5650	2900	2800	4200	2100	2750	*2900	2000	
0 mm	Front empty – rear radial dozer – raised				5800	3650	3200	3800	2450	2200				2800	1850	1650	7450
	Front empty – rear radial dozer – lowered				5750	*7600	3700	3800	*5550	2500				2800	*3150	1850	
	Wide Axle – Front empty – rear radial dozer – raised				5850	3700	3600	3850	2500	2450				2850	1850	1800	
	Wide Axle – Front empty – rear radial dozer – lowered				5800	*7600	4150	3800	*5550	2800				2800	*3150	2050	
–1500 mm	Front empty – rear radial dozer – raised	*6050	*6050	5900	5750	3650	3200	3750	2450	2150				3150	2050	1800	6900
	Front empty – rear radial dozer – lowered	*6050	*6050	*6050	5750	*6650	3650	3750	*4900	2450				3150	*3650	2050	
	Wide Axle – Front empty – rear radial dozer – raised	*6050	*6050	*6050	5800	3650	3600	3800	2450	2450				3150	2050	2050	
	Wide Axle – Front empty – rear radial dozer – lowered	*6050	*6050	*6050	5800	*6650	4100	3800	*4900	2750				3150	*3650	2300	
–3000 mm	Front empty – rear radial dozer – raised				*4800	3750	3300							3550*	2800	2450	5580
	Front empty – rear radial dozer – lowered				*4800	*4800	3750							3550*	*3550	2800	
	Wide Axle – Front empty – rear radial dozer – raised				*4800	3750	3700							3550*	2800	2750	
	Wide Axle – Front empty – rear radial dozer – lowered				*4800	*4800	4200							3550*	*3550	3150	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Lift Capacities – Variable Adjustable Boom (17'1"), 7'3" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 7,280 lb, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)
 Load over front
 Load over rear
 Load over side
 Load point height

	Undercarriage configuration	10 ft			15 ft			20 ft			25 ft						ft
25 ft	Front empty – rear radial dozer – raised				*10,100	*10,100	9,100							*8,600	*8,600	8,500	15.55
	Front empty – rear radial dozer – lowered				*10,100	*10,100	*10,100							*8,600	*8,600	*8,600	
	Wide Axle – Front empty – rear radial dozer – raised				*10,100	*10,100	10,000							*8,600	*8,600	*8,600	
	Wide Axle – Front empty – rear radial dozer – lowered				*10,100	*10,100	*10,100							*8,600	*8,600	*8,600	
20 ft	Front empty – rear radial dozer – raised				*10,900	10,300	9,300	*8,800	6,300	5,600				*6,900	6,000	5,300	20.47
	Front empty – rear radial dozer – lowered				*10,900	*10,900	10,300	*8,800	*8,800	6,300				*6,900	*6,900	6,000	
	Wide Axle – Front empty – rear radial dozer – raised				*10,900	10,400	10,200	*8,800	6,300	6,200				*6,900	6,000	5,900	
	Wide Axle – Front empty – rear radial dozer – lowered				*10,900	*10,900	*10,900	*8,800	*8,800	6,900				*6,900	*6,900	6,600	
15 ft	Front empty – rear radial dozer – raised				*12,800	9,800	8,800	9,100	6,200	5,600				*6,400	4,700	4,200	23.29
	Front empty – rear radial dozer – lowered				*12,800	*12,800	9,900	9,100	*10,800	6,200				*6,400	*6,400	4,700	
	Wide Axle – Front empty – rear radial dozer – raised				*12,800	9,900	9,700	9,200	6,200	6,100				*6,400	4,700	4,700	
	Wide Axle – Front empty – rear radial dozer – lowered				*12,800	*12,800	10,900	9,200	*10,800	6,900				*6,400	*6,400	5,200	
10 ft	Front empty – rear radial dozer – raised				13,700	9,000	8,000	8,800	5,900	5,300				*6,200	4,100	3,700	24.77
	Front empty – rear radial dozer – lowered				13,600	*15,400	9,000	8,800	*11,400	5,900				6,200	*6,200	4,200	
	Wide Axle – Front empty – rear radial dozer – raised				13,800	9,100	8,900	8,900	5,900	5,800				*6,200	4,200	4,100	
	Wide Axle – Front empty – rear radial dozer – lowered				13,700	*15,400	10,000	8,800	*11,400	6,600				*6,200	*6,200	4,600	
5 ft	Front empty – rear radial dozer – raised				12,800	8,300	7,300	8,400	5,600	4,900	6,100	4,000	3,500	6,000	3,900	3,500	25.13
	Front empty – rear radial dozer – lowered				12,800	*16,800	8,300	8,400	*12,200	5,600	6,000	*7,400	4,000	6,000	*6,400	4,000	
	Wide Axle – Front empty – rear radial dozer – raised				13,000	8,300	8,200	8,500	5,600	5,500	6,100	4,000	4,000	6,100	4,000	3,900	
	Wide Axle – Front empty – rear radial dozer – lowered				12,900	*16,800	9,300	8,500	*12,200	6,200	6,100	*7,400	4,500	6,000	*6,400	4,400	
0 ft	Front empty – rear radial dozer – raised				12,400	7,900	6,900	8,200	5,300	4,700				6,200	4,100	3,600	24.44
	Front empty – rear radial dozer – lowered				12,400	*16,500	7,900	8,200	*12,000	5,400				6,200	*6,900	4,100	
	Wide Axle – Front empty – rear radial dozer – raised				12,600	7,900	7,800	8,300	5,400	5,300				6,200	4,100	4,000	
	Wide Axle – Front empty – rear radial dozer – lowered				12,500	*16,500	8,900	8,200	*12,000	6,000				6,200	*6,900	4,600	
–5 ft	Front empty – rear radial dozer – raised	*13,900	*13,900	12,700	12,400	7,900	6,900	8,100	5,300	4,700				6,900	4,500	4,000	22.60
	Front empty – rear radial dozer – lowered	*13,900	*13,900	*13,900	12,400	*14,400	7,900	8,100	10,500	5,300				6,900	*8,000	4,600	
	Wide Axle – Front empty – rear radial dozer – raised	*13,900	*13,900	*13,900	12,500	7,900	7,800	8,200	5,300	5,200				7,000	4,600	4,500	
	Wide Axle – Front empty – rear radial dozer – lowered	*13,900	*13,900	*13,900	12,500	*14,400	8,900	8,200	10,500	5,900				7,000	*8,000	5,100	
–10 ft	Front empty – rear radial dozer – raised				*10,200	8,100	7,100							*8,100	6,400	5,600	17.88
	Front empty – rear radial dozer – lowered				*10,200	*10,200	8,100							*8,100	*8,100	6,400	
	Wide Axle – Front empty – rear radial dozer – raised				*10,200	8,100	8,000							*8,100	6,400	6,300	
	Wide Axle – Front empty – rear radial dozer – lowered				*10,200	*10,200	9,100							*8,100	*8,100	7,200	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M316 Wheel Excavator Specifications

Lift Capacities – Variable Adjustable Boom (5205 mm), 2.2 m Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 3300 kg, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)

 Load over front

 Load over rear

 Load over side

 Load point height

	Undercarriage configuration	3000 mm			4500 mm			6000 mm			7500 mm						mm
7500 mm	Front stabilizer – rear radial dozer – raised				*4950	*4950	4450							*3800	*3800	*3800	4890
	Front stabilizer – rear radial dozer – lowered				*4950	*4950	*4950							*3800	*3800	*3800	
	Front radial dozer – rear stabilizer – lowered				*4950	*4950	*4950							*3800	*3800	*3800	
	Front stabilizer – rear stabilizer – lowered				*4950	*4950	*4950							*3800	*3800	*3800	
6000 mm	Front stabilizer – rear radial dozer – raised				*4950	*4950	4500	4200	3400	2750				*3100	3100	2500	6310
	Front stabilizer – rear radial dozer – lowered				*4950	*4950	*4950	*4450	*4450	4300				*3100	*3100	*3100	
	Front radial dozer – rear stabilizer – lowered				*4950	*4950	*4950	*4450	*4450	*4450				*3100	*3100	*3100	
	Front stabilizer – rear stabilizer – lowered				*4950	*4950	*4950	*4450	*4450	*4450				*3100	*3100	*3100	
4500 mm	Front stabilizer – rear radial dozer – raised				*5950	5250	4250	4100	3350	2700				*2900	2500	2000	7130
	Front stabilizer – rear radial dozer – lowered				*5950	*5950	*5950	*5000	*5000	4250				*2900	*2900	*2900	
	Front radial dozer – rear stabilizer – lowered				*5950	*5950	*5950	*5000	*5000	4400				*2900	*2900	*2900	
	Front stabilizer – rear stabilizer – lowered				*5950	*5950	*5950	*5000	*5000	*5000				*2900	*2900	*2900	
3000 mm	Front stabilizer – rear radial dozer – raised				6150	4850	3900	3950	3200	2550	2800	2250	1800	2750	2250	1750	7560
	Front stabilizer – rear radial dozer – lowered				*7150	*7150	6300	*5300	*5300	4100	*3400	*3400	2900	*2800	*2800	*2800	
	Front radial dozer – rear stabilizer – lowered				*7150	*7150	6600	*5300	*5300	4250	*3400	*3400	3000	*2800	*2800	*2800	
	Front stabilizer – rear stabilizer – lowered				*7150	*7150	*7150	*5300	*5300	5100	*3400	*3400	*3400	*2800	*2800	*2800	
1500 mm	Front stabilizer – rear radial dozer – raised				5800	4500	3550	3800	3050	2400	2700	2200	1750	2650	2150	1700	7660
	Front stabilizer – rear radial dozer – lowered				*7800	*7800	5950	*5650	*5650	3900	*4350	*4350	2800	*2900	*2900	2750	
	Front radial dozer – rear stabilizer – lowered				*7800	*7800	6200	*5650	*5650	4050	*4350	4300	2950	*2900	*2900	2850	
	Front stabilizer – rear stabilizer – lowered				*7800	*7800	7650	*5650	*5650	4900	*4350	*4350	3500	*2900	*2900	*2900	
0 mm	Front stabilizer – rear radial dozer – raised				5600	4350	3400	3700	2950	2300				2700	2200	1750	7450
	Front stabilizer – rear radial dozer – lowered				*7600	*7600	5750	*5550	*5550	3800				*3150	*3150	2800	
	Front radial dozer – rear stabilizer – lowered				*7600	*7600	6050	*5550	*5550	3950				*3150	*3150	2950	
	Front stabilizer – rear stabilizer – lowered				*7600	*7600	7450	*5550	*5550	4800				*3150	*3150	*3150	
–1500 mm	Front stabilizer – rear radial dozer – raised	*6050	*6050	*6050	5600	4350	3400	3650	2900	2300				3050	2450	1950	6900
	Front stabilizer – rear radial dozer – lowered	*6050	*6050	*6050	*6650	*6650	5750	*4900	*4900	3800				*3650	*3650	3150	
	Front radial dozer – rear stabilizer – lowered	*6050	*6050	*6050	*6650	*6650	6000	*4900	*4900	3950				*3650	*3650	3250	
	Front stabilizer – rear stabilizer – lowered	*6050	*6050	*6050	*6650	*6650	*6650	*4900	*4900	4800				*3650	*3650	*3650	
–3000 mm	Front stabilizer – rear radial dozer – raised				*4800	4450	3500							*3550	3300	2600	5580
	Front stabilizer – rear radial dozer – lowered				*4800	*4800	*4800							*3550	*3550	*3550	
	Front radial dozer – rear stabilizer – lowered				*4800	*4800	*4800							*3550	*3550	*3550	
	Front stabilizer – rear stabilizer – lowered				*4800	*4800	*4800							*3550	*3550	*3550	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Lift Capacities – Variable Adjustable Boom (17'1"), 7'3" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 7,280 lb, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)
 Load over front
 Load over rear
 Load over side
 Load point height

	Undercarriage configuration	10 ft			15 ft			20 ft			25 ft						ft
25 ft	Front stabilizer – rear radial dozer – raised				*10,100	*10,100	9,500							*8,600	*8,600	*8,600	15.55
	Front stabilizer – rear radial dozer – lowered				*10,100	*10,100	*10,100							*8,600	*8,600	*8,600	
	Front radial dozer – rear stabilizer – lowered				*10,100	*10,100	*10,100							*8,600	*8,600	*8,600	
	Front stabilizer – rear stabilizer – lowered				*10,100	*10,100	*10,100							*8,600	*8,600	*8,600	
20 ft	Front stabilizer – rear radial dozer – raised				*10,900	*10,900	9,700	*8,800	7,300	5,900				*6,900	*6,900	5,600	20.47
	Front stabilizer – rear radial dozer – lowered				*10,900	*10,900	*10,900	*8,800	*8,800	*8,800				*6,900	*6,900	*6,900	
	Front radial dozer – rear stabilizer – lowered				*10,900	*10,900	*10,900	*8,800	*8,800	*8,800				*6,900	*6,900	*6,900	
	Front stabilizer – rear stabilizer – lowered				*10,900	*10,900	*10,900	*8,800	*8,800	*8,800				*6,900	*6,900	*6,900	
15 ft	Front stabilizer – rear radial dozer – raised				*12,800	11,300	9,200	8,900	7,200	5,900				*6,400	5,600	4,400	23.29
	Front stabilizer – rear radial dozer – lowered				*12,800	*12,800	*12,800	*10,800	*10,800	9,100				*6,400	*6,400	*6,400	
	Front radial dozer – rear stabilizer – lowered				*12,800	*12,800	*12,800	*10,800	*10,800	9,500				*6,400	*6,400	*6,400	
	Front stabilizer – rear stabilizer – lowered				*12,800	*12,800	*12,800	*10,800	*10,800	*10,800				*6,400	*6,400	*6,400	
10 ft	Front stabilizer – rear radial dozer – raised				13,300	10,500	8,400	8,500	6,900	5,500				6,000	4,900	3,900	24.77
	Front stabilizer – rear radial dozer – lowered				*15,400	*15,400	13,600	*11,400	*11,400	8,800				*6,200	*6,200	*6,200	
	Front radial dozer – rear stabilizer – lowered				*15,400	*15,400	14,200	*11,400	*11,400	9,100				*6,200	*6,200	*6,200	
	Front stabilizer – rear stabilizer – lowered				*15,400	*15,400	*15,400	*11,400	*11,400	11,000				*6,200	*6,200	*6,200	
5 ft	Front stabilizer – rear radial dozer – raised				12,500	9,700	7,700	8,200	6,600	5,200	5,900	4,800	3,800	5,800	4,700	3,700	25.13
	Front stabilizer – rear radial dozer – lowered				*16,800	*16,800	12,800	*12,200	*12,200	8,400	*7,400	*7,400	6,100	*6,400	*6,400	6,000	
	Front radial dozer – rear stabilizer – lowered				*16,800	*16,800	13,400	*12,200	*12,200	8,800	*7,400	*7,400	6,300	*6,400	*6,400	6,300	
	Front stabilizer – rear stabilizer – lowered				*16,800	*16,800	16,500	*12,200	*12,200	10,600	*7,400	*7,400	*7,400	*6,400	*6,400	*6,400	
0 ft	Front stabilizer – rear radial dozer – raised				12,100	9,400	7,400	7,900	6,400	5,000				6,000	4,900	3,800	24.44
	Front stabilizer – rear radial dozer – lowered				*16,500	*16,500	12,400	*12,000	*12,000	8,200				*6,900	*6,900	6,200	
	Front radial dozer – rear stabilizer – lowered				*16,500	*16,500	13,000	*12,000	*12,000	8,500				*6,900	*6,900	6,500	
	Front stabilizer – rear stabilizer – lowered				*16,500	*16,500	16,000	*12,000	*12,000	10,300				*6,900	*6,900	*6,900	
–5 ft	Front stabilizer – rear radial dozer – raised	*13,900	*13,900	13,400	12,000	9,300	7,300	7,900	6,300	5,000				6,700	5,400	4,300	22.60
	Front stabilizer – rear radial dozer – lowered	*13,900	*13,900	*13,900	*14,400	*14,400	12,400	*10,500	*10,500	8,200				*8,000	*8,000	7,000	
	Front radial dozer – rear stabilizer – lowered	*13,900	*13,900	*13,900	*14,400	*14,400	13,000	*10,500	*10,500	8,500				*8,000	*8,000	7,200	
	Front stabilizer – rear stabilizer – lowered	*13,900	*13,900	*13,900	*14,400	*14,400	*14,400	*10,500	*10,500	10,300				*8,000	*8,000	*8,000	
–10 ft	Front stabilizer – rear radial dozer – raised				*10,200	9,600	7,500							*8,100	7,600	6,000	17.88
	Front stabilizer – rear radial dozer – lowered				*10,200	*10,200	*10,200							*8,100	*8,100	*8,100	
	Front radial dozer – rear stabilizer – lowered				*10,200	*10,200	*10,200							*8,100	*8,100	*8,100	
	Front stabilizer – rear stabilizer – lowered				*10,200	*10,200	*10,200							*8,100	*8,100	*8,100	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M316 Wheel Excavator Specifications

Lift Capacities – Variable Adjustable Boom (5205 mm), 2.2 m Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 3300 kg, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)

 Load over front

 Load over rear

 Load over side

 Load point height

	Undercarriage configuration	3000 mm			4500 mm			6000 mm			7500 mm						mm
																	
7500 mm	Front empty – rear parallel dozer – trailer – raised				*4950	*4950	4400							*3750	*3750	3700	4920
	Front empty – rear parallel dozer – trailer – lowered				*4950	*4950	4900							*3750	*3750	*3750	
	Front parallel dozer – rear stabilizer – trailer – raised				*4950	*4950	4600							*3750	*3750	*3750	
	Front parallel dozer – rear stabilizer – trailer – lowered				*4950	*4950	*4950							*3750	*3750	*3750	
6000 mm	Front empty – rear parallel dozer – trailer – raised				*4950	*4950	4400	*4450	3400	2700				*3100	3050	2450	6330
	Front empty – rear parallel dozer – trailer – lowered				*4950	*4950	4900	*4450	*4450	3050				*3100	*3100	2750	
	Front parallel dozer – rear stabilizer – trailer – raised				*4950	*4950	4650	*4450	3850	2850				*3100	*3100	2600	
	Front parallel dozer – rear stabilizer – trailer – lowered				*4950	*4950	*4950	*4450	*4450	*4450				*3100	*3100	*3100	
4500 mm	Front empty – rear parallel dozer – trailer – raised				*6000	5300	4200	4500	3350	2650				*2900	2450	1950	7140
	Front empty – rear parallel dozer – trailer – lowered				*6000	*6000	4700	4500	*5000	3000				*2900	*2900	2200	
	Front parallel dozer – rear stabilizer – trailer – raised				*6000	5950	4400	4500	3750	2800				*2900	2800	2050	
	Front parallel dozer – rear stabilizer – trailer – lowered				*6000	*6000	*6000	*5000	*5000	4550				*2900	*2900	*2900	
3000 mm	Front empty – rear parallel dozer – trailer – raised				6750	4900	3800	4350	3200	2500	3050	2200	1750	*2800	2200	1750	7560
	Front empty – rear parallel dozer – trailer – lowered				6700	*7150	4300	4350	*5300	2850	3050	*3450	2000	*2800	*2800	1950	
	Front parallel dozer – rear stabilizer – trailer – raised				6750	5550	4000	4350	3600	2650	3050	2550	1850	*2800	2500	1850	
	Front parallel dozer – rear stabilizer – trailer – lowered				*7150	*7150	6800	*5300	*5300	4400	*3450	*3450	3100	*2800	*2800	*2800	
1500 mm	Front empty – rear parallel dozer – trailer – raised				6350	4550	3500	4200	3000	2350	3000	2150	1700	*2900	2100	1650	7660
	Front empty – rear parallel dozer – trailer – lowered				6350	*7800	3950	4150	*5650	2650	3000	*4350	1950	2900	*2900	1850	
	Front parallel dozer – rear stabilizer – trailer – raised				6350	5200	3700	4200	3450	2500	3000	2500	1800	*2900	2450	1750	
	Front parallel dozer – rear stabilizer – trailer – lowered				*7800	*7800	6450	*5650	*5650	4200	*4350	*4350	3050	*2900	*2900	*2900	
0 mm	Front empty – rear parallel dozer – trailer – raised				6200	4350	3350	4050	2900	2250				3000	2150	1700	7440
	Front empty – rear parallel dozer – trailer – lowered				6150	*7600	3800	4050	*5550	2550				3000	*3150	1900	
	Front parallel dozer – rear stabilizer – trailer – raised				6200	5000	3550	4050	3350	2400				3000	2500	1800	
	Front parallel dozer – rear stabilizer – trailer – lowered				*7600	*7600	6250	*5550	*5550	4100				*3150	*3150	3050	
–1500 mm	Front empty – rear parallel dozer – trailer – raised	*6150	*6150	6100	6200	4350	3300	4050	2900	2250				3400	2400	1900	6890
	Front empty – rear parallel dozer – trailer – lowered	*6150	*6150	*6150	6150	*6650	3800	4050	*4850	2550				3350	*3650	2150	
	Front parallel dozer – rear stabilizer – trailer – raised	*6150	*6150	*6150	6200	5000	3550	4050	3350	2400				3350	2800	2000	
	Front parallel dozer – rear stabilizer – trailer – lowered	*6150	*6150	*6150	*6650	*6650	6250	*4850	*4850	4100				*3650	*3650	3400	
–3000 mm	Front empty – rear parallel dozer – trailer – raised				*4750	4450	3400							*3600	3350	2600	5520
	Front empty – rear parallel dozer – trailer – lowered				*4750	*4750	3900							*3600	*3600	2950	
	Front parallel dozer – rear stabilizer – trailer – raised				*4750	*4750	3600							*3600	*3600	2750	
	Front parallel dozer – rear stabilizer – trailer – lowered				*4750	*4750	*4750							*3600	*3600	*3600	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Lift Capacities – Variable Adjustable Boom (17'1"), 7'3" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 7,280 lb, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)
 Load over front
 Load over rear
 Load over side
 Load point height

	Undercarriage configuration	10 ft			15 ft			20 ft			25 ft						ft
25 ft	Front empty – rear parallel dozer – trailer – raised				*10,300	*10,300	9,400							*8,500	*8,500	*8,500	15.65
	Front empty – rear parallel dozer – trailer – lowered				*10,300	*10,300	*10,300							*8,500	*8,500	*8,500	
	Front parallel dozer – rear stabilizer – trailer – raised				*10,300	*10,300	9,800							*8,500	*8,500	*8,500	
	Front parallel dozer – rear stabilizer – trailer – lowered				*10,300	*10,300	*10,300							*8,500	*8,500	*8,500	
20 ft	Front empty – rear parallel dozer – trailer – raised				*10,900	*10,900	9,500	*8,900	7,300	5,800				*6,900	6,900	5,500	20.54
	Front empty – rear parallel dozer – trailer – lowered				*10,900	*10,900	10,600	*8,900	*8,900	6,500				*6,900	*6,900	6,100	
	Front parallel dozer – rear stabilizer – trailer – raised				*10,900	*10,900	10,000	*8,900	8,200	6,100				*6,900	*6,900	5,800	
	Front parallel dozer – rear stabilizer – trailer – lowered				*10,900	*10,900	*10,900	*8,900	*8,900	*8,900				*6,900	*6,900	*6,900	
15 ft	Front empty – rear parallel dozer – trailer – raised				*12,900	11,400	9,000	9,700	7,200	5,700				*6,400	5,500	4,300	23.33
	Front empty – rear parallel dozer – trailer – lowered				*12,900	*12,900	10,100	9,700	*10,800	6,400				*6,400	*6,400	4,900	
	Front parallel dozer – rear stabilizer – trailer – raised				*12,900	12,800	9,500	9,700	8,100	6,100				*6,400	6,200	4,600	
	Front parallel dozer – rear stabilizer – trailer – lowered				*12,900	*12,900	*12,900	*10,800	*10,800	9,800				*6,400	*6,400	*6,400	
10 ft	Front empty – rear parallel dozer – trailer – raised				14,500	10,600	8,200	9,400	6,900	5,400				*6,200	4,800	3,800	24.77
	Front empty – rear parallel dozer – trailer – lowered				14,500	*15,400	9,300	9,300	*11,400	6,100				*6,200	*6,200	4,300	
	Front parallel dozer – rear stabilizer – trailer – raised				14,500	11,900	8,700	9,400	7,800	5,700				*6,200	5,600	4,100	
	Front parallel dozer – rear stabilizer – trailer – lowered				*15,400	*15,400	14,700	*11,400	*11,400	9,400				*6,200	*6,200	*6,200	
5 ft	Front empty – rear parallel dozer – trailer – raised				13,700	9,800	7,500	9,000	6,500	5,100	6,500	4,700	3,700	*6,400	4,600	3,600	25.13
	Front empty – rear parallel dozer – trailer – lowered				13,700	*16,800	8,500	9,000	*12,200	5,800	6,500	*7,400	4,100	*6,400	*6,400	4,100	
	Front parallel dozer – rear stabilizer – trailer – raised				13,700	11,200	8,000	9,000	7,500	5,400	6,500	5,400	3,900	*6,400	5,300	3,900	
	Front parallel dozer – rear stabilizer – trailer – lowered				*16,800	*16,800	13,800	*12,200	*12,200	9,100	*7,400	*7,400	6,500	*6,400	*6,400	*6,400	
0 ft	Front empty – rear parallel dozer – trailer – raised				13,300	9,400	7,200	8,800	6,300	4,900				6,700	4,800	3,700	24.41
	Front empty – rear parallel dozer – trailer – lowered				13,300	*16,500	8,200	8,700	*12,000	5,500				6,600	*7,000	4,200	
	Front parallel dozer – rear stabilizer – trailer – raised				13,300	10,800	7,600	8,800	7,200	5,200				6,700	5,500	4,000	
	Front parallel dozer – rear stabilizer – trailer – lowered				*16,500	*16,500	13,500	*12,000	*12,000	8,800				*7,000	*7,000	6,700	
–5 ft	Front empty – rear parallel dozer – trailer – raised	*14,100	*14,100	13,100	13,300	9,400	7,200	8,700	6,200	4,800				7,500	5,400	4,200	22.57
	Front empty – rear parallel dozer – trailer – lowered	*14,100	*14,100	*14,100	13,200	*14,400	8,200	8,700	*10,400	5,500				7,400	*8,000	4,700	
	Front parallel dozer – rear stabilizer – trailer – raised	*14,100	*14,100	13,900	13,300	10,800	7,600	8,700	7,200	5,200				7,500	6,200	4,500	
	Front parallel dozer – rear stabilizer – trailer – lowered	*14,100	*14,100	*14,100	*14,400	*14,400	13,400	*10,400	*10,400	8,800				*8,000	*8,000	7,500	
–10 ft	Front empty – rear parallel dozer – trailer – raised				*10,100	9,600	7,400							*8,200	7,700	5,900	17.62
	Front empty – rear parallel dozer – trailer – lowered				*10,100	*10,100	8,400							*8,200	*8,200	6,700	
	Front parallel dozer – rear stabilizer – trailer – raised				*10,100	*10,100	7,800							*8,200	*8,200	6,300	
	Front parallel dozer – rear stabilizer – trailer – lowered				*10,100	*10,100	*10,100							*8,200	*8,200	*8,200	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M316 Wheel Excavator Specifications

Lift Capacities – Variable Adjustable Boom (5205 mm), 2.5 m Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 3300 kg, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)

 Load over front

 Load over rear

 Load over side

 Load point height

	Undercarriage configuration	3000 mm			4500 mm			6000 mm			7500 mm						mm
																	
7500 mm	Front empty – rear radial dozer – raised				*4350	*4350	*4350							*3050	*3050	*3050	5280
	Front empty – rear radial dozer – lowered				*4350	*4350	*4350							*3050	*3050	*3050	
	Wide Axle – Front empty – rear radial dozer – raised				*4350	*4350	*4350							*3050	*3050	*3050	
	Wide Axle – Front empty – rear radial dozer – lowered				*4350	*4350	*4350							*3050	*3050	*3050	
6000 mm	Front empty – rear radial dozer – raised				*4300	*4300	*4300	*4050	3000	2700				*2600	2500	2250	6610
	Front empty – rear radial dozer – lowered				*4300	*4300	*4300	*4050	*4050	3000				*2600	*2600	2500	
	Wide Axle – Front empty – rear radial dozer – raised				*4300	*4300	*4300	*4050	3000	2950				*2600	2500	2450	
	Wide Axle – Front empty – rear radial dozer – lowered				*4300	*4300	*4300	*4050	*4050	3300				*2600	*2600	*2600	
4500 mm	Front empty – rear radial dozer – raised				*5150	4650	4150	4300	2900	2600				*2450	2000	1800	7400
	Front empty – rear radial dozer – lowered				*5150	*5150	4650	4250	*4850	2950				*2450	*2450	2000	
	Wide Axle – Front empty – rear radial dozer – raised				*5150	4650	4550	4300	2950	2900				*2450	2000	2000	
	Wide Axle – Front empty – rear radial dozer – lowered				*5150	*5150	5100	4300	*4850	3250				*2450	*2450	2250	
3000 mm	Front empty – rear radial dozer – raised				6450	4250	3750	4100	2750	2450	2900	1900	1700	*2450	1800	1600	7810
	Front empty – rear radial dozer – lowered				6400	*6900	4250	4100	*5150	2750	2900	*3900	1950	*2450	*2450	1800	
	Wide Axle – Front empty – rear radial dozer – raised				6450	4250	4200	4150	2750	2750	2900	1950	1900	*2450	1800	1750	
	Wide Axle – Front empty – rear radial dozer – lowered				6450	*6900	4750	4150	*5150	3050	2900	*3900	2150	*2450	*2450	2000	
1500 mm	Front empty – rear radial dozer – raised				6000	3900	3400	3950	2600	2300	2800	1850	1650	*2550	1700	1500	7900
	Front empty – rear radial dozer – lowered				6000	*7700	3900	3900	*5600	2600	2800	4200	1850	*2550	*2550	1700	
	Wide Axle – Front empty – rear radial dozer – raised				6050	3900	3850	3950	2600	2550	2850	1850	1850	*2550	1700	1700	
	Wide Axle – Front empty – rear radial dozer – lowered				6050	*7700	4350	3950	*5600	2900	2850	4250	2100	*2550	*2550	1900	
0 mm	Front empty – rear radial dozer – raised				5800	3700	3250	3800	2500	2200	2750	1800	1600	2650	1750	1550	7700
	Front empty – rear radial dozer – lowered				5800	*7700	3700	3800	*5600	2500	2750	4150	1800	2650	*2800	1750	
	Wide Axle – Front empty – rear radial dozer – raised				5850	3700	3650	3850	2500	2450	2800	1800	1800	2700	1750	1750	
	Wide Axle – Front empty – rear radial dozer – lowered				5850	*7700	4150	3800	*5600	2800	2800	4150	2050	2700	*2800	1950	
–1500 mm	Front empty – rear radial dozer – raised	*6300	*6300	5850	5750	3650	3200	3750	2450	2150				2950	1950	1700	7170
	Front empty – rear radial dozer – lowered	*6300	*6300	*6300	5750	*6900	3650	3750	*5050	2450				2950	*3250	1950	
	Wide Axle – Front empty – rear radial dozer – raised	*6300	*6300	*6300	5800	3650	3600	3800	2450	2400				3000	1950	1900	
	Wide Axle – Front empty – rear radial dozer – lowered	*6300	*6300	*6300	5800	*6900	4100	3800	*5050	2750				2950	*3250	2150	
–3000 mm	Front empty – rear radial dozer – raised				*5250	3700	3250	*3500	2500	2200				*3150	2400	2150	6210
	Front empty – rear radial dozer – lowered				*5250	*5250	3750	*3500	*3500	2500				*3150	*3150	2450	
	Wide Axle – Front empty – rear radial dozer – raised				*5250	3750	3650	*3500	2500	2500				*3150	2400	2400	
	Wide Axle – Front empty – rear radial dozer – lowered				*5250	*5250	4200	*3500	*3500	2800				*3150	*3150	2700	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Lift Capacities – Variable Adjustable Boom (17'1"), 8'2" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 7,280 lb, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)
 Load over front
 Load over rear
 Load over side
 Load point height

	Undercarriage configuration	10 ft			15 ft			20 ft			25 ft						ft
25 ft	Front empty – rear radial dozer – raised				*9,400	*9,400	9,300							*6,800	*6,800	*6,800	16.86
	Front empty – rear radial dozer – lowered				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	
	Wide Axle – Front empty – rear radial dozer – raised				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	
	Wide Axle – Front empty – rear radial dozer – lowered				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	
20 ft	Front empty – rear radial dozer – raised				*9,500	*9,500	9,400	*8,600	6,400	5,800				*5,800	5,600	5,000	21.49
	Front empty – rear radial dozer – lowered				*9,500	*9,500	*9,500	*8,600	*8,600	6,400				*5,800	*5,800	5,600	
	Wide Axle – Front empty – rear radial dozer – raised				*9,500	*9,500	*9,500	*8,600	6,400	6,300				*5,800	5,600	5,500	
	Wide Axle – Front empty – rear radial dozer – lowered				*9,500	*9,500	*9,500	*8,600	*8,600	7,100				*5,800	*5,800	*5,800	
15 ft	Front empty – rear radial dozer – raised				*11,200	10,000	8,900	9,200	6,300	5,600				*5,400	4,500	4,000	24.18
	Front empty – rear radial dozer – lowered				*11,200	*11,200	10,000	9,200	*10,600	6,300				*5,400	*5,400	4,500	
	Wide Axle – Front empty – rear radial dozer – raised				*11,200	10,000	9,900	9,300	6,300	6,200				*5,400	4,500	4,400	
	Wide Axle – Front empty – rear radial dozer – lowered				*11,200	*11,200	11,000	9,200	*10,600	7,000				*5,400	*5,400	5,000	
10 ft	Front empty – rear radial dozer – raised				13,800	9,200	8,100	8,900	5,900	5,300	6,200	4,100	3,700	*5,400	3,900	3,500	25.59
	Front empty – rear radial dozer – lowered				13,800	*14,900	9,200	8,800	*11,200	6,000	6,200	*7,600	4,200	*5,400	*5,400	4,000	
	Wide Axle – Front empty – rear radial dozer – raised				14,000	9,200	9,100	8,900	6,000	5,900	6,300	4,100	4,100	*5,400	4,000	3,900	
	Wide Axle – Front empty – rear radial dozer – lowered				13,900	*14,900	10,200	8,900	*11,200	6,600	6,200	*7,600	4,600	*5,400	*5,400	4,400	
5 ft	Front empty – rear radial dozer – raised				13,000	8,400	7,400	8,500	5,600	5,000	6,100	4,000	3,500	*5,600	3,800	3,300	25.92
	Front empty – rear radial dozer – lowered				12,900	*16,700	8,400	8,400	*12,100	5,600	6,000	9,000	4,000	*5,600	*5,600	3,800	
	Wide Axle – Front empty – rear radial dozer – raised				13,100	8,400	8,300	8,500	5,600	5,500	6,100	4,000	4,000	*5,600	3,800	3,700	
	Wide Axle – Front empty – rear radial dozer – lowered				13,000	*16,700	9,400	8,500	*12,100	6,300	6,100	9,100	4,500	*5,600	*5,600	4,200	
0 ft	Front empty – rear radial dozer – raised				12,500	7,900	7,000	8,200	5,300	4,700	6,000	3,900	3,400	5,900	3,800	3,400	25.26
	Front empty – rear radial dozer – lowered				12,400	*16,700	8,000	8,200	*12,100	5,400	5,900	*7,800	3,900	5,900	*6,100	3,900	
	Wide Axle – Front empty – rear radial dozer – raised				12,600	8,000	7,800	8,300	5,400	5,300	6,000	3,900	3,900	5,900	3,900	3,800	
	Wide Axle – Front empty – rear radial dozer – lowered				12,500	*16,700	9,000	8,200	*12,100	6,000	6,000	*7,800	4,400	5,900	*6,100	4,300	
–5 ft	Front empty – rear radial dozer – raised	*14,400	*14,400	12,600	12,400	7,800	6,900	8,100	5,300	4,600				6,500	4,300	3,800	23.49
	Front empty – rear radial dozer – lowered	*14,400	*14,400	*14,400	12,300	*15,000	7,900	8,100	*10,900	5,300				6,500	*7,200	4,300	
	Wide Axle – Front empty – rear radial dozer – raised	*14,400	*14,400	14,400	12,500	7,900	7,700	8,200	5,300	5,200				6,600	4,300	4,200	
	Wide Axle – Front empty – rear radial dozer – lowered	*14,400	*14,400	*14,400	12,400	*15,000	8,900	8,100	*10,900	5,900				6,600	*7,200	4,800	
–10 ft	Front empty – rear radial dozer – raised				*11,300	8,000	7,000	*7,200	5,400	4,800				*7,000	5,400	4,800	20.14
	Front empty – rear radial dozer – lowered				*11,300	*11,300	8,000	*7,200	*7,200	5,500				*7,000	*7,000	5,400	
	Wide Axle – Front empty – rear radial dozer – raised				*11,300	8,000	7,900	*7,200	5,500	5,400				*7,000	5,400	5,300	
	Wide Axle – Front empty – rear radial dozer – lowered				*11,300	*11,300	9,000	*7,200	*7,200	6,100				*7,000	*7,000	6,100	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M316 Wheel Excavator Specifications

Lift Capacities – Variable Adjustable Boom (5205 mm), 2.5 m Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 3300 kg, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)

 Load over front

 Load over rear

 Load over side

 Load point height

	Undercarriage configuration	3000 mm			4500 mm			6000 mm			7500 mm						mm
																	
7500 mm	Front stabilizer – rear radial dozer – raised				*4350	*4350	*4350							*3050	*3050	*3050	5280
	Front stabilizer – rear radial dozer – lowered				*4350	*4350	*4350							*3050	*3050	*3050	
	Front radial dozer – rear stabilizer – lowered				*4350	*4350	*4350							*3050	*3050	*3050	
	Front stabilizer – rear stabilizer – lowered				*4350	*4350	*4350							*3050	*3050	*3050	
6000 mm	Front stabilizer – rear radial dozer – raised				*4300	*4300	*4300	*4050	3450	2800				*2600	*2600	2350	6610
	Front stabilizer – rear radial dozer – lowered				*4300	*4300	*4300	*4050	*4050	*4050				*2600	*2600	*2600	
	Front radial dozer – rear stabilizer – lowered				*4300	*4300	*4300	*4050	*4050	*4050				*2600	*2600	*2600	
	Front stabilizer – rear stabilizer – lowered				*4300	*4300	*4300	*4050	*4050	*4050				*2600	*2600	*2600	
4500 mm	Front stabilizer – rear radial dozer – raised				*5150	*5150	4350	4150	3400	2750				*2450	2400	1900	7400
	Front stabilizer – rear radial dozer – lowered				*5150	*5150	*5150	*4850	*4850	4300				*2450	*2450	*2450	
	Front radial dozer – rear stabilizer – lowered				*5150	*5150	*5150	*4850	*4850	4450				*2450	*2450	*2450	
	Front stabilizer – rear stabilizer – lowered				*5150	*5150	*5150	*4850	*4850	*4850				*2450	*2450	*2450	
3000 mm	Front stabilizer – rear radial dozer – raised				6250	4950	3950	4000	3250	2600	2800	2300	1800	*2450	2150	1700	7810
	Front stabilizer – rear radial dozer – lowered				*6900	*6900	6400	*5150	*5150	4100	*3900	*3900	2900	*2450	*2450	*2450	
	Front radial dozer – rear stabilizer – lowered				*6900	*6900	6700	*5150	*5150	4250	*3900	*3900	3000	*2450	*2450	*2450	
	Front stabilizer – rear stabilizer – lowered				*6900	*6900	*6900	*5150	*5150	5150	*3900	*3900	3600	*2450	*2450	*2450	
1500 mm	Front stabilizer – rear radial dozer – raised				5850	4550	3600	3800	3050	2450	2750	2200	1750	2500	2050	1600	7900
	Front stabilizer – rear radial dozer – lowered				*7700	*7700	6000	*5600	*5600	3950	*4350	*4350	2850	*2550	*2550	*2550	
	Front radial dozer – rear stabilizer – lowered				*7700	*7700	6300	*5600	*5600	4100	*4350	4300	2950	*2550	*2550	*2550	
	Front stabilizer – rear stabilizer – lowered				*7700	*7700	*7700	*5600	*5600	4950	*4350	*4350	3550	*2550	*2550	*2550	
0 mm	Front stabilizer – rear radial dozer – raised				5600	4350	3400	3700	2950	2300	2700	2150	1700	2600	2100	1650	7700
	Front stabilizer – rear radial dozer – lowered				*7700	*7700	5800	*5600	*5600	3800	*4150	*4150	2800	*2800	*2800	2700	
	Front radial dozer – rear stabilizer – lowered				*7700	*7700	6050	*5600	*5600	3950	*4150	*4150	2900	*2800	*2800	*2800	
	Front stabilizer – rear stabilizer – lowered				*7700	*7700	7500	*5600	*5600	4800	*4150	*4150	3500	*2800	*2800	*2800	
–1500 mm	Front stabilizer – rear radial dozer – raised	*6300	*6300	6200	5550	4300	3400	3650	2900	2300				2850	2300	1800	7170
	Front stabilizer – rear radial dozer – lowered	*6300	*6300	*6300	*6900	*6900	5750	*5050	*5050	3750				*3250	*3250	2950	
	Front radial dozer – rear stabilizer – lowered	*6300	*6300	*6300	*6900	*6900	6000	*5050	*5050	3900				*3250	*3250	3100	
	Front stabilizer – rear stabilizer – lowered	*6300	*6300	*6300	*6900	*6900	*6900	*5050	*5050	4750				*3250	*3250	*3250	
–3000 mm	Front stabilizer – rear radial dozer – raised				*5250	4400	3450	*3500	3000	2350				*3150	2850	2250	6210
	Front stabilizer – rear radial dozer – lowered				*5250	*5250	*5250	*3500	*3500	*3500				*3150	*3150	*3150	
	Front radial dozer – rear stabilizer – lowered				*5250	*5250	*5250	*3500	*3500	*3500				*3150	*3150	*3150	
	Front stabilizer – rear stabilizer – lowered				*5250	*5250	*5250	*3500	*3500	*3500				*3150	*3150	*3150	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Lift Capacities – Variable Adjustable Boom (17'1"), 8'2" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 7,280 lb, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)
 Load over front
 Load over rear
 Load over side
 Load point height

	Undercarriage configuration	10 ft			15 ft			20 ft			25 ft						ft
25 ft	Front stabilizer – rear radial dozer – raised				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	16.86
	Front stabilizer – rear radial dozer – lowered				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	
	Front radial dozer – rear stabilizer – lowered				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	
	Front stabilizer – rear stabilizer – lowered				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	
20 ft	Front stabilizer – rear radial dozer – raised				*9,500	*9,500	*9,500	*8,600	7,400	6,100				*5,800	*5,800	5,300	21.49
	Front stabilizer – rear radial dozer – lowered				*9,500	*9,500	*9,500	*8,600	*8,600	*8,600				*5,800	*5,800	*5,800	
	Front radial dozer – rear stabilizer – lowered				*9,500	*9,500	*9,500	*8,600	*8,600	*8,600				*5,800	*5,800	*5,800	
	Front stabilizer – rear stabilizer – lowered				*9,500	*9,500	*9,500	*8,600	*8,600	*8,600				*5,800	*5,800	*5,800	
15 ft	Front stabilizer – rear radial dozer – raised				*11,200	*11,200	9,400	8,900	7,300	5,900				*5,400	5,300	4,200	24.18
	Front stabilizer – rear radial dozer – lowered				*11,200	*11,200	*11,200	*10,600	*10,600	9,200				*5,400	*5,400	*5,400	
	Front radial dozer – rear stabilizer – lowered				*11,200	*11,200	*11,200	*10,600	*10,600	9,600				*5,400	*5,400	*5,400	
	Front stabilizer – rear stabilizer – lowered				*11,200	*11,200	*11,200	*10,600	*10,600	*10,600				*5,400	*5,400	*5,400	
10 ft	Front stabilizer – rear radial dozer – raised				13,500	10,600	8,600	8,600	7,000	5,600	6,000	4,900	3,900	*5,400	4,700	3,700	25.59
	Front stabilizer – rear radial dozer – lowered				*14,900	*14,900	13,800	*11,200	*11,200	8,900	*7,600	*7,600	6,200	*5,400	*5,400	*5,400	
	Front radial dozer – rear stabilizer – lowered				*14,900	*14,900	14,400	*11,200	*11,200	9,200	*7,600	*7,600	6,500	*5,400	*5,400	*5,400	
	Front stabilizer – rear stabilizer – lowered				*14,900	*14,900	*14,900	*11,200	*11,200	11,000	*7,600	*7,600	*7,600	*5,400	*5,400	*5,400	
5 ft	Front stabilizer – rear radial dozer – raised				12,600	9,900	7,800	8,200	6,600	5,300	5,900	4,800	3,800	5,500	4,500	3,500	25.92
	Front stabilizer – rear radial dozer – lowered				*16,700	*16,700	12,900	*12,100	*12,100	8,500	*9,300	*9,300	6,100	*5,600	*5,600	*5,600	
	Front radial dozer – rear stabilizer – lowered				*16,700	*16,700	13,500	*12,100	*12,100	8,800	*9,300	9,300	6,300	*5,600	*5,600	*5,600	
	Front stabilizer – rear stabilizer – lowered				*16,700	*16,700	16,600	*12,100	*12,100	10,600	*9,300	*9,300	7,600	*5,600	*5,600	*5,600	
0 ft	Front stabilizer – rear radial dozer – raised				12,100	9,400	7,400	7,900	6,400	5,000	5,800	4,700	3,700	5,700	4,600	3,600	25.26
	Front stabilizer – rear radial dozer – lowered				*16,700	*16,700	12,400	*12,100	*12,100	8,200	*7,800	*7,800	6,000	*6,100	*6,100	5,900	
	Front radial dozer – rear stabilizer – lowered				*16,700	*16,700	13,000	*12,100	*12,100	8,500	*7,800	*7,800	6,200	*6,100	*6,100	*6,100	
	Front stabilizer – rear stabilizer – lowered				*16,700	*16,700	16,100	*12,100	*12,100	10,400	*7,800	*7,800	7,500	*6,100	*6,100	*6,100	
–5 ft	Front stabilizer – rear radial dozer – raised	*14,400	*14,400	13,300	12,000	9,300	7,300	7,800	6,300	4,900				6,300	5,100	4,000	23.49
	Front stabilizer – rear radial dozer – lowered	*14,400	*14,400	*14,400	*15,000	*15,000	12,300	*10,900	*10,900	8,100				*7,200	*7,200	6,500	
	Front radial dozer – rear stabilizer – lowered	*14,400	*14,400	*14,400	*15,000	*15,000	12,900	*10,900	*10,900	8,500				*7,200	*7,200	6,800	
	Front stabilizer – rear stabilizer – lowered	*14,400	*14,400	*14,400	*15,000	*15,000	*15,000	*10,900	*10,900	10,300				*7,200	*7,200	*7,200	
–10 ft	Front stabilizer – rear radial dozer – raised				*11,300	9,500	7,400	*7,200	6,500	5,100				*7,000	6,400	5,100	20.14
	Front stabilizer – rear radial dozer – lowered				*11,300	*11,300	*11,300	*7,200	*7,200	*7,200				*7,000	*7,000	*7,000	
	Front radial dozer – rear stabilizer – lowered				*11,300	*11,300	*11,300	*7,200	*7,200	*7,200				*7,000	*7,000	*7,000	
	Front stabilizer – rear stabilizer – lowered				*11,300	*11,300	*11,300	*7,200	*7,200	*7,200				*7,000	*7,000	*7,000	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M316 Wheel Excavator Specifications

Lift Capacities – Variable Adjustable Boom (5205 mm), 2.5 m Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 3300 kg, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)

 Load over front

 Load over rear

 Load over side

 Load point height

	Undercarriage configuration	3000 mm			4500 mm			6000 mm			7500 mm						mm
																	
7500 mm	Front empty – rear parallel dozer – trailer – raised				*4350	*4350	*4350							*3050	*3050	*3050	5310
	Front empty – rear parallel dozer – trailer – lowered				*4350	*4350	*4350							*3050	*3050	*3050	
	Front parallel dozer – rear stabilizer – trailer – raised				*4350	*4350	*4350							*3050	*3050	*3050	
	Front parallel dozer – rear stabilizer – trailer – lowered				*4350	*4350	*4350							*3050	*3050	*3050	
6000 mm	Front empty – rear parallel dozer – trailer – raised				*4300	*4300	*4300	*4100	3450	2750				*2600	*2600	2300	6630
	Front empty – rear parallel dozer – trailer – lowered				*4300	*4300	*4300	*4100	*4100	3100				*2600	*2600	2550	
	Front parallel dozer – rear stabilizer – trailer – raised				*4300	*4300	*4300	*4100	3900	2900				*2600	*2600	2400	
	Front parallel dozer – rear stabilizer – trailer – lowered				*4300	*4300	*4300	*4100	*4100	*4100				*2600	*2600	*2600	
4500 mm	Front empty – rear parallel dozer – trailer – raised				*5200	*5200	4250	4550	3350	2700				*2450	2350	1850	7400
	Front empty – rear parallel dozer – trailer – lowered				*5200	*5200	4750	4550	*4850	3000				*2450	*2450	2100	
	Front parallel dozer – rear stabilizer – trailer – raised				*5200	*5200	4450	4550	3800	2850				*2450	*2450	1950	
	Front parallel dozer – rear stabilizer – trailer – lowered				*5200	*5200	*5200	*4850	*4850	4600				*2450	*2450	*2450	
3000 mm	Front empty – rear parallel dozer – trailer – raised				6850	4950	3900	4400	3200	2550	3100	2250	1750	*2450	2100	1650	7810
	Front empty – rear parallel dozer – trailer – lowered				6800	*6950	4350	4350	*5150	2850	3100	*3950	2000	*2450	*2450	1850	
	Front parallel dozer – rear stabilizer – trailer – raised				6850	5600	4100	4400	3650	2700	3100	2600	1900	*2450	2400	1750	
	Front parallel dozer – rear stabilizer – trailer – lowered				*6950	*6950	6900	*5150	*5150	4400	*3950	*3950	3100	*2450	*2450	*2450	
1500 mm	Front empty – rear parallel dozer – trailer – raised				6450	4600	3550	4200	3050	2400	3000	2200	1700	*2550	2000	1550	7900
	Front empty – rear parallel dozer – trailer – lowered				6400	*7700	4000	4200	*5600	2700	3000	*4350	1950	*2550	*2550	1800	
	Front parallel dozer – rear stabilizer – trailer – raised				6400	5250	3750	4200	3450	2550	3000	2500	1800	*2550	2300	1700	
	Front parallel dozer – rear stabilizer – trailer – lowered				*7700	*7700	6500	*5600	*5600	4250	*4350	*4350	3050	*2550	*2550	*2550	
0 mm	Front empty – rear parallel dozer – trailer – raised				6200	4400	3350	4100	2900	2250	2950	2150	1650	*2800	2050	1600	7700
	Front empty – rear parallel dozer – trailer – lowered				6200	7700*	3800	4050	*5600	2550	2950	*4150	1900	*2800	*2800	1800	
	Front parallel dozer – rear stabilizer – trailer – raised				6200	5050	3550	4050	3350	2400	2950	2450	1800	*2800	2400	1700	
	Front parallel dozer – rear stabilizer – trailer – lowered				*7700	*7700	6250	*5600	*5600	4100	*4150	*4150	3000	*2800	*2800	*2800	
–1500 mm	Front empty – rear parallel dozer – trailer – raised	*6350	*6350	6050	6150	4350	3300	4050	2900	2250				3200	2300	1800	7160
	Front empty – rear parallel dozer – trailer – lowered	*6350	*6350	*6350	6150	*6900	3750	4000	*5050	2550				3150	*3250	2000	
	Front parallel dozer – rear stabilizer – trailer – raised	*6350	*6350	*6350	6150	5000	3500	4050	3300	2400				3200	2650	1900	
	Front parallel dozer – rear stabilizer – trailer – lowered	*6350	*6350	*6350	*6900	*6900	6200	*5050	*5050	4050				*3250	*3250	3200	
–3000 mm	Front empty – rear parallel dozer – trailer – raised				*5250	4400	3400	*3450	2950	2300				*3150	2850	2250	6170
	Front empty – rear parallel dozer – trailer – lowered				*5250	*5250	3850	*3450	*3450	2600				*3150	*3150	2500	
	Front parallel dozer – rear stabilizer – trailer – raised				*5250	5050	3600	*3450	3400	2450				*3150	*3150	2350	
	Front parallel dozer – rear stabilizer – trailer – lowered				*5250	*5250	*5250	*3450	*3450	*3450				*3150	*3150	*3150	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Lift Capacities – Variable Adjustable Boom (17'1"), 8'2" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 7,280 lb, heavy lift function on.

 Load at maximum reach (sticknose/bucket pin)
 Load over front
 Load over rear
 Load over side
 Load point height

	Undercarriage configuration	10 ft			15 ft			20 ft			25 ft						ft
25 ft	Front empty – rear parallel dozer – trailer – raised				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	16.93
	Front empty – rear parallel dozer – trailer – lowered				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	
	Front parallel dozer – rear stabilizer – trailer – raised				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	
	Front parallel dozer – rear stabilizer – trailer – lowered				*9,400	*9,400	*9,400							*6,800	*6,800	*6,800	
20 ft	Front empty – rear parallel dozer – trailer – raised				*9,500	*9,500	*9,500	*8,600	7,400	5,900				*5,800	*5,800	5,100	21.52
	Front empty – rear parallel dozer – trailer – lowered				*9,500	*9,500	*9,500	*8,600	*8,600	6,600				*5,800	*5,800	5,700	
	Front parallel dozer – rear stabilizer – trailer – raised				*9,500	*9,500	*9,500	*8,600	8,300	6,300				*5,800	*5,800	5,400	
	Front parallel dozer – rear stabilizer – trailer – lowered				*9,500	*9,500	*9,500	*8,600	*8,600	*8,600				*5,800	*5,800	*5,800	
15 ft	Front empty – rear parallel dozer – trailer – raised				*11,200	*11,200	9,200	9,800	7,300	5,800				*5,400	5,200	4,100	24.21
	Front empty – rear parallel dozer – trailer – lowered				*11,200	*11,200	10,300	9,700	*10,600	6,500				*5,400	*5,400	4,600	
	Front parallel dozer – rear stabilizer – trailer – raised				*11,200	*11,200	9,600	9,800	8,200	6,100				*5,400	*5,400	4,400	
	Front parallel dozer – rear stabilizer – trailer – lowered				*11,200	*11,200	*11,200	*10,600	*10,600	9,900				*5,400	*5,400	*5,400	
10 ft	Front empty – rear parallel dozer – trailer – raised				14,700	10,700	8,400	9,400	6,900	5,500	6,700	4,800	3,800	*5,400	4,600	3,600	25.59
	Front empty – rear parallel dozer – trailer – lowered				14,600	*15,000	9,400	9,400	*11,200	6,200	6,600	*7,600	4,300	*5,400	*5,400	4,100	
	Front parallel dozer – rear stabilizer – trailer – raised				14,700	12,100	8,800	9,400	7,900	5,800	6,700	5,500	4,100	*5,400	5,300	3,900	
	Front parallel dozer – rear stabilizer – trailer – lowered				*15,000	*15,000	14,800	*11,200	*11,200	9,500	*7,600	*7,600	6,700	*5,400	*5,400	*5,400	
5 ft	Front empty – rear parallel dozer – trailer – raised				13,800	9,900	7,600	9,100	6,500	5,100	6,500	4,700	3,700	*5,600	4,400	3,500	25.92
	Front empty – rear parallel dozer – trailer – lowered				13,800	*16,700	8,700	9,000	*12,100	5,800	6,500	*9,300	4,200	*5,600	*5,600	3,900	
	Front parallel dozer – rear stabilizer – trailer – raised				13,800	11,300	8,100	9,100	7,500	5,500	6,500	5,400	3,900	*5,600	5,100	3,700	
	Front parallel dozer – rear stabilizer – trailer – lowered				*16,700	*16,700	14,000	*12,100	*12,100	9,100	*9,300	*9,300	6,600	*5,600	*5,600	*5,600	
0 ft	Front empty – rear parallel dozer – trailer – raised				13,400	9,400	7,200	8,800	6,300	4,900	6,400	4,600	3,600	*6,100	4,500	3,500	25.26
	Front empty – rear parallel dozer – trailer – lowered				13,300	*16,700	8,200	8,700	*12,100	5,500	6,400	7,700	4,100	*6,100	*6,100	4,000	
	Front parallel dozer – rear stabilizer – trailer – raised				13,400	10,800	7,700	8,800	7,200	5,200	6,400	5,300	3,800	*6,100	5,200	3,800	
	Front parallel dozer – rear stabilizer – trailer – lowered				*16,700	*16,700	13,500	*12,100	*12,100	8,900	*7,700	*7,700	6,500	*6,100	*6,100	*6,100	
–5 ft	Front empty – rear parallel dozer – trailer – raised	*14,600	*14,600	13,000	13,300	9,300	7,100	8,700	6,200	4,800				7,000	5,000	3,900	23.46
	Front empty – rear parallel dozer – trailer – lowered	*14,600	*14,600	*14,600	13,200	*14,900	8,100	8,700	10,900	5,500				7,000	*7,200	4,500	
	Front parallel dozer – rear stabilizer – trailer – raised	*14,600	*14,600	13,800	13,300	10,700	7,600	8,700	7,200	5,100				7,000	5,800	4,200	
	Front parallel dozer – rear stabilizer – trailer – lowered	*14,600	*14,600	*14,600	*14,900	*14,900	13,400	*10,900	*10,900	8,800				*7,200	*7,200	7,100	
–10 ft	Front empty – rear parallel dozer – trailer – raised				*11,200	9,500	7,300	*7,100	6,400	5,000				*7,000	6,400	5,000	20.01
	Front empty – rear parallel dozer – trailer – lowered				*11,200	*11,200	8,300	*7,100	*7,100	5,700				*7,000	*7,000	5,700	
	Front parallel dozer – rear stabilizer – trailer – raised				*11,200	10,900	7,700	*7,100	*7,100	5,300				*7,000	*7,000	5,300	
	Front parallel dozer – rear stabilizer – trailer – lowered				*11,200	*11,200	*11,200	*7,100	*7,100	*7,100				*7,000	*7,000	*7,000	

*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M316 Wheel Excavator Specifications

Bucket Specifications and Compatibility

Contact your Cat dealer for special bucket requirements.

									3300 kg (7,280 lb) Counterweight							
									Variable Angle Boom							
									2.2 m (7'3") Stick				2.5 m (8'2") Stick			
		Width		Capacity		Weight		Fill	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered
	Linkage	mm	in	m^3	yd^3	kg	lb	%								
Pin-On (No Quick Coupler)																
General Duty	316	600	24	0.35	0.46	440	969	100	●	●	●	●	●	●	●	●
	316	900	36	0.62	0.81	546	1,203	100	⊖	●	●	●	⊖	◉	●	●
	316	1200	48	0.91	1.19	658	1,450	100	◇	○	●	●	◇	◇	●	●
	316	1300	51	1.00	1.31	695	1,532	100	X	◇	●	●	X	◇	●	●
Ditch Cleaning	316	2000	78	0.94	1.23	723	1,594	100	◇	◇	●	●	X	◇	●	●
Ditch Cleaning Tilt	316	2000	79	0.86	1.12	1028	2,266	100	X	◇	●	●	X	X	●	●
								kg	1540	1790	2973	3631	1456	1694	2825	3452
								lb	3,396	3,945	6,555	8,005	3,209	3,735	6,228	7,609
								Maximum load with pin-on (payload + bucket)								
With Pin Grabber Coupler																
General Duty	316	600	24	0.35	0.46	440	969	100	●	●	●	●	◉	●	●	●
	316	900	36	0.62	0.81	546	1,203	100	◇	⊖	●	●	◇	○	●	●
	316	1200	48	0.91	1.19	658	1,450	100	X	◇	●	●	X	X	●	●
	316	1300	51	1.00	1.31	695	1,532	100	X	X	◉	●	X	X	◉	●
Ditch Cleaning	316	2000	78	0.94	1.23	723	1,594	100	X	X	●	●	X	X	◉	●
Ditch Cleaning Tilt	316	2000	79	0.86	1.12	1028	2,266	100	X	X	◉	●	X	X	⊖	●
								kg	1209	1459	2642	3300	1125	1363	2494	3121
								lb	2,666	3,216	5,825	7,276	2,480	3,006	5,499	6,880
								Maximum load with coupler (payload + bucket)								

Maximum Material Density:

- ● 2100 kg/m³ (3,500 lb/yd³)
- ◉ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- ○ 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2022/AC:2022, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

Bucket Specifications and Compatibility *(continued)*

Contact your Cat dealer for special bucket requirements.

									3300 kg (7,280 lb) Counterweight							
									Variable Angle Boom							
									2.2 m (7'3") Stick				2.5 m (8'2") Stick			
		Width		Capacity		Weight		Fill	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered
	Linkage	mm	in	m^3	yd^3	kg	lb	%								
With CW-30 Coupler																
General Duty	316	600	24	0.35	0.46	439	967	100	●	●	●	●	●	●	●	●
	316	750	30	0.49	0.64	475	1,047	100	◉	●	●	●	⊖	●	●	●
	316	900	36	0.62	0.81	534	1,177	100	○	⊖	●	●	○	⊖	●	●
	316	1100	43	0.80	1.04	593	1,307	100	◇	○	●	●	X	◇	●	●
	316	1200	48	0.90	1.18	646	1,423	100	X	◇	●	●	X	◇	●	●
	316	1300	51	1.00	1.31	677	1,492	100	X	◇	●	●	X	X	◉	●
Heavy Duty	316	1300	51	1.00	1.31	694	1,529	100	X	◇	●	●	X	X	◉	●
General Duty – Leveling Edge	316	996	39.2	0.70	0.93	586	1,291	100	◇	○	●	●	◇	○	●	●
	316	1200	47	0.91	1.19	672	1,481	100	X	◇	●	●	X	◇	●	●
	316	690	27	0.47	0.61	476	1,049	100	◉	●	●	●	⊖	●	●	●
	316	790	31	0.56	0.73	509	1,122	100	⊖	◉	●	●	○	◉	●	●
Ditch Cleaning Tilt	316	1800	72	0.78	1.02	1048	2,310	100	X	X	●	●	X	X	●	●
	316	2000	79	0.86	1.13	1111	2,449	100	X	X	◉	●	X	X	◉	●
Maximum load with coupler (payload + bucket)								kg	1328	1578	2761	3419	1244	1482	2613	3240
								lb	2,928	3,478	6,087	7,538	2,742	3,268	5,761	7,142
With CW-30S Coupler																
General Duty	316	600	24	0.35	0.46	423	932	100	●	●	●	●	●	●	●	●
	316	750	30	0.49	0.64	471	1,038	100	◉	●	●	●	⊖	●	●	●
	316	900	36	0.62	0.81	534	1,177	100	○	⊖	●	●	○	⊖	●	●
	316	1100	43	0.80	1.04	593	1,307	100	◇	○	●	●	X	◇	●	●
	316	1200	48	0.91	1.18	646	1,423	100	X	◇	●	●	X	◇	●	●
	316	1300	51	1.00	1.31	677	1,492	100	X	◇	●	●	X	X	◉	●
Heavy Duty	316	1200	48	0.91	1.18	663	1,461	100	X	◇	●	●	X	◇	●	●
	316	1300	51	1.00	1.31	695	1,531	100	X	◇	●	●	X	X	◉	●
Ditch Cleaning Tilt	316	2000	79	0.86	1.13	1092	2,407	100	X	X	◉	●	X	X	◉	●
Maximum load with coupler (payload + bucket)								kg	1336	1586	2769	3427	1252	1490	2621	3248
								lb	2,946	3,495	6,105	7,556	2,760	3,286	5,779	7,160

Maximum Material Density:

- ● 2100 kg/m³ (3,500 lb/yd³)
- ◉ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- ○ 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

The above loads are in compliance with hydraulic excavator standard EN474-5:2022/AC:2022, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

M316 Wheel Excavator Specifications

Bucket Specifications and Compatibility *(continued)*

Contact your Cat dealer for special bucket requirements.

		Width		Capacity		Weight		Fill	3300 kg (7,280 lb) Counterweight – Variable Angle Boom – 2.2 m (7'3") Stick				2.5 m (8'2") Stick			
									Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered
	Linkage	mm	in	m^3	yd^3	kg	lb	%								
With S60 Coupler																
Heavy Duty	0	1100	43	0.80	1.05	628	1,385	100	◇	○	●	●	X	◇	●	●
	0	1150	45	0.90	1.18	699	1,641	100	X	◇	●	●	X	◇	●	●
Maximum load with coupler (payload + bucket)								kg	1364	1614	2797	3455	1280	1518	2649	3276
								lb	3,008	3,557	6,167	7,617	2,821	3,347	5,840	7,221
Pin-On, TRS17 S60																
General Duty – Grading	316	1600	63	0.80	1.05	551	1,215	100	X	X	●	●	X	X	●	●
General Duty – Digging	316	1100	43	0.70	0.92	559	1,232	100	X	X	●	●	X	X	●	●
	316	1100	43	0.80	1.05	580	1,279	100	X	X	●	●	X	X	●	●
General Duty – Trenching	316	540	20	0.35	0.46	283	624	100	⦿	●	●	●	⊖	●	●	●
Maximum load with pin-on (payload + bucket)								kg	896	1,146	2,329	2,987	812	1,050	2,181	2,808
								lb	1,976	2,525	5,135	6,586	1,790	2,316	4,809	6,190
Pin-On, TRS17 S60 (no hook)																
General Duty – Grading	316	1600	63	0.80	1.05	551	1,215	100	X	X	●	●	X	X	●	●
General Duty – Digging	316	1100	43	0.70	0.92	559	1,232	100	X	X	●	●	X	X	●	●
	316	1100	43	0.80	1.05	580	1,279	100	X	X	●	●	X	X	●	●
General Duty – Trenching	316	540	20	0.35	0.46	283	624	100	⦿	●	●	●	⊖	●	●	●
Maximum load with pin-on (payload + bucket)								kg	899	1,149	2,332	2,990	815	1,053	2,184	2,811
								lb	1,982	2,532	5,142	6,592	1,796	2,322	4,815	6,196
S60, TRS17 S60																
General Duty – Grading	316	1600	63	0.80	1.05	551	1,215	100	X	X	●	●	X	X	⦿	●
General Duty – Digging	316	1100	43	0.70	0.92	559	1,232	100	X	X	●	●	X	X	●	●
	316	1100	43	0.80	1.05	580	1,279	100	X	X	⦿	●	X	X	⦿	●
General Duty – Trenching	316	540	20	0.35	0.46	283	624	100	○	●	●	●	◇	⦿	●	●
Maximum load with pin-on (payload + bucket)								kg	740	990	2,173	2,831	656	894	2,025	2,652
								lb	1,632	2,181	4,791	6,242	1,446	1,972	4,465	5,846

Maximum Material Density:

- ● 2100 kg/m³ (3,500 lb/yd³)
- ⦿ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- ○ 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2022/AC:2022, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

Bucket Specifications and Compatibility *(continued)*

Contact your Cat dealer for special bucket requirements.

		Width		Capacity		Weight		Fill	3300 kg (7,280 lb) Counterweight							
									Variable Angle Boom							
									2.2 m (7'3") Stick				2.5 m (8'2") Stick			
	Linkage	mm	in	m³	yd³	kg	lb	%	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered
S60, TRS17 S60 - GM																
General Duty – Grading	316	1600	63	0.80	1.05	551	1,215	100	X	X	⦿	●	X	X	⦿	●
General Duty – Digging	316	1100	43	0.70	0.92	559	1,232	100	X	X	●	●	X	X	⦿	●
	316	1100	43	0.80	1.05	580	1,279	100	X	X	⦿	●	X	X	⊖	●
General Duty – Trenching	316	540	20	0.35	0.46	283	624	100	◇	⦿	●	●	X	⊖	●	●
Maximum load with coupler (payload + bucket)								kg	636	886	2,069	2,727	552	790	1,921	2,548
								lb	1,403	1,952	4,562	6,012	1,216	1,742	4,235	5,616
Pin-On, TRS17 HCS60																
General Duty – Grading	316	1600	63	0.80	1.05	551	1,215	100	X	X	●	●	X	X	●	●
General Duty – Digging	316	1100	43	0.70	0.92	559	1,232	100	X	X	●	●	X	X	●	●
	316	1100	43	0.80	1.05	580	1,279	100	X	X	●	●	X	X	⦿	●
General Duty – Trenching	316	540	20	0.35	0.46	283	624	100	⊖	●	●	●	⊖	●	●	●
Maximum load with pin-on (payload + bucket)								kg	877	1,127	2,310	2,968	793	1,031	2,162	2,789
								lb	1,934	2,484	5,093	6,544	1,748	2,274	4,767	6,148
HCS60, TRS17 S60																
General Duty – Grading	316	1600	63	0.80	1.05	551	1,215	100	X	X	⦿	●	X	X	⦿	●
General Duty – Digging	316	1100	43	0.70	0.92	559	1,232	100	X	X	●	●	X	X	●	●
	316	1100	43	0.80	1.05	580	1,279	100	X	X	⦿	●	X	X	⦿	●
General Duty – Trenching	316	540	20	0.35	0.46	283	624	100	○	⦿	●	●	◇	⊖	●	●
Maximum load with coupler (payload + bucket)								kg	712	962	2,145	2,803	628	866	1,997	2,624
								lb	1,570	2,120	4,729	6,180	1,384	1,910	4,403	5,784

Maximum Material Density:

- ● 2100 kg/m³ (3,500 lb/yd³)
- ⦿ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- ○ 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2022/AC:2022, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

M316 Wheel Excavator Specifications

Bucket Specifications and Compatibility *(continued)*

Contact your Cat dealer for special bucket requirements.

		Width		Capacity		Weight		Fill	3300 kg (7,280 lb) Counterweight							
									Variable Angle Boom							
									2.2 m (7'3") Stick				2.5 m (8'2") Stick			
	Linkage	mm	in	m^3	yd^3	kg	lb	%	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered
HCS60, TRS17 HCS60																
General Duty – Grading	316	1600	63	0.80	1.05	551	1,215	100	X	X	●	●	X	X	◉	●
General Duty – Digging	316	1100	43	0.70	0.92	559	1,232	100	X	X	●	●	X	X	●	●
	316	1100	43	0.80	1.05	580	1,279	100	X	X	◉	●	X	X	◉	●
General Duty – Trenching	316	540	20	0.35	0.46	283	624	100	○	◉	●	●	◇	◉	●	●
Maximum load with coupler (payload + bucket)								kg	731	981	2,164	2,822	647	885	2,016	2,643
								lb	1,612	2,162	4,771	6,222	1,426	1,952	4,445	5,826
Pin-On, TRS17 HCS65																
General Duty – Grading	316	1600	63	0.80	1.05	573	1,263	100	X	X	●	●	X	X	◉	●
General Duty – Digging	316	1100	43	0.70	0.92	581	1,281	100	X	X	●	●	X	X	●	●
	316	1100	43	0.80	1.05	601	1,325	100	X	X	●	●	X	X	◉	●
General Duty – Trenching	316	540	21	0.35	0.46	304	670	100	⊖	●	●	●	○	◉	●	●
Maximum load with pin-on (payload + bucket)								kg	835	1,085	2,268	2,926	751	989	2,120	2,747
								lb	1,841	2,391	5,000	6,451	1,655	2,181	4,674	6,055
HCS65, TRS17 HCS65																
General Duty – Grading	316	1600	63	0.80	1.05	573	1,263	100	X	X	◉	●	X	X	⊖	●
General Duty – Digging	316	1100	43	0.70	0.92	581	1,281	100	X	X	●	●	X	X	◉	●
	316	1100	43	0.80	1.05	601	1,325	100	X	X	◉	●	X	X	⊖	●
General Duty – Trenching	316	540	21	0.35	0.46	304	670	100	X	⊖	●	●	X	○	●	●
Maximum load with pin-on (payload + bucket)								kg	584	834	2,017	2,675	500	738	1,869	2,496
								lb	1,288	1,838	4,447	5,898	1,102	1,628	4,121	5,502
HCS65, TRS17 S65																
General Duty – Grading	316	1600	63	0.80	1.05	573	1,263	100	X	X	◉	●	X	X	⊖	●
General Duty – Digging	316	1100	43	0.70	0.92	581	1,281	100	X	X	●	●	X	X	◉	●
	316	1100	43	0.80	1.05	601	1,325	100	X	X	◉	●	X	X	⊖	●
General Duty – Trenching	316	540	21	0.35	0.46	304	670	100	◇	⊖	●	●	X	○	●	●
Maximum load with pin-on (payload + bucket)								kg	605	855	2,038	2,696	521	759	1,890	2,517
								lb	1,334	1,884	4,493	5,944	1,148	1,674	4,167	5,548

Maximum Material Density:

- ● 2100 kg/m^3 (3,500 lb/yd^3)
- ◉ 1800 kg/m^3 (3,000 lb/yd^3)
- ⊖ 1500 kg/m^3 (2,500 lb/yd^3)
- ○ 1200 kg/m^3 (2,000 lb/yd^3)
- ◇ 900 kg/m^3 (1,500 lb/yd^3)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2022/AC:2022, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

Attachments Offering Guide

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

✓ Match | ☐ No Match | ✓* Working range front only | ● 1800 kg/m³ (3,000 lb/yd³) | ○ 1200 kg/m³ (2,000 lb/yd³) | ◇ 600 kg/m³ (1,000 lb/yd³)

PIN-ON ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Blade/ Front Outrigger		Rear Outrigger/ Front Outrigger		Rear Blade	
Counterweight		**3300 kg (7,280 lb)**		**3300 kg (7,280 lb)**		**3300 kg (7,280 lb)**		**3300 kg (7,280 lb)**	
Boom Type		**Variable Adjustable Boom**		**Variable Adjustable Boom**		**Variable Adjustable Boom**		**Variable Adjustable Boom**	
Stick Length		**2.2 mm (7'3")**	**2.5 m (8'2")**	**2.2 mm (7'3")**	**2.5 m (8'2")**	**2.2 mm (7'3")**	**2.5 m (8'2")**	**2.2 mm (7'3")**	**2.5 m (8'2")**
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓	✓	✓	✓	✓*
Demolition and Sorting Grapples	G313 GC	✓	✓	✓	✓	✓	✓	✓	✓
	G314	✓	✓	✓	✓	✓	✓	✓	✓*
	G317 GC	✓	✓	✓	✓	✓	✓		
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓	✓	✓	✓	✓	✓	✓	✓*
Pulverizers	P214 Secondary Pulverizer	✓	✓	✓	✓	✓	✓	✓*	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓	✓	✓
Orange Peel Grapples	GSH420-500	●	●	●	●	●	●	○	
	GSH420-600	●	●	●	●	●	●		
	GSH520-500	●	●	●	●	●	●		
	GSH520-600	●	○	●	○	●	○		
	GSV520 GC-400	●	●	●	●	●	●	○	○
	GSV520 GC-500	●	●	●	●	●	●	○	
	GSV520 GC-600	●	●	●	●	●	●		
	GSV420-400	●	●	●	●	●	●	●	○
	GSV420-500	●	●	●	●	●	●	○	○
	GSV420-600	●	●	●	●	●	●		
	GSV520-400	●	●	●	●	●	●	○	○
	GSV520-500	●	●	●	●	●	●		
	GSV520-600	●	○	●	○	●	○		

(continued on next page)

Attachments Offering Guide *(continued)*

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

✓ Match ☐ No Match ✓* Working range front only

CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Blade/ Front Outrigger		Rear Outrigger/ Front Outrigger		Rear Blade	
Counterweight		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓	✓*	✓*
	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 S	✓		✓		✓			
Demolition and Sorting Grapples	G313 GC	✓	✓	✓	✓	✓	✓		
	G314	✓	✓	✓	✓	✓	✓		
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓	✓	✓	✓	✓	✓		
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓	✓	✓*

CW-30s DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Blade/ Front Outrigger		Rear Outrigger/ Front Outrigger		Rear Blade	
Counterweight		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓	✓*	✓*
	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G313 GC	✓	✓	✓	✓	✓	✓	✓*	✓*
	G314	✓	✓	✓	✓	✓	✓	✓*	
	G317 GC	✓		✓		✓			
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓	✓	✓	✓	✓	✓	✓*	
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓	✓	✓
Pulverizers	P214 Secondary Pulverizer	✓		✓		✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Attachments Offering Guide *(continued)*

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

✓ Match ☐ No Match ✓* Working range front only

CW-30 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Blade/ Front Outrigger		Rear Outrigger/ Front Outrigger		Rear Blade	
Counterweight		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.20 m (7'3")	2.5 m (8'2")	2.20 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓	✓	✓*
	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 S	✓		✓		✓			
Demolition and Sorting Grapples	G313 GC	✓	✓	✓	✓	✓	✓	✓*	
	G313 GC-Fixed CAN	✓	✓	✓	✓	✓	✓	✓	✓*
	G314	✓	✓	✓	✓	✓	✓	✓*	
	G317 GC	✓	✓	✓	✓	✓	✓		
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓	✓	✓	✓	✓	✓	✓*	
Pulverizers	P214 Secondary Pulverizer	✓		✓		✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓	✓	✓

HCCW30 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Blade/ Front Outrigger		Rear Outrigger/ Front Outrigger		Rear Blade	
Counterweight		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓	✓	✓*
	H115 GC S	✓		✓		✓			
	H115 S	✓	✓	✓	✓	✓	✓	✓*	
Demolition and Sorting Grapples	G313 GC	✓		✓		✓			
	G314	✓		✓		✓			
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓		✓		✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓		

(continued on next page)

M316 Wheel Excavator Specifications

Attachments Offering Guide *(continued)*

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

✓ Match ☐ No Match ✓* Working range front only

S60 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Blade/ Front Outrigger		Rear Outrigger/ Front Outrigger		Rear Blade	
Counterweight		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓	✓	✓		
Demolition and Sorting Grapples	G313 GC	✓	✓	✓	✓	✓	✓	✓*	✓*
	G314	✓	✓	✓	✓	✓	✓	✓*	
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓	✓	✓	✓	✓	✓	✓*	
Pulverizers	P214 Secondary Pulverizer	✓		✓		✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓	✓	✓

HCS60 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Blade/ Front Outrigger		Rear Outrigger/ Front Outrigger		Rear Blade	
Counterweight		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓	✓	✓		
Demolition and Sorting Grapples	G313 GC	✓	✓	✓	✓	✓	✓	✓*	
	G314	✓	✓	✓	✓	✓	✓		
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓	✓	✓	✓	✓	✓		
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

Attachments Offering Guide *(continued)*

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

✓ Match ☐ No Match ✓* Working range front only

HCS65 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Blade/ Front Outrigger		Rear Outrigger/ Front Outrigger		Rear Blade	
Counterweight		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓	✓	✓		
Demolition and Sorting Grapples	G313 GC	✓	✓	✓	✓	✓	✓		
	G314	✓	✓	✓	✓	✓	✓		
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓		✓		✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓	✓	✓*

TRS17 (PIN-ON TOP/S60 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Undercarriage		Front Blade/ Rear Outrigger		Front Outrigger/ Rear Blade		Front and Rear Outriggers	
Counterweight		3300 kg (7,280 lb)		3300 kg (7,280 lb)		3300 kg (7,280 lb)	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")	2.2 m (7'3")	2.5 m (8'2")
Demolition and Sorting Grapples	G212 GC	✓	✓	✓	✓	✓	✓
	G213 GC	✓	✓	✓	✓	✓	✓

TRS17 (S60 TOP/S60 BOTTOM) ATTACHMENTS

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

Undercarriage		Rear Outrigger/ Front Blade	Front Outrigger/ Rear Blade	Front and Rear Outriggers
Counterweight		3300 kg (7,280 lb)	3300 kg (7,280 lb)	3300 kg (7,280 lb)
Boom Type		Variable Adjustable Boom	Variable Adjustable Boom	Variable Adjustable Boom
Stick Length		2.2 m (7'3")	2.2 m (7'3")	2.2 m (7'3")
Demolition and Sorting Grapples	G212 GC	✓	✓	✓
	G213 GC	✓	✓	✓

The TRS14 has been replaced by TRS17. For legacy machines or work tool attachments, please consult the appropriate compatibility guide to ensure accurate matching and performance

(continued on next page)

M316 Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat® dealer for details.

	Standard	Optional
BOOM, STICKS, AND LINKAGES		
5.2 m (17'1") Variable Adjustable boom	✓	
2.2 m (7'3") stick		✓
2.5 m (8'2") stick		✓
Bucket linkage, 316-family without lifting eye		✓
Bucket linkage, 316-family with lifting eye		✓
CAT® TECHNOLOGY		
Cat Equipment Management:		
– VisionLink™	✓[1]	
– Remote Flash	✓	
– Remote Troubleshoot	✓	
Cat Grade:		
– Cat Grade with 2D		✓
– Cat Grade with 2D with Attachment Ready Option (ARO)		✓
– Laser catcher		✓
– Compatible with 3D grade systems from Trimble, Topcon, and Leica		✓
– Cat Grade 3D Ready		✓
– Cat Grade Connectivity		✓[2]
Cat Assist:		
– Grade Assist		✓
– Cat Payload:		
– On-the-go weighing		✓
– Payload/cycle information		✓
– VisionLink back office reporting		✓[2]
Other:		
Cat Tiltrotator (TRS) integration		✓
ELECTRICAL SYSTEM		
LED lights on boom and cab	✓	
LED lights on chassis (left-hand, right-hand) and counterweight		✓
Programmable time-delay LED working lights	✓	
Roading and indicator lights, front and rear	✓	
Maintenance free batteries	✓	
Centralized electrical disconnect switch	✓	
Electrical refueling pump		✓

	Standard	Optional
ENGINE		
Cat C4.4 Single Turbo diesel engine	✓	
Power mode selector	✓	
One-touch low idle with automatic engine speed control	✓	
Automatic engine idle shutdown	✓	
Work up to 3000 m (9,842 ft) above sea level without engine power de-rating	✓	
Up to 52°C (125°F) high-ambient cooling capacity	✓	
Down to –18°C (0°F) cold starting capability	✓	
Double element air filter with integrated pre-calener	✓	
Electric fuel priming pump	✓	

[1]Provides core telematics data to manage health, maintenance insights, and condition monitoring. Other plans available for more comprehensive data reporting. Consult your Cat dealer for details.
[2]VisionLink subscription required. Consult your Cat dealer for details.

(Continued on next page)

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional
HYDRAULIC SYSTEM		
Boom, stick and bucket drift reduction valves	✓	
Boom and stick lowering check valves	✓	
Bucket cylinder check valves		✓
Electronic main control valve	✓	
Automatic hydraulic oil warm up	✓	
Element type main hydraulic filter	✓	
One-slider joysticks	✓	
Two-slider joysticks		✓
Advanced Tool Control (one/two way high-pressure flow with drift reduction)	✓	
Second high pressure auxiliary circuit (one/two way high-pressure flow)		✓
Medium pressure auxiliary circuit (one/two way medium-pressure flow)		✓
Heavy lift mode	✓	
Quick coupler circuit for Cat pin grabber and CW dedicated	✓	
SmartBoom™		✓
Ride control		✓
Cat tiltrotator support		✓
Joystick steering		✓
Separate dedicated swing pump	✓	
Automatic swing brake	✓	
Cat BIO HYDO™ Advanced biodegradable hydraulic oil		✓
Adjustable hydraulic aggressiveness	✓	
Pattern changer	✓	
SAFETY AND SECURITY		
Rear and right-side-view cameras	✓	
360° visibility		✓
Wide angle mirrors	✓	
Heated and remotely adjustable mirrors		✓
Travel alarm		✓
Signal/warning horn	✓	
Rotating beacon on cab and chassis		✓
Neutral lever (lock out) for all controls	✓	
Ground-level accessible secondary engine shutoff switch in cab	✓	
Lockable disconnect switch	✓	
Bluetooth® receiver	✓	
Anti-skid plate and countersunk bolts on service platform	✓	
Inspection lighting		✓
2D E-Fence		✓
Beacon flash function with E-fence		✓[3]
Cab Avoidance		✓

	Standard	Optional
SERVICE AND MAINTENANCE		
Scheduled Oil Sampling (S·O·S℠) ports	✓	
Automatic lubrication system for implement and swing system		✓
Integrated vehicle health management system	✓	
UNDERCARRIAGE AND STRUCTURES		
All wheel drive	✓	
Automatic brake/axle lock	✓	
Creeper speed	✓	
Electronic swing and travel lock	✓	
Heavy-duty axles, advanced disc brake system and travel motor, adjustable braking force	✓	
Oscillating front axle, lockable, with remote greasing point	✓	
10.00-20 16 PR, dual tires		✓
11.00-20 dual tires		✓
315/70R22.5, no gap dual tires		✓
445/70R 19.5, single tires		✓
300-80-22.5 dual pneumatic, spacerless tire		✓
Steps with tool box in undercarriage (left and right)	✓	
Two-piece drive shaft	✓	
Two speed hydrostatic transmission	✓	
Undercarriage steps, for parallel blade		✓
Rear blade (radial) undercarriage		✓
Rear blade (radial)/front outrigger undercarriage		✓
Rear outrigger/front blade (radial) undercarriage		✓
Rear outrigger/front outrigger undercarriage		✓
Fenders, front and rear, synthetic		✓
Travel restraint bracket for grapple/clamshell		✓
3300 kg (7,280 lb) counterweight	✓	

[3] UK only.

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- 75 mm (3") retractable seat belt

SAFETY AND SECURITY

- Bluetooth key fob

GUARDS

- Operator Protective Guards (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)

Cab Options

	Deluxe	Premium
Sound-suppressed ROPS cab	●	●
Heated seat with air-adjustable suspension	●	X
Heated and cooled seat with automatic adjustable suspension	X	●
Height-adjustable console, infinite with no tool	●	●
High-resolution 254 mm (10") LCD touchscreen monitor	●	●
Mechanical mirror	●	X
Electrical and adjustable heated mirror	X	●
Automatic bi-level air conditioner	●	●
Jog dial and shortcut keys for monitor control	●	●
Keyless push-to-start engine control	●	●
Auxiliary relay	○	○
51 mm (2") orange seat belt	●	●
Unfastened seat belt warning	●	●
Bluetooth integrated radio (including USB, auxiliary port and microphone)	●	●
2 × 12V DC outlets	●	●
Document storage	●	●
Cup and bottle holders	●	●
Openable two-piece front window (laminated)	●	○
Fixed one-piece front window (P5A classified)	X	○
Parallel wiper with washer	●	●
Fixed glass skylight	●	●
LED dome lights	●	●
Foot illumination	●	●
Roller rear sunscreen	X	●
Rear window emergency exit	●	●
Washable floor mat	●	●
Beacon ready	●	●
OPG “ready”	●	●
Vandal guards “ready”	●	●
Two LED cab lights	●	●
Rain visor	●	●

● Standard

○ Optional

X Not available

M316 Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit https://www.caterpillar.com/en/company/sustainability.

Engine

- The Cat® C4.4 engine meets U.S. EPA Tier 4 Final and EU Stage V emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) and are compatible* with ULSD blended with the following lower-carbon intensity fuels** up to:
  - ✓ 20% biodiesel FAME (fatty acid methyl ester)***
  - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

  Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

**While Caterpillar engines are compatible with these alternative fuels, some regions may not allow their use.*

***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

****Engines with no aftertreatment devices are compatible with higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).*

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a or R1234yf. See the label or instruction manual for identification of the gas.
  - – If equipped with R134a (Global Warming Potential = 1430), the system contains 0.9 kg (2.0 lb) of refrigerant which has a CO_2 equivalent of 1.287 metric tonnes (1.418 tons).
  - – If equipped with R1234yf (Global Warming Potential = 0.5), the system contains 0s.75 kg (1.65 lb) of refrigerant which has a CO_2 equivalent of 0.0004 metric tonnes (0.0004 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
  - – Barium < 0.01%
  - – Cadmium < 0.01%
  - – Chromium < 0.01%
  - – Lead < 0.01%

Sound Performance

ISO 6396:2008 internal	70 dB(A)
ISO 6395:2008 external	102 dB(A)

- External Sound – The labelled spectator sound power level represents the Guaranteed Value per 2000/14/EC, when properly equipped, and is measured according to the test procedures and conditions specified in ISO 6395:2008. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Internal Sound – The operator sound pressure level is measured according to the test procedures and conditions specified in ISO 6396:2008 for a cab offered by Caterpillar, when properly installed and maintained and tested with the door and windows closed. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained for doors/windows open) for extended periods or in noisy environment(s).

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
  - – Advanced hydraulic systems balance power and efficiency
  - – The latest hydraulic oil filter provides longer life with a 3,000-hour replacement interval
  - – Eco mode supports reduced fuel consumption for light applications
  - – One-touch low idle with automatic engine speed control
  - – Boost productivity and increase operating efficiency with optional Cat technologies
  - – Remote flash and remote troubleshoot

Recycling

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage
Steel	59.23%
Iron	10.38%
Nonferrous Metal	2.31%
Mixed Metal	9.46%
Mixed-Metal and Nonmetal	0.01%
Plastic	1.28%
Rubber	3.31%
Mixed Nonmetallic	0.00%
Fluid	7.19%
Other	4.41%
Uncategorized	2.76%
Total	100%

A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714:2008 (Earthmoving machinery – Recyclability and recoverability –Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused, or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714:2008 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following value in the table may vary.

Recyclability – 89%

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at **www.cat.com**

© 2026 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, VisionLink, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ4131-02 (11-2026)
Replaces: AEXQ4131-01
Build Number: 07E
(Europe)