



M319

Wheel Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Transmission	2
Service Refill Capacities	2
Swing Mechanism	2
Undercarriage	2
Operating Weights	2
Major Component Weights	3
Hydraulic System	3
Tires	3
Dozer Blade	4
Vibration Levels	4
Standards	4
Sound Performance	4
Air Conditioning System	4
Dimensions	5
Undercarriage Dimensions	6
Working Ranges	7
Lift Capacities – Variable Adjustable Boom (VAB)	8
Bucket Specifications and Compatibility:	
Europe	14
North America	18
Attachments Offering Guide:	
Europe	19
North America	34
Standard and Optional Equipment	45
Dealer Installed Kits and Attachments	47
Cab Options	48
M319 Environmental Declaration	49

M319 Wheel Excavator Specifications

Engine

Engine Model	Cat® C4.4	
Engine Power		
ISO 14396	129 kW	174 hp
ISO 14396 (metric)	176 hp (PS)	
Net Power		
ISO 9249	128 kW	171 hp
ISO 9249 (metric)	174 hp (PS)	
Bore	105 mm	4.1 in
Stroke	127 mm	5.0 in
Displacement	4.4 L	268.5 in ³
Biodiesel Capability	Up to B20 ⁽¹⁾	
Number of Cylinders	4	

- Meets U.S. EPA Tier 4 Final and EU Stage V emission standards.
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when engine is equipped with fan, air cleaner, CEM exhaust gas aftertreatment, alternator, and cooling fan running at intermediate speed.
- Rated speed 2,200 rpm.

⁽¹⁾Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:

- ✓ 20% biodiesel FAME (fatty acid methyl ester)*
- ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).*

***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

Transmission

Forward/Reverse		
1st Gear	10 km/h	6.2 mph
2nd Gear	35 km/h	21.7 mph
Creeper Speed		
1st Gear	5.5 km/h	3.4 mph
2nd Gear	15 km/h	9.3 mph
Drawbar Pull	104 kN	23,380 lbf
Maximum Gradeability at (19 000 kg/41,850 lb)	65%	

Service Refill Capacities

Fuel Tank (total capacity)	290 L	76.6 gal
Diesel Exhaust Fluid Tank	20 L	5.3 gal
Cooling System	35 L	9.2 gal
Engine Oil	13 L	3.4 gal
Hydraulic Tank	120 L	31.7 gal
Hydraulic System (including tank)	280 L	74 gal
Rear Axle Housing (differential)	14 L	3.7 gal
Front Steering Axle (differential)	10.5 L	2.8 gal
Final Drive (each)	2.5 L	0.7 gal
Powershift Transmission	2.5 L	0.7 gal

Swing Mechanism

Maximum Swing Speed*	9.4 rpm	
Maximum Swing Torque	47.1 kN·m	34,739 lbf·ft

*For CE-marked machine default value may be set lower.

Undercarriage

Ground Clearance	360 mm	14.2 in
Maximum Steering Angle	35°	
Oscillation Axle Angle	± 8.5°	
Minimum Turning Radius		
Outside of Tire	6600 mm	21.6 ft
Outside of Tire (plastic fender)	7900 mm	25.9 ft
End of Variable Adjustable Boom	7100 mm	23.3 ft

Operating Weights*

Minimum	19 000 kg	41,890 lb
Maximum	21 050 kg	46,410 lb

Typical Configurations

Variable Adjustable Boom**		
Rear Blade Only	19 250 kg	42,440 lb
Blade and Outriggers	20 250 kg	44,640 lb
Front and Rear Outriggers	20 450 kg	45,080 lb

*Operating weight includes full fuel tank, operator, bucket 700 kg (1,540 lb) and dual pneumatic tires. Weight varies depending on configuration.

**Typical configurations include 2.5 m (8'2") stick, bucket and 220 kg (485 lb) quick coupler.

M319 Wheel Excavator Specifications

Major Component Weights

Booms (including VA and stick cylinder, pins and standard hydraulic lines)		
5.2 m (17'1") Variable Adjustable Boom	2200 kg	4,850 lb
Sticks (including cylinder, bucket linkage, pins and standard hydraulic lines)		
2.2 m (7'3") Stick*	790 kg	1,740 lb
2.5 m (8'2") Stick	810 kg	1,790 lb
2.9 m (9'6") Stick	860 kg	1,900 lb
Counterweight		
5000 kg (11,020 lb) Counterweight	5000 kg	11,020 lb
Undercarriage (including axles, standard tires and steps)		
Rear Blade	4950 kg	10,910 lb
Front Blade/Rear Outrigger	6000 kg	13,230 lb
Rear Outrigger/Front Blade	6000 kg	13,230 lb
Rear Outrigger/Front Outrigger	6200 kg	13,670 lb
Buckets		
CW Bucket General Duty (GD) 1200 mm (47"), 0.91 m ³ (1.19 yd ³)	610 kg	1,340 lb
Pin-On Bucket GD 1200 mm (47"), 0.91 m ³ (1.19 yd ³)	650 kg	1,430 lb
Quick Couplers (QC)		
CW30 Dedicated Quick Coupler	220 kg	490 lb
Pin Grabber Quick Coupler	300 kg	660 lb

*Europe only.

Hydraulic System

Maximum Pressure – Implement Circuit		
Normal	35 000 kPa	5,076 psi
Heavy Lift	37 000 kPa	5,366 psi
Travel Circuit	35 000 kPa	5,076 psi
Maximum Pressure – Auxiliary Circuit		
High Pressure	35 000 kPa	5,076 psi
Medium Pressure	17 000 kPa	2,466 psi
Swing Mechanism	35 000 kPa	5,076 psi
Maximum Flow		
Implements	254 L/min	67 gal/min
Travel Circuit	210 L/min	56 gal/min
Auxiliary Circuit		
High Pressure	250 L/min	66.0 gal/min
Medium Pressure	55 L/min	14.5 gal/min
Swing Mechanism	98 L/min	25.9 gal/min
Cylinders		
Boom Cylinder (VA) – Bore	120 mm	0'5"
Boom Cylinder (VA) – Stroke	954 mm	3'2"
VAB Cylinder – Bore	140 mm	0'6"
VAB Cylinder – Stroke	743 mm	2'5"
Stick Cylinder – Bore	120 mm	0'5"
Stick Cylinder – Stroke	1147 mm	3'9"
Bucket Cylinder – Bore	100 mm	0'4"
Bucket Cylinder – Stroke	1055 mm	3'6"

Tires

Standard	10.00-20 (dual pneumatic)
Optional	11.00-20 (dual pneumatic)
	315/70R22.5 (dual pneumatic spacerless)
	445/70/R19.5 TL XF (single pneumatic)
	300-80-22.5 (dual pneumatic, spacerless)

M319 Wheel Excavator Specifications

Dozer Blade

Blade Type	Parallel	
Width	2540 mm	8'4"
Width (wide axles)	2750 mm	9'0"
Blade Roll-Over Height	570 mm	1'10"
Blade Total Height	610 mm	2'0"
Maximum Lowering Depth From Ground	130 mm	0'5"
Maximum Raising Height Above Ground	495 mm	1'7"

Vibration Levels

Maximum Hand/Arm (ISO 5349-2001)	<2.5 m/s ²	<8.2 ft/s ²
Maximum Whole Body (ISO/TR 25398:2006)	<0.5 m/s ²	<1.6 ft/s ²
Seat Transmissibility Factor (ISO 7096:2020-spectral class EM6)	<0.7	

Standards

Brakes	ISO 3450:2011
Cab Rollover Protective Structure (ROPS)	ISO 12117-2:2008
Operator Protective Guard (OPG) (Optional)	ISO 10262:1998
Cab/Sound Levels	Meets appropriate standards as listed below

Sound Performance

ISO 6395:2008 internal	70 dB(A)
ISO 6395:2008 external	98 dB(A)

- Blue Angel Certified
- External Sound – The labelled spectator sound power level represents the Guaranteed Value per 2000/14/EC amended by 2005/88/EC, when properly equipped, and is measured according to the test procedures and conditions specified in ISO 6395:2008. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Internal Sound – The operator sound pressure level is measured according to the test procedures and conditions specified in ISO 6396:2008 for a cab offered by Caterpillar, when properly installed and maintained and tested with the door and windows closed. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained for doors/windows open) for extended periods or in noisy environment(s).


Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.0 kg of refrigerant, which has a CO₂ equivalent of 1.43 metric tonnes.

M319 Wheel Excavator Specifications

Dimensions

All Dimensions are approximate. Values are with 10.00-20 Dual Pneumatic Tires.

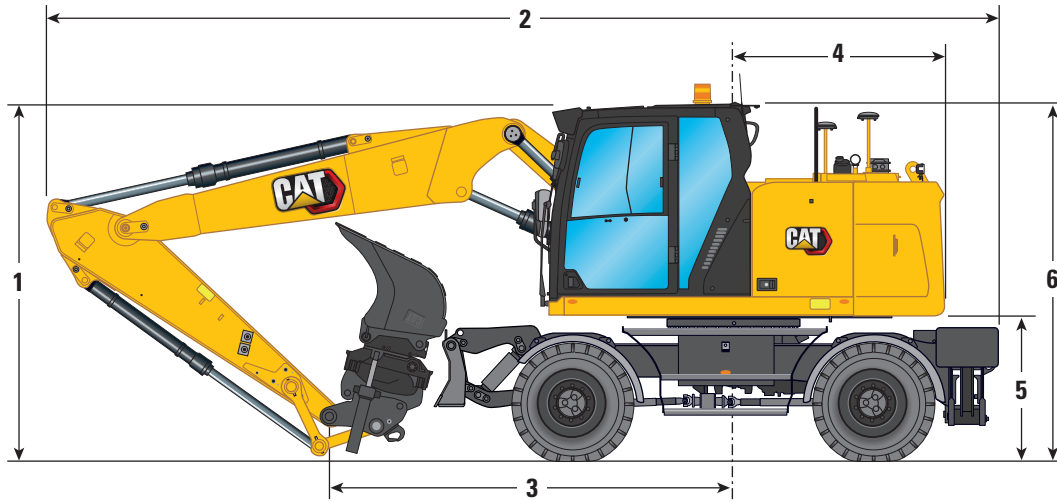

Boom Option

Variable Adjustable Boom 5.2 m (17'1")

Stick Options

2.2 m (7'3")

2.5 m (8'2")

2.9 m (9'6")

1 Shipping Height

With Operator Protective Guard (OPG) (highest point between boom and cab)

3360 mm (11'0")

3360 mm (11'0")

3380 mm (11'1")

Without OPG

3230 mm (10'7")

3250 mm (10'8")

3390 mm (11'1")

2 Shipping Length

8160 mm (26'9")

8110 mm (26'7")

8080 mm (26'6")

3 Support Point

3860 mm (12'8")

3520 mm (11'7")

3340 mm (10'11")

4 Tail Swing Radius

1900 mm (6'3")

1900 mm (6'3")

1900 mm (6'3")

5 Counterweight Clearance

1300 mm (4'3")

1300 mm (4'3")

1300 mm (4'3")

6 Cab Height

No OPG

3200 mm (10'6")

3200 mm (10'6")

3200 mm (10'6")

With OPG

3360 mm (11'0")

3360 mm (11'0")

3360 mm (11'0")

Overall Machine Width

7 Width with Outriggers on Ground

3820 mm (12'6")

3820 mm (12'6")

3820 mm (12'6")

8 Width with Outriggers Up

2540 mm (8'4")

2540 mm (8'4")

2540 mm (8'4")

9 Width with Blade

2540 mm (8'4")

2540 mm (8'4")

2540 mm (8'4")

Width with Blade (wide axles)

2750 mm (9'0")

2750 mm (9'0")

2750 mm (9'0")

10 Width with Outriggers Fully Down

3650 mm (12'0")

3650 mm (12'0")

3650 mm (12'0")

Enclosure Height (doors)

2500 mm (8'2")

2500 mm (8'2")

2500 mm (8'2")

11 Upperframe Width

2540 mm (8'4")

2540 mm (8'4")

2540 mm (8'4")

Roading Position

12 Steering Wheel to Linkage in Roading Position

3260 mm (10'8")

3250 mm (10'8")


—

13 Height in Roading Position

3970 mm (13'0")

3990 mm (13'1")

—

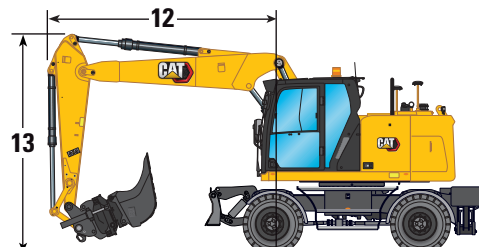

M319 Wheel Excavator Specifications

Undercarriage Dimensions


All Dimensions are approximate.

Undercarriage	Rear Blade	Rear Blade/ Front Outrigger	Rear Outrigger/ Front Blade	Rear Outrigger/ Front Outrigger
14 Overall Undercarriage Length	4440 mm (14'7")	5050 mm (16'7")	5050 mm (16'7")	4955 mm (16'3")
15 Wheel Base	2700 mm (8'10")	2700 mm (8'10")	2700 mm (8'10")	2700 mm (8'10")
16 Swing Bearing Center to Rear Axle	1250 mm (4'1")	1250 mm (4'1")	1250 mm (4'1")	1250 mm (4'1")
17 Swing Bearing Center to Front Axle	1450 mm (4'9")	1450 mm (4'9")	1450 mm (4'9")	1450 mm (4'9")
18 Rear Axle to Rear Outrigger (mid)	—	—	875 mm (2'10")	875 mm (2'10")
19 Front Axle to Front Outrigger (mid)	—	875 mm (2'10")	—	875 mm (2'10")
20 Rear Axle to Parallel Blade (end)	1200 mm (3'11")	1200 mm (3'11")	—	—
Front Axle to Parallel Blade (end)	—	—	1245 mm (4'1")	—
21 Maximum Outrigger Depth	—	120 mm (0'5")	120 mm (0'5")	120 mm (0'5")
22 Blade Width (standard axles)	2540 mm (8'4")	2540 mm (8'4")	2540 mm (8'4")	—
Blade Width (wide axles)	2750 mm (9'0")	2750 mm (9'0")	2750 mm (9'0")	—
Maximum Blade Depth Below Ground	130 mm (0'5")	130 mm (0'5")	130 mm (0'5")	—
Ground Clearance				
Lowest Step Clearance	420 mm (1'5")	420 mm (1'5")	420 mm (1'5")	420 mm (1'5")
23 Outrigger Clearance	325 mm (1'1")	325 mm (1'1")	325 mm (1'1")	325 mm (1'1")
24 Blade Clearance	495 mm (1'7")	495 mm (1'7")	495 mm (1'7")	495 mm (1'7")
25 Axle Clearance	360 mm (1'2")	360 mm (1'2")	360 mm (1'2")	360 mm (1'2")



*Maximum tire clearance with outrigger fully down




Undercarriage with dozer only



Undercarriage with 2 sets of outriggers




Undercarriage with 1 set of outriggers and dozer

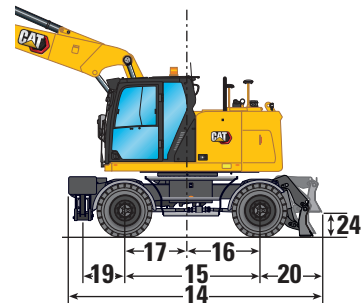

M319 Wheel Excavator Specifications

Working Ranges

All Dimensions are approximate. Values are with 10.00-20 Dual Pneumatic Tires.

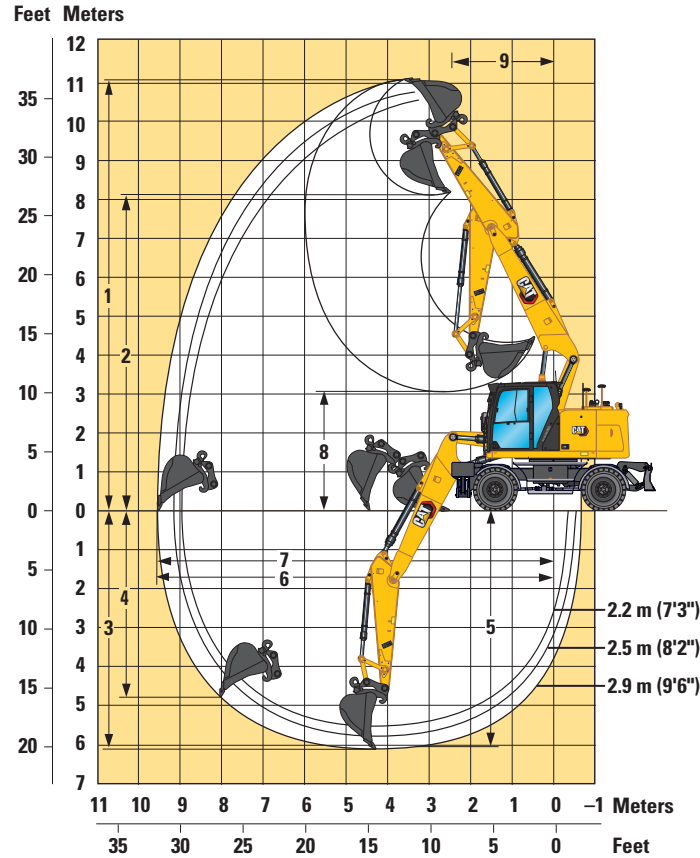

Boom Option	Variable Adjustable Boom		
	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Stick Options			
1 Maximum Cutting Height	10 520 mm (34'6")	10 740 mm (35'3")	11 110 mm (36'5")
2 Maximum Loading Height	7580 mm (24'10")	7790 mm (25'7")	8160 mm (26'9")
3 Maximum Digging Depth	5460 mm (17'11")	5750 mm (18'10")	6140 mm (20'2")
4 Maximum Vertical Wall Digging Depth	4230 mm (13'11")	4450 mm (14'7")	4830 mm (15'10")
5 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	5350 mm (17'7")	5640 mm (18'6")	6050 mm (19'10")
6 Maximum Reach	9140 mm (30'0")	9390 mm (30'10")	9610 mm (31'6")
7 Maximum Reach at Ground Line	8960 mm (29'5")	9210 mm (30'3")	9610 mm (31'6")
8 Minimum Loading Height	3780 mm (12'5")	3430 mm (11'3")	3100 mm (10'2")
9 Minimum Front Swing Radius	2150 mm (7'1")	2180 mm (7'2")	2400 mm (7'10")
Bucket Forces (ISO)	119 kN (26,752 lbf)	119 kN (26,752 lbf)	119 kN (26,752 lbf)
Stick Forces (ISO)	81 kN (18,210 lbf)	75 kN (16,861 lbf)	67 kN (15,062 lbf)
Bucket Type	GD	GD	GD
Bucket Capacity	0.91 m ³ (1.19 yd ³)	0.91 m ³ (1.19 yd ³)	0.91 m ³ (1.19 yd ³)
Bucket Tip Radius (Pin-On)	1378 mm (4'6")	1378 mm (4'6")	1378 mm (4'6")
Bucket Tip Radius (QC)	1484 mm (4'10")	1484 mm (4'10")	1484 mm (4'10")

Range values are with dual pneumatic tires (10.00-20).

Range values are calculated with a GD bucket (CW) and CW quick coupler with a tip radius of 1484 mm (4'10").

Force values are calculated with heavy lift on, a GD bucket (pin-on) and a tip radius of 1378 mm (4'6").

M319 Wheel Excavator Specifications

Lift Capacities – Variable Adjustable Boom 7'3" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 11,030 lb, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height					
	Undercarriage configuration	10 ft			15 ft			20 ft			25 ft								
																	ft		
25 ft	Free on Wheels				*12,100	*12,100	10,100										*10,100	*10,100	9,300
	Front Empty – Rear Dozer – Stabilized				*12,100	*12,100	11,200										*10,100	*10,100	*10,100
	Front Dozer – Rear Stabilizer – Stabilized				*12,100	*12,100	*12,100										*10,100	*10,100	*10,100
	Front Stabilizer – Rear Stabilizer – Stabilized				*12,100	*12,100	*12,100										*10,100	*10,100	*10,100
	Free on Wheels – Wide Axles				*12,100	*12,100	11,100										*10,100	*10,100	*10,100
20 ft	Free on Wheels				*12,900	*12,900	10,200	10,500	8,000	6,300							*8,200	7,500	6,000
	Front Empty – Rear Dozer – Stabilized				*12,900	*12,900	11,400	10,500	*10,600	7,000							*8,200	*8,200	6,700
	Front Dozer – Rear Stabilizer – Stabilized				*12,900	*12,900	*12,900	*10,600	*10,600	*10,600							*8,200	*8,200	*8,200
	Front Stabilizer – Rear Stabilizer – Stabilized				*12,900	*12,900	*12,900	*10,600	*10,600	*10,600							*8,200	*8,200	*8,200
	Free on Wheels – Wide Axles				*12,900	*12,900	11,200	*10,600	8,000	6,900							*8,200	7,600	6,600
15 ft	Free on Wheels				*14,000	12,400	9,700	10,500	7,900	6,200							*7,600	6,000	4,700
	Front Empty – Rear Dozer – Stabilized				*14,000	*14,000	10,900	10,400	*10,800	6,900							*7,600	*7,600	5,300
	Front Dozer – Rear Stabilizer – Stabilized				*14,000	*14,000	*14,000	*10,800	*10,800	10,600							*7,600	*7,600	*7,600
	Front Stabilizer – Rear Stabilizer – Stabilized				*14,000	*14,000	*14,000	*10,800	*10,800	*10,800							*7,600	*7,600	*7,600
	Free on Wheels – Wide Axles				*14,000	12,500	10,800	10,500	7,900	6,900							*7,600	6,100	5,300
10 ft	Free on Wheels				15,700	11,600	8,900	10,100	7,500	5,900							7,300	5,400	4,200
	Front Empty – Rear Dozer – Stabilized				15,600	*15,900	10,100	10,100	*11,400	6,600							7,200	*7,400	4,700
	Front Dozer – Rear Stabilizer – Stabilized				*15,900	*15,900	15,800	*11,400	*11,400	10,200							*7,400	*7,400	7,300
	Front Stabilizer – Rear Stabilizer – Stabilized				*15,900	*15,900	*15,900	*11,400	*11,400	*11,400							*7,400	*7,400	*7,400
	Free on Wheels – Wide Axles				15,800	11,600	9,900	10,200	7,600	6,600							7,300	5,400	4,700
5 ft	Free on Wheels				14,800	10,800	8,200	9,800	7,200	5,600	7,100	5,200	4,000	7,000	5,200	4,000	7,000	5,200	4,000
	Front Empty – Rear Dozer – Stabilized				14,800	*18,600	9,300	9,700	*12,400	6,300	7,000	*8,800	4,600	7,000	*7,600	4,500	7,000	*7,600	4,500
	Front Dozer – Rear Stabilizer – Stabilized				*18,600	*18,600	15,000	*12,400	*12,400	9,900	*8,800	*8,800	7,100	*7,600	*7,600	7,100	*7,600	*7,600	*7,600
	Front Stabilizer – Rear Stabilizer – Stabilized				*18,600	*18,600	18,500	*12,400	*12,400	11,900	*8,800	*8,800	8,600	*7,600	*7,600	*7,600	*7,600	*7,600	*7,600
	Free on Wheels – Wide Axles				14,900	10,800	9,200	9,800	7,200	6,200	7,100	5,200	4,500	7,100	5,200	4,500	7,100	5,200	4,500
0 ft	Free on Wheels				14,400	10,400	7,900	9,500	7,000	5,400							7,200	5,300	4,100
	Front Empty – Rear Dozer – Stabilized				14,400	*18,200	9,000	9,500	*13,300	6,100							7,200	*8,300	4,700
	Front Dozer – Rear Stabilizer – Stabilized				*18,200	*18,200	14,600	*13,300	*13,300	9,600							*8,300	*8,300	7,300
	Front Stabilizer – Rear Stabilizer – Stabilized				*18,200	*18,200	18,000	*13,300	*13,300	11,600							*8,300	*8,300	*8,300
	Free on Wheels – Wide Axles				14,500	10,500	8,800	9,600	7,000	6,000							7,300	5,300	4,600
-5 ft	Free on Wheels	*15,400	*15,400	14,300	14,400	10,400	7,800	9,500	6,900	5,300							8,100	6,000	4,600
	Front Empty – Rear Dozer – Stabilized	*15,400	*15,400	*15,400	14,300	*16,000	8,900	9,400	*11,600	6,000							8,100	*8,900	5,200
	Front Dozer – Rear Stabilizer – Stabilized	*15,400	*15,400	*15,400	*16,000	*16,000	14,600	*11,600	*11,600	9,600							*8,900	*8,900	8,200
	Front Stabilizer – Rear Stabilizer – Stabilized	*15,400	*15,400	*15,400	*16,000	*16,000	*16,000	*11,600	*11,600	11,600							*8,900	*8,900	*8,900
	Free on Wheels – Wide Axles	*15,400	*15,400	*15,400	14,500	10,400	8,800	9,500	7,000	6,000							8,200	6,000	5,100

*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M319 Wheel Excavator Specifications

Lift Capacities – Variable Adjustable Boom 2.5 m Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 5000 kg, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height				
	Undercarriage configuration	3000 mm			4500 mm			6000 mm			7500 mm							
																	mm	
9000 mm	Free on Wheels														*5750	*5750	*5750	
	Front Empty – Rear Dozer – Stabilized														*5750	*5750	*5750	
	Front Dozer – Rear Stabilizer – Stabilized														*5750	*5750	*5750	
	Front Stabilizer – Rear Stabilizer – Stabilized														*5750	*5750	*5750	
	Free on Wheels – Wide Axles														*5750	*5750	*5750	
7500 mm	Free on Wheels				*5150	*5150	4800								*3600	*3600	3600	
	Front Empty – Rear Dozer – Stabilized				*5150	*5150	*5150								*3600	*3600	*3600	
	Front Dozer – Rear Stabilizer – Stabilized				*5150	*5150	*5150								*3600	*3600	*3600	
	Front Stabilizer – Rear Stabilizer – Stabilized				*5150	*5150	*5150								*3600	*3600	*3600	
	Free on Wheels – Wide Axles				*5150	*5150	*5150								*3600	*3600	*3600	
6000 mm	Free on Wheels				*5100	*5100	4800	*4750	3800	3000					*3100	*3100	2500	
	Front Empty – Rear Dozer – Stabilized				*5100	*5100	*5100	*4750	*4750	3350					*3100	*3100	2800	
	Front Dozer – Rear Stabilizer – Stabilized				*5100	*5100	*5100	*4750	*4750	*4750					*3100	*3100	*3100	
	Front Stabilizer – Rear Stabilizer – Stabilized				*5100	*5100	*5100	*4750	*4750	*4750					*3100	*3100	*3100	
	Free on Wheels – Wide Axles				*5100	*5100	*5100	*4750	3800	3300					*3100	*3100	2750	
4500 mm	Free on Wheels				*6150	5850	4600	*4850	3700	2950					*2950	2600	2050	
	Front Empty – Rear Dozer – Stabilized				*6150	*6150	5100	*4850	*4850	3250					*2950	*2950	2300	
	Front Dozer – Rear Stabilizer – Stabilized				*6150	*6150	*6150	*4850	*4850	*4850					*2950	*2950	*2950	
	Front Stabilizer – Rear Stabilizer – Stabilized				*6150	*6150	*6150	*4850	*4850	*4850					*2950	*2950	*2950	
	Free on Wheels – Wide Axles				*6150	5850	5050	*4850	3700	3250					*2950	2600	2250	
3000 mm	Free on Wheels				*7150	5450	4200	4750	3550	2750	3350	2500	1950		*2900	2300	1800	
	Front Empty – Rear Dozer – Stabilized				*7150	*7150	4750	4700	*5150	3100	3350	*4150	2200		*2900	*2900	2050	
	Front Dozer – Rear Stabilizer – Stabilized				*7150	*7150	*7150	*5150	4750	4750	*4150	3400	*2900		*2900	*2900	*2900	
	Front Stabilizer – Rear Stabilizer – Stabilized				*7150	*7150	*7150	*5150	*5150	*5150	*4150	*4150	4050		*2900	*2900	*2900	
	Free on Wheels – Wide Axles				*7150	5450	4650	4750	3550	3050	3400	2500	2150		*2900	2350	2000	
1500 mm	Free on Wheels				6950	5050	3850	4550	3350	2600	3300	2400	1900		3050	2250	1750	
	Front Empty – Rear Dozer – Stabilized				6900	*8550	4350	4550	*5650	2950	3250	*4350	2100		3000	*3050	1950	
	Front Dozer – Rear Stabilizer – Stabilized				*8550	*8550	7000	*5650	*5650	4600	*4350	*4350	3300		*3050	*3050	*3050	
	Front Stabilizer – Rear Stabilizer – Stabilized				*8550	*8550	*8550	*5650	*5650	5550	*4350	*4350	4000		*3050	*3050	*3050	
	Free on Wheels – Wide Axles				7000	5050	4300	4600	3350	2900	3300	2450	2100		*3050	2250	1950	
0 mm	Free on Wheels				6750	4850	3650	4400	3250	2500	3250	2350	1850		3100	2300	1750	
	Front Empty – Rear Dozer – Stabilized				6700	*8500	4150	4400	*6200	2800	3200	*4600	2050		3100	*3350	2000	
	Front Dozer – Rear Stabilizer – Stabilized				*8500	*8500	6800	*6200	*6200	4450	*4600	*4600	3250		*3350	*3350	3150	
	Front Stabilizer – Rear Stabilizer – Stabilized				*8500	*8500	8400	*6200	*6200	5400	*4600	*4600	3950		*3350	*3350	*3350	
	Free on Wheels – Wide Axles				6750	4850	4100	4450	3250	2800	3250	2400	2050		3150	2300	2000	
-1500 mm	Free on Wheels				*6950	*6950	6600	6700	4800	3600	4400	3200	2450			3450	2550	1950
	Front Empty – Rear Dozer – Stabilized				*6950	*6950	*6950	6650	*7650	4150	4350	*5600	2800			3450	*3900	2200
	Front Dozer – Rear Stabilizer – Stabilized				*6950	*6950	*6950	*7650	*7650	6750	*5600	*5600	4400			*3900	*3900	3500
	Front Stabilizer – Rear Stabilizer – Stabilized				*6950	*6950	*6950	*7650	*7650	*7650	*5600	*5600	5350			*3900	*3900	*3900
	Free on Wheels – Wide Axles				*6950	*6950	*6950	6700	4800	4050	4400	3200	2750			3500	2550	2200
-3000 mm	Free on Wheels							*5850	4900	3700								
	Front Empty – Rear Dozer – Stabilized							*5850	*5850	4200								
	Front Dozer – Rear Stabilizer – Stabilized							*5850	*5850	*5850								
	Front Stabilizer – Rear Stabilizer – Stabilized							*5850	*5850	*5850								
	Free on Wheels – Wide Axles							*5850	4900	4150								

*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M319 Wheel Excavator Specifications

Lift Capacities – Variable Adjustable Boom 8'2" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 11,030 lb, heavy lift function on.

Stick Diagram	Undercarriage configuration	Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height				
		10 ft	15 ft	20 ft	25 ft	ft												
30 ft	Free on Wheels																	
	Front Empty – Rear Dozer – Stabilized																	
	Front Dozer – Rear Stabilizer – Stabilized																	
	Front Stabilizer – Rear Stabilizer – Stabilized																	
	Free on Wheels – Wide Axles																	
25 ft	Free on Wheels																	
	Front Empty – Rear Dozer – Stabilized																	
	Front Dozer – Rear Stabilizer – Stabilized																	
	Front Stabilizer – Rear Stabilizer – Stabilized																	
	Free on Wheels – Wide Axles																	
20 ft	Free on Wheels																	
	Front Empty – Rear Dozer – Stabilized																	
	Front Dozer – Rear Stabilizer – Stabilized																	
	Front Stabilizer – Rear Stabilizer – Stabilized																	
	Free on Wheels – Wide Axles																	
15 ft	Free on Wheels																	
	Front Empty – Rear Dozer – Stabilized																	
	Front Dozer – Rear Stabilizer – Stabilized																	
	Front Stabilizer – Rear Stabilizer – Stabilized																	
	Free on Wheels – Wide Axles																	
10 ft	Free on Wheels																	
	Front Empty – Rear Dozer – Stabilized																	
	Front Dozer – Rear Stabilizer – Stabilized																	
	Front Stabilizer – Rear Stabilizer – Stabilized																	
	Free on Wheels – Wide Axles																	
5 ft	Free on Wheels																	
	Front Empty – Rear Dozer – Stabilized																	
	Front Dozer – Rear Stabilizer – Stabilized																	
	Front Stabilizer – Rear Stabilizer – Stabilized																	
	Free on Wheels – Wide Axles																	
0 ft	Free on Wheels																	
	Front Empty – Rear Dozer – Stabilized																	
	Front Dozer – Rear Stabilizer – Stabilized																	
	Front Stabilizer – Rear Stabilizer – Stabilized																	
	Free on Wheels – Wide Axles																	
-5 ft	Free on Wheels																	
	Front Empty – Rear Dozer – Stabilized																	
	Front Dozer – Rear Stabilizer – Stabilized																	
	Front Stabilizer – Rear Stabilizer – Stabilized																	
	Free on Wheels – Wide Axles																	
-10 ft	Free on Wheels																	
	Front Empty – Rear Dozer – Stabilized																	
	Front Dozer – Rear Stabilizer – Stabilized																	
	Front Stabilizer – Rear Stabilizer – Stabilized																	
	Free on Wheels – Wide Axles																	

*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M319 Wheel Excavator Specifications

Lift Capacities – Variable Adjustable Boom 2.9 m Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 5000 kg, heavy lift function on.

Stick mm	Undercarriage configuration	Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height			mm			
		3000 mm	4500 mm	6000 mm	7500 mm	3000 mm	4500 mm	6000 mm	7500 mm	3000 mm	4500 mm	6000 mm	7500 mm	3000 mm	4500 mm	6000 mm				
9000 mm	Free on Wheels																	*4100	*4100	*4100
	Front Empty – Rear Dozer – Stabilized																	*4100	*4100	*4100
	Front Dozer – Rear Stabilizer – Stabilized																	*4100	*4100	*4100
	Front Stabilizer – Rear Stabilizer – Stabilized																	*4100	*4100	*4100
	Free on Wheels – Wide Axles																	*4100	*4100	*4100
7500 mm	Free on Wheels				*4500	*4500	*4500											*2950	*2950	*2950
	Front Empty – Rear Dozer – Stabilized				*4500	*4500	*4500											*2950	*2950	*2950
	Front Dozer – Rear Stabilizer – Stabilized				*4500	*4500	*4500											*2950	*2950	*2950
	Front Stabilizer – Rear Stabilizer – Stabilized				*4500	*4500	*4500											*2950	*2950	*2950
	Free on Wheels – Wide Axles				*4500	*4500	*4500											*2950	*2950	*2950
6000 mm	Free on Wheels				*4250	*4250	*4250	*4350	3850	3050								*2600	*2600	2250
	Front Empty – Rear Dozer – Stabilized				*4250	*4250	*4250	*4350	*4350	3400								*2600	*2600	2500
	Front Dozer – Rear Stabilizer – Stabilized				*4250	*4250	*4250	*4350	*4350	*4350								*2600	*2600	*2600
	Front Stabilizer – Rear Stabilizer – Stabilized				*4250	*4250	*4250	*4350	*4350	*4350								*2600	*2600	*2600
	Free on Wheels – Wide Axles				*4250	*4250	*4250	*4350	3850	3350								*2600	*2600	2450
4500 mm	Free on Wheels				*4850	*4850	4650	*4700	3750	2950	3450	2550	2000					*2450	2350	1850
	Front Empty – Rear Dozer – Stabilized				*4850	*4850	*4850	*4700	*4700	3300	3400	*3650	2250					*2450	*2450	2100
	Front Dozer – Rear Stabilizer – Stabilized				*4850	*4850	*4850	*4700	*4700	*4700	*3650	*3650	3450					*2450	*2450	*2450
	Front Stabilizer – Rear Stabilizer – Stabilized				*4850	*4850	*4850	*4700	*4700	*4700	*3650	*3650	*3650					*2450	*2450	*2450
	Free on Wheels – Wide Axles				*4850	*4850	*4850	*4700	3750	3250	3450	2550	2250					*2450	2400	2050
3000 mm	Free on Wheels				*6800	5550	4300	4750	3550	2800	3350	2500	1950					*2450	2150	1650
	Front Empty – Rear Dozer – Stabilized				*6800	*6800	4800	4750	*5000	3150	3350	*4000	2200					*2450	*2450	1900
	Front Dozer – Rear Stabilizer – Stabilized				*6800	*6800	*6800	*5000	*5000	4800	*4000	*4000	3400					*2450	*2450	*2450
	Front Stabilizer – Rear Stabilizer – Stabilized				*6800	*6800	*6800	*5000	*5000	*5000	*4000	*4000	*4000					*2450	*2450	*2450
	Free on Wheels – Wide Axles				*6800	5550	4750	4800	3550	3100	3400	2500	2200					*2450	2150	1850
1500 mm	Free on Wheels				7000	5100	3900	4550	3350	2600	3300	2400	1900					*2550	2050	1600
	Front Empty – Rear Dozer – Stabilized				6950	*8100	4400	4550	*5450	2950	3250	*4200	2100					*2550	*2550	1800
	Front Dozer – Rear Stabilizer – Stabilized				*8100	*8100	7100	*5450	*5450	4600	*4200	*4200	3300					*2550	*2550	*2550
	Front Stabilizer – Rear Stabilizer – Stabilized				*8100	*8100	*8100	*5450	*5450	*5450	*4200	*4200	4000					*2550	*2550	*2550
	Free on Wheels – Wide Axles				7050	5100	4350	4600	3400	2900	3300	2400	2100					*2550	2050	1800
0 mm	Free on Wheels				6750	4850	3650	4400	3250	2500	3200	2350	1800					*2750	2100	1600
	Front Empty – Rear Dozer – Stabilized				6700	*8550	4150	4400	*6000	2800	3200	*4450	2050					*2750	*2750	1850
	Front Dozer – Rear Stabilizer – Stabilized				*8550	*8550	6800	*6000	*6000	4450	*4450	*4450	3250					*2750	*2750	*2750
	Front Stabilizer – Rear Stabilizer – Stabilized				*8550	*8550	8400	*6000	*6000	5400	*4450	*4450	3900					*2750	*2750	*2750
	Free on Wheels – Wide Axles				6750	4850	4100	4450	3250	2750	3250	2350	2050					*2750	2100	1800
-1500 mm	Free on Wheels				*6500	*6500	*6500	6650	4750	3600	4350	3150	2400					3150	2300	1800
	Front Empty – Rear Dozer – Stabilized				*6500	*6500	*6500	6600	*7950	4100	4300	*5800	2750					*3150	*3150	2000
	Front Dozer – Rear Stabilizer – Stabilized				*6500	*6500	*6500	*7950	*7950	6700	*5800	*5800	4400					*3150	*3150	*3150
	Front Stabilizer – Rear Stabilizer – Stabilized				*6500	*6500	*6500	*7950	*7950	*7950	*5800	*5800	5350					*3150	*3150	*3150
	Free on Wheels – Wide Axles				*6500	*6500	*6500	6700	4800	4050	4350	3150	2700					*3150	2300	2000
-3000 mm	Free on Wheels				*6400	4800	3600	4400	3200	2450										
	Front Empty – Rear Dozer – Stabilized				*6400	*6400	4150	4350	*4550	2800										
	Front Dozer – Rear Stabilizer – Stabilized				*6400	*6400	*6400	*4550	*4550	4450										
	Front Stabilizer – Rear Stabilizer – Stabilized				*6400	*6400	*6400	*4550	*4550	*4550										
	Free on Wheels – Wide Axles				*6400	4850	4050	4400	3200	2750										

*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

M319 Wheel Excavator Specifications

Bucket Specifications and Compatibility – Europe

Contact your Cat dealer for special bucket requirements. Configurations calculated with wide axle width 2.5 m (8'2").

	Linkage	Width		Capacity		Weight		Fill	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	
		mm	in	m ³	yd ³	kg	lb														%
									Variable Adjustable Boom												
									2.2 m (7'3")				2.5 m (8'2")				2.9 m (9'6")				
Pin-On (No Quick Coupler)									◇	○	●	●	◇	○	●	●	X	◇	●	●	
General Duty	316	1300	51	1.00	1.31	695	1,532	100	◇	○	●	●	◇	○	●	●	X	◇	●	●	
	316	600	24	0.35	0.46	440	969	100	●	●	●	●	●	●	●	●	●	●	●	●	
	316	900	36	0.62	0.81	546	1,203	100	●	○	●	●	⊙	●	●	●	⊖	●	●	●	
	316	1200	48	0.91	1.19	658	1,450	100	○	○	●	●	○	○	●	●	◇	○	●	●	
Ditch Cleaning	316	2000	78	0.94	1.23	723	1,594	100	○	⊖	●	●	◇	○	●	●	◇	◇	●	●	
Ditch Cleaning Tilt	316	2000	79	0.86	1.12	1028	2,266	100	◇	○	●	●	X	◇	●	●	X	◇	●	●	
Maximum load with pin-on (payload + bucket)									kg	1800	2070	3390	4129	1706	1964	3226	3929	1548	1790	2968	3621
									lb	3,968	4,563	7,475	9,103	3,761	4,330	7,112	8,661	3,413	3,946	6,544	7,984

	Linkage	Width		Capacity		Weight		Fill	Variable Adjustable Boom												
		mm	in	m ³	yd ³	kg	lb		%	2.2 m (7'3")				2.5 m (8'2")				2.9 m (9'6")			
With Pin Grabber Coupler									X	◇	●	●	X	◇	●	●	X	X	⊙	●	
General Duty	316	1300	51	1.00	1.31	695	1,532	100	X	◇	●	●	X	◇	●	●	X	X	⊙	●	
	316	1100	43	0.80	1.04	632	1,392	100	◇	○	●	●	◇	○	●	●	X	◇	●	●	
	316	600	24	0.35	0.46	440	969	100	●	●	●	●	●	●	●	●	●	●	●	●	
	316	900	36	0.62	0.81	546	1,203	100	⊖	⊙	●	●	○	⊙	●	●	◇	⊖	●	●	
	316	1200	48	0.91	1.19	658	1,450	100	◇	○	●	●	X	◇	●	●	X	◇	●	●	
Ditch Cleaning	316	2000	78	0.94	1.23	723	1,594	100	X	◇	●	●	X	◇	●	●	X	X	●	●	
Ditch Cleaning Tilt	316	2000	79	0.86	1.12	1028	2,266	100	X	X	●	●	X	X	●	●	X	X	⊙	●	
Maximum load with coupler (payload + bucket)									kg	1469	1739	3060	3798	1375	1633	2895	3598	1217	1459	2638	3290
									lb	3,239	3,834	6,745	8,373	3,032	3,601	6,382	7,932	2,684	3,217	5,815	7,254

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

M319 Wheel Excavator Specifications

Bucket Specifications and Compatibility – Europe (continued)

Contact your Cat dealer for special bucket requirements. Configurations calculated with wide axle width 2.5 m (8'2").

	Linkage	Width		Capacity		Weight		Fill	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	
		mm	in	m ³	yd ³	kg	lb														%
									Variable Adjustable Boom												
									2.2 m (7'3")				2.5 m (8'2")				2.9 m (9'6")				
With CW-30 Coupler																					
General Duty	316	600	24	0.35	0.46	439	967	100	●	●	●	●	●	●	●	●	●	●	●	●	●
	316	750	30	0.49	0.64	475	1,047	100	●	●	●	●	●	●	●	●	●	●	●	●	●
	316	900	36	0.62	0.81	534	1,177	100	⊖	⊖	●	●	⊖	⊖	●	●	⊖	⊖	●	●	●
	316	1100	43	0.80	1.04	593	1,307	100	○	○	●	●	◇	○	●	●	◇	○	●	●	●
	316	1200	48	0.90	1.18	646	1,423	100	◇	○	●	●	◇	○	●	●	X	◇	○	●	●
	316	1300	51	1.00	1.31	677	1,492	100	◇	○	●	●	X	◇	●	●	X	◇	○	●	●
Heavy Duty	316	1300	51	1.00	1.31	694	1,529	100	◇	○	●	●	X	◇	●	●	X	◇	○	●	●
General Duty – Leveling Edge	316	996	39.2	0.70	0.93	586	1,291	100	⊖	⊖	●	●	○	⊖	●	●	◇	○	●	●	●
	316	1200	47	0.91	1.19	672	1,481	100	◇	○	●	●	◇	○	●	●	X	◇	○	●	●
	316	690	27	0.47	0.61	476	1,049	100	●	●	●	●	●	●	●	●	⊖	●	●	●	●
	316	790	31	0.56	0.73	509	1,122	100	⊖	●	●	●	⊖	●	●	●	⊖	⊖	●	●	●
Ditch Cleaning Tilt	316	1800	72	0.78	1.02	1048	2,310	100	X	◇	●	●	X	◇	●	●	X	X	●	●	●
	316	2000	79	0.86	1.13	1111	2,449	100	X	◇	●	●	X	X	●	●	X	X	●	●	●
Maximum load with coupler (payload + bucket)									kg	1588	1858	3178	3917	1494	1752	3014	3717	1336	1578	2756	3409
									lb	3,501	4,096	7,007	8,635	3,294	3,863	6,644	8,194	2,946	3,479	6,077	7,516

	Linkage	Width		Capacity		Weight		Fill	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	
		mm	in	m ³	yd ³	kg	lb														%
									Variable Adjustable Boom												
									2.2 m (7'3")				2.5 m (8'2")				2.9 m (9'6")				
With CW-30S Coupler																					
General Duty	316	600	24	0.35	0.46	423	932	100	●	●	●	●	●	●	●	●	●	●	●	●	●
	316	750	30	0.49	0.64	471	1,038	100	●	●	●	●	●	●	●	●	●	●	●	●	●
	316	900	36	0.62	0.81	534	1,177	100	⊖	●	●	●	⊖	⊖	●	●	○	⊖	●	●	●
	316	1100	43	0.80	1.04	593	1,307	100	○	⊖	●	●	◇	⊖	●	●	◇	○	●	●	●
	316	1200	48	0.91	1.18	646	1,423	100	◇	○	●	●	◇	○	●	●	X	◇	○	●	●
	316	1300	51	1.00	1.31	677	1,492	100	◇	○	●	●	X	◇	●	●	X	◇	○	●	●
Heavy Duty	316	1200	48	0.91	1.18	663	1,461	100	◇	○	●	●	◇	○	●	●	X	◇	○	●	●
	316	1300	51	1.00	1.31	695	1,531	100	◇	○	●	●	X	◇	●	●	X	◇	○	●	●
Ditch Cleaning Tilt	316	2000	79	0.86	1.13	1092	2,407	101	X	◇	●	●	X	X	●	●	X	X	●	●	●
Maximum load with coupler (payload + bucket)									kg	1596	1866	3186	3925	1502	1760	3022	3725	1344	1586	2764	3417
									lb	3,519	4,114	7,025	8,653	3,311	3,881	6,662	8,211	2,963	3,497	6,095	7,534

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊖ 1800 kg/m³ (3,000 lb/yd³)
- 1500 kg/m³ (2,500 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

M319 Wheel Excavator Specifications

Bucket Specifications and Compatibility – Europe (continued)

Contact your Cat dealer for special bucket requirements. Configurations calculated with wide axle width 2.5 m (8'2").

Linkage	Width		Capacity		Weight		Fill	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	
	mm	in	m ³	yd ³	kg	lb														%
No Machine Coupler, TRS14 CW30									Variable Adjustable Boom											
									2.2 m (7'3")				2.5 m (8'2")				2.9 m (9'6")			
Grading – General Duty	316	1700	67	0.65	0.85	634	1,397	100	X	◇	●	●	X	◇	●	●	X	X	●	●
Trenching – General Duty	316	660	26	0.45	0.59	395	871	100	⊖	●	●	●	○	⊙	●	●	◇	⊖	●	●
Maximum load with pin-on (payload + bucket)								kg	1078	1348	2668	3407	984	1242	2504	3207	826	1068	2246	2899
								lb	2,377	2,972	5,883	7,511	2,169	2,739	5,520	7,069	1,821	2,355	4,953	6,392
No Machine Coupler, TRS14 CW30S									Variable Adjustable Boom											
									2.2 m (7'3")				2.5 m (8'2")				2.9 m (9'6")			
Grading – General Duty	316	1600	63	0.75	0.98	595	1,311	100	X	◇	●	●	X	◇	●	●	X	X	●	●
Maximum load with pin-on (payload + bucket)								kg	1124	1394	2714	3453	1030	1288	2550	3253	872	1114	2292	2945
								lb	2,478	3,073	5,984	7,612	2,271	2,840	5,621	7,171	1,923	2,456	5,054	6,493
No Machine Coupler, TRS14 S60									Variable Adjustable Boom											
									2.2 m (7'3")				2.5 m (8'2")				2.9 m (9'6")			
Grading – General Duty	316	1500	59	0.52	0.68	511	1,127	100	○	⊙	●	●	○	⊖	●	●	◇	○	●	●
	316	1500	59	0.65	0.85	535	1,179	100	◇	⊖	●	●	◇	○	●	●	X	◇	●	●
	316	1600	63	0.75	0.98	576	1,270	100	◇	○	●	●	X	◇	●	●	X	X	●	●
Trenching – General Duty	316	540	21	0.33	0.43	320	706	100	●	●	●	●	●	●	●	●	⊙	●	●	●
								kg	1225	1495	2815	3554	1131	1389	2651	3354	973	1215	2393	3046
Maximum load with pin-on (payload + bucket)								lb	2,701	3,296	6,207	7,835	2,493	3,063	5,844	7,393	2,145	2,679	5,277	6,716
								CW30, TRS14 CW30									Variable Adjustable Boom			
									2.2 m (7'3")				2.5 m (8'2")				2.9 m (9'6")			
Grading – General Duty	316	1700	67	0.65	0.85	634	1,397	100	X	X	●	●	X	X	●	●	X	X	●	●
Trenching – General Duty	316	660	26	0.45	0.59	395	871	100	◇	⊖	●	●	X	○	●	●	X	◇	●	●
Maximum load with pin-on (payload + bucket)								kg	852	1122	2442	3181	758	1016	2278	2981	600	842	2020	2673
								lb	1,878	2,473	5,385	7,013	1,671	2,240	5,022	6,571	1,323	1,856	4,454	5,894

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

M319 Wheel Excavator Specifications

Bucket Specifications and Compatibility – Europe (continued)

Contact your Cat dealer for special bucket requirements. Configurations calculated with wide axle width 2.5 m (8'2").

	Linkage	Width		Capacity		Weight		Fill	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered														
		mm	in	m ³	yd ³	kg	lb														%													
CW30S, TRS14 CW30S									Variable Adjustable Boom																									
									2.2 m (7'3")				2.5 m (8'2")				2.9 m (9'6")																	
Grading – General Duty									316	1600	63	0.75	0.98	595	1,311	100	X	X	●	●	X	X	●	●	X	X	●	●						
Maximum load with pin-on (payload + bucket)									kg	927	1197	2517	3256	833	1091	2353	3056	675	917	2095	2748	lb	2,044	2,639	5,550	7,178	1,836	2,406	5,187	6,736	1,488	2,022	4,620	6,059
S60, TRS14 S60									Variable Adjustable Boom																									
									2.2 m (7'3")				2.5 m (8'2")				2.9 m (9'6")																	
Grading – General Duty									316	1600	63	0.75	0.98	576	1,270	100	X	◇	●	●	X	◇	●	●	X	X	●	●	X	X	●	●		
									316	1700	67	0.80	1.05	610	1,346	100	X	◇	●	●	X	X	●	●	X	X	●	●	X	X	●	●		
									316	1800	71	0.90	1.18	643	1,418	100	X	X	●	●	X	X	●	●	X	X	⊙	●	X	X	⊙	●		
Trenching – General Duty									316	540	21	0.33	0.43	540	1,190	100	⊖	●	●	●	○	●	●	●	◇	⊖	●	●	●	●	●	●	●	●
Maximum load with pin-on (payload + bucket)									kg	1084	1354	2674	3413	990	1248	2510	3213	832	1074	2252	2905	lb	2,390	2,985	5,896	7,524	2,183	2,752	5,533	7,083	1,835	2,368	4,966	6,405

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

M319 Wheel Excavator Specifications

Bucket Specifications and Compatibility – North America

Contact your Cat dealer for special bucket requirements. Configurations calculated with wide axle width 2.5 m (8'2").

	Linkage	Width		Capacity		Weight		Fill	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	
		mm	in	m ³	yd ³	kg	lb										%
										Variable Adjustable Boom							
										2.5 m (8'2")				2.9 m (9'6")			
Pin-On (No Quick Coupler)																	
General Duty	316	600	24	0.35	0.46	454	1,001	100	●	●	●	●	●	●	●	●	●
	316	750	30	0.49	0.64	516	1,137	100	●	●	●	●	●	●	●	●	●
	316	900	36	0.62	0.81	580	1,278	100	⊙	●	●	●	⊖	⊙	●	●	●
	316	1050	42	0.76	1.00	629	1,386	100	○	⊙	●	●	○	⊖	●	●	●
	316	1200	48	0.91	1.19	697	1,538	100	◇	○	●	●	◇	○	●	●	●
General Duty – Wide Tip	316	600	24	0.42	0.55	473	1,042	100	●	●	●	●	●	●	●	●	●
	316	750	30	0.58	0.76	535	1,179	100	●	●	●	●	⊙	●	●	●	●
	316	1050	42	0.90	1.18	670	1,478	100	○	⊖	●	●	◇	○	●	●	●
Severe Duty	316	600	24	0.35	0.46	505	1,113	90	●	●	●	●	●	●	●	●	●
	316	750	30	0.49	0.64	578	1,274	90	●	●	●	●	●	●	●	●	●
	316	900	36	0.62	0.81	653	1,440	90	⊙	●	●	●	⊖	●	●	●	●
	316	1050	42	0.76	1.00	708	1,561	90	⊖	⊙	●	●	○	⊖	●	●	●
	316	1200	48	0.91	1.19	785	1,731	90	◇	⊖	●	●	◇	○	●	●	●
Ditch Cleaning	316	1500	60	0.93	1.22	579	1,277	100	○	⊖	●	●	◇	○	●	●	●
	316	1500	60	0.64	0.84	830	1,829	100	○	⊙	●	●	◇	⊖	●	●	●
	316	1800	72	0.78	1.02	928	2,046	100	◇	○	●	●	X	◇	●	●	●
	316	2000	79	0.86	1.12	1043	2,299	100	X	◇	●	●	X	◇	●	●	●
Maximum load with pin-on (payload + bucket)									kg	1706	1964	3226	3929	1548	1790	2968	3621
									lb	3,761	4,330	7,112	8,661	3,413	3,946	6,544	7,984
										Variable Adjustable Boom							
										2.5 m (8'2")				2.9 m (9'6")			
With Pin Grabber Coupler																	
General Duty	316	600	24	0.35	0.46	454	1,001	100	●	●	●	●	●	●	●	●	●
	316	750	30	0.49	0.64	516	1,137	100	●	●	●	●	●	●	●	●	●
	316	900	36	0.62	0.81	580	1,278	100	⊙	●	●	●	⊖	⊙	●	●	●
	316	1050	42	0.76	1.00	629	1,386	100	○	⊙	●	●	○	⊖	●	●	●
	316	1200	48	0.91	1.19	697	1,538	100	◇	○	●	●	◇	○	●	●	●
General Duty – Wide Tip	316	600	24	0.42	0.55	473	1,042	100	●	●	●	●	●	●	●	●	●
	316	750	30	0.58	0.76	535	1,179	100	●	●	●	●	⊙	●	●	●	●
	316	1050	42	0.90	1.18	670	1,478	100	○	⊖	●	●	◇	○	●	●	●
Severe Duty	316	600	24	0.35	0.46	505	1,113	90	●	●	●	●	●	●	●	●	●
	316	750	30	0.49	0.64	578	1,274	90	●	●	●	●	●	●	●	●	●
	316	900	36	0.62	0.81	653	1,440	90	⊙	●	●	●	⊖	●	●	●	●
	316	1050	42	0.76	1.00	708	1,561	90	⊖	⊙	●	●	○	⊖	●	●	●
	316	1200	48	0.91	1.19	785	1,731	90	◇	⊖	●	●	◇	○	●	●	●
General Duty – Pin Grabber Performance	316	600	24	0.33	0.43	436	961	100	●	●	●	●	●	●	●	●	●
	316	900	36	0.57	0.75	578	1,273	100	⊙	●	●	●	⊖	●	●	●	●
Severe Duty – Pin Grabber Performance	316	1050	42	0.70	0.92	712	1,570	90	⊖	⊙	●	●	○	⊙	●	●	●
Ditch Cleaning	316	1500	60	0.93	1.22	579	1,277	100	○	⊖	●	●	◇	○	●	●	●
Ditch Cleaning Tilt	316	1500	60	0.64	0.84	830	1,829	100	○	⊙	●	●	◇	⊖	●	●	●
	316	1800	72	0.78	1.02	928	2,046	100	◇	○	●	●	X	◇	●	●	●
	316	2000	79	0.86	1.12	1043	2,299	100	X	◇	●	●	X	◇	●	●	●
Maximum load with coupler (payload + bucket)									kg	1375	1633	2895	3598	1217	1459	2638	3290
									lb	3,032	3,601	6,382	7,932	2,684	3,217	5,815	7,254

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match
 No Match
 1800 kg/m³ (3,000 lb/yd³)
 1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS

Undercarriage	Rear Outrigger/Front Blade	Rear Outrigger/Front Outrigger					
		Variable Adjustable Boom					
Boom Type	Variable Adjustable Boom	Variable Adjustable Boom					
Stick Length	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
	H120 S		✓	✓		✓	✓
Demolition and Sorting Grapples	G313 GC	✓	✓	✓	✓	✓	✓
	G314	✓	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3015 Flat Top		✓			✓	
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓
Orange Peel Grapples	GSH420-500	●	●	●	●	●	●
	GSH420-600	●	●	●	●	●	●
	GSH420-750	●	●	○	●	●	○
	GSH520-500	●	●	●	●	●	●
	GSH520-600	●	●	○	●	●	○
	GSH520-750	●	●		●	●	
	GSV420-400	●	●	●	●	●	●
	GSV420-500	●	●	●	●	●	●
	GSV420-600	●	●	●	●	●	●
	GSV420-750	●	●	○	●	●	○
	GSV520-400	●	●	●	●	●	●
	GSV520-500	●	●	●	●	●	●
	GSV520-600	●	●	○	●	●	○
	GSV520-750	●	●	○	●	●	○
	GSV520 GC-400	●	●	●	●	●	●
	GSV520 GC-500	●	●	●	●	●	●
	GSV520 GC-600	●	●	●	●	●	●
	GSV520 GC-750	●	●	○	●	●	○
Clamshell Grapples	CTV15-1000	●	○		●	○	
	CTV15-1200	○			○		

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

No Match

1800 kg/m³ (3,000 lb/yd³)

1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS (continued)

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)			Front Outriggers; Rear Blade			
		Variable Adjustable Boom			Variable Adjustable Boom			
		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	
Hydraulic Hammers	H110 S	✓	✓	✓				
	H115 GC S	✓	✓	✓				
	H115 S	✓	✓	✓				
	H120 S		✓	✓				
Demolition and Sorting Grapples	G313 GC	✓	✓	✓				
	G314	✓	✓	✓				
Mobile Scrap and Demolition Shears	S3015 Flat Top		✓					
Compactors (Vibratory Plate)	CVP75	✓	✓	✓				
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓	
Orange Peel Grapples	GSH420-500	●	●	●				
	GSH420-600	●	●	●				
	GSH420-750	●	●	○				
	GSH520-500	●	●	●				
	GSH520-600	●	●	○				
	GSH520-750	●	●					
	GSV420-400	●	●	●				
	GSV420-500	●	●	●				
	GSV420-600	●	●	●				
	GSV420-750	●	●	○				
	GSV520-400	●	●	●				
	GSV520-500	●	●	●				
	GSV520-600	●	●	○				
	GSV520-750	●	●	○				
	GSV520 GC-400	●	●	●				
	GSV520 GC-500	●	●	●				
	GSV520 GC-600	●	●	●				
	GSV520 GC-750	●	●	○				
	Clamshell Grapples	CTV15-1000	●	○				
		CTV15-1200	○					

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

No Match

1800 kg/m³ (3,000 lb/yd³)

1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS (continued)

Undercarriage		Rear Blade (Wide Undercarriage)			Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 GC S	✓	✓	✓			
	H115 S	✓	✓	✓			
	H120 S		✓	✓			
Demolition and Sorting Grapples	G313 GC	✓	✓	✓			
	G314	✓	✓	✓			
Mobile Scrap and Demolition Shears	S3015 Flat Top		✓				
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓
Orange Peel Grapples	GSH420-500	●	●	○			
	GSH420-600	●	○	○			
	GSH420-750	○	○				
	GSH520-500	●	○	○			
	GSH520-600	○	○				
	GSV420-400	●	●	●			
	GSV420-500	●	●	●			
	GSV420-600	●	○	○			
	GSV420-750	○	○				
	GSV520-400	●	●	●			
	GSV520-500	●	●	○			
	GSV520-600	○	○	○			
	GSV520-750	○					
	GSV520 GC-400	●	●	●			
	GSV520 GC-500	●	●	○			
	GSV520 GC-600	○	○	○			
GSV520 GC-750	○	○					

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

No Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade			Rear Outrigger/Front Outrigger		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 GC S		✓	✓		✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

CAT PIN GRABBER COUPLER ATTACHMENTS (continued)

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)			Front Outriggers; Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 GC S		✓	✓			
	H115 S	✓	✓	✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

CAT PIN GRABBER COUPLER ATTACHMENTS (continued)

Undercarriage		Rear Blade (Wide Undercarriage)			Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 GC S		✓	✓			
	H115 S	✓	✓	✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

No Match

CW-30s DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade			Rear Outrigger/Front Outrigger		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G313 GC		✓	✓		✓	✓
	G314		✓	✓		✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

CW-30s DEDICATED COUPLER ATTACHMENTS (continued)

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)			Front Outriggers; Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 S	✓	✓	✓			
Demolition and Sorting Grapples	G313 GC		✓	✓			
	G314		✓	✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

CW-30s DEDICATED COUPLER ATTACHMENTS (continued)

Undercarriage		Rear Blade (Wide Undercarriage)			Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 S	✓	✓	✓			
Demolition and Sorting Grapples	G313 GC		✓	✓			
	G314		✓	✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

No Match

CW-30 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade			Rear Outrigger/Front Outrigger		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G313 GC	✓	✓	✓	✓	✓	✓
	G313 GC Fixed CAN	✓	✓	✓	✓	✓	✓
	G314	✓	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3015 Flat Top		✓	✓		✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

CW-30 DEDICATED COUPLER ATTACHMENTS (continued)

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)			Front Outriggers; Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 GC S	✓	✓	✓			
	H115 S	✓	✓	✓			
Demolition and Sorting Grapples	G313 GC	✓	✓	✓			
	G313 GC Fixed CAN	✓	✓	✓			
	G314	✓	✓	✓			
Mobile Scrap and Demolition Shears	S3015 Flat Top		✓	✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

CW-30 DEDICATED COUPLER ATTACHMENTS (continued)

Undercarriage		Rear Blade (Wide Undercarriage)			Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 GC S	✓	✓	✓			
	H115 S	✓	✓	✓			
Demolition and Sorting Grapples	G313 GC	✓	✓	✓			
	G313 GC Fixed CAN	✓	✓	✓			
	G314	✓	✓	✓			
Mobile Scrap and Demolition Shears	S3015 Flat Top		✓	✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

* Working range front only

No Match

HCCW30 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Front Blade; Rear Outriggers			Front and Rear Outriggers		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S		✓	✓		✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15		✓	✓		✓	✓

HCCW30 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Front Outriggers; Rear Blade (Wide Undercarriage)			Front Outriggers; Rear Blade	
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom	
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")
Hydraulic Hammers	H110 S		✓	✓		
Compactors (Vibratory Plate)	CVP75	✓	✓	✓		
Rotary Cutters	RC15		✓	✓	✓	✓

HCCW30 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Blade (Wide Undercarriage)			Rear Blade	
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom	
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S		✓	✓		
Compactors (Vibratory Plate)	CVP75	✓	✓	✓		
Rotary Cutters	RC15		✓	✓	✓	✓*

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

No Match

S60 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade			Rear Outrigger/Front Outrigger		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G313 GC		✓			✓	
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

S60 DEDICATED COUPLER ATTACHMENTS (continued)

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)			Front Outriggers; Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 GC S	✓	✓	✓			
	H115 S	✓	✓	✓			
Demolition and Sorting Grapples	G313 GC		✓				
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

S60 DEDICATED COUPLER ATTACHMENTS (continued)

Undercarriage		Rear Blade (Wide Undercarriage)			Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 GC S	✓	✓	✓			
	H115 S	✓	✓	✓			
Demolition and Sorting Grapples	G313 GC		✓				
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

HCS60 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade			Rear Outrigger/Front Outrigger		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓

HCS60 DEDICATED COUPLER ATTACHMENTS (continued)

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)		
Boom Type		Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓
	H115 S	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓

HCS60 DEDICATED COUPLER ATTACHMENTS (continued)

Undercarriage		Rear Blade (Wide Undercarriage)		
Boom Type		Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓
	H115 S	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

HCS65 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade			Rear Outrigger/Front Outrigger		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

HCS65 DEDICATED COUPLER ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)			Front Outriggers; Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 S	✓	✓	✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

HCS65 DEDICATED COUPLER ATTACHMENTS *(continued)*

Undercarriage		Rear Blade (Wide Undercarriage)			Rear Blade		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓			
	H115 S	✓	✓	✓			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓			
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

No Match

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

TRS14 (PIN-ON TOP/S60 BOTTOM) ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade			Rear Outrigger/Front Outrigger		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 GC S		✓			✓	
	H110 S		✓			✓	
Demolition and Sorting Grapples	G212 GC		✓	✓		✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓

TRS14 (PIN-ON TOP/S60 BOTTOM) ATTACHMENTS (continued)

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)		
Boom Type		Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 GC S		✓	
	H110 S		✓	
Demolition and Sorting Grapples	G212 GC		✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓

TRS14 (PIN-ON TOP/S60 BOTTOM) ATTACHMENTS (continued)

Undercarriage		Rear Blade (Wide Undercarriage)		
Boom Type		Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 GC S		✓	
	H110 S		✓	
Demolition and Sorting Grapples	G212 GC		✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

TRS14 (S60 TOP/S60 BOTTOM) ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade		Rear Outrigger/Front Outrigger	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓

TRS14 (S60 TOP/S60 BOTTOM) ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓

TRS14 (S60 TOP/S60 BOTTOM) ATTACHMENTS *(continued)*

Undercarriage		Rear Blade (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

No Match

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

TRS14 (PIN-ON TOP/HCS60 BOTTOM) ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade			Rear Outrigger/Front Outrigger		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S		✓	✓		✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓

TRS14 (PIN-ON TOP/HCS60 BOTTOM) ATTACHMENTS (continued)

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)					
Boom Type		Variable Adjustable Boom					
Stick Length		2.2 m (7'3")		2.5 m (8'2")		2.9 m (9'6")	
Hydraulic Hammers	H110 S			✓			✓
Compactors (Vibratory Plate)	CVP75		✓		✓		✓

TRS14 (PIN-ON TOP/HCS60 BOTTOM) ATTACHMENTS (continued)

Undercarriage		Rear Blade (Wide Undercarriage)					
Boom Type		Variable Adjustable Boom					
Stick Length		2.2 m (7'3")		2.5 m (8'2")		2.9 m (9'6")	
Hydraulic Hammers	H110 S			✓			✓
Compactors (Vibratory Plate)	CVP75		✓		✓		✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

TRS14 (HCS60 TOP/HCS60 BOTTOM) ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade		Rear Outrigger/Front Outrigger	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓

TRS14 (HCS60 TOP/HCS60 BOTTOM) ATTACHMENTS (continued)

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓

TRS14 (HCS60 TOP/HCS60 BOTTOM) ATTACHMENTS (continued)

Undercarriage		Rear Blade (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – Europe (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

TRS14 (PIN-ON TOP/HCS65 BOTTOM) ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade			Rear Outrigger/Front Outrigger		
Boom Type		Variable Adjustable Boom			Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")	2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓

TRS14 (PIN-ON TOP/HCS65 BOTTOM) ATTACHMENTS (continued)

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)		
Boom Type		Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓	✓

TRS14 (PIN-ON TOP/HCS65 BOTTOM) ATTACHMENTS (continued)

Undercarriage		Rear Blade (Wide Undercarriage)		
Boom Type		Variable Adjustable Boom		
Stick Length		2.2 m (7'3")	2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match
 No Match
 1800 kg/m³ (3,000 lb/yd³)
 1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Outrigger/ Front Outrigger		Rear Blade/ Front Outrigger (Wide Undercarriage)	
		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Boom Type		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Stick Length		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G314	✓	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓		✓		✓	
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓
Orange Peel Grapples	GSH420-500	●	●	●	●	●	●
	GSH420-600	●	●	●	●	●	●
	GSH420-750	●	○	●	○	●	○
	GSH520-500	●	●	●	●	●	●
	GSH520-600	●	○	●	○	●	○
	GSH520-750	●		●		●	

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match
 No Match
 1800 kg/m³ (3,000 lb/yd³)
 1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓
	H115 GC S	✓	✓
	H115 S	✓	✓
	H120 S	✓	✓
Demolition and Sorting Grapples	G314	✓	✓
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓	
Compactors (Vibratory Plate)	CVP75	✓	✓
Rotary Cutters	RC15	✓	✓
Orange Peel Grapples	GSH420-500	●	●
	GSH420-600	●	●
	GSH420-750	●	○
	GSH520-500	●	●
	GSH520-600	●	○
	GSH520-750	●	

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Outrigger/ Front Outrigger		Rear Blade/ Front Outrigger (Wide Undercarriage)	
		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Boom Type		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

CAT PIN GRABBER COUPLER ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger	
		Variable Adjustable Boom	
Boom Type		2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓
	H115 GC S	✓	✓
	H115 S	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓
Rotary Cutters	RC15	✓	✓

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

S60 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Outrigger/ Front Outrigger		Rear Blade/ Front Outrigger (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

S60 DEDICATED COUPLER ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓
	H115 GC S	✓	✓
	H115 S	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓
Rotary Cutters	RC15	✓	✓

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

HCS60 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade		Rear Outrigger/Front Outrigger	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓

HCS60 DEDICATED COUPLER ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓
	H115 S	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

HCS65 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger/ Front Blade		Rear Outrigger/ Front Outrigger		Rear Blade/ Front Outrigger (Wide Undercarriage)	
		Variable Adjustable Boom		Variable Adjustable Boom		Variable Adjustable Boom	
Boom Type		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓
Rotary Cutters	RC15	✓	✓	✓	✓	✓	✓

HCS65 DEDICATED COUPLER ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger	
		Variable Adjustable Boom	
Boom Type		2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓
	H115 S	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓
Rotary Cutters	RC15	✓	✓

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

No Match

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

TRS14 (PIN-ON TOP/S60 BOTTOM) ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade		Rear Outrigger/Front Outrigger	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 GC S	✓		✓	
	H110 S	✓		✓	
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓

TRS14 (PIN-ON TOP/S60 BOTTOM) ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 GC S	✓	
	H110 S	✓	
Compactors (Vibratory Plate)	CVP75	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

TRS14 (S60 TOP/S60 BOTTOM) ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade		Rear Outrigger/Front Outrigger	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓

TRS14 (S60 TOP/S60 BOTTOM) ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

* Working range front only

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

TRS14 (PIN-ON TOP/HCS60 BOTTOM) ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade		Rear Outrigger/Front Outrigger	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓

TRS14 (PIN-ON TOP/HCS60 BOTTOM) ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Hydraulic Hammers	H110 S	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

* Working range front only

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

TRS14 (HCS60 TOP/HCS60 BOTTOM) ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade		Rear Outrigger/Front Outrigger	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓

TRS14 (HCS60 TOP/HCS60 BOTTOM) ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

(continued on next page)

M319 Wheel Excavator Specifications

Attachments Offering Guide – North America *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region. Configurations calculated with wide axle width 2.5 m (8'2").

Match

* Working range front only

Some attachments require more hydraulic flow and are best suited with a machine that has HP2 circuits and a tiltrotator with a high flow swivel. Check the hydraulic capability of your machine and tiltrotator and the requirements of your attachment to ensure a proper match.

TRS14 (PIN-ON TOP/HCS65 BOTTOM) ATTACHMENTS

Undercarriage		Rear Outrigger/Front Blade		Rear Outrigger/Front Outrigger	
Boom Type		Variable Adjustable Boom		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")	2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓

TRS14 (PIN-ON TOP/HCS65 BOTTOM) ATTACHMENTS *(continued)*

Undercarriage		Rear Blade/Front Outrigger (Wide Undercarriage)	
Boom Type		Variable Adjustable Boom	
Stick Length		2.5 m (8'2")	2.9 m (9'6")
Compactors (Vibratory Plate)	CVP75	✓	✓

NOTE: Use hammers on tiltrotators less than 10% of working hours per year or maximum 200 hours per year. Refer to your Operation and Maintenance Manual for recommended hydraulic flow requirements.

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOM, STICKS AND LINKAGES			HYDRAULIC SYSTEM		
5.2 m (17'1") Variable Adjustable boom	✓		Boom, stick and bucket drift reduction valves	✓	
2.9 m (9'6") stick		✓	Boom/stick lowering check valves		✓
2.5 m (8'2") stick		✓	Bucket cylinder check valves		✓
2.2 m (7'3") stick ⁽¹⁾		✓	Overload warning	✓	
Bucket linkage, 316-family with lifting eye		✓	Electronic main control valve	✓	
Bucket linkage, 316-family without lifting eye		✓	Automatic hydraulic oil warm up	✓	
ELECTRICAL SYSTEM			Element type main hydraulic filter	✓	
LED lights on chassis (left-hand, right-hand) and counterweight	✓		One-slider joysticks	✓	
Programmable time-delay LED working lights	✓		Two-slider joysticks		✓
Roading and indicator lights, front and rear	✓		Advanced Tool Control (one/two way high-pressure flow with drift reduction)	✓	
Maintenance free batteries	✓		Second high pressure auxiliary circuit (one/two way high-pressure flow)		✓
Centralized electrical disconnect switch	✓		Medium pressure auxiliary circuit (one/two way medium-pressure flow)		✓
Electrical refueling pump		✓	Heavy lift mode	✓	
ENGINE			Quick coupler circuit for Cat pin grabber and CW-dedicated coupler	✓	
Cat C4.4 Twin Turbo diesel engine – meets U.S. EPA Tier 4 Final and EU Stage V emission standards.	✓		SmartBoom™		✓
Power mode selector	✓		Ride control		✓
One-touch low idle with automatic engine speed control	✓		Cat tiltrotator support		✓
Automatic engine idle shutdown	✓		Joystick steering		✓
52°C (125°F) high-ambient cooling capacity	✓		Separate dedicated swing pump	✓	
Cold starting capability for –18°C (0°F)	✓		Automatic swing brake	✓	
Double element air filter with integrated pre-cleaner	✓		Cat BIO HYDO™ Advanced biodegradable hydraulic oil		✓
Electric fuel priming pump	✓		Adjustable hydraulic aggressiveness	✓	
On-demand electric cooling fans	✓		Pattern changer	✓	

(continued on next page)

⁽¹⁾Available in Europe only.

M319 Standard and Optional Equipment

Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
SAFETY AND SECURITY			UNDERCARRIAGE AND STRUCTURES		
Rear and right-side-view cameras	✓		All wheel drive	✓	
360° visibility		✓	Automatic brake/axle lock	✓	
Wide angle mirrors	✓		Creeper speed	✓	
Heated and remotely adjustable mirrors		✓	Electronic swing and travel lock	✓	
Travel alarm		✓	Heavy-duty axles, advanced disc brake system and travel motor, adjustable braking force	✓	
Signal/warning horn		✓	Oscillating front axle, lockable, with remote greasing point	✓	
Inspection Lighting		✓	10.00-20 16 PR, dual tires		✓
Rotating beacon on cab and chassis		✓	11.00-20 16 PR, dual tires		✓
Neutral lever (lock out) for all controls	✓		315/70R22.5, no gap dual tires		✓
Ground-level accessible secondary engine shutoff switch in cab	✓		445/70R 19.5, single tires		✓
Lockable disconnect switch	✓		300-80-22.5 dual pneumatic, spacerless tire		✓ ³
Bluetooth® receiver	✓		Steps with tool box in undercarriage (left and right)	✓	
Anti-skid plate and countersunk bolts on service platform	✓		Two-piece drive shaft	✓	
2D E-Fence		✓	Two speed hydrostatic transmission	✓	
Inspection lighting		✓	Rear blade undercarriage		✓ ³
Cab Avoidance		✓	Rear blade undercarriage wide axle gauge		✓ ³
TECHNOLOGY			Rear blade/front outrigger undercarriage		✓
Cat Equipment Management:			Rear blade/front outrigger undercarriage wide axle gauge		✓
– VisionLink®	✓ ¹		Rear outrigger/front blade undercarriage		✓
– VisionLink Productivity		✓ ²	Rear outrigger/front outrigger undercarriage		✓
– Remote Flash	✓		Fenders, front and rear, synthetic		✓
– Remote Troubleshoot	✓		Travel restraint bracket for grapple/clamshell		✓
Cat Grade:			5000 kg (11,020 lb) counterweight	✓	
– Cat Grade with 2D		✓	Trailer Package		✓ ³
– Cat Grade with 2D with Attachment Ready Option (ARO)		✓	SERVICE AND MAINTENANCE		
– Laser catcher		✓	Scheduled Oil Sampling (S·O·S SM) ports	✓	
– Cat Grade 3D Ready		✓	Automatic lubrication system for implement and swing system		✓
– Cat Grade Connectivity		✓ ²	Integrated vehicle health management system	✓	
Cat Assist:			¹ Provides core telematics data to manage health, maintenance insights, and condition monitoring. Other plans available for more comprehensive data reporting. Consult your Cat dealer for details. ² VisionLink subscription required. Consult your Cat dealer for details. ³ Europe only		
– Grade Assist		✓			
Cat Payload:					
– On-the-go weighing		✓			
– Payload/cycle information		✓			
Other:					
Cat Tiltrotator (TRS) integration		✓			

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- 75 mm (3") retractable seat belt

SAFETY AND SECURITY

- Bluetooth® key fob

GUARDS

- Operator Protective Guard (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)

M319 Cab Options

Cab Options

	Deluxe	Premium
Sound-suppressed ROPS cab	●	●
Heated seat with air-adjustable suspension	●	X
Heated and cooled seat with automatic adjustable suspension	X	●
Height-adjustable console, infinite with no tool	●	●
High-resolution 254 mm (10") LCD touchscreen monitor	●	●
Mechanical mirror	●	X
Electrical mirror	X	●
Automatic bi-level air conditioner	●	●
Jog dial and shortcut keys for monitor control	●	●
Keyless push-to-start engine control	●	●
51 mm (2") orange seat belt	●	●
Unfastened seat belt warning	●	●
Bluetooth integrated radio (including USB, auxiliary port and microphone)	●	●
Auxiliary relay	○	○
2 × 12V DC outlets	●	●
Document storage	●	●
Cup and bottle holders	●	●
Openable two-piece front window (laminated)	●	○
Fixed one-piece front window (P5A classified)*	X	○
Parallel wiper with washer	●	●
Fixed glass skylight	●	●
LED dome lights	●	●
Foot illumination	●	●
Roller rear sunscreen	X	●
Rear window emergency exit	●	●
Washable floor mat	●	●
Beacon ready	●	●
Operator Protective Guard (OPG) "ready"	●	●
Vandalism "ready"	●	●
Two LED cab lights	●	●
Rain visor	●	●

*Europe only

● Standard

○ Optional

X Not available

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

Engine

- The Cat® C4.4 engine meets U.S. EPA Tier 4 Final and EU Stage V emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).*

***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.0 kg (2.2 lb) of refrigerant which has a CO₂ equivalent of 1.43 metric tonnes (1.576 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound Performance

ISO 6395:2008 internal	70 dB(A)
ISO 6395:2008 external	98 dB(A)

- Blue Angel Certified
- External Sound – The labelled spectator sound power level represents the Guaranteed Value per 2000/14/EC amended by 2005/88/EC, when properly equipped, and is measured according to the test procedures and conditions specified in ISO 6395:2008. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Internal Sound – The operator sound pressure level is measured according to the test procedures and conditions specified in ISO 6396:2008 for a cab offered by Caterpillar, when properly installed and maintained and tested with the door and windows closed. The measurements were conducted at 70% of the maximum engine cooling fan speed.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained for doors/windows open) for extended periods or in noisy environment(s).

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Advanced hydraulic systems balance power and efficiency
 - The latest hydraulic oil filter provides longer life with a 3,000-hour replacement interval
 - Eco mode supports reduced fuel consumption for light applications
 - One-touch low idle with automatic engine speed control
 - Boost productivity and increase operating efficiency with optional Cat technologies
 - Remote Flash and Remote Troubleshoot

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2025 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. VisionLink is a trademark of Caterpillar Inc., registered in the United States and in other countries.

AEXQ4136-01 (02-2025)
Replaces AEXQ4136-00
Build Number: 07E
(Europe, N Am)

