



Shown with optional equipment.

# Cat<sup>®</sup> G3612 with ADEM<sup>™</sup>4 GAS ENGINE

Cat<sup>®</sup> G3600 ADEM<sup>™</sup>4 (A4) engines provide a wide range of power options to fit your gas compression application. G3600 A4 engines bring the highest uptime in the industry and long operating intervals between overhaul. Operators that use G3600 A4 engines in their fleet enjoy virtually no unscheduled downtime, the right power for their application, the lowest operating costs, and emissions compliance. Ideal applications for G3600 A4 engines include centralized gathering stations, gas processing, transmissions, and storage applications.

Cat G3612 A4 Gen 1 gas engine with standard ratings: 2796 kW (3750 bhp) @ 1000 rpm and Cat G3612 A4 Gen 2 gas engine with standard ratings: 2796 kW (3750 bhp) @ 1000 rpm and uprated ratings: 3076 kW (4125 bhp) @ 1000 rpm. NSPS site compliant capable.

## FEATURES AND BENEFITS:

### ENGINE DESIGN

- ADEM<sup>™</sup> 4 (A4) engine control system provides complete engine control, monitoring, and protection while maintaining emissions.
- Widest fuel tolerance in the industry for application flexibility.
- Proven reliability and durability with the lowest owning and operating costs.

### EMISSIONS

- Meets U.S. EPA Spark Ignited Stationary NSPS emissions for 2010 with the use of an oxidation catalyst.

### ADVANCED DIGITAL ENGINE MANAGEMENT

- The A4 engine management system integrates speed control, air/fuel ratio control, and ignition/detonation controls into a complete engine management system. The A4 engine has an improved user interface, display system, shutdown controls, and system diagnostics.

### FULL RANGE OF ATTACHMENTS

- Large variety of factory-installed engine attachments reduces packaging time.

### TESTING

- Every engine is full-load tested to ensure proper engine performance.

### MOVES MORE GAS, MORE POWER:

- Increased horsepower rating delivers up to 10% more gas production, helping operators boost throughput, maximizing revenue and meet growing demand.

### LOWER EMISSIONS:

- Designed to support environmental goals, this system delivers ultra-low NOx emissions (0.3 g/bhp-h) and eliminates crankcase emissions, cutting greenhouse gases and ensuring global compliance for cleaner, more sustainable operations.

### FUEL FLEXIBILITY:

- Engineered for multi-fuel use, this solution cuts fuel treatment costs while boosting efficiency and ensuring reliable performance, across all fuel types.

## Specifications

V-12, 4-Stroke-Cycle		Cooling System Capacity	
Serial Prefix	ZMC	Total	675 L (178 gal)
Bore	300 mm (11.8 in)	JW	570 L (150 gal)
Stroke	300 mm (11.8 in)	SCAC	105 L (28 gal)
Displacement	254.4 L (15,528 cu in)	Lube Oil System (refill)	1030 L (272 gal)
Aspiration	Turbocharged-Aftercooled	Oil Change Interval	5000 hours
Digital Engine Management		Rotation (from flywheel end)	Counterclockwise
Governor and Protection	Electronic (ADEM <sup>™</sup> 4)	Flywheel Teeth	255
Combustion	Low Emission (Lean Burn)		



# G3612 with ADEM™4 Gas Engine

## Technical Data

G3612 A4 Gen 2 with CCV				
Performance Number	EM7345-00	EM7346-00	EM7343-00	EM7344-00
Engine Power – bkW (hp)	2796 (3750)	2796 (3750)	3076 (4125)	3076 (4125)
Engine Speed – rpm	1000	1000	1000	1000
Max Altitude without Derate @ Rated Torque and 38 °C (100 °F) – m (ft)	3078 (11,098)	3379 (11,086)	2243 (7359)	2674 (8773)
<b>Aftercooler Temperature</b>				
Stage 1 (JW) – °C (°F)	88 (190)	88 (190)	88 (190)	88 (190)
Stage 2 (SCAC) – °C (°F)	54 (130)	54 (130)	54 (130)	54 (130)
<b>Emissions*</b>				
NO <sub>x</sub> (as NO <sub>2</sub> ) – g/bkW-h (g/bhp-h)	0.40 (0.30)	0.67 (0.50)	0.40 (0.30)	0.67 (0.50)
CO – g/bkW-h (g/bhp-h)	2.88 (2.15)	2.27 (1.69)	2.88 (2.15)	2.27 (1.69)
NMNEHC (VOCs [mol. wt. of 15.84]) – g/bk-h (g/bhp-h)	0.25 (0.19)	0.21 (0.16)	0.24 (0.18)	0.21 (0.16)
HCHO (Formaldehyde) – g/bkW-h (g/bhp-h)	0.19 (0.14)	0.20 (0.15)	0.19 (0.14)	0.19 (0.14)
Fuel Consumption (LHV) – MJ/bkW-h (btu/bhp-h)	9.55 (6749)	9.41 (6650)	9.43 (6669)	9.29 (6570)
<b>Heat Balance</b>				
Heat Rejection to Jacket Water (JW) – kW (btu/min)	715 (40,636)	696 (39,602)	765 (43,494)	743 (42,272)
Heat Rejection to Lube Oil (OC) – kW (btu/min)	329 (18,704)	331 (18,848)	333 (18,945)	336 (19,120)
Heat Rejection to Air Conditioning (A/C) – Stage 1 (1AC) – kW (btu/min)	710 (40,401)	669 (38,065)	878 (49,919)	835 (47,507)
Heat Rejection to A/C – Stage 2 (2AC) – kW (btu/min)	156 (8850)	148 (8408)	177 (10,072)	168 (9562)
Heat Rejection to Atmosphere – kW (btu/min)	325 (18,454)	315 (17,917)	320 (18,182)	315 (17,919)
<b>Exhaust System</b>				
Exhaust Temperature – Engine Outlet – °C (°F)	437 (819)	442 (828)	423 (794)	427 (800)
Gas Pressure – kPag (psig)	400-485 (58.0-70.3)	400-485 (58.0-70.3)	400-485 (58.0-70.3)	400-485 (58.0-70.3)


\*100 °F/500 ft/Natural Gas 84.7 MN, 905 LHV

## Rating Definitions and Conditions

Engine performance is obtained in accordance with SAE J1995, ISO3046/1, BS5514/1, and DIN6271/1 standards. Transient response data is acquired from an engine/generator combination at normal operating temperature and in accordance with ISO3046/1 standard ambient conditions. Also, in accordance with SAE J1995, BS5514/1, and DIN6271/1 standard reference conditions. Conditions: Power for gas engines is based on fuel having an LHV of 33.74 kJ/L (905 Btu/ cu ft) at 101 kPa (29.91 in Hg) and 15 °C (59 °F). Fuel rate is based on a cubic meter at 100 kPa (29.61 in Hg) and 15.6 °C (60.1 °F). Air flow is based on a cubic foot at 100 kPa (29.61 in Hg) and 25 °C (77 °F). Exhaust flow is based on a cubic foot at 100 kPa (29.61 in Hg) and stack temperature.

## Dimensions

All dimensions are approximate.

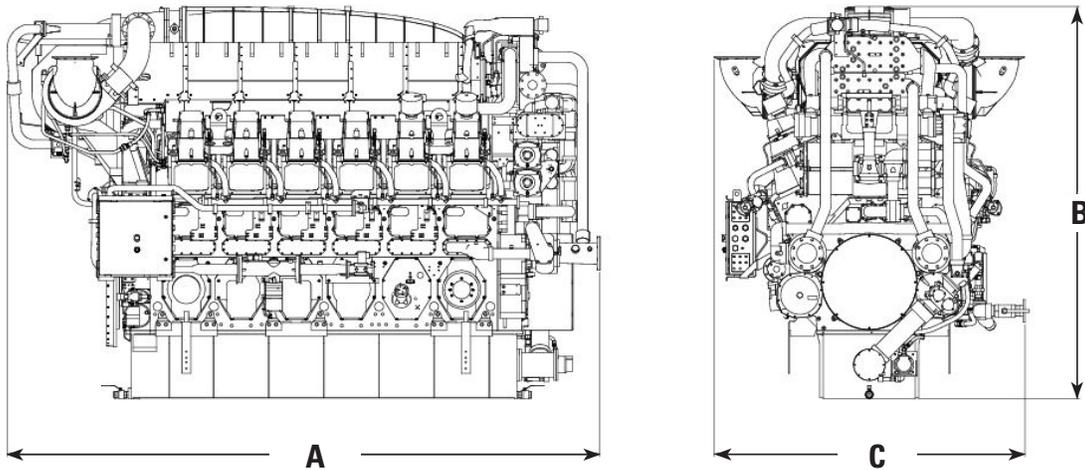

<b>A</b> Length	4955.70 mm	195.10 in	<b>C</b> Width	2782.30 mm	109.51 in
<b>B</b> Height	3279 mm	129.10 in	Weight (wet)	27 145 kg	59,845 lb

Note: Do not use for installation design. See general dimension drawings for detail. Weights and dimensions are approximations.

## Standard and Optional Equipment

### Standard Equipment

#### Air Inlet System

- Air cleaner – standard duty
- Inlet air adapter

#### Cooling System

- Compressor Oil cooler connections
- Jacket Water pump
- Aftercooler/oil cooler pump
- Jacket Water thermostats and housing
- Two-stage aftercooler
- Jacket Water heater connections
- Standard ANSI connections
- Crankcase Ventilation

#### Starting System

- Dual turbine starting motors

#### Exhaust System

- Dry exhaust manifolds
- Single vertical outlet adapter
- Dual layer heat shields
  - Layer 1: stainless steel foil
  - Layer 2: carbon steel

#### Fuel System

- Gas admission valves – electronically controlled fuel supply pressure

#### Instrumentation

- 8 inch HMI Engine Control Panel
- Interconnect Harness

#### Lubrication System

- Crankcase breather – top mounted
- Oil pan drain valve – front and rear

### OPTIONAL EQUIPMENT

#### Air Inlet System

- Heavy-duty air cleaner with pre-cleaners

#### Charging Alternator

- 35 Amp and 65 Amp charging alternators – CSA approved

#### Exhaust System

- Flexible bellows adapters

#### Fuel System

- Fuel filter
- Gas pressure regulator
- Flexible connection

#### Lubrication System

- Air or electric motor-driven prelube
- Duplex oil filter
- Oil level regulator

# G3612 with ADEM™4 Gas Engine

---

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2025 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, VisionLink™, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

LEHW21989-03 (12-2025)  
Replaces LEHW21989-02  
(Global)

