SUPERCLEAN 40 BLUE COVER

Applicable Standard - Norme di riferimento

Hose dimensions according to **ISO 11237**
Hose applications according to **EN 1829-2**

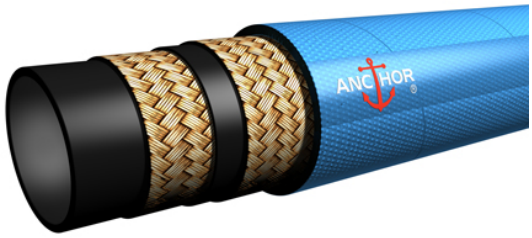

ENGLISH

Liner
Water resistant synthetic rubber

Reinforcement
Two braids of high tensile steel wire

Cover
Oil and weather resistant blue synthetic rubber

Application
High-pressure cleaning machines for cold and hot water. Not to be used in steam or high-temperature hydraulic applications

Temperature
Cold and hot water up to 150°C (302°F), with usual cleaning ingredients
Hydraulics Oils:
Water Glycol Hydraulic Fluids:
Water:
Air:

ITALIANO

Sottostrato
Gomma sintetica resistente all'acqua

Rinforzo
Due trecce di filo d'acciaio con elevata resistenza al carico di rottura

Copertura
Gomma sintetica blu resistente agli olii ed alle condizioni atmosferiche

Applicazioni
Sistemi di lavaggio ad alta pressione con acqua fredda e calda. Non usare in applicazioni con vapore o con alte temperature idrauliche

Temperatura
Utilizzo con acqua fredda e calda fino a 150°C (302°F) con comuni agenti
Olii idraulici:
Acqua, fluidi idraulici acqua e glicole:
Acqua:
Aria:

	DN	dash size	inch	mm	mm	inch	MPa	psi	MPa	psi	mm	inch	g/m	lb/ft
S40BU-5	8	-5	5/16"	7,9	16	0,63	40	5800	100	14500	85	3,35	326	0,219
S40BU-6	10	-6	3/8"	9,5	18,3	0,72	40	5800	100	14500	90	3,54	414	0,278
S40BU-8	12	-8	1/2"	12,7	21,5	0,846	40	5800	100	14500	130	5,12	532	0,357

This hose fits with SERIES 1 couplings

ANCHOR *SuperClean 40* ** */*" +150°C WP ** MPa (*** bar)

© Caterpillar Fluid Systems