


Hose applications according to **EN 1829-2** manufacturer design

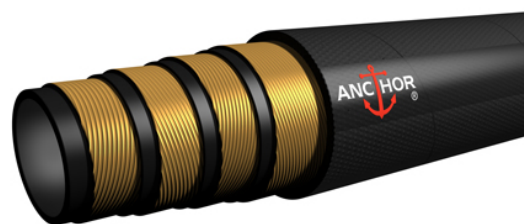

Liner

Water resistant synthetic rubber

Reinforcement

Four spirals of high tensile steel wire

Cover

Oil and weather resistant black synthetic rubber

Application

High pressure water jet machines

Temperature

Hydraulics Oils:

Water Glycol Hydraulic Fluids: from -40°C to 70°C (from -40°F to 158°F)

Water: from -10°C to 70°C (from 14°F to 158°F)

Air: up to 70°C (up to 158°F)

Sottostrato

Gomma sintetica resistente all'acqua

Rinforzo

Quattro spirali di filo d'acciaio con elevata resistenza al carico di rottura

Copertura

Gomma sintetica nera resistente agli olii ed alle condizioni atmosferiche

Applicazioni

Macchine a getto d'acqua ad alta pressione

Temperatura

Olii idraulici:

Acqua, fluidi idraulici acqua e glicole: da -40°C a 70°C (da -40°F a 158°F)

Acqua: da -10°C a 70°C (da 14°F a 158°F)

Aria: fino a 70°C (fino a 158°F)

[illegible]

This hose fits with SERIES 3 couplings