


1JC1

Applicable Standard - Norme di riferimento

ISO 12 151-5

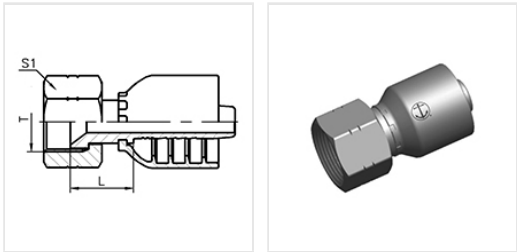

ENGLISH

JIC Female Swivel 37° Cone

ITALIANO

Femmina JIC, cono a 37°

"N" in last code digit is for solid slip-back nut

"N" nell'ultima posizione del codice indica il dado a battuta

	HEAD			DIMENSIONS									
		T	nom. fl. sz. dash sz.	L	H	S1	S2	D	L1				
1JC10403		7/16"X20	-4	14,5	0	14				5	-3	0,03	0,07
1JC10404		7/16"X20	-4	15	0	14				6	-4	0,05	0,1
1JC10504		1/2 X20	-5	15,5	0	17				6	-4	0,05	0,12
1JC10604		9/16"X18	-6	16,5	0	19				6	-4	0,06	0,12
1JC10804N		3/4"X16	-8	18	0	22				6	-4	0,07	0,16
1JC10505		1/2"X20	-5	15,5	0	17				8	-5	0,06	0,13
1JC10605		9/16"X18	-6	16,5	0	19				8	-5	0,07	0,15
1JC10606		9/16"X18	-6	16,5	0	19				10	-6	0,08	0,17
1JC10806		3/4"X16	-8	17,5	0	22				10	-6	0,08	0,19
1JC11006N		7/8"X14	-10	17,5	0	27				10	-6	0,11	0,24
1JC10808		3/4"X16	-8	18	0	22				12	-8	0,1	0,23
1JC11008		7/8"X14	-10	19	0	27				12	-8	0,13	0,28
1JC11208N		1.1/16"X12	-12	20	0	32				12	-8	0,17	0,38
1JC11010		7/8"X14	-10	20	0	27				16	-10	0,14	0,32
1JC11210		1.1/16"X12	-12	21,5	0	32				16	-10	0,19	0,42
1JC11012		7/8"X14	-10	20	0	27				19	-12	0,19	0,41
1JC11212		1.1/16"X12	-12	21,5	0	32				19	-12	0,21	0,47
1JC11412		1.3/16"X12	-14	21,5	0	36				19	-12	0,24	0,52
1JC11612N		1.5/16"X12	-16	22	0	41				19	-12	0,29	0,65
1JC11216		1.1/16"X12	-12	23	0	32				25	-16	0,32	0,7
1JC11616		1.5/16"X12	-16	23	0	41				25	-16	0,36	0,8
1JC12016		1.5/8"X12	-20	25	0	50				25	-16	0,47	1,04
1JC12020		1.5/8"X12	-20	26	0	50				31	-20	0,62	1,37
1JC12420N		1.7/8"X12	-24	26,5	0	60				31	-20	0,83	1,83
1JC12424		1.7/8"X12	-24	27.5	0	60				38	-24	0,99	2,19
1JC13224N		2.1/2"X12	-32	27	0	75				38	-24	1,34	2,94
1JC13232N		2.1/2"X12	-32	27	0	75				51	-32	1,61	3,54