


R14 SAE 100 R14







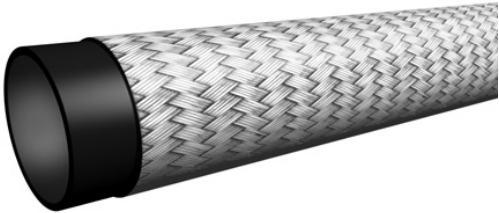








Applicable Standard  
SAE J517 100 R14

- Liner  
Seamless polytetrafluoroethylene
- Reinforcement  
One braid of high tensile steel wire
- Cover



Application  
Medium pressure PTFE lined

Temperature  
Hydraulics Oils: from -54°C to 232°C (from -65°F to 450°F)  
Water Glycol Hydraulic Fluids:  
Water:  
Air:

														
	DN	dash size	inch	mm	mm	inch	bar	psi	bar	psi	mm	inch	g/m	lb/ft
2677278	5	-3	3/16	4,8	8,2	0,332	105	1500	689	10000	50	2		
 N/A	No cover material on this hose product													
2247696	6	-4	1/4	6,4	10,1	0,397	105	1500	620	9000	75	3		
 N/A	No cover material on this hose product													
2247697	8	-5	5/16	7,9	11,6	0,456	105	1500	552	8000	100	4		
 N/A	No cover material on this hose product													
2247698	10	-6	3/8	9,5	13,4	0,527	105	1500	483	7000	125	5		
 N/A	No cover material on this hose product													
2247699	11	-7	7/16	10,3	14,3	0,562	70	1000	414	6000	135	5,25		
 N/A	No cover material on this hose product													
2247700	12	-8	1/2	12,7	16,8	0,661	56	800	414	6000	165	6,5		
 N/A	No cover material on this hose product													
2247701	16	-10	5/8	15,9	20,1	0,791	56	800	345	5000	200	7,75		
 N/A	No cover material on this hose product													
2972798	19	-12	3/4	19,1	23,3	0,917	56	800	576	4000	230	9		
 N/A	No cover material on this hose product													
2972799	22	-14	7/8	22,2	26,9	1,059	56	800	541	3500	230	9		
 N/A	No cover material on this hose product													

This hose fits with JN couplings