


2JC1

Applicable Standard - Norme di riferimento
ISO 12 151-5

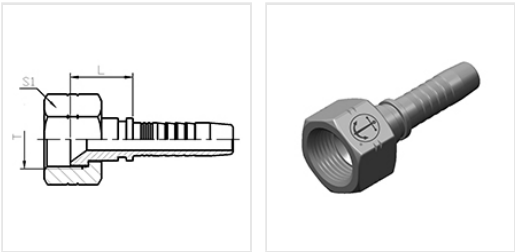

ENGLISH

JIC Female Swivel 37° Cone

ITALIANO

Femmina JIC, cono a 37°

"N" in last code digit is for solid slip-back nut

"N" nell'ultima posizione del codice indica il dado a battuta

	HEAD			DIMENSIONS									
		T	nom. fl. sz. dash sz.	L	H	S1	S2	D	L1				
2JC10404		7/16"X20	-4	16	0	14				6	-4	0,02	0,05
2JC10504		1/2"X20	-5	16,5	0	17				6	-4	0,03	0,06
2JC10604		9/16"X18	-6	17,5	0	19				6	-4	0,03	0,07
2JC10804N		3/4"X16	-8	19	0	22				6	-4	0,06	0,13
2JC10606		9/16"X18	-6	18	0	19				10	-6	0,04	0,09
2JC10806N		3/4"X16	-8	19,5	0	22				10	-6	0,05	0,11
2JC11006N		7/8"X14	-10	20	0	27				10	-6	0,08	0,18
2JC10808		3/4"X16	-8	19	0	22				12	-8	0,06	0,14
2JC11008N		7/8"X14	-10	20	0	27				12	-8	0,08	0,19
2JC11208N		1.1/16"X12	-12	21	0	32				12	-8	0,13	0,28
2JC11010		7/8"X14	-10	20,5	0	27				16	-10	0,1	0,21
2JC11210		1.1/16"X12	-12	22	0	32				16	-10	0,13	0,28
2JC11012		7/8"X14	-10	21,5	0	27				19	-12	0,12	0,26
2JC11212		1.1/16"X12	-12	23	0	32				19	-12	0,14	0,31
2JC11412N		1.3/16"X12	-14	23	0	36				19	-12	0,24	0,52
2JC11612N		1.5/16"X12	-16	23,5	0	41				19	-12	0,23	0,51
2JC11216		1.1/16"X12	-12	25	0	32				25	-16	0,22	0,47
2JC11616		1.5/16"X12	-16	24,5	0	41				25	-16	0,26	0,57
2JC12016N		1.5/8"X12	-20	26	0	50				25	-16	0,38	0,84
2JC12020		1.5/8"X12	-20	26,5	0	50				31	-20	0,4	0,88
2JC12420N		1.7/8"X12	-24	27	0	60				31	-20	0,51	1,12
2JC12424		1.7/8"X12	-24	27.5	0	60				38	-24	0,66	1,45
2JC13224N		2.1/2"X12	-32	30	0	75				38	-24	1,04	2,29
2JC13232		2.1/2"X12	-32	28	0	75				51	-32	0,96	2,12