


ISO 11237 1SC

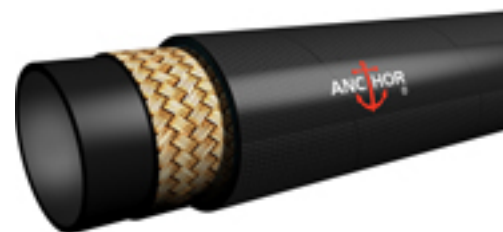

Oil resistant synthetic rubber

One braid of high tensile steel wire

High abrasion resistance (HA) synthetic rubber MSHA approved

High pressure hydraulic lines

Hydraulics Oils: from -40°C to 100°C (from -40°F to 212°F)

Water Glycol Hydraulic Fluids: from -40°C to 70°C (from -40°F to 158°F)

Water: from 0°C to 70°C (from 32°F to 158°F)

Air: up to 70°C (up to 158°F)

[illegible][illegible]

This hose fits with SERIES 1 couplings