


Manufacturer design

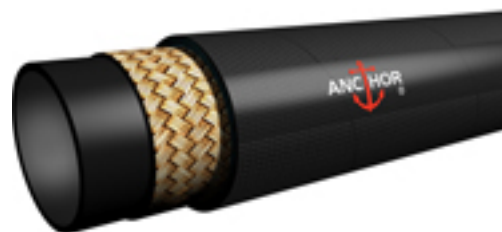

Oil resistant synthetic rubber

One braid of high tensile steel wire

Oil and weather resistant black synthetic rubber, MSHA approved, resistant to oil and weather conditions

Compact Hose no-skive for Pilot lines

Hydraulics Oils: from -40°C to 121°C (from -40°F to 250°F)

Water Glycol Hydraulic Fluids: from -40°C to 70°C (from -40°F to 158°F)

Water: from -40°C to 70°C (from -40°F to 158°F)

Air:

[illegible][illegible]

This hose fits with SERIES 1 couplings