

FLAIL MOWERS

MINI HYDRAULIC EXCAVATORS



Models

HMF110
HMF210

Machine Compatibility


305 CR, 305.5 CR, 306 CR
307.5, 308 CR, 309 CR, 310

Current machines listed. Machine model availability and attachment vary by region. Contact your local Cat® dealer for exact compatibility and availability.




Cat® Flail Mowers are designed for high performance cutting of vegetation, saplings and undergrowth from overgrown agricultural areas, retention ponds and forested terrain. The hydraulic flail mowers reduce weeds, saplings, shrubs and small trees into mulched material, making them ideal for environmental maintenance applications, such as mowing along ditches, fence rows and retention ponds, controlling overgrowth and cleaning up high banks and slopes.

FEATURES - FLAIL MOWERS



PISTON MOTOR

Piston motor is used to improve operational efficiency of tool and flow is matched to ideal machine condition.

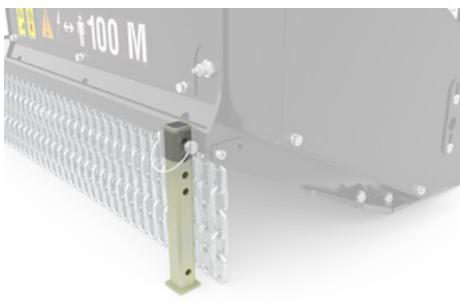

INTEGRATED REAR ROLLER

Integrated rear roller keeps swinging teeth out of the dirt as it rolls flat with the ground, preventing excess wear and extending tooth life.





BOLT-ON REPLACEABLE SKID SHOES

Bolt-on replaceable skid shoes are reinforced and built to last, yet easily replaceable as needed.

OMM CONTAINER

Tool mounted and sealed from the elements, container stores the Operation Maintenance Manual (OMM) in a protective case on the attachment.

SPECIFICATIONS - FLAIL MOWERS

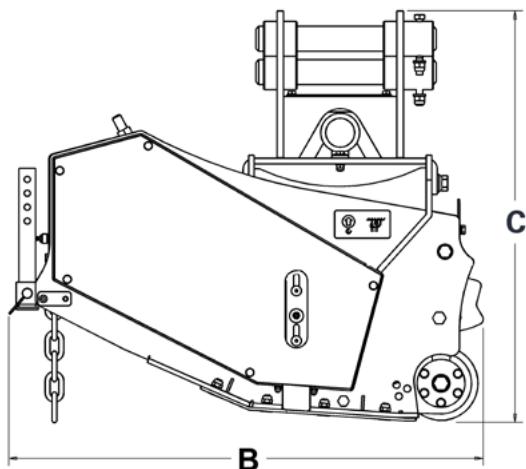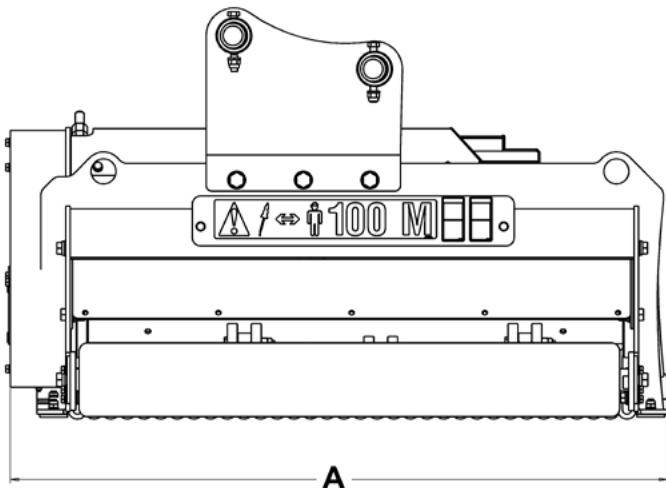

FLAIL MOWERS

| Model | HMF110 | HMF210 |
|--|----------------------|---------------------|
| Working Width – mm (in) | 1000 (39.4) | 1000 (39.4) |
| A Overall Width – mm (in) | 1184 (46.6) | 1184 (46.6) |
| B Overall Length – mm (in) | 842 (33.21) | 842 (33.1) |
| C Overall Height – mm (in) | 741 (29.2) | 766 (30.2) |
| Weight – kg (lb) | 377 (831.1) | 383 (844.4) |
| Drum Speed – rpm | 2540-2620 | 2560-2630 |
| Swinging Teeth per Drum | 16 | |
| Drive Method | V-Belt | |
| Motor | Axial Piston | |
| Maximum Cutting Diameter – mm (in) | 50 (2) | |
| Optimal Hydraulic Flow – L/min (gpm) | 50-80 (13-21) | 70-130 (18-34) |
| Optimal Hydraulic Pressure – bar (psi) | 150-250 (2175-3626) | 150-250 (2175-3626) |
| Required Hydraulics | 1st Auxiliary | |
| Interface | Pin On (Pin Grabber) | |



STANDARD TWO-YEAR WARRANTY

All flail mowers come standard with a two-year warranty to give you peace of mind when purchasing a quality Cat attachment.

For more complete information on Cat products, dealer services and industry solutions, visit us on the web
at www.cat.com

AEHQ8646-00 (2-2026)
Replaces AEHQ8047-01
(Global)

© 2026 Caterpillar. All Rights Reserved.

Materials and specifications are subject to change without notice. Featured machines in photos may include
additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the
"Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein,
are trademarks of Caterpillar and may not be used without permission.
www.cat.com www.caterpillar.com

