



CAT[®] DEO™

API CI-4 PLUS DIESEL ENGINE OIL
FOR NORTH AMERICA (CANADA,
MEXICO, UNITED STATES)

SAE 15W-40, SAE 10W-30

RECOMMENDED USE

- Tier 3 and prior engines without aftertreatment systems.
- Heavy-duty diesel engines made by other manufacturers that recommend API CI-4 PLUS, CI-4, and prior classification oils.
- Automotive gasoline engines that require API SL classification oils.

Always follow the fluid recommendations in your OMM. Contact your dealer for additional information.

DISCOVER THE DIFFERENCE

Cat[®] DEO is developed, tested, and approved by Caterpillar to meet the same high standards as all Genuine Cat Parts.

- Increased Engine Life – Resists oxidation and helps prevent buildup of deposits on pistons and rings.
- Proven Performance – Tested thoroughly in Cat diesel engines to enhance engine life and performance in all applications, including engines using high sulfur fuels.
- Long-Lasting Protection – Improved soot control and enhanced shear stability enable the oil to maintain proper viscosity for longer operating periods.
- Factory-Fill – Used as standard factory-fill for Cat engines.



CAT DEO

TYPICAL CHARACTERISTICS*

SAE viscosity grade	15W-40	10W-30
Flash point, °C (ASTM D92)	223	228
Density, g/ml @ 15°C (ASTM D4052)	0.87	0.87
Pour point, °C (ASTM D97)	-36	-42
Viscosity		
kinematic, cSt @ 40°C (ASTM D445)	110.40	80.98
kinematic, cSt @ 100°C (ASTM D445)	15.30	12.16
Viscosity index (ASTM D2270)	145	146
Sulfated ash, % wt. (ASTM D874)	1.28	1.25
TBN (ASTM D2896)	11.0	11.5
Zinc, % wt. (ASTM D4951)	0.130	0.124
Phosphorous, % wt. (ASTM D4951)	0.113	0.108

15W-40

Meets or exceeds the performance requirements of:

- API CI-4 PLUS/CI-4/CH-4/SL
- Caterpillar ECF-2
- ACEA E7-16

Can be used in engines requiring:

- Cummins CES 20078/77/76/72/71
- Mack EO-M/EO-N/EO-M PLUS/EO-N Premium Plus
- MAN 3275-1
- MB 228.3
- Renault RLD-2
- Volvo VDS-2/VDS-3

10W-30

Meets or exceeds the performance requirements of:

- API CI-4 PLUS/CI-4/CH-4/SL
- Caterpillar ECF-2

Can be used in engines requiring:

- Cummins CES 20076/71
- Mack EO-M/EO-M PLUS
- Volvo VDS-2

* The values shown are typical values and should not be used as quality control parameters to either accept or reject product. Specifications are subject to change without notice.

CAT DEALERS DEFINE WORLD-CLASS PRODUCT SUPPORT.




We offer you the right parts and service solutions, when and where you need them.

The Cat dealer network of highly trained experts helps keep your entire fleet up and running to maximize your equipment investment.

PEHJ0059-05
www.cat.com

© 2025 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, S-O-S, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

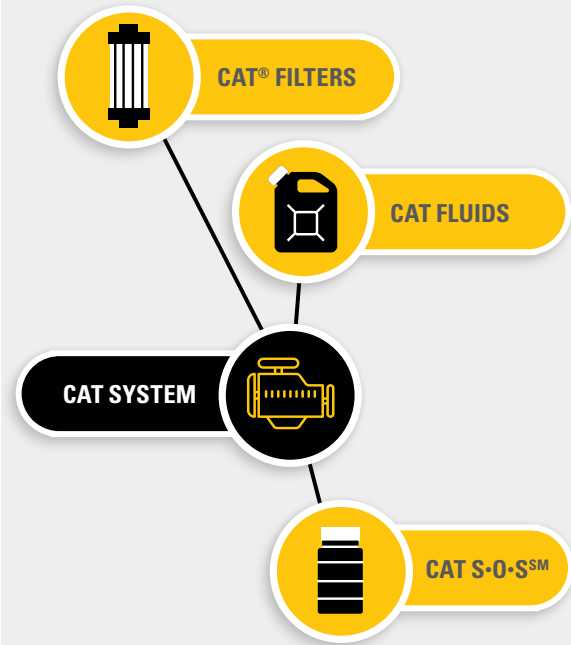

Cat filters and fluids are designed alongside Cat equipment, helping ensure optimal performance and customer value.

HEALTH AND SAFETY

Under normal conditions of intended use, this product does not pose a risk to health. Excessive exposure may result in eye, skin, or respiratory irritation. Always observe good hygiene measures. Read and understand the Safety Data Sheet (SDS) before using this product. For a copy of the SDS, visit us on the web at www.catmsds.com.

