


0.5 g/bhp-hr NOx or 1.0 g/bhp-hr NOx (NTE)

CAT® ENGINE SPECIFICATIONS

V-16, 4-Stroke-Cycle

Bore	170 mm (6.7 in.)
Stroke	190 mm (7.5 in.)
Displacement	69.3 L (4230 cu. in.)
Aspiration	Turbocharged-2 Stage Aftercooled Digital Engine Management
Governor and Protection	Electronic (ADEM™ A3)
Combustion	Low Emission (Lean Burn)
Engine Weight, net dry (approx)....	8401 kg (18,520 lb)
Power Density	8.2 kg/kW (13.4 lb/hp)
Power per Displacement	19.9 bhp/L
Total Cooling System Capacity	221.5 L (58.5 gal)
Jacket Water	204.4 L (54 gal)
SCAC	17 L (4.5 gal)
Lube Oil System (refill)	424 L (112 gal)
Oil Change Interval	1000 hour
Rotation (from flywheel end)	Counterclockwise
Flywheel and Flywheel Housing	SAE No. 00
Flywheel Teeth	183

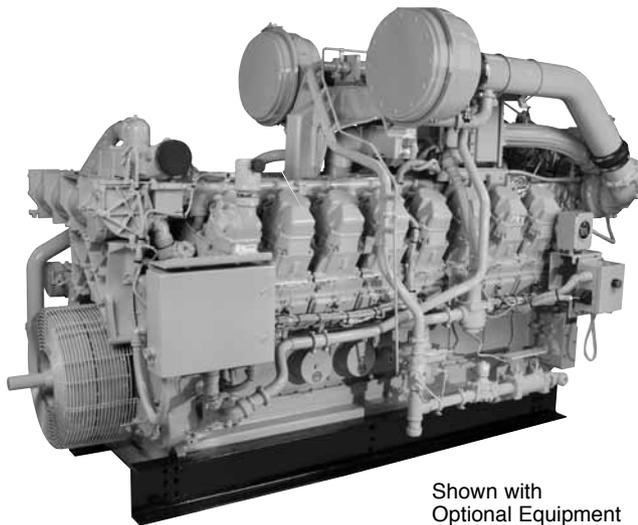

Shown with
Optional Equipment

FEATURES

Engine Design

- Built on G3500 LE proven reliability and durability
- Ability to burn a wide spectrum of gaseous fuels
- Robust diesel strength design prolongs life and lowers owning and operating costs
- Broad operating speed range at lower site air densities (high altitude/hot ambient temperatures)
- Higher power density improves fleet management
- Quality engine diagnostics
- Detonation-sensitive timing control for individual cylinders

Ultra Lean Burn Technology (ULB)

ULB technology uses an advanced control system, a better turbo match, improved air and fuel mixing, and a more sophisticated combustion recipe to provide:

- Lowest engine-out emissions
- Highest fuel efficiency
- Improved altitude and speed turndown
- Stable load acceptance and load rejection

Emissions

- Meets U.S. EPA Spark Ignited Stationary NSPS emissions for 2010
- Lean air/fuel mixture provides best available emissions and fuel efficiency for engines of this bore size

Advanced Digital Engine Management

ADEM A3 engine management system integrates speed control, air/fuel ratio control, and ignition/detonation controls into a complete engine management system. ADEM A3 has improved: user interface, display system, shutdown controls, and system diagnostics.

Full Range of Attachments

Large variety of factory-installed engine attachments reduces packaging time.

Testing

Every engine is full-load tested to ensure proper engine performance.

Gas Engine Rating Pro

GERP is a PC-based program designed to provide site performance capabilities for Cat® natural gas engines for the gas compression industry. GERP provides engine data for your site's altitude, ambient temperature, fuel, engine coolant heat rejection, performance data, installation drawings, spec sheets, and pump curves.

Product Support Offered Through Global Cat Dealer Network

More than 2,200 dealer outlets

Cat factory-trained dealer technicians service every aspect of your petroleum engine

Cat parts and labor warranty

Preventive maintenance agreements available for repair-before-failure options

S•O•SSM program matches your oil and coolant samples against Caterpillar set standards to determine:

- Internal engine component condition
- Presence of unwanted fluids
- Presence of combustion by-products
- Site-specific oil change interval

Over 80 Years of Engine Manufacturing Experience

Over 60 years of natural gas engine production

Ownership of these manufacturing processes enables Caterpillar to produce high quality, dependable products

- Cast engine blocks, heads, cylinder liners, and flywheel housings
- Machine critical components
- Assemble complete engine

Web Site

For all your petroleum power requirements, visit www.catoilandgas.cat.com.

STANDARD EQUIPMENT

Air Inlet System

Axial flow air cleaners
Service indicator
Cleanable

Cooling System

Two-stage charge air cooling:
First stage — JW + OC + 1st stage AC
Second stage — 2nd stage AC
Engine cooling and charge air cooling thermostats

Exhaust System

Dry exhaust manifolds and turbocharger housings

Flywheels and Housings

SAE 00 flywheel
SAE 00 flywheel housing
SAE standard rotation

Fuel System

Electronic fuel metering valve
Requires 7-50 psig gas supply
Gas pressure regulator
Gas shutoff valve

Instrumentation

Remote-mounted Advisor control panel
Interconnect harness

Lube System

Top-mounted crankcase breathers
Oil cooler
Oil filter and oil sampling valve
Drain valve
Turbo oil accumulator
API B16.3 approved gas/air-driven pre-lube system

Torsional Vibration Analysis

Caterpillar provided
Required through first quarter 2010

Mounting

Rails

Control Panels

4" LCD Advisor display panel
Shipped loose

Starting System

90 psi TDI starter
150 psi TDI starter

Power Take-Offs

Front housing, two sided
Front lower LH accessory drive

Protection System — Display/Alarm/Shutdown

Low oil pressure
Oil filter differential pressure
High fuel or oil temperature
Engine oil to engine coolant
Differential temperature
High coolant temperature
Engine speed
Engine load
Battery voltage
Detonation
Manifold air temperature
Coolant JW inlet/outlet pressure
Left turbo inlet temperature
Right turbo inlet temperature
Cylinder port temperature

Protection System — Display Only

Service hours
Oxygen level

General

Paint — Cat yellow
Dual 23" vibration damper with guard
CSA Certification, Class 1 Division 2 Groups C and D

OPTIONAL EQUIPMENT

Air Inlet System

Rectangular air inlet adapter
Circular air inlet adapter

Charging System

Battery Charger 20 amp

Connections

Mechanical joint assembly
Inlet connection

Exhaust System

Flexible fittings available at first production build
Elbows and mufflers

Instrumentation

Optional interconnect harness

Lube System

Shipped with lube oil

Mounting System

Rails

Power Take-Offs

Front stub shaft

Literature

Options available

Packing

TECHNICAL DATA
G3516B LE Gas Petroleum Engine — 1400 rpm***


Fuel System		0.5 g NOx NTE Rating DM8800-03	1.0 g NOx NTE Rating DM8850-02
Engine Power @ 100% Load	bkW (bhp)	1029 (1380)	1029 (1380)
Engine Speed	rpm	1400	1400
Max Altitude @ Rated Torque and 38°C (100°F)	m (ft)	1219.2 (4000)	1828.8 (6000)
Speed Turndown @ Max Altitude, Rated Torque, and 38°C (100°F)	%	25	25
Aftercooler Temperature			
Stage 1 (JW)	°C (°F)	98.9 (210)	98.9 (210)
Stage 2 (SCAC)	°C (°F)	54 (130)	54 (130)
Emissions*			
NOx	g/bkW-hr (g/bhp-hr)	0.67 (0.50)	1.34 (1.00)
CO	g/bkW-hr (g/bhp-hr)	3.26 (2.43)	3.75 (2.80)
CO ₂	g/bkW-hr (g/bhp-hr)	635 (474)	603 (449)
VOC**	g/bkW-hr (g/bhp-hr)	0.64 (0.48)	0.51 (0.38)
Fuel Consumption*** @ 100% Load	MJ/bkW-hr (Btu/bhp-hr)	10.33 (7301)	9.97 (7050)
Heat Balance			
Heat Rejection to Jacket Water @ 100% Load			
JW	bkW (Btu/mn)	412.37 (23,451)	418.9 (23,820)
OC	bkW (Btu/mn)	78.2 (4449)	78.2 (4449)
Heat Rejection to Aftercooler @ 100% Load			
1st Stage AC	bkW (Btu/mn)	94.23 (5359)	78.55 (4467)
2nd Stage AC	bkW (Btu/mn)	176.7 (10,047)	157.9 (8984)
Heat Rejection to Exhaust @ 100% Load LHV to 25° C (77° F)	bkW (Btu/mn)	1098 (62,428)	1021.9 (58,113)
Heat Rejection to Atmosphere @ 100% Load	bkW (Btu/mn)	107.34 (6110)	107.34 (6110)
Exhaust System			
Exhaust Gas Flow Rate @ 100% Load	m ³ /min (cfm)	258.4 (9126)	246.8 (8716)
Exhaust Stack Temperature @ 100% Load	°C (°F)	533.33 (992)	532.22 (990)
Intake System			
Air Inlet Flow Rate @ 100% Load	m ³ /min (scfm)	88.52 (3126)	84.70 (2991)
Gas Pressure	kPag (psig)	48-345 (7-50)	48-345 (7-50)

*at 100% load and speed, all values are listed as not to exceed

**Volatile organic compounds as defined in U.S. EPA 40 CFR 60, subpart JJJJ

***ISO 3046/1

DIMENSIONS

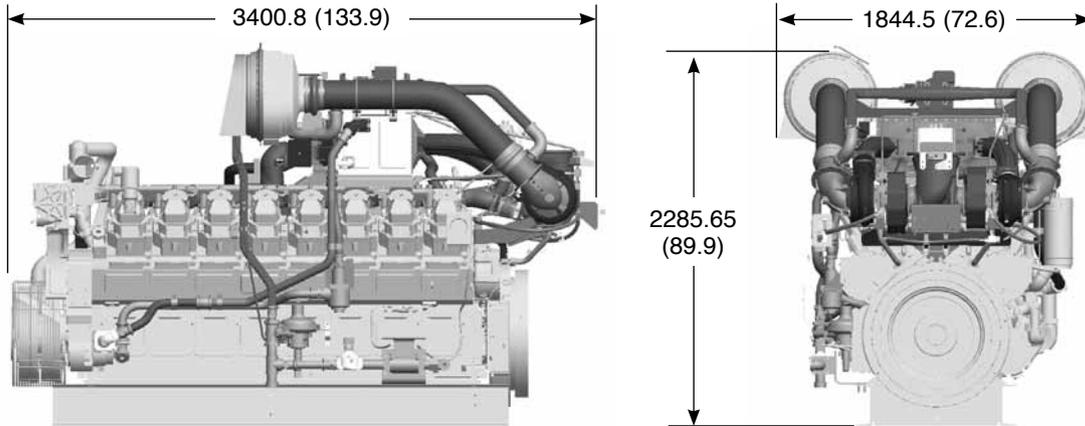

DIMENSIONS		
Length	mm (in.)	3400.8 (133.9)
Width	mm (in.)	1844.55 (72.6)
Height	mm (in.)	2285.65 (89.9)
Shipping Weight	kg (lb)	8401 (18,520)

Note: General configuration not to be used for installation.

Dimensions are in mm (inches).

RATING DEFINITIONS AND CONDITIONS

Engine performance is obtained in accordance with SAE J1995, ISO3046/1, BS5514/1, and DIN6271/1 standards.

Transient response data is acquired from an engine/generator combination at normal operating temperature and in accordance with ISO3046/1 standard ambient conditions. Also in accordance with SAE J1995, BS5514/1, and DIN6271/1 standard reference conditions.

Conditions: Power for gas engines is based on fuel having an LHV of 33.74 kJ/L (905 Btu/cu ft) at 101 kPa (29.91 in. Hg) and 15° C (59° F). Fuel rate is based on a cubic meter at 100 kPa (29.61 in. Hg) and 15.6° C (60.1° F). Air flow is based on a cubic foot at 100 kPa (29.61 in. Hg) and 25° C (77° F). Exhaust flow is based on a cubic foot at 100 kPa (29.61 in. Hg) and stack temperature.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, ADEM, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.