



3512B Land Drilling Generator Set

1245 kW (1750 kVA)
1310 bkW (1757 bhp)
50 Hz (1500 rpm)



Image shown with optional attachments.

CAT® GENERATOR SET SPECIFICATIONS

V-12, 4-Stroke-Cycle-Diesel

Emissions	Non-certified
Bore	170 mm (6.69 in)
Stroke	190 mm (7.48 in)
Displacement	52 L (3158 in ³)
Aspiration	Turbocharged-Aftercooled
Fuel System	EUI™
Engine Control and Protection	ADEM™ A3
Generator	SR4B
Voltage	600
Generator Set Control	EMCP 4.3

Note: Power rating does not include radiator fan power.

FEATURES

Product Design

- Developed specifically to meet the demands of oil and gas applications
- Latest electronics for enhanced safety, performance, and user interface
- Proven reliability and durability
- Robust base design for high durability and ideal for loading/unloading operations
- Market-leading power density
- Rugged, oversized cooling system for 50°C ambient capability at rated power
- Long overhaul life proven in oilfield applications
- Core engine components designed for reconditioning and reuse at overhaul

Ease of Installation

- Inner-outer base mounting configuration simplifies rig integration
- Wide range of attachments enable configuration flexibility
- Inner base three-point generator mounting maintains factory alignment
- Single lifting point simplifies installation work

Safety

- E-stop pushbutton on instrument panel
- Air shutoff and explosion relief valves available
- Configurable alarm, derate, and shutdown set points
- Extra alarms, inputs, and outputs available

Custom Packaging

For any petroleum application, trust Caterpillar to meet your exact needs with a factory custom package. Cat® engines, generators, enclosures, controls, radiators,

transmissions — anything your project requires — can be custom-designed and matched to meet any project requirement. Custom packages are globally supported and are covered by a one-year warranty after startup.

Testing

- Every Cat generator set is full-load tested to ensure proper engine performance.
- Standard configurations are assembled, tested, and validated as a package to ensure performance, reliability and durability.

Product Support Offered Through Global Cat Dealer Network

- More than 2,200 dealer outlets
- Cat factory-trained dealer technicians service every aspect of your Cat petroleum product
- Worldwide parts availability, service, and warranty
- Preventive maintenance agreements available for repair-before-failure options
- S•O•SSM program matches your oil and coolant samples against Caterpillar set standards to determine:
 - Internal engine component condition
 - Presence of unwanted fluids
 - Presence of combustion by-products
 - Site-specific oil change interval

Over 80 Years of Engine Manufacturing Experience

Ownership of these manufacturing processes enables Caterpillar to produce high quality, dependable products.

Web Site

For all your petroleum power requirements, visit www.catoilandgasinfo.com.



CONFIGURATION

Air Inlet System

- Corrosion-resistant aftercooler core
- Air inlet shutoff
- Air cleaner options:
 - *Regular duty
 - Heavy duty
- + Remote air inlet adapter – round 305 mm (12 in)

Control System

- ADEM A3 ECU, left-hand mounted
- Engine control options:
 - *Direct rack control 0-200 mADC, space heater and jacket water heater connection and controls
 - Cat DVR control, includes reactive droop capability, 3-phase voltage sensing, kVAR/PF modes, RFI suppression, min/max exciter limiter and exciter diode monitor, space heater and jacket water heater connection and controls
 - Direct rack control 0-200 mADC with 6 stator RTDs, 2 bearing RTDs, space heater and jacket water heater connection and controls
 - Cat DVR control, includes reactive droop capability, 3-phase voltage sensing, kVAR/PF modes, RFI suppression, min/max exciter limiter and exciter diode monitor, space heater and jacket water heater connection and controls, 6 stator RTDs, 2 bearing RTDs
- + Load sharing governor, 2301A

Cooling System

- Separate-circuit aftercooled
- Outlet controlled jacket water thermostat
- Jacket water pump – gear driven
- Dual outlet
- Aftercooler water pump – gear driven
- Aftercooler water thermostat
- Radiator options:
 - *Caterpillar supplied radiator, 46/CVD-0.520 ratio, includes blower fan, fan drive, pulley, belt guard, coolant level sensor, regulator, and fuel cooler
 - Remote cooling connection RH
 - Remote cooling connection LH
 - Customer provided radiator
 - Custom radiator
- Cooling system connection options (for use with customer-supplied radiator):
 - Dual outlet coupling-type connections
 - Dual outlet hose and clamp-type connections
- Fan drive and belt guard (for use with remote and customer-supplied radiators)
- Fan pulley options (for use with customer-supplied radiator):
 - Front stub shaft
 - Front stub shaft with 197 mm pulley
 - Front stub shaft with 248 mm pulley
 - Custom
- + Coolant level sensor

Exhaust System

- Dry exhaust manifold
- Dual turbochargers, water cooled bearings
- Adapter, “Y,” converts two 203 mm (8 in) to one 356 mm (14 in) outlet
- Weldable exhaust flanges (2), 250.95 mm
- + Elbow, 356 mm (14 in)
- + Muffler, 356 mm (14 in), spark arresting, includes companion flanges, clean out-box, and spark box

Flywheel and Housing

- SAE No. 00 flywheel
- SAE No. 00 flywheel housing
- SAE standard rotation

Fuel System

- Fuel transfer pump
- Fuel return line with flexible connection
- Electronic unit injectors
- Fuel filter options:
 - *Fuel filter simplex (LH) with priming pump (LH)
 - Custom fuel filter
- + Primary fuel filter
- + Primary fuel filter with water separator

Generator Attachments

- Generator terminal box options:
 - Barrel-mounted petroleum terminal box
 - Barrel-mounted petroleum terminal box with air filter and pressure differential switch
- + Current transformers (3)
- + Cable access box

Instrumentation

- Emergency stop button
- Analog gauges:
 - Fuel pressure
 - Engine oil pressure
 - Engine oil temperature
 - Engine coolant temperature
 - DC voltage
 - Engine percent load
- EMCP 4.3 control panel
 - 5.5 inch graphical display
 - 16 languages supported
 - Engine/generator monitoring and protection
 - CAN, RS 485 MODBUS, Ethernet communications supported
 - Remote e-stop/start/stop
 - Engine start and crank attempt counter
- Thermocouple options:
 - Thermocouples installed, one per cylinder
 - *No thermocouples included
- Service port connector
- Customer connection terminal blocks
- + Communications module PL1000T
- + Communications module PL1000E

*Denotes which option is included in the standard configuration

+ Optional attachment



CONFIGURATION (continued)

Lubrication System

- Crankcase breather
- Oil cooler
- Shallow oil pan
- Oil drain extension, 2 in NPT female connection
- Oil filter options:
 - *Simplex oil filter
 - Custom oil filter
- Centrifugal oil filter options:
 - RH installed centrifugal oil filter
 - *No centrifugal oil filter included
- Lubricating oil options:
 - SAE15W40, Caterpillar DEO, 500 hour
 - *No lubricating oil included
- + Crankcase fumes disposal
- + Oil level regulator

Mounting System

- Inner base options:
 - *4.19 m (165 in) length, 412 mm (16.2 in) height tubes, 1.18 m (50.5 in) wide
 - Custom base
- Outer base options:
 - *No outer base included
 - Custom outer base
- + Package isolator supports (3), for mounting inner base to customer-supplied base

Power Take-off

- Charging alternator options
 - *No alternator
 - Alternator, 24V, 60A

Protection System

- Alarms:
 - ECU voltage
 - Oil pressure
 - Low/high water temperature

- Overspeed
- Crankcase pressure
- Aftercooler temperature
- Low water level (optional)
- Air inlet restriction
- Exhaust stack temperature
- Oil/fuel filter differential pressure

Derate:

- High water temperature
- Crankcase pressure
- Aftercooler temperature
- Air inlet restriction
- Exhaust temperature

Shutdown:

- Oil pressure
- Low/high water temperature
- Overspeed
- Crankcase pressure
- Aftercooler temperature

Explosion relief valve options:

- Explosion relief valves (3)
- *No explosion relief valves
- + Metal particle detector switch
- + Metal particle detector with annunciator

Starting System

- Starting motor options:
 - *TDI air starting motor, RH – 1034 kPa (150 psi)
 - Custom starting motor
- + Air pressure regulator

General

- Barring group options:
 - LH installed engine barring group
 - *No barring group included
- + Jacket water heater

*Denotes which option is included in the standard configuration

+ Optional attachment



TECHNICAL DATA

3512B Land Drilling Generator Set — 1500 rpm

	Units	DM8458
Generator Set Data		
Rated power	ekW	1245
kVA rating	kVA	1750
Rated power factor		0.7
Frequency	Hz	50
Engine Data		
Engine power	bkW (bhp)	1310 (1757)
Engine speed	rpm	1500
Max. altitude without derate	m (ft)	1500 (4921)
BMEP	kPa (psi)	2025 (294)
BSFC @ 100% load	g/bkW-hr (lb/bhp-hr)	201 (0.33)
BSFC @ 75% load	g/bkW-hr (lb/bhp-hr)	204 (0.33)
BSFC @ 50% load	g/bkW-hr (lb/bhp-hr)	208 (0.34)
BSFC @ 25% load	g/bkW-hr (lb/bhp-hr)	225 (0.37)
Fuel consumption (nominal)	L/hr (gal/hr)	313.8 (82.9)
Air flow rate (@25°C, 101.3 kPa)	m ³ /min (ft ³ /min)	100 (3531)
Inlet manifold pressure	kPa (psi)	225.4 (32.7)
Inlet manifold temperature	°C (°F)	77 (170.6)
Aftercooler water temperature	°C (°F)	60 (140)
Jacket water temperature	°C (°F)	99 (210)
Exhaust stack temperature	°C (°F)	448.4 (839)
Exhaust flow rate (@ stack temp, 101.3 kPa)	m ³ /min (ft ³ /min)	254.5 (8988)
Lube oil system capacity	L (gal)	318 (84)
Engine coolant capacity	L (gal)	157 (41)
Radiator coolant capacity (JW)	L (gal)	197 (52)
Radiator coolant capacity (AC)	L (gal)	197 (52)
Oil change interval	Hours	500
Generator Data		
Frame size		826
Efficiency		95%
Voltage	Volts	600
Design kVA rating	kVA	1900
Insulation class		H
Temperature rise (@ 40°C ambient temp)	°C	80
Coastal protection		Included
Excitation		PM
Number of poles		4
Winding		Form wound
Pitch		0.8
Number of leads		6
Number of bearings		2
Ingress protection (IP) rating		23
Alignment		Close coupled
Space heater	W	1200
RTDs per phase		2
RTD resistance	Ohm	10



ALTITUDE AND AMBIENT DERATION FACTORS

	10°C	20°C	30°C	40°C	50°C
0 m	1.00	1.00	1.00	1.00	1.00
300 m	1.00	1.00	1.00	1.00	1.00
500 m	1.00	1.00	1.00	1.00	1.00
1000 m	1.00	1.00	1.00	1.00	0.97
1500 m	1.00	1.00	0.97	0.94	0.91
2000 m	0.98	0.94	0.91	0.88	0.85
2500 m	0.92	0.89	0.86	0.83	0.80
3000 m	0.86	0.83	0.80	0.78	0.75
3200 m	0.84	0.81	0.78	0.76	0.74

EMCP 4.3 FEATURES

140 mm (5.5 in) Graphical Display

- Generator AC voltage
- 3-phase (L-L & L-N)
- ± 0.25% accuracy
- rpm and battery voltage
- Generator AC current (per phase and average)
- Generator frequency
- Power metering (kW, kVA, kVA_r, pf)
- Hour meters (kW-hour, kVA_r-hour)
- Engine oil pressure (psi, kPa or bar)
- Engine oil temperature (°C or °F)
- Engine coolant temperature (°C or °F)
- Multiple language support
- Engine start and crank attempt counter
- Real time clock

Communication

- Accessory CAN data link
- RS-485 annunciator data link
- RS-485 SCADA (Modbus RTU)
- Ethernet SCADA (Modbus TCP)

Controls

- Auto/start/stop
- Engine cooldown timer
- Emergency stop
- Engine cycle crank
- Programmable cycle timer

Generator Set Protection

- Over/under voltage
- Over/under frequency
- Generator phase sequence
- Over current (timed and inverse)
- Reverse kW, kVA
- Current balance
- Low oil pressure
- High coolant temp
- Low coolant level
- Fail to start
- Overspeed

Outputs

- 16 programmable digital outputs
- 3 programmable (4-20mA or ±10V)
- 2 programmable (PWM)

Inputs

- Emergency stop
- Remote start
- 12 programmable digital inputs
- Oil pressure and water temperature
- 3 programmable inputs (±10V, PWM, current, or resistive)
- Oil temperature, fuel level

Other Features


- 16 languages supported:
 - Arabic - Greek
 - Chinese - Italian
 - Danish - Japanese
 - Dutch - Portuguese
 - English - Russian
 - Finnish - Spanish
 - French - Swedish
 - German - Turkish
- Programmable security levels
- Reduced power mode
- Programmable kW relay
- Cat switchgear integration
- Status event log



3512B LAND DRILLING GENERATOR SET

1245 kW 50 Hz

LAND DRILLING GENERATOR SET

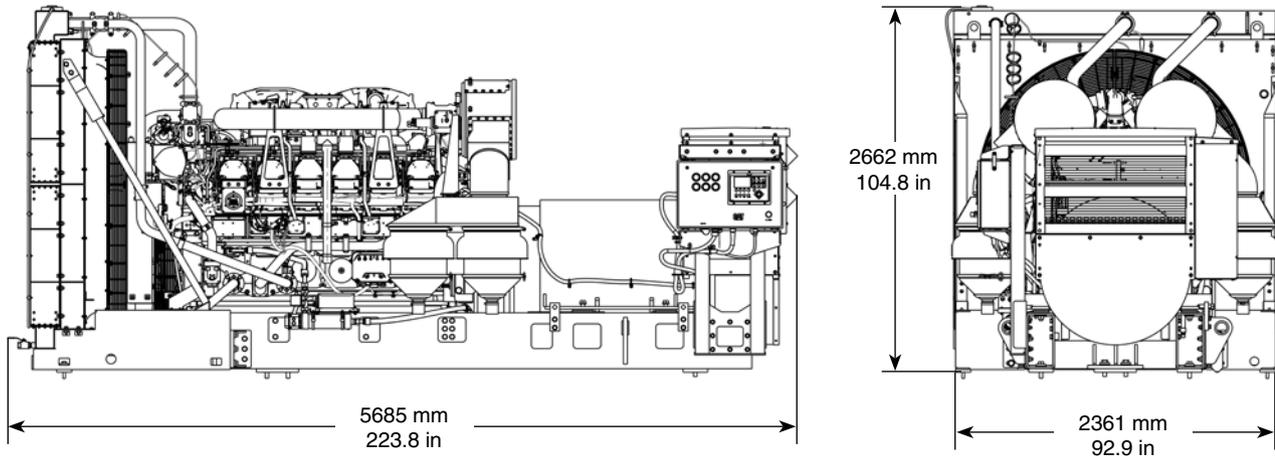

Generator Set Dimensions		
Length	5685 mm	223.8 in
Width	2361 mm	92.9 in
Height	2662 mm	104.8 in
Weight	13 545 kg	29,861 lb

*Generator set weight is dry and includes engine, generator, and base.

Note: Do not use for installation design. See installation drawing for details.

RATING DEFINITIONS AND CONDITIONS

Performance is obtained and corrected in accordance with ISO 3046/1. Reference atmospheric inlet air: 100 kPa (29.61 in Hg), 25°C (77°F), 30% relative humidity at stated aftercooler temperature. Performance is also in accordance with SAE J1995, BS5514/1, and DIN6271/1 standard reference conditions, Reference fuel: #2 distillate diesel with a 35 degree API gravity, lower heating value is 42 780 kJ/kg (18,390 Btu/lb) when used at 29°C (84.2°F), where the density is 838.9 g/L (7.001 lb/gal).

Engines are equipped with standard accessories; lube oil pump, fuel pump, aftercooler water pump, and jacket water pump. The power required to drive auxiliaries must be deducted from the gross output to arrive at the net power available for the external (flywheel) load. Typical auxiliaries include cooling fans, air compressors, and charging alternators.

- Power tolerance is +/- 5%
- Exhaust stack temperature tolerance is +/- 8%
- Inlet airflow rate tolerance is +/- 5%
- Intake manifold pressure tolerance is +/- 10%
- Exhaust flow rate tolerance is +/- 6%
- Fuel rate tolerance is +/- 5%
- Heat rejection tolerance is +/- 5%
- Exhaust heat rejection tolerance is +/- 10%
- Wet exhaust mass flow rate

Information contained in this publication may be considered confidential. Discretion is recommended when distributing. Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, ADEM, EUI, S•O•S, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.