
SAFE LOCK by Kwikset



DAYLON Lever

- ANSI/BHMA Grade 3 certified security
- 3-hour UL fire-rated product available
- ADA Compliant
- Push button locking feature

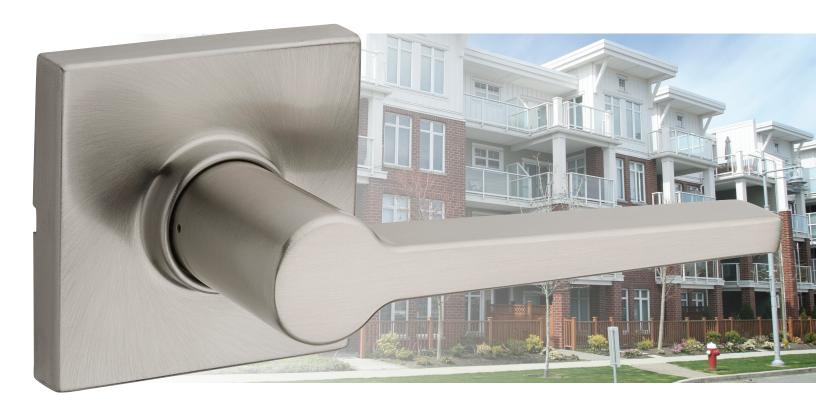

Keyed function interior passage for storeroom in Satin Nickel



Privacy function interior push-button in Polished Chrome



Keyed function interior push-button in Matte Black

SAFE LOC by Kwikset.

Specifications

| Door Prep | Cross Bore 2-1/8", Edge Bore 1" | |
|----------------|--|--|
| Backset | Adjustable 2-3/8" or 2-3/4". | |
| Door Thickness | 1-3/8" - 1-3/4" standard doors | |
| Cylinder | Traditional 5-Pin, Pin & Tumbler | |
| Faceplates | 1" x 2-1/4" Round corner or drive-in | |
| Strikes | Knob/lever: 2-¼"full lip, specify round corner | |
| Bolt | Knob/Lever: ½" Throw | |
| Door Handing | Non-handed | |
| ANSI/BHMA | Grade 3 certified | |
| UL | Meets 3 hour UL fire rating for SL1002 and SL6002. Optional 1/3 hour UL fire rating for SL1000 and SL6000. | |

Function Availability

| Model No. | Description (ANSI/BHMA functions are listed in italics) |
|-------------|--|
| 1000/1002UL | Passage/Hall/Closet: Both levers always freeF75 |
| 4000 | Privacy/Bed/Bath: Both levers locked or unlocked by push button inside. Outside knob unlocked by emergency keyF76 |
| 6000/6002UL | Entry: Both levers locked or unlocked by key outside or push button inside. $-F82$ |
| 6500 | Storeroom/Vestibule: Outside unlocked only while key is turned. Inside always free. <i>-F86</i> |
| 7000 | Half Dummy Trim, Surface Mounted: For doors where only a pull is required. No operation. <i>-Int</i> . |

Available Finishes







514 Matte Black



15 Satin Nickel



26D Satin Chrome





