

SMARTCODE™ 912 LEVER FEATURING ZIGBEE® HA1.2

Model #: 912

Function: Keyed Entry Lever



Convenience

- Backlit keypad with one-touch locking
- Motorized locking mechanism enables true remote locking & unlocking
- Tapered deadbolt design permits misaligned doors to lock & unlock with ease
- SmartKey® easy re-key backup keyway
- Interior LED status indicator—Locked/Unlocked status & low battery status
- Auto re-lock feature—locks door 30-seconds after unlocking

Security

- 30 user access code capacity, 4-8 digit code length
- 128-bit Advanced Encryption Standard (AES) communication
- Drill and pick resistant backup keyway with BumpGuard™ protection
- Independent, local user authentication - No controller connectivity required
- User settings stored on lock memory - settings remain even in case of a power outage

Customizable Features

- Auto re-lock 30-seconds after unlocking - ON/OFF
- Interior LED locked/unlocked status - ON/OFF
- Audible feedback - ON/OFF

Specifications

Electrical:

Input Power 6V (4 x AA alkaline batteries)

Mechanical:

Door Prep 2 1/8" diameter face hole & 1" diameter latch hole

Backset Adjustable 2 3/8" or 2 3/4"

Door Thickness 1 3/8" - 1 3/4" automatic adjustment

Faceplates 1" x 2 1/4" round corner standard

Strikes Round corner strike 2 3/4" x 2 1/8"

Latch Round corner adjustable 2 3/8" x 2 3/4"

Bolt 1/2" throw

Door Handing Reversible

Cylinder SmartKey Security™

Environmental:

Temperature Range Exterior: -40°F to 150°F
Interior: 32°F to 140°F

Humidity Exterior: 100% condensing
Interior: 99% non-condensing

SMARTCODE™ 912
TOUCHPAD ELECTRONIC LEVER

With ZigBee® HA1.2 Wireless Technology




Wireless Communication



- ZigBee® wireless technology
- RF Operation: 2.4 GHz (US)
- Range: Typical 250ft line of sight

Electronic Compliance

- ZigBee: HA1.2
- FCC Part 15
- Industry Canada

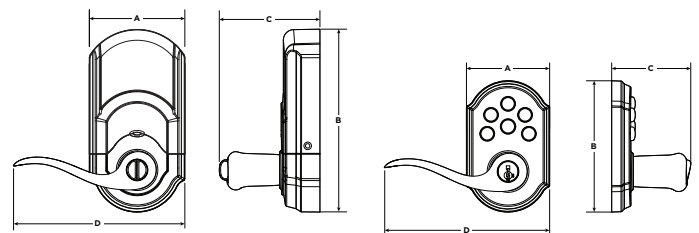

Interior

Exterior

| Design | A | B | C | D |
|----------|------------------------|-------------------------|------------------------|-------------------------|
| Interior | 3 15/64" (82.15 mm) | 6 3/16" (157.16 mm) | 3 27/64" (86.92 mm) | 5 13/16" (147.64 mm) |
| Exterior | 2 13/16" (71.44 mm) | 4 29/64" (113.11 mm) | 2 11/16" (68.26 mm) | 5 39/64" (142.48 mm) |

HA 1.2 Enabled Lock Features:

- Monitor lock status (locked/unlocked)
- Remote locking and unlocking
- Lock jam notification

HA1.2 Enabled Lock Management Features:

- Over the Air Updates
 - ZigBee daughter card and Lock mainboard updates
- Multiple user type settings
 - 24/7 user codes
 - Time limited user codes (up to 7 schedules per user)
 - One-time user codes
- Remote Lock Configuration
 - Add/Remove users
 - Status LED On/Off
 - AutoLock (time is user configurable)
 - Sound on/off
- Remote and local reset to factory default settings
- Remote power status information
- Remotely disable/enable local programming interface
- Tamper detection - Alarm if the device senses lock disassembly
- Audio/Visual enrollment success indicator
- Invalid code entry alarm with lockout state duration (user configurable)