
Advanced image quality within reach

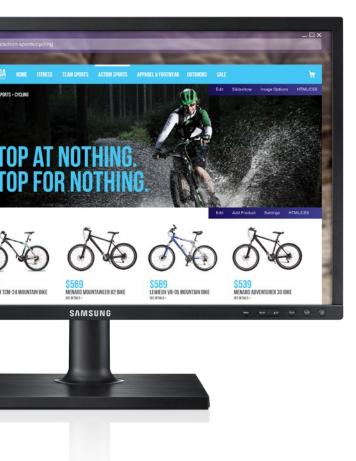

Contact us

1-866-SAM4BIZ samsung.com/business samsung.com/b2bmonitors

Follow us

youtube.com/samsungbizusa

SamsungBizUSA

s24E650PL 23.6" desktop monitor

Can a monitor deliver superior picture quality affordably? That's what the Samsung SE650 Series desktop monitor lineup is all about. Take the Samsung S24E650PL. It's a budget-friendly monitor that utilizes Samsung's PLS panel technology to deliver outstanding picture quality, as well as wide 178° viewing angles. The monitor features approximately 30% recycled material, less than 0.005W Off Mode power consumption, built-in speakers, and the fully adjustable stand keeps users more comfortable, focused and productive. Rounding out the features are VGA, HDMI and DisplayPort connections, VESA mount compatibility, a matte black bezel with clearly labeled buttons, built-in speakers and a 3-year warranty. The Samsung S24E650PL. Business value has never looked better.

Key features



Environmentally friendly

Industry-leading features include approximately 30% recycled material, less than 0.005W Off Mode power consumption, Eco features to reduce power consumption when monitor is in use, and fully recyclable packaging.



Impressive picture quality

The LED-backlit LCD screen delivers sharp, bright, beautiful images. Mega infinity dynamic contrast ratio ensures subtle detail even in the lights and darks, and MagicAngle technology delivers improved color even when viewed off-angle.

Slim design that fits any desk

The sleek, stylish design and low-profile stand take up less desk space and contribute to a cleaner-looking office. The built-in cable management feature also contributes to a clutter-free work environment.



Ergonomic, adjustable stand

The monitor swivels, tilts, pivots and is height-adjustable, for greater user comfort. And since the monitor is VESA compatible, installation on a wall or separate mounting arm is easy.



Built-in speakers

Integrated speakers mean no external sound system is needed. Audio In and Headphones Out provide further listening options. And the S24E650PL is speaker bar ready. The Samsung SPU10 (sold separately) is designed to be attached seamlessly to the back of compatible Samsung monitors. It adds rich stereo sound without taking up an inch of desk space.



Fast, easy connectivity

VGA, HDMI 1.4, DVI (with included HDMI to DVI cable) and DisplayPort 1.2 give users flexibility in high-speed connectivity. Whatever devices users need to connect to today or in the future, the S24E650PL keeps everyone's options open.



Easy on the eyes

When Eye Saver Mode is active, blue light levels are lowered, for reduced eye strain during long work hours. Flicker-free technology adds further viewing comfort by eliminating flickering at all levels of brightness.



Bind Source Control Con			S24E650PL
Alse Easy Sa MM S12 20 MG View Tage Sa MM S12 20 MG View Tage Sa MM Fiel MG View Tage Sa MM Fiel MG View Tage Sa MM Fiel MG Commit Net Subsit MG Commit Net Subsit MG Commit Net Subsit MG State Sa MM MG <	Display	Screen Size	
Fat Canadia Fat Canadia Fat Canadia Notion Meet The Society of Canadia Control Society of Canadia Person Fac Allon Person Fac Allon Person Fac Allon Persoc Allon <td rowspan="4">Dopay</td> <td></td> <td></td>	Dopay		
Reduce Resi 100 x 100 160 Reside Resid			
Part Spa 755/110 PArt Spa 755/110 Spates Spa 745 Contr 2001 2001 2001 2001 2001 2001 2001 200			
Regime in yola Solar in yola Regime in yola Solar in yola Depart for the for the solar in yola Margine in yola Depart for the solar in yola Margine in yola Depart for the solar in yola Margine in yola Depart for the solar in yola Margine in yola Weing July plustant Weing July 127/17P Depart for the solar in yola 127/17P Depart for the solar in yola 127/17P Depart for the solar in yola 127/17P Depart for the solar in yolar in yo			
Colute Single			
Deams Contra Halo Mag =			
Pai fax phý Pai fax phý Exposibilite fich Figh 221 ph 221 ph 221 ph Figh 221 ph			
Response fine (b is -0) Amening Very Apple forculativitation 17/97/73 Very Apple forculativitation 17/97/73 Very Apple forculativitation 17/97/73 Very Apple forculativitation 17/97/73 Very Apple forculativitation 16/94 Very Apple forculativitation 16/94 Very Apple forculativitation 16/94 Very Apple forculativitation 16/94 Stranut Machingthe No Stranut Machingthe No Stranut Machingthe No Stranut Machingthe No Very Apple forculativitation No Stranut Machingthe No Stranut Machingthe No Very Apple forculativitation No Stranut Machingthe No Very Apple forculativitation No Very Apple forcul			
Worig Appletication/emide 179/178* Conc Sappet 116:10410 197/18 Conc Sappet 116:10410 197/18 Conc Sappet 116:10410 197/18 Sampet Appletication/emide No Sampet Appletication/emide <td></td> <td></td> <td></td>			
Oxic Sami MS 2019 DSA 1 Oxic Sami MS 2019 225 Refere Res Pd BA Samia Magdi S			
Out Carling 10% Control Carling 10% Refers Make 10% GRAC Carling 10% Refers Make 10% GRAC Carling 10% Semang Magnet/Semang 10% No Semang 10% No			
Befest Rise Rise Officiency Beges Star Names			
Image Series Vis Reading Magebight No Samang Magebight Vis Samang Magebight Vis Samang Magebight No			
Features Simulay Mugicizying Mo Simulay Mugicizying Yes Of Timer Pies Yes Simulay Mugicizying Yes Of Timer Pies Yes Simulay Mugicizying Yes Of Timer Pies Yes Simulay Mugicizying Yes Simulay Mugici			
Sinsung Magdingti Nei Sinsung Magdingti Nei <t< td=""><td></td><td></td><td></td></t<>			
Sinsor Magdiabase Mes Spesser Maddiabase Mes File Free Mes Come Modi Mes Come Modi Mes Come Modi Mes Modian Confini Michae B Display Michae B Median B Display Michae B Median B Modian Confini Median B Modian Confini Mes Modian Confini	Features		
gen kobs ¹ Yes Nikor Yes Yes Nikor Yes Yes Nikor Xes Yes Son Hob Wickow & St Office Yes Yes Office Yes		Samsung MagicBright	Yes
File Yes Game Mode Windows S1 Game Mode Windows S1 Goro Topily Windows S1 Start Go Seng Yes Goro Topily Windows Mode Start Go Seng Yes Goro Souty Data Yes Coro Souty Data Yes Mode Parts Yes Hold Parts Yes Data Parts Yes Hold Parts Yes Kann Data Yes Hold Parts Yes Kann Data Yes Kann Data Parts Yes Kann Data		Samsung MagicUpscale	Yes
Renk One Visit Social Socicocis Social Social Social Socicol Social Social Social		Eye Saver Mode	Yes
Window Carification Window Ba ¹ 0 SC propitely Window, Moc. Start EO Sking Ne E So Sking Pitel Ne E So Sking Pitel Ne UT Imar Pite Ne UT Imar Pitel Ne UT Imar Pitel <td< td=""><td>Flicker Free</td><td>Yes</td></td<>		Flicker Free	Yes
Bits Operating Windows, Main Smart Exo Swing Plus Me Constraint Swing Plus Me Off Ther Plus Me Off Ther Plus Me Off Ther Plus Me Display Plus Me Off Ther Plus Me Display Plus Me Display Plus Me Display Plus Me Addo In Me <		Game Mode	Yes
Bits Bits Ministancia Ministancia Smart Eor Sonigh Ne Ne Constant Eor Sonigh Ne Ne Off Timer Pine Ne Ne Off Timer Pine Ne Ne Display Ful Ne Ne Off Timer Pine Ne Ne Display Ful Ne Ne Addo In Ne Ne Addo In Ne Ne Stant Eor Sonigh Ne Ne Stant Eor Sonigh Ne Ne Operating Ne Ne Stant Eor Sonigh Ne Ne Operating Ne Ne Ne Ne Ne Operating Ne Ne Operating Ne Ne Ne Ne Ne		Windows Certification	Windows 8.1
Start Eoo Saving Yes Eoo Saving Prus Yes Off Timer Plus Yes Unter Plus Yes Unter Plus No #OM/ON Collex Included) DisplayPort No #OM/ON Collex Included) DisplayPort 1 HOM No #OM/ON Collex Included) Addo In Yes Start For Other Yes Start For Other Yes USB Sond Star Peobly No Vers Table Norman No USB Sond Star Peobly No Norman No USB Sond Star Peobly No Norman No Norman No Norman No Norman No Norman No			Windows, Mac
Ecs Swap Plus Visit Off Inter Plus Visit Visit Sector Off Inter Plus Visit Off Inter Plus Visit Plus Off Inter Plus Visit Plus Plus Off Plus Plus Plus Starl Flus Plus Plus Off Plus Plus Plus Off Plus Plus Plus Off Plus Plus Plus Off Plus Plus Plus			Yes
Internet Internet Yes Internet VIA No (DAM) No (DAM) No (DAM) No (DAM) No DisplayPort 1 1 No			
Interface KA 1 VM No (PMM DV Cable Included) DepayPort 1 Addo In 1 Speaker 1 Kolo In Vice Speaker 11/2 Speaker 11/2 Speaker 11/2 Speaker 11/2 Speaker 10-40°C USB Hoh No USB Hoh No Speaker 10-40°C Constitutions Hundry Hundry 10-40°C Stard Topic Back Stard Topic Back Stard Topic Holds No 100-240W 2000/W Power Consumption (Ferry Star 0 for 100-240W Power Consumption (Ferry Star 0 for 200 Hor 100-240W Power Consumption (Ferry Star 0 for 200 Hor 100-240W			
VM We (PUMC) Cable included) Display (Purt) 1 Display (Purt) 1 Audio No Audio Wei Account Audio Wei Account Beadprino Dut Wei Account Beadprino Dut Wei Account ISB Mui No ISB Mui No Consider Beadyi No Statistic Micro No Statistic Micro No Consider Beadyi No Statistic Micro Statistic Micro Male Micro Statistic Micro Statistic Micro Statistic Micro Statistic Micro Statistic Micro Statistic Micro Statist	Interface		
Polyport 1 HOM 1 HOM 1 Adda h Yes Specier Yes Specier Yes LSB Join Dolt Yes Contition Handa 10-40°C Contition Bark Contition Has Yes Stand Function HAS Yes Vali Mouth Oto Xol0 Yes Power Consumption (Frietry Star 6) Test Condition Yes Yes Power Consumption (Frietry Star 6) Test Condition Yes Yes Power Consumption (Frietry Star 6) Test Condition Yes Yes Power Consumption (Frietry Star 6) Test Condition Yes Yes Power Consumption (Frietry Star 6) Test Condition Yes Yes Power Consumption (Frietry Star 6) Test Condition Yes Yes Yas Yes Po	internated		
Holi 1 Audo in o Yes Audo in o Yes Sealer 1W2_concentration Heatphone Out Yes UBS blub No UBS pum Bar (Pendy) No Operation Tompenture 10-40°C Humino Operation Tompenture 10-40°C Monto H93 (100-20, Tit: 3° (22), Swiet: 45° (2°, 0°) -45° (0°, +2°) Pore Consumption Foregr Stef 0 Test Condition Sand Function H93 (100-20, Tit: 3° (22), Swiet: 45° (2°, 0°) -45° (0°, +2°) Pore Consumption Foregr Stef 0 Test Condition Pore Consumption Foregr Stef 0 Test Condition 100 × 100 × 200			
Audu In Yes Speaker WP2 Speaker WP2 Speaker WP2 Speaker WP2 USS Audu Str (Ready) No Contineer Imperature 10-40°C Contineer Base Autor (Speaker) No Contineer Base Autor (Speaker) Imperature 10-40°C Contineer Base Autor (Speaker) Base Autor (Speaker) No Stand Function Max Autor (Speaker) Max Autor (Speaker) No Valid Autor (Speaker) Dower Suspin (Speaker) Max Autor (Speaker) No Valid Function Max Autor (Speaker) Max Autor (Speaker) No Valid Function Max Autor (Speaker) No No Valid Function Max Autor (Speaker) No No Valid Function Max Autor (Speaker) No No Valid Function No No No No Valid Function No No No No No Valid Function			
Speaker 11/2 Headphore Dut Yes USB Hu No USB Hu No USB Sound Bar (Ready) No Temperature 10-40°C Humdiy 10-20 (pon-condensing) % Humdiy 10-20 (pon-condensing) % Bark Stand Tippe Bark Stand Tippe Bark Stand Tippe Mail Mount 100-200 Vall Mount 100 to 10 Vew Consumption (Finery Star 6.0 Test Condition) 21 (Piny W Power Consumption (Finery Star 6.0 Test Condition) 21 (Piny W Power Consumption (Finery Star 6.0 Test Condition) 21 (Piny W Power Consumption (Finery Star 6.0 Test Condition) 21 (Piny W Power Consumption (Finery Star 6.0 Test Condition) 21 (Piny W Star Umension with Stard (WebD) 21 Pin '1.3 (Pin 'x 2.2''' Package Dimension (WebD) 21 Pin '1.3 (Pin 'x 2.2'' Package Weight 12 4 (Re.3 Star Weight With Stard 81 (Re) Package Weight 12 4 (Re.3 Star Weight With Stard 81 (Re)			
Image: Process of the state of the			
USB Hub No USB Shub Bar Pleady No USB Shub Bar Pleady No USB Shub Bar Pleady Inspectative Humidity 10-800 (nn-condensing) %. Belan Golor Stand Type Black Wall Mount HVS: 100-22.0, Tit: -5° (±2°, 0°) -45° (0°, +2°), Pvot: -1° (±°, 0°) -96° (0°, +2°) Wall Mount 100 × 100 Wall Mount 100 × 100 Power Consumption (Finder) Star 6.0 Test Condito Power Consumption (Finder) Star 6.0 Test Power Art 10.0 Cest Att 10.0 Cest			
USB Sound Bar Ready No 00r 10-80 (pon-condensing) % Conditions Fraperature 00r Back 10-80 (pon-condensing) % Back Stand Function HAS: 130.0±2.0, THE: 3° (±2°, 0°) -45° (0°, +2°), Pivot: 1° (±°, 0°) -95° (0°, +2°) Stand Function HAS: 130.0±2.0, THE: 3° (±2°)-25° (±2°), Swiet: -45° (±2°, 0°) -45° (0°, +2°), Pivot: 1° (±°, 0°) -95° (0°, +2°) Vel Power Scoresurption (Energy Sar 6.0 Test Condition) AC 100-240V Power Consumption (Infergy Sar 6.0 Test Condition) AC 100-240V Est Ban 0.006 W Power Consumption (Infergy Sar 6.0 Test Condition) AC 100-240V Est Ban 0.006 W Power Consumption (Infergy Sar 6.0 Test Condition) AC 100-240V Est Ban 0.006 W Power Consumption (Infergy Sar 6.0 Test Condition) AC 100-240V Est Ban 0.006 W Power Consumption (Infergy Sar 6.0 Test Condition) AC 100-240V Est Ban 0.006 W Package Dimension (Whode) 2.18° x 13.0° x 2.8° (MAV) / 21.8° x 13.9° x 8.8° (MNI) Est Ban 0.006 W Set Dimension with Stand (WebCl) 2.49° x 7.3° x 16.0° Est Ban 0.006 W Set Dimension with Stand (WebCl) 2.49° x 7.3° x 16.0° Est Ban 0.006 W			
Operating Conditions Temperature Humidity 10-40°C Destign Besign Stand Type 10-40°C Back Destign Stand Type Back Back Stand Type HAS Back Vent Stand Type HAS Stand Type HAS Back Vent Mount 100-200, File Power Supply AC 100-240V 20, File Power Consumption (Energy Star 6.0 Test Condition) 22, (Fy) W Less than 0.005 W Pype Internal Power 22, (Fy) W Less than 0.005 W Pype Internal Power 23, 8* 7, 19, 0* x 8.8* (MAX) / 21, 8* x 13, 9* x 8.8* (MIN) Set Dimension With Stand (Webd) 24, 9* x 7, 3* x 16, 0* 24 Package Dimension With Stand 124, (bs.) 24, 9* x 7, 3* x 16, 0* Set Weight with Stand 124, (bs.) 88 (bs.) Package Uright with Stand 15, 7, (bs.) 15, 7, (bs.) Other Colos			
Conditions Humidity 10B0 (non-condensing % Design Stand Type Black Design Stand Type Black Stand Type HAS Wall Mount 100 x0.02.0			
Design Color Black Yes Stand Type HAS Stand Function HAS: 130.0±2.0, Tilt: -3° (±2°) –25° (±2°), Switel: -45° (0°, +2°), Plvot: -1° (±2°, 0°) –95° (0°, +2°) Weil Muont 100 × 100 Power Consumption (Energy Star 6.0 Test Conditon) 22 (typ) W Power Consumption (Off Mode) 100 × 100 Type Internal Power Detailed Dimensions Set Dimension with Stand (WxHo) (Max/Min) Set Dimension with Stand (WxHo) 21.8° x 13.0° x 2.8° (MXV) / 21.8° x 13.9° x 8.8° (MIN) Set Dimension without Stand (WxHo) 24.9° x 7.3° x 16.0° Package Dimension (WXHo) 24.9° x 7.3° x 16.0° Velight 15.7 (tbs.) Package Vieight with Stand 12.4 (tbs.) Set Weight without Stand 8.8 (bs.) Package Vieight 15.7 (tbs.) Power Cable Length 1.5m Others Ouide Others Ouide Green Management EnergyEnroton EnergyEnroton 10.5 (Canada): CC Part15 Subpart B, CE (Europe): ENS5022, ENS5024, KCC Korean; KR0950-1, FSB (Singapore), Soncap Negeria), Kucas (Kwuit), SAS0 (Saudi Arabia): EC60950-1, CCC (china): 6B4943-2011 <td></td> <td></td> <td></td>			
Stand Type HAS Stand Function HAS: 30.0.0±2.0, Titt: -3° (±2°), Swivel: -45° (0°, +2°), Pwot: -1° (-2°, 0°) -95° (0°, +2″) Weil Mount 100 x 100 Power Supply AC 100-240V Power Consumption (Energy Star 6.0 Test Condition) Less than 0.005 W Power Consumption (Energy Star 6.0 Test Condition) Less than 0.005 W Power Consumption (Stand (Webd) Less than 0.005 W Stel Dimension with Stand (Webd) 21.8° x 13.0° x 2.8° Package Dimension with Stand (Webd) 21.8° x 13.0° x 2.8° Package Weight with Stand 12.4 (bs.) Stel Weight without Stand 8.8 (bs.) Package Weight 1.5 / To (bs.) Package Weight 1.5 / To (bs.) Package Weight 1.5 / To (bs.) Cather Stand Could Length 1.5 // To (bs.) Package Weight 1.			
Stand Function HAS: 130.0±2.0, Tilt: 3° (±2°)-25° (±2°), Swivel: -45° (0°, +2°), Pivot: -1° (*2°, 0°) -95° (0°, +2°) Wall Mount 100 x 100 Power Supply Act 100-240V Power Consumption Energy Star 6.0 Test Condition 22 (Ty) W Power Consumption (10 Mode) Less than 0.005 W Tope Internal Power Detailed Dimensions Set Dimension with Stand (WxHoD) 21.8° x 13.0° x 2.2° Accessories Set Weight with Stand 12.4 % x 3.3° x 8.8° (MIN) 21.8° x 13.0° x 2.2° Package Dimension without Stand 8.4 (Dis) 8.4 (Dis) 8.4 (Dis) 8.4 (Dis) Set Dimension without Stand 12.4 (Dis) 8.4 (Dis) 8.4 (Dis) 8.4 (Dis) Set Weight without Stand 13.6 (Dis) 0.00 (Dis) 1.5 (Dis) 1.5 (Dis) Accessories Cables VGA Cable, HDMI-UV Cable, Audio Cable Power Cable Length 1.5 (Dis) Others Outer Set (Dis) Col (Dis) <td>Design</td> <td></td> <td></td>	Design		
Wall Mount 100 x 100 Construction of Construction (Energy Star 6.0 Test Condition) Power Consumption (Off Mode) AC 100-240V East than 0.005 W Power Consumption (Off Mode) Less than 0.005 W East than 0.005 W Type Internal Power East than 0.005 W East than 0.005 W Detailed Dimensions Set Dimension with Stand (WxHxD) 21.8" x 13.0" x 2.8" MIN) Set Dimension with Stand (WxHxD) 21.8" x 13.0" x 2.2" East than 0.005 W Package Dimension (WxHxD) 21.8" x 13.0" x 2.2" East than 0.005 W Package Dimension (WxHxD) 21.8" x 16.0" East than 0.005 W Velight Set Weight with Stand 12.4 (bs.) Set Weight with Stand 8.8 (bs.) Package Weight Package Weight 15.7 (bs.) East the Gold Ea			
Power Power Supply Power Consumption (Energy Star 6.0 Test Condition) Power Consumption (M Mode) AC 100–240V Detailed Dimensions Set Dimension with Stand (WAHAD) (Max/Min) 22 (Typ) W Detailed Dimensions Set Dimension with Stand (WAHAD) (Max/Min) 21.8" x 13.0" x 8.8" (MIN) Set Dimension with Stand (WAHAD) 21.8" x 13.0" x 8.8" (MIN) 21.8" x 13.0" x 2.2" Package Dimension (WAHAD) 24.9" x 7.3" x 16.0" 24.9" x 7.3" x 16.0" Set Weight with Stand 12.4 (Us.) 84.0 (Us.) Accessories Cables VGA Cable, HDM-DVI Cable, Audio Cable Power Cable Length 1.5.m 0.005 (Ling): EGO0950-1, eLlus (US,Canada): UL60950-1, KC (Korea): K60950-1, PSB (Singapore), Soncap (Negeria), Kucas (Kwuit), SASO (Saudi Arabia): EGO0950-1, CCC (China): GB4943-2011 Certification Setery CGC (USA), IC (Canada): FCC Parti S Subpart B, CE (Europe): ENS5022, ENS5024, KCC Korean) KN22, KN24, C-tick (Australia): AS/NZSS48 (CISPR22), CCC (China): GB4943-2011 Green Management Recycled Plastic Foregy/Earl 6.0 Setery Warranty Warranty Sy agr S			
Power Consumption (Energy Star 6.0 Test Condition) Power Consumption (Off Mode) 22 (Typ) W Less than 0.005 W Less than 0.005 W Type Internal Power Detailed Dimension Set Dimension with Stand (WxHxD) (Max/Mn) 21.8" x 13.0" x 2.8" (MAX) / 21.8" x 13.9" x 8.8" (MIN) Set Dimension without Stand (WxHxD) 21.8" x 13.0" x 2.2" Package Dimension (WxHxD) Package Dimension (WxHxD) 24.9" x 7.3" x 16.0" Package Vieipht with Stand Set Weipht with Stand 12.4 (bs.) Set Weipht with Stand 8.8 (bs.) Package Weight 15.7 (bs.) Set Weipht with Stand 15.7 (bs.) Accessories Cables VVA Cable, HOMI-DV Cable, Audio Cable Power Cable, Length 1.5m Others Ouk Setup Guide 0.6 (UX, Setup Guide 15.6 (USA), IC (Canada): FCC Part15 Subpart 8, CE (Europe): EN55024, KCC Korean) KN22, KN24, C-tick (Australia): AS/NZS3548 (CISPR22), CCC (China): GB4943-2011 Energy/Environment Mark Energystar 6.0 Recycled Plastic 30% PC Cree (Cable Excluded) Yeas Set Setup Subpart 8, CE (urope): EN55024, KCC Korean) KN22, KN24, C-tick (Australia): AS/NZS3548 (CISPR22), CCC (China): GB9254-2008 GB17625.1-2012 Green Management Energy/Environment Mark		Wall Mount	
Power Consumption (Off Mode) Type Less than 0.005 W Internal Power Detailed Dimensions Set Dimension with Stand (WorkD) (Max/Min) 21.8" x 13.0" x 8.8" (MAX) / 21.8" x 13.9" x 8.8" (MIN) Detailed Dimensions Set Dimension with Stand (WorkD) 21.8" x 13.0" x 2.2" Package Dimension (WorkD) 24.9" x 7.3" x 16.0" Weight Weight Weight with Stand 12.4 (bs.) 24.9" x 7.3" x 16.0" Accessorie Set Weight without Stand 8.8 (bs.) Package Weight 15.7 (bs.) Accessorie Cables Power Cable Length 15.7 (bs.) 15.7 (bs.) Others Ouick Setup Guide 0.6 (Correl): (EcoopSo-1, EcoOpSo-1, NCB (Korea): K60950-1, NCB (Korea): K60950-1, Soncap (Negeria), Kucas (Kwuit), SASD (Saudi Arabia): IEC60950-1, CCC (China): GB4943-2011 Certification Safety CB (LI): IEC60950-1, ILE00950-1, CLU (Korea): K60950-1, KCC Korean): KN22, KN24, C-tok (Australia): ASNZS3548 (CISPR22), CCC (China): GB4943-2011 Green Management Recycled Plastic Fnergy/Ervironment Mark Recycled Plastic Safet PVC Free (Cable Excluded) Yes 3 years		Power Supply	AC 100~240V
Type Internal Power Detailed Dimension Set Dimension with Stad (WxHxD) (Max/Min) 21.8" x 13.0" x 8.8" (MIN) Set Dimension with Stad (WxHxD) 21.8" x 13.0" x 8.8" (MIN) 21.8" x 13.0" x 8.2" Package Dimension without Stand (WxHxD) 24.9" x 7.3" x 16.0" 24.9" x 7.3" x 16.0" Weight Set Weight with Stand 8.8 (bs.) 24.9" x 7.3" x 16.0" Package Dimension (WxHxD) 24.9" x 7.3" x 16.0" 24.9" x 7.3" x 16.0" Weight Set Weight with Stand 8.8 (bs.) 24.9" x 7.3" x 16.0" Package Umension (WxHxD) 24.9" x 7.3" x 16.0" 24.9" x 7.3" x 16.0" Package Weight 15.7" (bs.) 3.0" 3.0" (bs.) Package Weight 15.7" (bs.) 3.5" Outer Sabe Length 1.5m 0.0" (bde Setup Guide Others Outer Sabe Length 0.0" (bde Setup Guide 2.5" (bde 9/ 3.2" (bd			22 (Typ) W
Detailed Dimensions Set Dimension with Stand (WXHxD) (Max/Min) Set Dimension without Stand (WXHxD) 21.8" x 13.0" x 2.2" Package Dimension (WHxD) 24.9" x 7.3" x 16.0" Weight Set Weight without Stand 12.4 (bs.) Set Weight without Stand 8.8 (bs.) Package Weight 15.7 (bs.) Accessories Cables Power Cable Length 15.7 (bs.) Others Outek Setup Guide Others Outek Setup Guide Certification Set (USPR2), IC Conda): FCO 2050-1, EN60950-1, CULus (US, Canada): UL60950-1, KC (Korea): K60950-1, PSB (Singapore), Soncap (Negeria), Kucas (Kwuit), SASD (Saudi Arabia): IEC60950-1, CCC (China): GB4943-2011 Energy/Environment Mark Energy/Environment Mark Recycled Plastic 30% PVC Free (Cables Excluded) Yes Warranty Warranty		Power Consumption (Off Mode)	Less than 0.005 W
Detailed Dimensions Set Dimension with Stand (WxHxD) (Max/Min) 21.8" x 13.9" x 8.8" (MAX) / 21.8" x 13.9" x 8.8" (MAX) Package Dimension without Stand (WxHxD) 21.8" x 13.0" x 2.2" Package Dimension (WxHxD) 24.9" x 7.3" x 16.0" Weight Set Weight with Stand 12.4 (bs.) Set Weight without Stand 8.8 (bs.) Package Weight 15.7 (bs.) Accessories Cables Power Cable Length 1.5m Others Ouks Setup Guide Certification Set (USA), IC (Canada): FCC Part15 Subpart B, CE (Europe): EN55022, EN55024, KCC Korean) KN22, KN24, C-tick (Australia): AS/NZS3548 (CISPR22), CCC (China): GB9254-2008 GB17625.1-2012 Green Management Energy/Environment Mark Energystar 6.0 Recycled Plastic 30% Yeas PVC Free (Cable Excluded) Yeas		Туре	Internal Power
Set Dimension without Stand (WxHxD) 21.8" x 13.0" x 2.2" Package Dimension (WxHxD) 24.9" x 7.3" x 16.0" Weight Mit Stand 12.4 (bs.) Set Weight with Stand 12.4 (bs.) Set Weight with Stand 8.8 (bs.) Package Weight 15.7 (bs.) Accessories Cables Power Cable Length 1.5m Others Outick Setup Guide Others Outick Setup Guide Settly CCE (Gosp60-1, ENG0950-1, CUL (Gosp60-1, CUL (Gosp60-1, CC (China): GB4943-2011 Erengy/Errivnomment Mark Energystar 6.0 Recycled Plastic 30% PC/C Free (Cable Excluded) Yes Warranty Warranty 3 years	Detailed Dimensions		21.8" x 19.0" x 8.8" (MAX) / 21.8" x 13.9" x 8.8" (MIN)
Package Dimension (WxHxD) 24.9" x 7.3" x 16.0" Weight Set Weight with Stand 12.4 (bs.) Set Weight without Stand 8.8 (bs.) Package Weight 15.7 (bs.) Accessories Cables VGA Cable, HDMI-DVI Cable, Audio Cable Power Cable Length 1.5m Others Ouick Setup Guide ECC Fock USA). IC (Canada): FOC Part15 Subpart B, CE (Europe): ENS5022, ENS5024, KCC Korean) KN22, KN24, C-tick (Australia): AS/NZS3548 (CISPR22), CCC (China): GB9254-2008 GB17625.1-2012 Green Management Energy/Environment Mark Recycled Plastic Energystar 6.0 Recycled Plastic VOY CFree (Cables Excluded) Yes Safe V Safe V VOY Cree (Cables Excluded) Yes Safe V Safe V Warranty Warranty Warranty Safe V Safe V		Set Dimension without Stand (WxHxD)	21.8" x 13.0" x 2.2"
Weight Set Weight without Stand 12.4 (bs.) Set Weight without Stand 8.8 (bs.) Package Weight 15.7 (bs.) Accessories Cables Power Cable Length 1.5.m Others Ouick Setus Guide Others Ouick Setus Guide Certification Safety Energy/Environment Mark Encrystar 6.0 Recycled Plastic 30% PVC Free (Cables Excluded) Year Warranty Warranty Safes			24.9" x 7.3" x 16.0"
Set Weight without Stand 8.8 (lbs.) Package Weight 8.8 (lbs.) Accessories Package Weight 15.7 (lbs.) Accessories Cable VGA Cable, HDMI-DVI Cable, Audio Cable Power Cable Length 1.5m Others Ouck Setup Guide Certification Setely CG (EU): ECOSGDO-1, ENEOSGD-1, ULLIS (US, Canada): ULE0950-1, KC (Korea): K60950-1, PSB (Singapore), Soncap (Negeria), Kucas (Kwuit), SAS0 (Saudi Arabia): EC60950-1, CCC (China): GB4943-2011 EMC FCC (USA), IC (Canada): FCC Part15 Subpart B, CE (Europe): EN55022, EN55024, KCC Korean) KN22, KN24, C-tick (Australia): AS/NZS3548 (CISPR22), CCC (China): GB9254-2008 GB17625.1-2012 Green Management Energy/Environment Mark Energystar 6.0 Recycled Plastic 30% 30% VGC res (Cables Excluded) Yes	Weight		
Package Weight 15.7 (bs.) Accessories Cables VGA Cable, HOM-DVI Cable, Audio Cable Power Cable Length 0.5m Others Outick Setup Guide Enc CB (EU): IEC60950-1, EN60950-1, CC (China): GB4943-2011 ENC FCC (USA), IC (Canada): FCC Part15 Subpart B, CE (Europe): ENS5022, ENS5024, KCC Korean) KN22, KN24, C-tick (Australia): AS/NZS3548 (CISPR22), CCC (China): GB9254-2008 GB17625.1-2012 Green Management Energy/Environment Mark Energystar 6.0 PVOC Free (Cables Excluded) Yes Warranty Warranty Yearsh			
Accessories Cables VGA Cable, HDMI-DVI Cable, Audio Cable Power Cable Length 1.5m Others Ouick Setup Guide Certification Safety EMC CB (EU): IEC00950-1, EN60950-1, CULus (US, Canada): UL60950-1, KC (Korea): K60950-1, PSB (Singapore), Soncap (Negeria), Kucas (Kwuit), SASO (Saudi Arabia): IEC60950-1, CC (China): 6B4943-2011 EMC FCC (USA), IC (Canada): FCC Part15 Subpart B, CE (Europe): EN55022, EN55024, KCC Korean) KN22, KN24, C-tick (Australia): AS/NZS3548 (CISPR22), CCC (China): GB9254-2008 GB17625.1-2012 Green Management Energy/Environment Mark Recycled Plastic Energystar 6.0 VC Free (Cables Excluded) Yes VVC Free (Cables Excluded) Yes Warranty Warranty 3 years			
Power Cable Length Others 1.5m Others Ouick Setup Guide Certification Safety CB (EU): IEC00950-1, EN00950-1, CULus (US, Canada): UL60950-1, KC (Korea): K60950-1, PSB (Singapore), Soncap (Negeria), Kucas (Kwuit), SAS0 (Saudi Arabia): IEC60950-1, CCC (China): GB4943-2011 Energy/Environment Mark Energystar 6.0 Power Cable Excluded) Yes Warranty Warranty Warranty Sages	Accessories		
Others Ouick Setup Guide Certification Safety CB (EU): IEC60950-1, CULus (US,Canada): UL60950-1, KC (Korea): K60950-1, SOncap (Negeria), Kucas (Kwuit), SAS0 (Saudi Arabia): IEC60950-1, CCC (China): GB4943-2011 EMC FOC (USA), IC (Canada): FOC Part15 Subpart B, CE (Europe): EN55022, EN55024, KCC Korean) KN22, KN24, C-tick (Australia): AS/NZS3548 (CISPR22), CCC (China): GB9254-2008 (B17625.1-2012 Green Management Energy/Environment Mark Energystar 6.0 Recycled Plastic 30% VOr Free (Cables Excluded) Yes			
Certification Safety CB (EU): IEC60950-1, EN60950-1, CULus (US, Canada): UL60950-1, KC (Korea): K60950-1, PSB (Singapore), Soncap (Negeria), Kucas (Kwuit), SAS0 (Saudi Arabia): IEC60950-1, CCC (China): GB4943-2011 EMC FCC USA), IC (Canada): FCC Part15 Subpart B, CE (Europe): EN55022, EN55024, KCC Korean) KN22, KN24, C-tick (Australia): AS/NZS3548 (CISPR22), CCC (China): GB9254-2008 GB17625.1-2012 Green Management Energy/Environment Mark Energystar 6.0 Repcyled Plastic 30% PVC Free (Cables Excluded) Yes Warranty Warranty 3 years			
EMC FCC (USA), IC (Canada); FCC Part15 Subpart B, CE (Europe): EN55022, EN55024, KCC Korean) KN22, KN24, C-tick (Australia); AS/NZS3548 (CISPR22), CCC (China); GB9254-2008 GB17625.1-2012 Green Management Recycled Plastic Energy/Environment Mark Recycled Plastic Energystar 6.0 VDC Free (Cables Excluded) 30% Ves Warranty Warranty Sayars			
Green Management Energy/Environment Mark Energystar 6.0 Recycled Plastic 30% PVC Free (Cables Excluded) Yes Warranty Warranty 3 years	ociuncauon		De Los Le Constanti en la constanti de la constanti de La constanti de la const Constanti de la constanti d
Recycled Plastic 30% PVC Free (Cables Excluded) Yes Warranty Warranty 3 years	Green Management		
PVC Free (Cables Excluded) Yes Warranty Warranty 3 years	dieen wanagement		
Warranty Warranty 3 years			
CONNECTIVITY	Warranty	Warranty	3 years
	CONNECTIVITY		

1. DisplayPort In

- г. Displayru
- 2. HDMI In
- 3. VGA In
- 4. Audio In/Out





Learn moresamsung.com/business or samsung.com/b2bmonitorsProduct support1-800-SAMSUNG1-866-SAM4BIZFollow usImage: samsungbizusa image: samsungbizusa ima

SAMSUNG

Samsung Electronics has been named 2015 ENERGY STAR Partner of the Year in the product manufacturing category by the U.S. Environmental Protection Agency (EPA).

©2015 Samsung Electronics America, Inc. Samsung is a registered mark of Samsung Electronics Corp., Ltd. Specifications and design are subject to change without notice. Non-metric weights and measurements are approximate. All brand, product, service names and logos are trademarks and or registered trademarks of their respective manufacturers and companies. See samsung.com for detailed information. Printed in USA. MON-S24E650PLDSHT-DEC15T

