



Project: _____
 Architect: _____
 Contractor: _____
 Suppliers: _____

Dealer: _____
 Engineer: _____
 Location: _____
 Date: _____

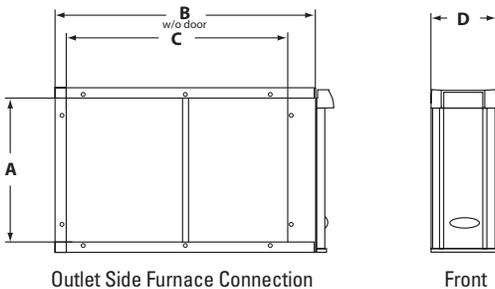

Outlet Side Furnace Connection

Front

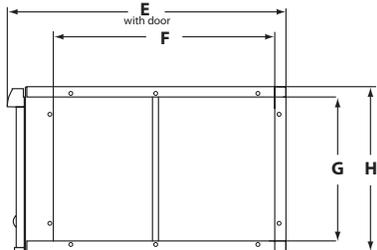

Inlet Side Return Duct Connection

DIMENSIONS OF UNITS (INCHES)				
MODEL	1110	1210	1310	1410
A	15-7/16	19-3/4	18-1/16	15-7/16
B	20-1/16	25-3/8	20-1/16	28-1/16
C	17-3/8	21-3/16	15-7/8	23-7/8
D	6-3/4	6-3/4	6-3/4	6-3/4
E	22-1/16	27-3/8	22-1/16	30-1/16
F	17-3/8	21-3/16	15-7/8	23-7/8
G	15-7/16	19-3/4	18-1/16	15-7/16
H	17-3/4	22-1/16	20-3/8	17-3/4

CABINET

Preassembled
 Outer Housing: 22 gauge, galvanized unpainted cabinet, painted door
 Door: Self-aligning door; snaps into place
 UL Listed

MEDIA

MERV 11		
Size (microns)	Representative Particle	Efficiency
10+	Pollen	95%
6+	Mold Spores	94%
2+	Bacteria, Fungi	72%
1+	Pet Dander, Respirable Dust	56%

Collapsible media with integrated self-spacing pleats

SelfSeal™ dramatically reduces air bypass, improving media performance

PRODUCT SPECIFICATIONS

Airflow Capacity: Up to 2000 CFM maximum

Max Equipment Weight:

1110 cabinet supports 250 lbs. static load

1210/1310/1410 cabinet

supports 400 lbs. static load

Air Cleaner Operating Environment: 0°F - 140°F

Humidity: 0-90% non-condensing

	Shipping Weight	Resistance @ Airflow Volume (inches w.c. @CFM)	Filtering Media Area
MODELS	1210	18 lbs. .06" @ 600 .09" @ 800 .12" @ 1000 .16" @ 1200 .20" @ 1400 .25" @ 1600 .30" @ 1800 .35" @ 2000	31.4 sq. ft.
	1310	15 lbs. .09" @ 600 .13" @ 800 .18" @ 1000 .23" @ 1200	19.4 sq. ft.
	1410	17 lbs. .06" @ 600 .09" @ 800 .12" @ 1000 .16" @ 1200 .20" @ 1400 .25" @ 1600 .30" @ 1800 .35" @ 2000	28.3 sq. ft.