

Dartboard Cabinet Mount

MOUNTING INSTRUCTIONS

1) Mounting the cabinet:

Using a ruler, from the floor up locate the distance of 5'8". The center of your cabinet should be set at the distance of 5'8". Locate the wall studs set behind the wall. Note, the wall studs are 16" apart from one another. The four holes on the back of the cabinet are also 16" apart. Use the provided screws to securely mount the cabinet to studs in wall.

2) Mounting the dartboard:

a. Using the provided hardware place the hanging bracket with its two holes directly over the center predrilled holes. Using the screws provided fasten the hanging bracket to the cabinet.



b. Secure the three spacers provided to the back of the dartboard about two to three inches in from the outer edge, and evenly proportioned around the back of the dartboard.

c. Located on the back of the dartboard, in its center, should be a pre-taped indentation (if indentation is not there, simply find the center of the board). Once the center has been identified, sink the center screw into the center of the dartboard. **DO NOT SINK THE SCREW FLUSH OR COUNTER FLUSH.** You want the screw to stick out of the back of the board slightly further than the spacers.

d. Turn board around so the face is showing out and the back of the board is facing the cabinet. Use the center screw on the back of the dartboard and slide it onto the hanging bracket. **MAKE SURE THE CENTER SCREW IS SECURELY PLACED IN THE HANGING BRACKET.**

WARNING!

Due to extensive weight, and to prevent accidental injury, cabinet must be secured to wall before play.

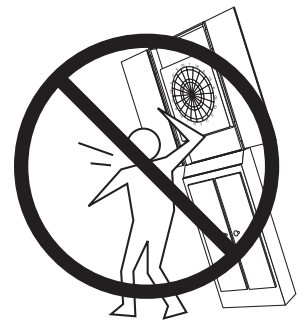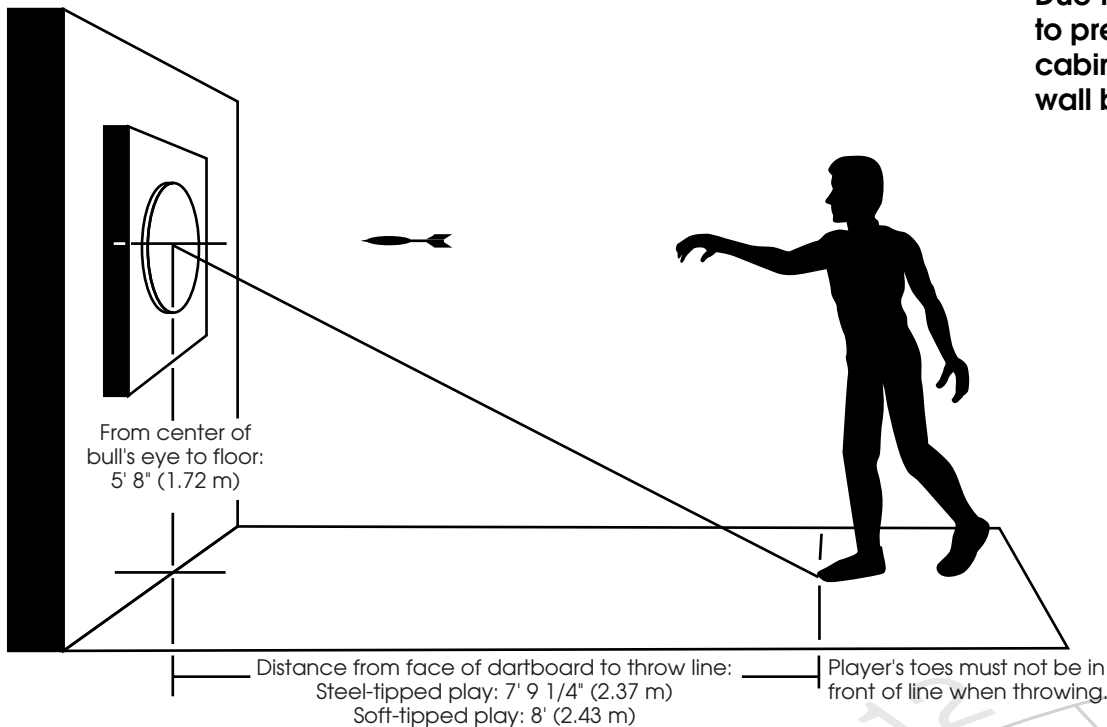

The throw line (not included) should be placed 7' 9.25" from where the wall that the dartboard is mounted to and the floor meet.

GLD[®]
P R O D U C T S

S84 W19093 Enterprise Drive • Muskego, WI 53150 USA
800 225 7593 • FAX 800 841 6944
Email: gld@gldmfg.com