

## When Brightness Counts™



<u>Green Laser:</u> POWER OUTPUT<Imw WAVELENGTH 500-540nm

Red Laser:

POWER OUTPUT<1mw WAVELENGTH 630-670nm TRUGLO, Inc.

525 International Parkway Richardson, Texas 75081 Ph: 972-774-0300 Fx: 972-774-0323 E-mail: contactus@truglo.com

#### COMPLIES WITH 21 CFR 1040.10 AND 1040.11



This product is not a toy. Read all warnings and instructions prior to use. Property damage, serious injury or death may result from improper use. Keep out of the reach of children.

## WARNING

Laser light is extremely bright and can potentially cause permanent eye damage or interfere with critical operations if improperly used.

- **NEVER** look into or stare at the laser beam or its reflection.
- **NEVER** point the laser beam at a person or animal.
- **NEVER** shine the laser at reflective surfaces.
- **NEVER** point the laser beam at any type of moving vehicle, including aircraft. Such actions are unlawful and extremely dangerous.
- **NEVER** point the laser beam at a person using binoculars or other magnifying instruments, such as rifle scopes, cameras or telescopes.
- **NEVER** remove any safety label from the laser.
- **NEVER** attempt to dissemble, repair or modify the laser. Such actions could lead to hazardous exposure.

**WARNING** Before you begin, always make sure the weapon is unloaded and safe to handle.

**A**WARNING Always practice safe handling techniques with any weapon.

**AWARNING** Once mounted, the weapon will be pointed in the direction of anything illuminated by the laser.

**AWARNING** Never point the laser at a target you do not intend to shoot.

## WARNING

Never engage the trigger until you are ready to fire. The laser can be activated without placing your finger insider the trigger guard.


#### On / Off

Constant on: Move the on / off lever to the down position.

Momentary on: Hold the on /off lever in the up position.

#### Laser / Light Modes

- Laser only: Move the mode switch to the up position.
- Light only: Move the mode switch to the middle position.
- Laser and Light: Move the mode switch to the down position.



LED


#### Battery

• Your laser sight uses two CR123A lithium 3-volt batteries.

To replace batteries:

#### CAUTION: CHECK TO MAKE SURE YOUR WEAPON IS UNLOADED.

- Unlock the Quick-Detach Lever.
- Rotate the Back Plate Lock and remove the Back Plate.
- Replace the batteries (please note the polarity of each battery marked on the outside housing).
- Reinstall the Back Plate and lock in place.

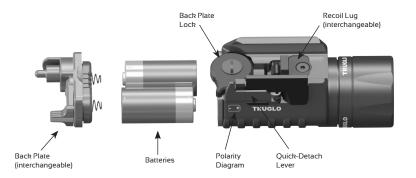

#### Mounting

#### CAUTION: CHECK TO MAKE SURE YOUR WEAPON IS UNLOADED.

- Your laser sight has integrated mounting rails that attach to a standard Weaver-style base or Picatinny rail.
- Unlock the Quick-Detach Lever and set the laser sight onto the mounting base of the weapon.
- The Recoil Lug should fit into one of the grooves in the top of the mounting base. Be sure the laser sight is fully seated before locking the Quick-Detach Lever.

#### PLEASE NOTE:

- It may be necessary to interchange the Recoil Lug.
- Two additional Recoil Lugs are included. These can be used to fit a majority of firearm/rail configurations.

• To replace the Recoil Lug, use the included 2mm hex wrench.

#### Left-Handed Back Plate

- 1. Unlock the Quick-Detach Lever.
- 2. Rotate the Back Plate Lock and remove the Back Plate.
- 3. Install the Left-handed Back Plate and lock in place.

#### Remote Pressure Switch

- 1. Unlock the Quick-Detach Lever.
- 2. Rotate the Back Plate Lock and remove the Back Plate.
- 3. Install the Remote Pressure Switch and lock in place.

#### ZEROING (windage and elevation adjustments)

Please note that the laser has been pre-set at the factory to be aligned with the mounting base of the laser sight. Only minor windage and elevation adjustments should be required.

If significant adjustments are necessary, please make sure the laser sight is properly mounted or adjust the mounting base. The maximum adjustment is approximately 10 inches in all directions at 30 feet. Insufficient adjustment is not a defect with the laser sight.

# CAUTION: ALWAYS USE EYE AND EAR PROTECTION. SHOOT ONLY AT AN APPROVED SHOOTING RANGE OR A SUITABLE SAFE AREA.

- After carefully firing at the target, CHECK TO MAKE SURE YOUR WEAPON IS UNLOADED.
- Make any necessary adjustments to the W/E adjustment screws using the included 1.25mm allen wrench.
- Turning the Windage Adjustment Screw clockwise moves the POI to the left.
- Turning the Elevation Adjustment Screw clockwise moves the POI down.
- Do not over-adjust the windage or elevation adjustment screws. Stop turning if you feel any resistance.



#### TWO-YEAR LIMITED WARRANTY

TRUGLO, Inc. warrants this product to be free from original defects in materials and workmanship for a period of TWO (2) YEARS from the date of original retail purchase, subject to the limitations set forth herein. This warranty applies only to the original retail purchaser and requires the purchaser to supply a copy of the original proof of purchase (original sales receipt) at the time warranty service is requested. No additional warranty "registration" is required.

If this product should malfunction or fail, contact us for a Return Merchandise Authorization number. The RMA number should be clearly marked on the outside of the package. Please include a complete description of the problem, your name, address, telephone number and a copy of the original proof of purchase. All transportation, insurance and freight charges associated with warranty service and repairs are the responsibility of the purchaser. Please include a check or money order in the amount of \$12.50 to cover processing and return postage. If an original defect is found by us, we will, at our option, repair, replace or make appropriate adjustment. For contact information go to www.truglo.com or call 972-774-0300.

This Limited Warranty does not apply to: (a) asserted defects caused by normal wear and tear of any part including knobs, camouflage finish, etc.; (b) asserted defects caused by modification, unauthorized service, accidents, neglect, misuse, abuse, improper maintenance, acts of Nature; (c) asserted defects involving subjective personal likes or judgments; (d) batteries; or (e) products purchased outside the USA.

THIS I IMITED WARRANTY IS THE EXCLUSIVE WARRANTY FOR THIS PRODUCT. WE DISCLAIM ANY AND ALL OTHER WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR OF MERCHANTABILITY. WE SHALL NOT BE LIABLE IN TORT. INCLUDING NEGLIGENCE OR STRICT LIABILITY, AND SHALL HAVE NO LIABILITY AT ALL FOR INJURY TO PERSONS OR PROPERTY OUR LIABILITY FOR FAILURE TO FULFILL ANY OBLIGATION UNDER THIS LIMITED WARRANTY OR ANY OTHER LIABILITY IN CONNECTION WITH THIS PRODUCT SHALL BE LIMITED TO THE AMOUNT OF THE PURCHASE PRICE RECEIVED BY US FOR THE PRODUCT. THE REMEDIES STATED. IN THIS LIMITED WARRANTY ARE THE PURCHASER'S EXCLUSIVE REMEDIES AGAINST US REGARDING THIS PRODUCT. UNDER NO CIRCUMSTANCES SHALL WE BE LIABLE FOR ANY INDIRECT. INCIDENTAL. SPECIAL OR CONSEQUENTIAL DAMAGES, INCLUDING LOST PROFITS AND REVENUES, INCONVENIENCE OR INTERRUPTIONS IN OPERATIONS, OR ANY OTHER COMMERCIAL OR ECONOMIC LOSSES OF ANY KIND THESE LIMITATIONS AND DISCLAIMERS ARE NOT MADE BY US WHERE PROHIBITED BY LAW SOME STATES PROHIBIT LIMITATIONS OF WARRANTIES AND THE PURCHASER MAY HAVE ADDITIONAL RIGHTS IN THOSE STATES

www.TRUGLO.com