

Assembly Instructions & User's Manual Aluminum Cargo Carrier

153312



Please keep this instruction manual for future reference

Customer Service: (888) 922-2336

7:00 am to 12:00 am CST (daily)

Live Chat at: www.academy.com

Email: customerservice@academy.com

Made in China

Table of Contents

Warnings	2
Tools and Parts	3
Assembly Instructions	4
Care and Maintenance	5
Warranty Information	6

Note: Before beginning assembly of product, make sure all parts are present. Compare parts with package content list and hardware contents. If any part is missing or damaged do not attempt to assemble the unit. Contact customer service for replacement parts.

Warnings

Do not exceed maximum weight capacity of 750lbs. when using 2" receiver bar.

Distribute weight evenly on platform.

This carrier is not intended for transporting humans.

Do not carry loads wider or deeper than carrier.

Do not carry flammable items on carrier.

Do not allow exhaust fumes to blow directly on items. This is a FIRE HAZARD.

Always check your trailer hitch's rated Tongue Weight before loading.


Place heavier loads closer to receiver, distribute the weight as evenly as possible from left to right.

Always check local DOT ordinances regarding the use of hitch carriers, in some regions it may be illegal to cover or obscure license plate and tail lights.


Always inspect your hitch carrier for loose bolts, damage or rusting before use, DO NOT USE carrier if damaged. Make sure that carrier is secured on the trailer hitch mount and all loads are secured on the carrier.

Tools Required

1 Open Wrench (1pc) Size=17mm



Parts List

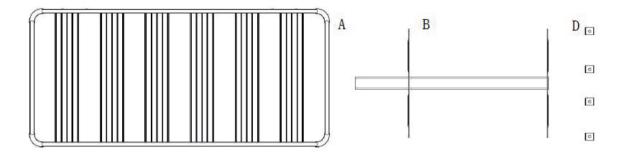

Item #	Description	Q'ty
Α	Cargo Carrier Frame	1
В	Support Tube	1
D	U Style Pin	4

Hardware



Item #	Description	Q'ty	
C	M10*35 Carriage bolt	4	
E M10 Locknut		4	


Assembly Instructions

Step 1:

Place carrier frame (A) on a flat surface facing down, align support tube (B) to carrier frame (A) as show in image.

Secure parts together using M10*35 bolt (C), M10 Locknut (E) and U style pin (D)

Note: Receiver must be on the opposite side of reflection.

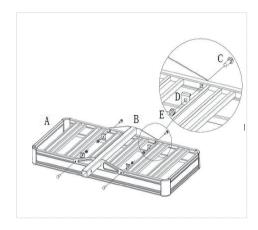


Step 2:

Screw down all the bolts and locknuts.

IMPORTANT! Check that all connections are tight.

With assistant, lift the carrier and insert the support tube into towing vehicle's 2" hitch receiver .(not included)

Slide the Hitch pin through the Pin holes and fasten in place by inserting the R-clip.

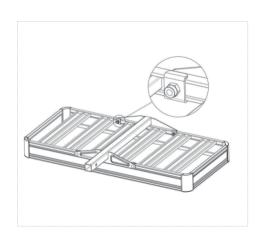

Care and Maintenance

Visual inspection MUST be made prior to each use of the cargo carrier. Check for cracks, cracked welds, missing or damaged parts. Any carrier that appears to be damaged in any way should not be used until a manufacturer or supplier's authorized repair center makes necessary repairs.

Make sure that all bolts are tightened.

Check all mounting hardware prior to each use and make sure it is secure before using the cargo carrier. Keep cargo carrier free from dirt, grease or other debris.

BECAUSE OF THE POTENTIAL HAZARDS
ASSOCIATED WITH THE MISUSE OF EQUIPMENT
OF THIS TYPE, NO MODIFICATIONS SHALL BE
MADE TO PRODUCT.

Warranty Information

This product has been manufactured under the highest standards of quality and workmanship. We warrant to the original consumer purchaser that all aspects of this product will be free of defects in material and workmanship for one year from the date of purchase. A replacement for any defective part will be supplied free of charge for installation by the consumer. Defects or damage caused by the use of other than genuine parts are not covered by this warranty. This warranty shall be effective from the date of purchase as shown in the purchaser receipt.

This warranty is valid for the original consumer purchaser only and excludes industrial, commercial or business use of the product, product damage due to shipment or failure which results from alteration, product abuse, or product misuse, whether performed by a contractor, service company, or consumer. We will not be responsible for labor charges and/or damage incurred in installation, repair or replacement nor for incidental or consequential damage.