




R-TEC Automation® Track

Our R-TEC Automation® Track System allows a commercial look with the benefits of motorization. Upgrade your R-TEC Automation® Track with Finestra® Wood or Finestra® Custom Decorative Hardware Fascias and Finials to complete your look.

- Integrated ARC™ radio frequency control allows individual or group control across your window treatments.
- Slim profile to not obstruct the stack of your draperies.
- Heavy Duty easy click installation and release brackets.
- Manual override permits the drapery to be adjusted manually, making it ideal for power outages.
- Obstruction Detection: If the drapery motion is obstructed while motor is running, the drapery motor stops automatically to prevent damage.
- Available in White or Bronze.
- Tandem alternative option: see page 21 of the Drapery Databook for details.

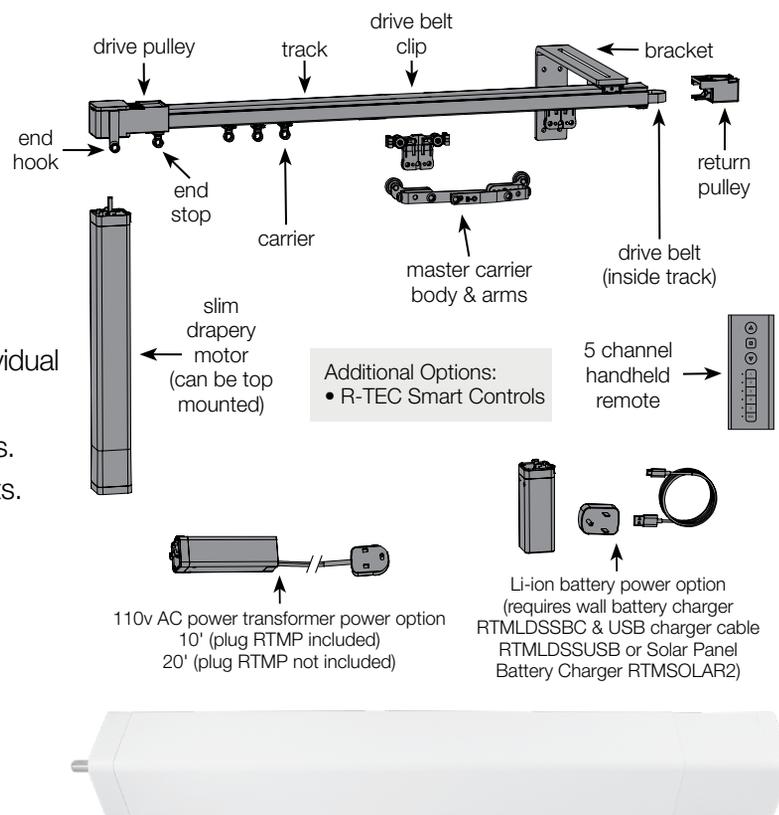


FEATURES



2-Way RF
Communication



Adjustable
Speed



Preferred
Open / Close
Limit Settings



Favorite
Position



Obstruction
Detection




Manual
Override




Quiet
Operation

APPLICATIONS



Pinch Pleat



Ripplefold



Narrow



Li-ion
Battery




110v AC Power
Transformer 10' or 20'




Solar Panel
Battery Charger


SPECIFICATIONS

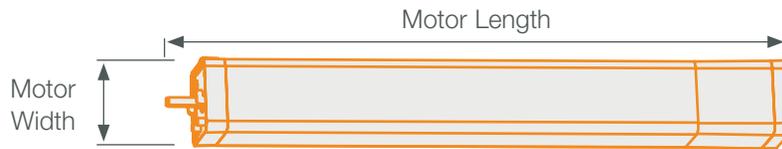

Slim Drapery Motor

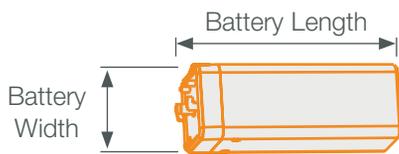

Li-ion Battery

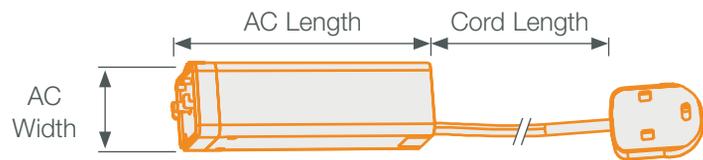

110v AC Power Transformer

MOTOR SPECS

Voltage	Torque	Max. Run Time	Motor Length	Motor Width	Battery Length	Battery Width	AC Length	AC Width	Cord Length	Amps	Sound Level
24 V DC	1.2 Nm	12 min.	12.875"	1.75"	4.4375"	1.75"	5.3125"	1.75"	10' or 20'	1.5 A	~44 DB

SYSTEM SPECS

Item #	Motor	Open / Close speed	Max. Track Length	Max. Drapery Weight
RTMLDSS50	Slim Drapery Motor	14 cm/sec. (5.5 in/sec.)	19' Continuous; 36' Spliced	110 lbs.