


### R-TEC Smart Controls - Remotes & Wall Switches RTMHR1C, RTMHR5C, RTMHRP15C, RTMHRP15C/K, RTMHR15C, RTMWSR5C, RTMWCR1C, RTMWCR2C, RTMWSR15C



Handheld remotes with wall mounts give users complete control from an elegant handheld remote.

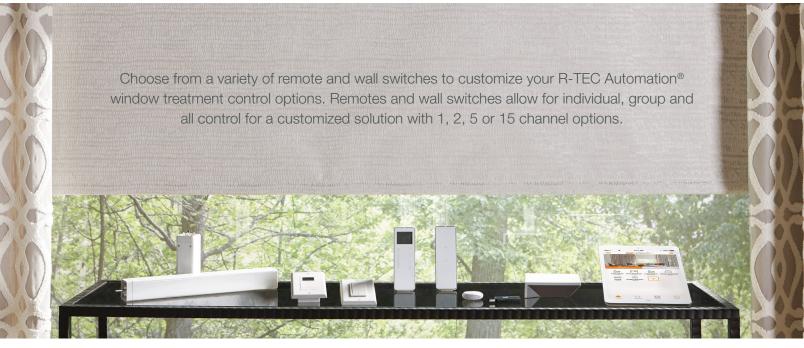

1 or 15 Channel Handheld Remotes with Wall Mounts offer modern features, including LCD displays, individual, group and all control and precision leveling. They feature a contemporary design with touch sensitive controls.



Push5 or Push15 Channel Handheld Remotes with Wall Mount offer luxury and functionality in a well-crafted minimal design, featuring soft tactile rubber buttons that can control 5 or 15 individual or 5 or 15 groups of window treatments, as well as an "All' button that conveniently activates all programmed channels. Wall switches provide a sensible control option for room and whole home control.



5 Channel Surface Mount Wall Switch offers easy installation without having to cut into the wall with a slim profile. Any single channel or all 5 channels can be selected for operation at any time.



1, 2 or 15 Channel Cut-In Wall Mount Switches offer the ability to hide unused channels for easier scrolling and selection, featuring a contemporary design and a wirefree deployment, making them retrofit ready for any location. Require RTMSMB/W for installation.



# SPECIFICATIONS

	Handheld Remote with Wall Mount 1 or 5 Channel	Handheld Remote with Wall Mount Push5 or Push15 Channel	Surface Mount Wall Switch 5 Channel	Cut-In Wall Mount Switch 1, 2 or 15 Channel
			۶ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱ ۱	
Voltage	3V (CR2450)	3V (CR2450)	3V (CR2450)	3V (2x AAA)
Frequency	433.92 MHz	433.92 MHz	433.92 MHz	433.92 MHz
Transmitting Power	10 milliwatt	10 milliwatt	10 milliwatt	10 milliwatt
Ambient Operating Temperature	-10° C to 50° C	-10° C to 50° C	-10° C to 50° C	-10° C to 50° C
Range	65'	65'	65'	65'

## DIMENSIONS


### HANDHELD REMOTES WITH WALL MOUNTS

 $\bigtriangledown$ 

1

2"

1 Channel Remote Range: 65' RTMHR1C




Push5 Channel Remote Range: 65' RTMHR5C

4 ¾"


►

3/

Push15 Channel Remote Range: 65' RTMHRP15C or /K




15 Channel Remote Range: 65' RTMHR15C



#### WALL SWITCHES

5 Channel Surface Mount Wall Switch Range: 65' RTMWSR5C



1, 2 or 15 Channel Wall Box Mount Switch Range: 65', requires RTMSMB/W for installation RTMWCR1C, RTMWCR2C, RTMWSR15C

