

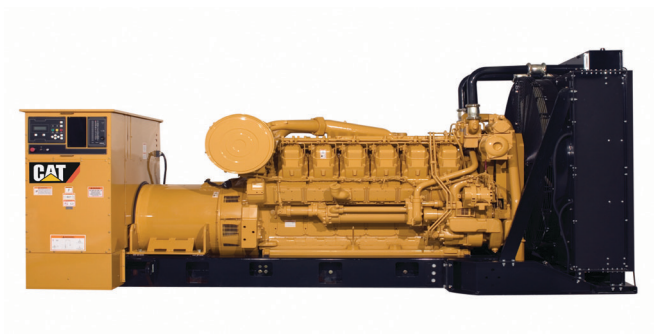


Image shown may not reflect actual package.

CONTINUOUS 890 kW 1113 kVA 60 Hz 1800 rpm 12 470 Volts

Caterpillar is leading the power generation marketplace with Power Solutions engineered to deliver unmatched flexibility, expandability, reliability, and cost-effectiveness.

FEATURES

FUEL/EMISSIONS STRATEGY

- Low Fuel consumption

DESIGN CRITERIA

- The generator set accepts 100% rated load in one step per NFPA 110 and meets ISO 8528-5 transient response.

FULL RANGE OF ATTACHMENTS

- Wide range of bolt-on system expansion attachments, factory designed and tested
- Flexible packaging options for easy and cost effective installation

WORLDWIDE PRODUCT SUPPORT

- Cat dealers provide extensive post sale support including maintenance and repair agreements
- Cat dealers have over 1,800 dealer branch stores operating in 200 countries
- The Cat® S•O•SSM program cost effectively detects internal engine component condition, even the presence of unwanted fluids and combustion by-products

CAT® 3512 TA DIESEL ENGINE

- Reliable, rugged, durable design
- Field-proven in thousands of applications worldwide
- Four-stroke-cycle diesel engine combines consistent performance and excellent fuel economy with minimum weight

CAT HV GENERATOR

- Matched to the performance and output characteristics of Cat engines
- Single point access to accessory connections
- UL 1446 Recognized Class F insulation

CAT EMCP 4 CONTROL PANELS

- Simple user friendly interface and navigation
- Scalable system to meet a wide range of customer needs
- Integrated Control System and Communications Gateway

CONTINUOUS 890 kW 1113 kVA

60 Hz 1800 rpm 12 470 Volts



FACTORY INSTALLED STANDARD & OPTIONAL EQUIPMENT

System	Standard	Optional
Air Inlet	• Single element canister type air cleaner • Service indicator	☐ Dual element & heavy duty air cleaners ☐ Air inlet adapters & shut-off
Cooling	• Radiator with guard • Coolant drain line with valve • Fan and belt guards • Cat® Extended Life Coolant*	☐ Radiator duct flange ☐ Jacket water heater
Exhaust	• Dry exhaust manifold • Flanged faced outlets	☐ Mufflers and Silencers ☐ Stainless steel exhaust flex fittings ☐ Elbows, flanges, expanders & Y adapters
Fuel	• Secondary fuel filters • Fuel priming pump • Flexible fuel lines • Fuel cooler*	☐ Water separator ☐ Duplex fuel filter
Generator	• Class F insulation • Cat digital voltage regulator (CDVR) with kVAR/PF control, 3-phase sensing • Winding temperature detectors • Anti-condensation space heaters	☐ Oversized generators ☐ Cross current compensation transformer ☐ Bearing temperature detectors
Power Termination	• Bus bar (NEMA mechanical lug holes) • Right hand cable entry • Top or bottom cable entry	☐ Left hand cable entry
Governor	• Woodward 2301A isochronous	☐ Electronic load sharing governor
Control Panels	• EMCP 4.2 • User Interface panel (UIP) - wall mounted • AC & DC customer wiring area (right side) • Emergency stop pushbutton	☐ Option for right or left mount UIP ☐ Local & remote annunciator modules ☐ Digital I/O Module ☐ Generator temperature monitoring & protection ☐ Remote monitoring software
Lube	• Lubricating oil and filter • Oil drain line with valves • Fumes disposal • Gear type lube oil pump	☐ Oil level regulator ☐ Deep sump oil pan ☐ Electric & air prelube pumps ☐ Manual prelube with sump pump ☐ Duplex oil filter
Mounting	• Rails - Engine / generator / radiator mounting • Rubber anti-vibration mounts (shipped loose)	☐ Isolator removal ☐ Spring-type vibration isolator (shipped loose) ☐ IBC Isolators
Starting/Charging	• 24 volt starting motor(s) • Batteries with rack and cables • Battery disconnect switch	☐ Battery chargers (5 or 10 amp) ☐ 45 amp charging alternator ☐ Oversize batteries ☐ Ether starting aid ☐ Heavy duty starting motors ☐ Barring device (manual)
General	• Right-hand service • Paint - Caterpillar Yellow except rails and radiators are gloss black • SAE standard rotation • Flywheel and flywheel housing - SAE No. 00	☐ CSA certification ☐ CE Certificate of Conformance ☐ Seismic Certification per Applicable Building Codes: IBC 2000, IBC 2003, IBC 2006, IBC 2009, CBC 2007 * Not included with packages without radiators

CONTINUOUS 890 kW 1113 kVA

60 Hz 1800 rpm 12 470 Volts



SPECIFICATIONS

CAT GENERATOR

Cat HV Generator

Frame size..... 2730

Excitation..... Permanent Magnet

Pitch..... 0.6670

Number of poles..... 4

Number of bearings..... 2

Number of Leads..... 006

Insulation..... Class H with tropicalization and antiabrasion

Insulation..... Class F with tropicalization and antiabrasion

- Consult your Caterpillar dealer for available voltages

IP Rating..... IP23

Alignment..... Closed Coupled

Overspeed capability..... 125

Wave form Deviation (Line to Line)..... 002.00

Voltage regulator..... 3 Phase sensing with volts/Hz

Voltage regulation..... Less than +/- 1/2% (steady state)

Less than +/- 1% (no load to full load)

Telephone influence factor..... Less than 50

Harmonic Distortion..... Less than 5%

CAT DIESEL ENGINE

3512 TA, V-12, 4-Stroke Water-cooled Diesel

Bore..... 170.00 mm (6.69 in)

Stroke..... 190.00 mm (7.48 in)

Displacement..... 51.80 L (3161.03 in³)

Compression Ratio..... 13.5:1

Aspiration..... TA

Fuel System..... Direct unit injection

Governor Type..... 2301A

CAT EMCP 4 SERIES CONTROLS

EMCP 4 controls including:

- Run / Auto / Stop Control
- Speed and Voltage Adjust
- Engine Cycle Crank
- 24-volt DC operation
- Environmental sealed front face
- Text alarm/event descriptions

Digital indication for:

- RPM
- DC volts
- Operating hours
- Oil pressure (psi, kPa or bar)
- Coolant temperature
- Volts (L-L & L-N), frequency (Hz)
- Amps (per phase & average)
- kW, kVA, kVAR, kW-hr, %kW, PF

Warning/shutdown with common LED indication of:

- Low oil pressure
- High coolant temperature
- Overspeed
- Emergency stop
- Failure to start (overcrank)
- Low coolant temperature
- Low coolant level

Programmable protective relaying functions:

- Generator phase sequence
- Over/Under voltage (27/59)
- Over/Under Frequency (81 o/u)
- Reverse Power (kW) (32)
- Reverse reactive power (kVar) (32RV)
- Overcurrent (50/51)

Communications:

- Six digital inputs (4.2 only)
- Four relay outputs (Form A)
- Two relay outputs (Form C)
- Two digital outputs
- Customer data link (Modbus RTU)
- Accessory module data link
- Serial annunciator module data link
- Emergency stop pushbutton

Compatible with the following:

- Digital I/O module
- Local Annunciator
- Remote CAN annunciator
- Remote serial annunciator

CONTINUOUS 890 kW 1113 kVA

60 Hz 1800 rpm 12 470 Volts



TECHNICAL DATA

Open Generator Set - - 1800 rpm/60 Hz/12 470 Volts	DM8226	
Low Fuel Consumption		
Generator Set Package Performance Genset Power rating @ 0.8 pf Genset Power rating with fan	1112.5 kVA 890 kW	
Coolant to aftercooler Coolant to aftercooler temp max	82 ° C	180 ° F
Fuel Consumption 100% load with fan 75% load with fan 50% load with fan	244.2 L/hr 190.5 L/hr 138.3 L/hr	64.5 Gal/hr 50.3 Gal/hr 36.5 Gal/hr
Cooling System ¹ Air flow restriction (system) Air flow (max @ rated speed for radiator arrangement) Engine Coolant capacity with radiator/exp. tank Engine coolant capacity Radiator coolant capacity	0.12 kPa 1331 m³/min 286.8 L 156.8 L 130.0 L	0.48 in. water 47004 cfm 75.8 gal 41.4 gal 34.3 gal
Inlet Air Combustion air inlet flow rate	85.2 m³/min	3008.8 cfm
Exhaust System Exhaust stack gas temperature Exhaust gas flow rate Exhaust flange size (internal diameter) Exhaust system backpressure (maximum allowable)	452.1 ° C 215.7 m³/min 203.2 mm 6.7 kPa	845.8 ° F 7617.4 cfm 8.0 in 26.9 in. water
Heat Rejection Heat rejection to coolant (total) Heat rejection to exhaust (total) Heat rejection to aftercooler Heat rejection to atmosphere from engine Heat rejection to atmosphere from generator	580 kW 933 kW 104 kW 114 kW 57.8 kW	32985 Btu/min 53060 Btu/min 5914 Btu/min 6483 Btu/min 3287.1 Btu/min
Alternator ² Motor starting capability @ 30% voltage dip Frame Temperature Rise	2839 skVA 2730 80 ° C	144 ° F
Lube System Sump refill with filter	310.4 L	82.0 gal
Emissions (Nominal) ³ NOx g/hp-hr CO g/hp-hr HC g/hp-hr PM g/hp-hr	9.41 g/hp-hr .84 g/hp-hr .35 g/hp-hr .135 g/hp-hr	

¹ For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.

² UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics. Generator temperature rise is based on a 40°C ambient per NEMA MG1-32.

³ Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77°F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 btu/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

CONTINUOUS 890 ekW 1113 kVA

60 Hz 1800 rpm 12 470 Volts



RATING DEFINITIONS AND CONDITIONS

Meets or Exceeds International Specifications: AS1359, CSA, IEC60034-1, ISO3046, ISO8528, NEMA MG 1-22, NEMA MG 1-33, UL508A, 72/23/EEC, 98/37/EC, 2004/108/EC

Continuous - Output available with non-varying load for an unlimited time. Average power output is 70-100% of the continuous power rating. Typical peak demand is 100% of continuous rated ekW for 100% of operating hours. Continuous power in accordance with ISO3046. Continuous ambients shown indicate ambient temperature at 100% load which results in a coolant top tank temperature below the alarm temperature.

Ratings are based on SAE J1349 standard conditions.

These ratings also apply at ISO3046 standard conditions.

Fuel rates are based on fuel oil of 35° API [16° C (60° F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29° C (85° F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal.). Additional ratings may be available for specific customer requirements, contact your Cat representative for details. For information regarding Low Sulfur fuel and Biodiesel capability, please consult your Cat dealer.

CONTINUOUS 890 kW 1113 kVA

60 Hz 1800 rpm 12 470 Volts



DIMENSIONS

Package Dimensions		
Length	5544.8 mm	218.3 in
Width	2073.1 mm	81.62 in
Height	2367.2 mm	93.2 in
Weight	14 232 kg	31,376 lb

NOTE: For reference only - do not use for installation design. Please contact your local dealer for exact weight and dimensions. (General Dimension Drawing #2748719).

Performance No.: DM8226

Feature Code: 512DE5J

Gen. Arr. Number: 2524216

Source: U.S. Sourced

July 29 2011

17799205

www.Cat-ElectricPower.com

© 2011 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice.
The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.