



GEP13.5-6

Diesel Generator Set
Exclusively from your Cat® dealer

EU Stage III Emissions Compliant

Image shown may not reflect actual package

Output Ratings		
Generating Set Model - 3 Phase	Prime*	Standby*
380-415V, 50Hz	12.5 kVA 10.0 kW	13.5 kVA 10.8 kW
220/127V, 60 Hz	15.0 kVA 12.0 kW	16.5 kVA 13.2 kW

* Refer to ratings definitions on page 4.
Ratings at 0.8 power factor.

Technical Data		
Engine Make & Model:	Perkins™ 403D-15G	
Alternator Model:	LL1114D	
Control Panel:	DCP-10	
Base Frame Type:	Heavy Duty Fabricated Steel	
Circuit Breaker Type:	3 Pole MCB	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Fuel Tank Capacity: litres (US gal)	62 (16.4)	
Fuel Consumption, Prime: l/hr (US gal/hr)	3.7 (1.0)	4.3 (1.1)
Fuel Consumption, Standby : l/hr (US gal/hr)	4.0 (1.1)	4.9 (1.3)

Engine Technical Data

Physical Data			
Manufacturer:	Perkins		
Model:	403D-15G		
No. of Cylinders/Alignment:	3 / In Line		
Cycle:	4 Stroke		
Induction:	Naturally Aspirated		
Cooling Method:	Water		
Governing Type:	Mechanical		
Governing Class:	ISO 8528 G1 50 Hz / G2 60 Hz		
Compression Ratio:	22.5:1		
Displacement: l (cu.in)	1.5 (91.3)		
Bore/Stroke: mm (in)	84.0 (3.3)/90.0 (3.5)		
Moment of Inertia: kg m² (lb. in²)	2.17 (7415)		
Engine Electrical System:			
-Voltage/Ground:	12/Negative		
-Battery Charger Amps:	65		
Weight: kg (lb) - Dry:	197 (434)		
- Wet:	202 (445)		

Air System	50 Hz	60 Hz	
Air Filter Type:	Replaceable Element		
Combustion Air Flow:			
m³/min (cfm)	-Standby:	1.1 (38)	1.2 (43)
	-Prime:	1.1 (38)	1.2 (43)
Max. Combustion Air Intake			
Restriction: kPa (in H ₂ O)	6.4 (25.7)	6.4 (25.7)	
Radiator Cooling Air Flow:			
m³/min (cfm)	28.8 (1017)	37.2 (1314)	
External Restriction to			
Cooling Air Flow: Pa (in H ₂ O)	125 (0.5)	125 (0.5)	

Cooling System	50 Hz	60 Hz
Cooling System Capacity:		
I (US gal)	6.0 (1.6)	6.0 (1.6)
Water Pump Type: Centrifugal		
Heat Rejected to Water &		
Lube Oil: kW (Btu/min)		
-Standby:	12.9 (734)	15.2 (864)
-Prime:	11.6 (660)	13.6 (773)
Heat Radiation to Room: Heat radiated from engine and alternator		
kW (Btu/min)	-Standby: 6.0 (341)	7.1 (404)
	-Prime: 5.4 (307)	6.3 (358)
Radiator Fan Load: kW (hp)	0.2 (0.2)	0.3 (0.4)
Cooling system designed to operate in ambient conditions up to 50°C (122°F). Contact your local Olympian™ dealer for power ratings at specific site conditions.		

Lubrication System	
Oil Filter Type:	Spin-On, Full Flow
Total Oil Capacity l (US gal):	6.0 (1.6)
Oil Pan l (US gal):	4.5 (1.2)
Oil Type:	API CH4 15W-40
Cooling Method:	N/A

Performance	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Gross Engine Power: kW (hp)		
-Standby:	13.5 (18.0)	16.2 (22.0)
-Prime:	12.2 (16.0)	14.7 (20.0)
BMEP: kPa (psi)		
-Standby:	722.0 (104.7)	722.0 (104.7)
-Prime:	652.0 (94.6)	655.0 (95.0)
Regenerative Power: kW	4.1	5.3

Fuel System				
Fuel Filter Type:	Replaceable Element			
Recommended Fuel:	Class A2 Diesel or BSEN590			
Fuel Consumption: l/hr (US gal/hr)				
	110% Load	100% Load	75% Load	50% Load
Prime				
50 Hz	4.0 (1.1)	3.7 (1.0)	2.8 (0.7)	2.0 (0.5)
60 Hz	4.9 (1.3)	4.3 (1.1)	3.2 (0.8)	2.4 (0.6)
Standby				
50 Hz		4.0 (1.1)	3.0 (0.8)	2.1 (0.6)
60 Hz		4.9 (1.3)	3.5 (0.9)	2.5 (0.7)
(based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)				

Exhaust System	50 Hz	60 Hz	
Silencer Type:	Industrial		
Silencer Model & Quantity:	IND (1)		
Pressure Drop Across			
Silencer System: kPa (in Hg)	0.56 (0.165)	0.80 (0.236)	
Silencer Noise Reduction			
Level: dB	30	18.6	
Max. Allowable Back			
Pressure: kPa (in. Hg)	10.2 (3.0)	10.2 (3.0)	
Exhaust Gas Flow:			
m³/min (cfm)	-Standby:	2.9 (102)	3.4 (119)
	-Prime:	2.7 (95)	3.1 (111)
Exhaust Gas Temperature: °C (°F)			
	-Standby:	490 (914)	505 (941)
	-Prime:	445 (833)	455 (851)

Alternator Performance Data

Data Item	50 Hz				60 Hz				
	415/240V	400/230V	380/220V						220/127V
Motor Starting Capability* kVA	28	27	25	-	-	-	-	-	27
Short Circuit Capacity %	-	-	-	-	-	-	-	-	-
Reactances: Per Unit									
Xd	1.938	2.086	2.311	-	-	-	-	-	2.482
X'd	0.200	0.216	0.239	-	-	-	-	-	0.257
X''d	0.100	0.108	0.119	-	-	-	-	-	0.128

Reactances shown are applicable to prime ratings.
*Based on 30% voltage dip at 0.6 power factor.

Alternator Technical Data

Physical Data		Operating Data	
Manufactured for Olympian by:	OLYMPIAN	Overspeed: RPM	2250
Model:	LL1114D	Voltage Regulation: (steady state)	+/- 1.0%
No. of Bearings:	1	Wave Form NEMA = TIF:	50
Insulation Class:	H	Wave Form IEC = THF:	2.0%
Winding Pitch - Code:	2/3 - 6	Total Harmonic Content LL/LN:	4.0%
Wires:	12	Radio Interference:	Supression is in line with European Standard EN61000-6
Ingress Protection Rating:	IP23	Radiant Heat: kW (Btu/min)	
Excitation System:	SHUNT		
AVR Model:	R220	-50 Hz:	2.5 (142)
		-60 Hz:	2.8 (159)

Technical Data



Voltage 50 Hz	Prime		Standby	
	kVA	kW	kVA	kW
415/240V	12.5	10.0	13.5	10.8
400/230V	12.5	10.0	13.5	10.8
380/220V	12.5	10.0	13.5	10.8

Voltage 60 Hz	Prime		Standby	
	kVA	kW	kVA	kW
220/127V	15.0	12.0	16.5	13.2

Weights & Dimensions

Weights: kg (lb)	
Net (+ lube oil)	378 (833)
Wet (+ lube oil & coolant)	384 (847)
Fuel, lube oil & coolant	432 (952)

Dimensions: mm (in)	
Length	1400 (55.1)
Width	620 (24.4)
Height	1054 (41.5)

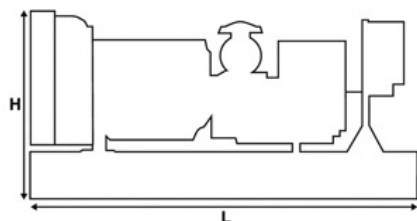

Note: General configuration not to be used for installation. See general dimension drawings for detail.

Definitions

Standby Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

Prime Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

General Data

Documents

A full set of operation and maintenance manuals and circuit wiring diagrams.

Quality Standards

The equipment meets the following standards: BS5000, ISO 8528, ISO 3046, IEC 60034, NEMA MG-1.22.

Warranty

All prime equipment carries a one year manufacturer's warranty. Standby equipment, limited to 500 running hours per year, has a two year manufacturer's warranty. For details on warranty cover please contact your local Dealer, or visit our website: www.OlympianPower.com.

Information contained in this publication may be considered confidential. Discretion is recommended when distributing.

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, their respective logos OLYMPIAN, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

www.OlympianPower.com

© 2013 Caterpillar
All rights reserved.