




P895-1

Output Ratings

Voltage, Frequency	Prime	Standby
	kVA	
	kW	
480/277V, 60 Hz	812.5	895
	650	716

Ratings at 0.8 power factor.

Please refer to the output ratings technical data section for specific generator set outputs per voltage.

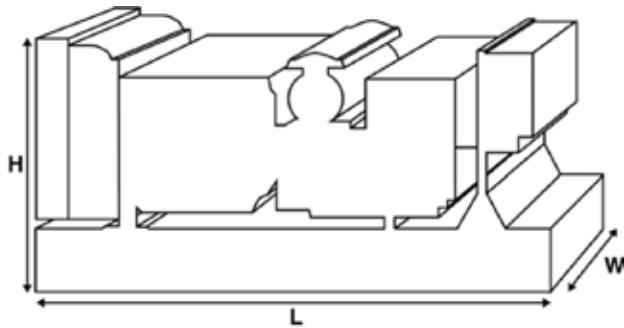

Dimensions and Weights

Length	mm	4130 (162.6)
Width	mm	1690 (66.5)
Height	mm	2570 (101.2)
Weight (Dry)	kg	4869 (10734)
Weight (Wet)	kg	4979 (10977)

Ratings in accordance with ISO 8528, ISO 3046, IEC 60034,

BS5000 and NEMA MG-1.22.

Generator set pictured may include optional accessories.

Prime Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standby Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity.

Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

FG Wilson offer a range of optional features to allow you to tailor our generator sets to meet your power needs.

Options available include:

- Upgrade to CE Certification
- A wide range of Sound Attenuated Enclosures
- A variety of generator set control and synchronising panels
- Additional alarms and shutdowns
- A selection of exhaust silencer noise levels

For further information on all of the standard and optional features accompanying this product please contact your local Dealer or visit:

www.fgwilson.com



Ratings and Performance Data

Engine Make	Perkins		
Engine Model:	2806A-E18TTAG6		
Alternator Make	Leroy Somer		
Alternator Model:	LL7224J		
Control Panel:	FG100		
Base Frame:	Heavy Duty Fabricated Steel		
Circuit Breaker Type:	3 Pole ACB/MCCB		
Frequency:	50 HZ	60 HZ	
Engine Speed: RPM	rpm		
Fuel Tank Capacity:	litres (US gal)	1702 (449.62)	
Fuel Consumption Prime	litres (US gal)/hr	172.8 (45.6)	
Fuel Consumption Standby	litres (US gal)/hr	192 (50.7)	

Engine Technical Data

No. of Cylinders	6				
Alignment	IN LINE				
Cycle	4 STROKE				
Bore	mm (in)	145 (5.7)			
Stroke	mm (in)	183 (7.2)			
Induction	TURBOCHARGED AIR TO AIR CHARGE COOLED				
Cooling Method	WATER				
Governing Type	ELECTRONIC				
Governing Class	ISO 8528 G3				
Compression Ratio	14.0:1				
Displacement	L (cu. in)	18.1 (1104.5)			
Moment of Inertia:	kg m ² (lb/in ²)	3.59 (12268)			
Voltage	24				
Ground	Negative				
Battery Charger Amps	50				
Engine Weight Dry	kg (lb)	2361 (5205)			
Engine Weight Wet	kg (lb)	2477 (5461)			

Engine Performance Data

		50 Hz	60 Hz
Engine Speed	rpm		1800
Gross Engine Power Prime	kW (hp)		714 (957)
Gross Engine Power Standby	kW (hp)		785 (1053)
BMEP Prime	kPa (psi)		2626 (380.8)
BMEP Standby	kPa (psi)		2886 (418.6)



Fuel System

Fuel Filter Type:	Eco Replaceable Element			
Recommended Fuel:	Class A2 Diesel			
Fuel Consumption at	110 % Load	100 % Load	75 % Load	50 % Load
50 Hz Prime:	l/hr (US gal/hr)			
50 Hz Standby	l/hr (US gal/hr)	-		
60 Hz Prime	l/hr (US gal/hr)	192 (50.7)	172.8 (45.6)	128.5 (33.9)
60 Hz Standby	l/hr (US gal/hr)	-	192 (50.7)	141.5 (37.4)
60 Hz	l/hr (US gal/hr)			88.5 (23.4)
60 Hz	l/hr (US gal/hr)			96.2 (25.4)

(Based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869 class A2, EN590)

Air System

50 Hz

Non Canister

Combustion Air Flow Prime	m³/min (cfm)	66 (2331)
Combustion Air Flow Standby	m³/min (cfm)	69 (2437)
Max. Combustion Air Intake Restriction	kPa	3.7 (14.9)

Cooling System

50 Hz

60 Hz

Cooling System Capacity	l (US gal)	109.5 (28.9)
Water Pump Type:	Centrifugal	
Heat Rejected to Water & Lube Oil: Prime	kW (Btu/min)	201 (11431)
Heat Rejected to Water & Lube Oil: Standby	kW (Btu/min)	217 (12341)
Heat Radiation to Room*: Prime	kW (Btu/min)	157 (8928)
Heat Radiation to Room*: Standby	kW (Btu/min)	173 (7492)
Radiator Fan Load:	kW (hp)	31.5 (42.2)
Radiator Cooling Airflow:	m³/min (cfm)	899.3 (31759)
External Restriction to Cooling Airflow:	Pa (in H2O)	125 (0.5)

*: Heat radiated from engine and alternator

Designed to operate in ambient conditions up to 50°C (122°F).

Contact your local FG Wilson Dealer for power ratings at specific site conditions.

Lubrication System

Oil Filter Type:	Spin-On, Full Flow	
Total Oil Capacity:	l (US gal)	68 (18)
Oil Pan Capacity:	l (US gal)	56 (14.8)
Oil Type:		API CH4 / CI4
Oil Cooling Method:	WATER	

Exhaust System

50 Hz

60 Hz

Maximum Allowable Back Pressure:	kPa (in Hg)	8.5 (2.5)
Exhaust Gas Flow: Prime	m³/min (cfm)	143 (5050)
Exhaust Gas Flow: Standby	m³/min (cfm)	152 (5368)
Exhaust Gas Temperature: Prime	°C (°F)	435 (815)
Exhaust Gas Temperature: Standby	°C (°F)	455 (851)



Alternator Physical Data

No. of Bearings:	1
Insulation Class:	H
Winding Pitch:	2/3
Winding Code	6
Wires:	12
Ingress Protection Rating:	IP23
Excitation System:	AREP
AVR Model:	R450M

* dependant on voltage code selected

Alternator Operating Data

Overspeed: rpm	2250
Voltage Regulation: (Steady state)	±0.5
Wave Form NEMA = TIF:	50
Wave Form IEC = THF:	2
Total Harmonic content LL/LN:	4
Radio Interference:	EN61000-6
Radiant Heat: 50 Hz	kW (Btu/min)
Radiant Heat: 60 Hz	42 (2388)

Alternator Performance Data 50 Hz:

Voltage Code

Motor Starting Capability*	kVA					
Short Circuit Capacity**	%	300	300	300	300	300
Reactances	X _d					
	X' _d					
	X'' _d					

Alternator Performance Data 60 Hz

	480/277 V	380/220 V		440/254 V
Voltage Code	240/139 V			220/127 V
Motor Starting Capability*	kVA	2512	1630	2142
Short Circuit Capacity**	%	300	300	300
Reactances	X _d	2.672	3.83	3.179
	X' _d	0.132	0.189	0.157
	X'' _d	0.105	0.151	0.125

Reactances shown are applicable to prime ratings.

*Based on 30% voltage dip at 0.6 power factor.

** With optional independant excitation system (PMG / AUX winding)



Output Ratings 50 Hz

	Prime	Standby		
Voltage Code	kVA	kW	kVA	kW
415/240V				
400/230V				
380/220V				
230/115V				
220/127V				
220/110V				
200/115V				
240V				
230V				
220V				

Output Ratings 60 Hz

	Prime	Standby		
Voltage Code	kVA	kW	kVA	kW
480/277V	812.5	650	895	716
440/254V	812.5	650	895	716
416/240V				
400/230V				
380/220V	730	584	805	644
240/139V	812.5	650	895	716
240/120V				
230/115V				
220/127V	812.5	650	895	716
220/110V				
208/120V				
240/120				
220/110				



P895-1

Dealer Contact Details

Documentation

Operation and maintenance manual including circuit wiring diagrams.

Generator Set Standards

The equipment meets the following standards: BS5000, ISO 8528, ISO 3046, IEC 60034, NEMA MG-1.22.

Caterpillar (NI) Limited is the manufacturer of FG Wilson brand diesel generating sets, and our facilities manufacture products in the following locations:

Brazil • China • India

With headquarters in Northern Ireland, FG Wilson products are distributed through a Global Dealer Network.

To contact your local Sales Office, please visit the FG Wilson website at www.fgwilson.com.

In line with our policy of continuous product development, we reserve the right to change specification without notice.