











Rubbermaid® Adjustable Shelving



Selection steps:

1 Select your Shelf:  Size
 Color
 Quantity

2 Select your Brackets & Uprights:

A Bracket size / type **B** Bracket/Upright quantity

Shelf Depth	Single Track	Twin Track
8" D	= 8"  or 	6.5" 
10" D	= 10"  or 	9" 
12" D	= 12"  or 	11.5" 


Recommended number of brackets (per shelf)	Shelf Width			
	24"	36"	48"	72"
	2	3	4	5
	2	3	4	5

Track Type	Depth	Capacity	Track Type	Depth	Capacity
Single Track	8"	275 lbs.	Twin Track	6.5"	500 lbs.
	10"	200 lbs.		9"	375 lbs.
	12"	175 lbs.		11.5"	275 lbs.
	16"	75 lbs.		14.5"	225 lbs.
				18.5"	450 lbs.
				24"	275 lbs.

* Load capacities are tested in accordance with ANSI product testing specifications. A pair of brackets holds up to the specified load capacity when system is installed correctly into wall studs. These load limits are intended to be used as general guidelines only. (See back for installation steps)

3 Select the proper hardware:


Single Track Shelving



Screw Qty for each Upright	Upright Length			
	24"	36"	48"	72"
	3	4	5	7


#6 x 2" Phillips Flat Head

Twin Track Shelving




Screw Qty for each Upright	Upright Length		
	25"	47.5"	70"
	3	5	7


#12 x 2-1/2" Phillips Flat Head




#6 x 2" Phillips Flat Head



#6 x 1-1/4" Phillips Flat Head

	1
Screw Qty for each Bracket	1


Installation steps: (wall studs)

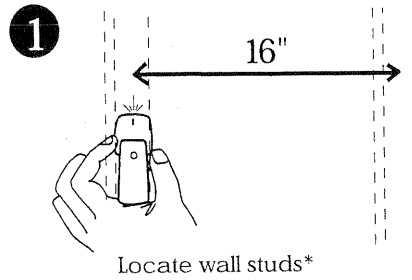


1 Locate wall studs*




Tools needed:

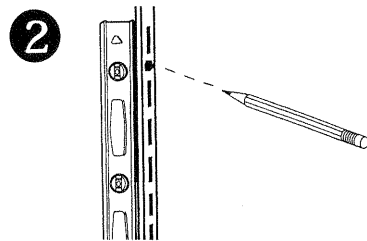


2 Level Upright vertically and mark holes




3 A Drill pilot holes




B Mount first Upright

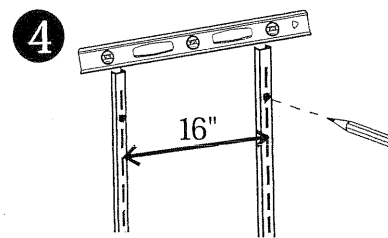


4 Level next Upright horizontally and mark holes




5 A Drill pilot holes




B Mount second Upright



6 Firmly tap brackets into Uprights



7 Place shelves in position



8 Twin Track ONLY

Secure brackets to shelf with screws

*For maximum loading capacity and proper installation, Uprights should be mounted to wall studs, which are typically located at 16" intervals along walls. If wall studs cannot be located, utilize hollow wall anchors to mount Uprights.