



PRODUCT SPECIFICATIONS

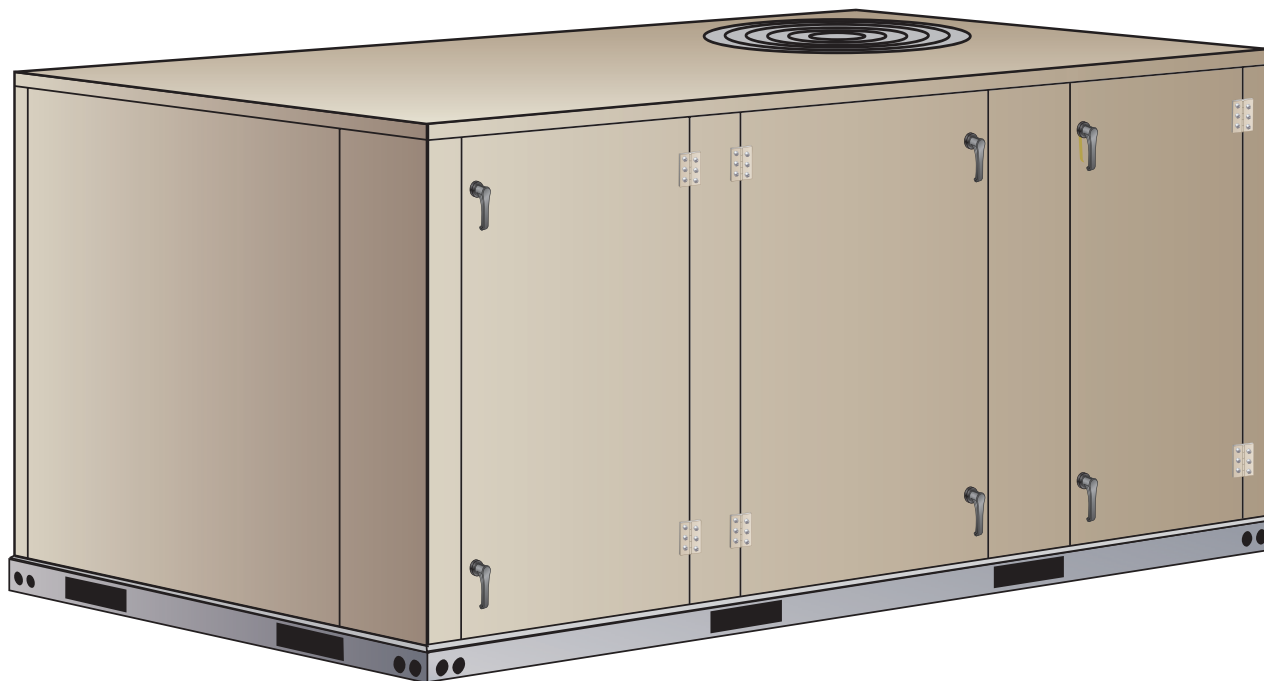


10.6 to 21 kW (3 to 6 Ton)
Net Cooling Capacity - 9.2 to 19.2 kW (31 400 to 65 500 Btuh)
Optional Electric Heat - 5.7 to 23 kW

MODEL NUMBER IDENTIFICATION

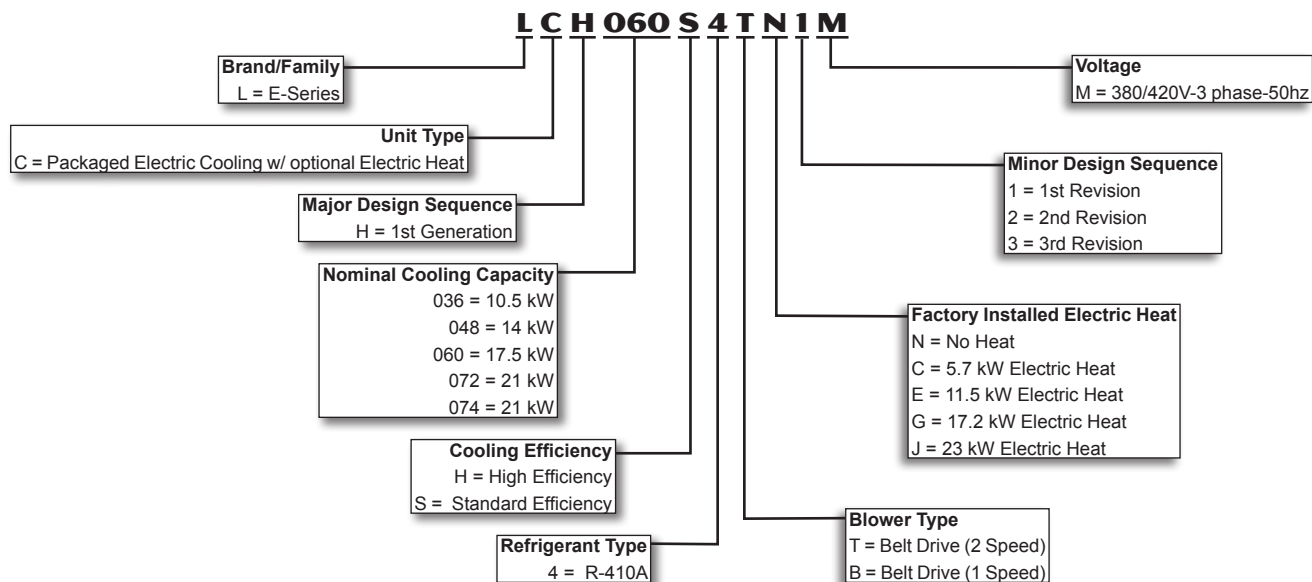

FEATURES AND BENEFITS

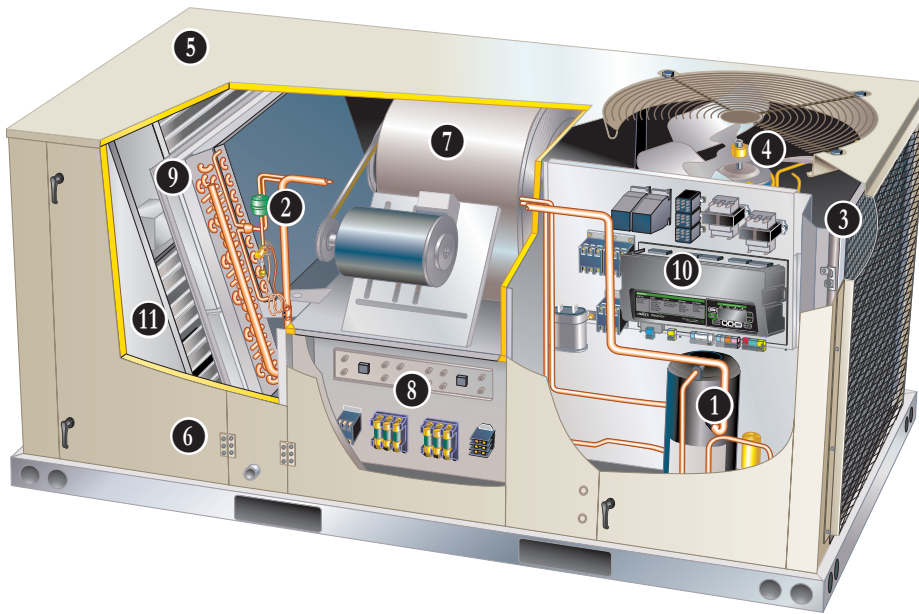

Allied E-Series packaged rooftop unit product line was created to save energy with intelligence by offering some of the highest energy efficiency ratings available with a powerful, easy to use unit controller. This makes **E-Series** rooftop units perfect for business owners looking for a Heating, Ventilation, and Air Conditioning (HVAC) product with the lowest total cost of ownership. **E-Series** rooftop units feature:

- **Two-Stage Scroll Compressor** - All 10.5 to 17.5 kW and 21 kW (074) models feature a two-stage scroll compressor which allows E-Series rooftop units to deliver just the necessary amount of cooling needed to meet the space's demand. Single speed scroll compressor is furnished on 21 kW (072) models.
- **Eco-Last™ Coil System** - Smaller, lighter condenser coil.
- **Hinged Access Panels** - Provide quick access to components and protect panels and roof from damage during servicing.
- **Isolated Compressor Compartment** - Allows performance check during normal compressor operation without disrupting airflow.
- **Corrosion-Resistant Removable, Reversible Drain Pan** - Provides application flexibility, durability and improved serviceability.
- **Thermostatic Expansion Valves** - Provide peak cooling performance across the entire application range.
- **Dehumidification System Option** - Patented system allows for independent control of temperature and humidity, providing enhanced comfort control.
- **MERV 13 (Minimum Efficiency Rating Value) Filters** - Available as factory or field option and provides an enhanced level of indoor air quality.
- **Foil-Faced Insulation** - Insulation on all internal surfaces that have contact with airflow helps minimize airborne fibers and improve indoor air quality (IAQ).
- **Common Components** - Many maintenance items are standard throughout the entire product line, reducing the need to carry different parts to the job or maintain in inventory.

Intelli-Guide™ Control System

Standard on every rooftop unit, the Intelli-Guide™ unit controller is the center of the Intelli-Guide™ Control System. The intuitive user interface makes setup, troubleshooting and service easier than ever. Each unit tracks the runtime of every major component and records the date and time when service or maintenance is performed.



WireRight™ System

The WireRight™ system simplifies field sensor or thermostat installation through advanced connectors that are keyed and color-coded to help prevent miswiring. Not only is the wire coloring scheme standardized across all models, each connection is intuitively labeled to make troubleshooting and servicing quick and easy.

FEATURES AND BENEFITS

CONTENTS

Blower Data	24
Cooling Ratings	17
Dehumidification System Ratings	22
Dimensions - Accessories	40
Dimensions - Unit	39
Electric Heat Capacities	34
Features And Benefits	2
Intelli-Guide™ Control System	6
Model Number Identification	1
Options / Accessories	13
Outdoor Sound Data	35
Sequence Of Operation	10
Specifications	16
Unit Clearances	35
Weight Data	38

PERFORMANCE/QUALITY

Components bonded for grounding to meet safety standards for servicing required by Underwriters Laboratories (UL) and the International Electrotechnical Commission (IEC).

Cooling performance is rated at test conditions included in Air-Conditioning, Heating and Refrigeration Institute (AHRI) Standard 210/240-2008 (036 thru 060) or 340/360-2007 (072/074) while operating at rated voltage and air volumes.

International Organization for Standardization (ISO) 9001 Registered Manufacturing Quality System.

CE MARK OPTION

The CE mark has been added to our rooftop product line as a configure to order (CTO) option. This optional construction allows units to be sold into countries requiring CE marking for rooftop products.



CE marked units meet the requirements of the Machinery Directive 2006/42/EC, Low Voltage Directive 73/23/EEC, EMC Directive 89/336/EEC, and Gas Directive 90/396/EEC. Declaration of conformity certificates will be provided for each CE marked unit on demand.

Key features of this option over and above standard product features are:

- Touch-proof electrical components meeting the requirements of EN 60529.
- Branch circuits over 0.5 kW load have overcurrent protection.
- Rotary style/finger safe disconnect switch with locking handle prevents disconnect door from being opened with the power on. Padlock can be applied to lock the disconnect switch in the OFF position.
- The factory wiring has been redesigned for separation of high and low voltage circuits.

COOLING SYSTEM

Designed to maximize sensible and latent cooling performance at design conditions.

System can operate from -18°C to 52°C without any additional controls.

R-410A Refrigerant

Non-chlorine based, ozone friendly, R-410A.

1 Copeland Scroll Ultra Tech™ Two-Stage Compressor (10.5 to 17.5 kW and 21 kW 074 Models)

Scroll compressors on all models for high performance, reliability and quiet operation. Two-stage scroll compressors are furnished on 10.5 to 17.5 kW and 21 kW (074) models for increased part load efficiency.

Single speed scroll furnished on 21 kW (072) models.

Resiliently mounted on rubber grommets for quiet operation.

Compressor Crankcase Heater
Protects against refrigerant migration that can occur during low ambient operation.

Thermal Expansion Valve
Assures optimal performance throughout the application range.
Removable element head.

2 **Filter/Drier**
High capacity filter/drier protects the system from dirt and moisture.

High Pressure Switch
Protects the compressor from overload conditions such as dirty condenser coils, blocked refrigerant flow, or loss of outdoor fan operation.

Low Pressure Switch
Protects the compressor from low pressure conditions such as low refrigerant charge, or low/no airflow.

Freezestat
Protects the evaporator coil from damaging ice build-up due to conditions such as low/no airflow, or low refrigerant charge.

FEATURES AND BENEFITS


COOLING SYSTEM **(continued)**

3 Eco-Last™ Coil System

Condenser coil features lightweight, all aluminum brazed fin construction.

Constructed of three components:

a flat extrusion tube, fins in-between the flat extrusion tube and two refrigerant manifolds.



Eco-Last™ Coil System Features:

- Improved heat transfer performance due to high primary surface area (flat tubes) versus secondary surface (fins).
- Smaller internal volume (reduced refrigerant charge).
- High durability (all aluminum construction).
- Fewer brazed joints.
- Compact design (reduces unit weight).
- Easy maintenance/cleaning.

Face-split design.

Mounting brackets with rubber inserts secure coil to unit providing vibration dampening and corrosion protection.

Evaporator Coil

Copper tube construction, enhanced rippled-edge aluminum fins, flared shoulder tubing connections, silver soldered construction for improved heat transfer. Factory leak tested. Cross row circuiting with rifled tubing optimizes both sensible and latent cooling capacity.

Condensate Drain Pan

Plastic pan with positive slope.

Side or bottom drain connections.

Reversible to allow connection at back of unit.

4 Outdoor Coil Fan Motor

Thermal overload protected, totally enclosed, permanently lubricated sleeve (036 and 048 models) or ball bearings (060, 072 and 074 models), shaft up, wire basket mount.

Outdoor Coil Fan

Polyvinyl chloride (PVC) coated fan guard furnished.

Required Selections

Cooling Capacity

Specify nominal cooling capacity of the unit.

Options/Accessories

Factory Installed

Conventional Fin/Tube Condenser Coil (replaces Eco-Last™ Coil System)

Copper tube construction, enhanced rippled-edge aluminum fins, flared shoulder tubing connections, silver soldered construction.

Service Valves

Fully serviceable brass valves installed in discharge & liquid lines.

Not available for units equipped with **Eco-Last™** Coil System or dehumidification option.

Factory or Field Installed

Condensate Drain Trap

Field installed only, may be factory enclosed to ship with unit.

Available in copper or polyvinyl chloride (PVC).

Drain Pan Overflow Switch

Monitors condensate level in drain pan, shuts down unit if drain becomes clogged.

CABINET

5 Construction

Heavy-gauge steel panels and full perimeter heavy-gauge galvanized steel base rail provides structural integrity for transportation, handling, and installation.

Base rails have rigging holes.

Three sides of the base rail have forklift slots.

Raised edges around duct and power entry openings in the bottom of the unit provide additional protection against water entering the building.

Airflow Choice

Units are shipped in downflow (vertical) configuration, can be field converted to horizontal airflow configuration without any optional kits.

Duct Flanges

Provided for horizontal duct attachment.

Power Entry

Electrical lines can be brought through the unit base or through horizontal access knock-outs.

Exterior Panels

Constructed of heavy-gauge, galvanized steel with a two-layer enamel paint finish.

Insulation

All panels adjacent to conditioned air are fully insulated with non-hygroscopic fiberglass insulation.

Unit base is fully insulated. The insulation also serves as an air seal to the roof curb, eliminating the need to add a seal during installation.

6 Access Panels

Hinged tool-less access panels are provided for the economizer/filter section, and compressor/controls section.

All hinged panels have seals and quarter-turn latching handles to provide a tight air and water seal.

FEATURES AND BENEFITS

CABINET (continued)

NOTE - Optional Economizers, Power Exhaust, Outdoor Air Dampers and Barometric Relief Dampers for 060/072/074 models include a filler panel for proper cabinet fit.

Required Selections

Airflow Configuration

Specify horizontal or downflow.

Options/Accessories

Factory Installed

Corrosion Protection

A completely flexible immersed coating with an electrodeposited dry film process. (AST ElectroFin E-Coat) Meets Mil Spec MIL-P-53084, ASTM B117 Standard Method Salt Spray Testing.

Indoor Corrosion Protection:

- Coated coil
- Coated reheat coilpainted blower housing

- Painted base

Outdoor Corrosion Protection:

- Coated coil
- Painted base

Field Installed

Combination Coil/Hail Guards

Heavy gauge steel frame painted to match cabinet with expanded metal mesh to protect the outdoor coil from damage.

BLOWER

A wide selection of supply air blower options are available to meet a variety of airflow requirements.

Overload protected, equipped with ball bearings.

Belt drive motors with two-speed capability (low static/high static) are available on 036, 048, 060 and 074 models in several different sizes to maximize air performance.

Single speed belt drive motor is available on 072 models.

7 Supply Air Blower

Forward curved blades, blower wheel is statically and dynamically balanced.

All belt drive motors have adjustable pulley for speed change.

Ordering Information

Specify motor kW and drive kit number when base unit is ordered.

Required Selections

Order one drive kit, see Drive Kit Specifications Table.

ELECTRICAL

WireRight™ System

Advanced wiring connectors are keyed and color-coded to prevent miswiring. Wire coloring scheme is standardized across all models. Each connection is intuitively labeled to make troubleshooting and servicing quick and easy.

Electrical Plugs

Positive connection electrical plugs are used to connect common accessories or maintenance parts for easy removal or installation.

Options/Accessories

Factory or Field Installed

8 Electric Heat

Electric heat is CE marked.

Helix wound nichrome elements, individual element limit controls, wiring harness. Unit fuse block is furnished as standard. See Options / Accessories tables for ordering information.

INDOOR AIR QUALITY

9 Air Filters

Disposable 51 mm filters furnished as standard.


Options/Accessories

Factory or Field Installed

High Efficiency Air Filters

Disposable MERV 8 or MERV 13 (Minimum Efficiency Reporting Value based on ASHRAE 52.2) efficiency 51 mm pleated filters.

UVC Germicidal Lamps

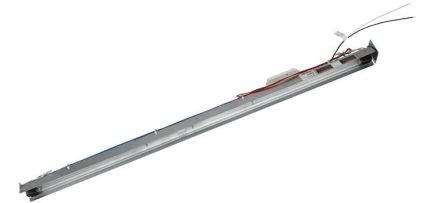

Helps eliminate mold and bacterial growth on the evaporator and drain pans. Improves indoor air quality and maintains efficiency of system by reducing fouling of evaporator coil.

Field Installed

Indoor Air Quality (CO2) Sensors

Monitors CO2 levels, reports to the Intelli-Guide™ Unit Controller which adjusts economizer dampers as needed.

INTELLI-GUIDE™ CONTROL SYSTEM

10 INTELLI-GUIDE™ 2.0 UNIT CONTROLLER



The Intelli-Guide unit controller is a microprocessor-based controller that provides flexible control of all unit functions.

Features:

LCD Display - Easy to read menu with buttons for menu navigation. during setup and diagnostics. 4 lines x 20 character display.

Menu LEDs - Four LEDs (*Data, Setup, Service, Settings*) aid in menu navigation.

Main Menu and Help Buttons - Quick navigation to home screen and built-in help functions.

Scroll, Value Adjustment Select and Save Buttons

Simplified Setup Procedure - SETUP menu insures proper installation and setup of the rooftop unit.

Profile Setup - Copy key settings between units with the same configuration greatly reducing setup time.

USB Port - Allows a technician to download and transfer unit information to help verify service was performed.

USB drive will also allow updating software on the Intelli-guide™ Control System to obtain enhanced functionality without the need to change components.

Unit Controller Software

Unit Self-Test - Unit Controller can perform a rooftop unit self-test to verify individual critical component and system performance. Included is an economizer test function that helps assure the economizer is operating correctly.

Time Clock with Run-time Information

Built-In Functions Include:

Adjustable Blower On/Off Delay

Built-in Control Parameter Defaults

Compressor Time-Off Delay

DDC Compatible

Dirty Filter Switch Input

Discharge Air Temperature Control

Display/Sensor Readout

Economizer Control Options -

See Economizer / Outdoor Air / Exhaust Options.

Fresh Air Tempering

Extensive Unit Diagnostics -

Over 100 diagnostic and status messages in English.

Exhaust Fan Control Modes -

Fresh air damper position.

Permanent Diagnostic Code Storage

Field Adjustable Control

Parameters - Over 200 different control settings.

Indoor Air Quality Input -

Demand Control Ventilation ready

Low Ambient Controls - Cooling

operation down to 0°F.

Gas Valve Time Delay Between First and Second Stage

Minimum Compressor Run Time

Network Capable - Can be daisy chained to other units or controls.

Night Setback Mode

Return Air Temperature Limit Control

Safety Switch Input - Allows Controller to respond to a external safety switch trip.

Service Relay Output

Smoke Alarm Mode - Four choices (unit off, positive pressure, negative pressure, purge).

Staging - Up to 2 heat/2 cool (standard Intelli-Guide™ unit controller thermostat input). Up to 3 cool with additional relay. Up to 4 cool with room sensor or network operation.

“Strike Three” Protection

NOTE - Intelli-Guide™ Control System features shown vary with the type of rooftop unit the control is installed in.

NOTE - See separate Intelli-Guide™ Control System Product Specifications Bulletin for additional information.

Gas Reheat Control -

Simultaneous heating and cooling operation for controlling humidity for process air applications such as supermarkets.

On Demand Dehumidification -

Monitors and controls condenser hot gas reheat operation with Humiditrol® option.

Thermostat Bounce Delay

Warm Up Mode Delay

LED Indicators

PC Interface - Connect to the Intelli-Guide™ unit controller from a PC with the Lennox Unit Controller Software.

Room Sensor Operation -

Controls temperature.

Options/Accessories

Factory or Field Installed

Blower Proving Switch

Monitors blower operation, shuts down unit if blower fails.

Dirty Filter Switch

Senses static pressure increase indicating dirty filter condition.

Control Options

Factory or Field Installed

Fresh Air Tempering

Used in applications with high outside air requirements. The Controller energizes the first stage heat as needed to maintain a minimum supply air temperature for comfort, regardless of the thermostat demand. When ordered as a factory option, the sensor ships with the unit but must be field installed.

Smoke Detector

Photoelectric type, installed in supply air section, return air section or both sections. Available with power board and single sensor (supply or return) or power board and two sensors (supply and return). Power board located in unit control compartment.

Interoperability via BACnet® or LonTalk® Protocols

Communication compatible with third-party automation systems that support the BACnet Application Specific Controller device profile, LonMark® Space Comfort Controller functional profile, or LonMark Discharge Air Controller functional profile.

OPTIONS / ACCESSORIES

Controls Options (continued)

Commercial Control Systems

Aftermarket DDC

Novar® ETM modules and options.

Thermostats

Control system and thermostat options. Aftermarket unit controller options.

Field Installed

Humidity Sensor Kit

Humidity sensor required with factory installed dehumidification option or Supermarket reheat field selectable option.

General Purpose Control Kit

Plug-in control provides additional analog and digital inputs/outputs for field installed options.

11. ECONOMIZER

Economizer operation is set and controlled by the Intelli-Guide™ Unit Controller.

Simple plug-in connections from economizer to unit controller for easy installation.

Optional sensors may be used instead of unit sensors to determine whether outdoor air is suitable for free cooling. See Options/Accessories table.

Factory or Field Installed

High Performance Economizer
Combination Outdoor Air Hood is furnished.

Factory installed Economizer can be ordered with three exhaust options:

- Barometric Relief Dampers
- Power Exhaust Fan
NOTE - See Power Exhaust Fan section for additional requirements.
- No Exhaust.

Field installed Economizer includes Barometric Relief Dampers with Combination Hood.

Barometric Relief Dampers allow relief of excess air, dampers prevent blow back and outdoor air infiltration during off cycle, bird screen furnished.

NOTE - Barometric Relief Dampers are required when Economizer is factory installed with field or factory installed Power Exhaust Fan option. See Power Exhaust Fan section and Options/Accessories table.

Demand Control Ventilation (DCV) ready using optional CO2 sensors. Horizontal Economizer Conversion kit is available for field installation.

Horizontal Barometric Dampers are required for horizontal Economizer applications and must be ordered separately.

Gear-driven action, high torque 24-volt fully-modulating spring return damper motor, return air and outdoor air dampers, plug-in connections to unit, nylon bearings, enhanced neoprene blade edge seals and flexible stainless steel jamb seals to minimize air leakage. Refer to Installation Instructions for complete setup information.

Differential Sensible Control

Factory setting. Uses outdoor air and return air sensors that are furnished with the unit. The Intelli-Guide™ Unit Controller compares outdoor air temperature and return air and using setpoints, enables the economizer when the outdoor air temperature is below the configured setpoint and cooler than return air.

NOTE - Differential Sensible Control can be configured in the field to provide Offset Differential Sensible Control or Single Sensible Control.

In Offset Differential Sensible Control mode, the economizer is enabled if the temperature differential (offset) between outdoor air and return air reaches the configured setpoint. In Single Sensible Control mode, the economizer is enabled when outdoor air temperature falls below the configured setpoint.

Global Control

The unit controller communicates with a DDC system with one global sensor (enthalpy or sensible) to determine whether outside air is suitable for free cooling on all units connected to the control system. Sensor must be field provided.

ECONOMIZER (continued)

Factory or Field Installed

Single Enthalpy Temperature Control

Outdoor air enthalpy sensor enables Economizer if the outdoor enthalpy is less than the setpoint of the control.

Differential Enthalpy Control

Order two Single Enthalpy Controls. One is field installed in the return air section, the other in the outdoor air section. Allows the economizer control to select between outdoor air or return air, whichever has lower enthalpy.

Field Installed

Building Pressure Control

Maintains constant building pressure level.

Using information from a differential pressure between the outdoor air and the building air, the Intelli-Guide™ unit controller changes the economizer position to help maintain a constant building pressure.

NOTE - Not available with Demand Control Ventilation (CO2 Sensor).

Horizontal Barometric Relief Dampers

For use when unit is configured for horizontal applications with an economizer.

Allows relief of excess air.

Blade type dampers prevent blow back and outdoor air infiltration during off cycle.

Field installed in return air duct.

Exhaust hood with bird screen furnished.

Requires Horizontal Economizer Conversion Kit.

Horizontal Economizer Conversion Kit

Insulated panel covers the bottom return air opening on the unit base to convert downflow economizer to horizontal air flow.

EXHAUST

Factory or Field Installed

Power Exhaust Fan

Installs internal to unit for downflow applications with economizer option. Provides exhaust air pressure relief. Interlocked to run when supply air blower is operating, fan runs when outdoor air dampers are 50% open (adjustable), motor is overload protected.

Fan is 406 mm diameter with 4 fan blades and a 0.25 kW motor.

NOTE - If Power Exhaust is field installed with a factory installed Economizer, the Economizer must be ordered with No Exhaust option. Barometric Relief Dampers must also be ordered separately for field installation.

NOTE - If Power Exhaust is factory installed with a factory installed Economizer, Barometric Relief Dampers must also be ordered separately for field installation.

OUTDOOR AIR

Factory or Field Installed

Outdoor Air Dampers - Downflow or Horizontal

Single blade damper, 0 to 25% (fixed) outdoor air adjustable, installs in unit.

Automatic model features fully modulating spring return damper motor with plug-in connection. Manual model features a slide damper. Maximum mixed air temperature in cooling mode: 38°C. Outdoor Air Hood is furnished.

ROOF CURBS

Nailer strip furnished, mates to unit, US National Roofing Contractors Approved, shipped knocked down.

Hybrid Roof Curbs, Downflow

Roof curb can be assembled using interlocking tabs to fasten corners together. No tools required.

Curb can also be fastened together with furnished hardware.

Available in 203, 356, 457, and 610 mm heights.

See Options/Accessories table.

Adjustable Pitch Curb

Fully adjustable pitch curb provides a level platform for rooftop units allowing flexible installations on roofs with uneven or sloped angles.

Maximum slope is 19 mm per 300 mm in any direction.

Uses interlocking tabs to fasten corners together. No tools required.

Hardware is furnished to connect upper curb with lower curb.

Available in 356 mm height.

Adaptor Curbs (not shown)

Curbs are regionally sourced. Dimensions will vary based upon the source. Contact your local sales representative for a detailed cut sheet with applicable dimensions.

CEILING DIFFUSERS

Ceiling Diffusers (Flush or Step-Down)

Diffuser face and grilles with white powder coat finish, insulated (UL listed duct liner), diffuser box with collars for duct connection, fixed blades (flush diffusers) and double deflection blades (step-down diffusers), provisions for suspending, internally sealed (prevents recirculation), removable return air grille, adapts to T-bar ceiling grids or plaster ceilings.

Transitions (Supply and Return)

Used with diffusers, installs in roof curb, galvanized steel construction, flanges furnished for duct connection to diffusers, fully insulated.

DEHUMIDIFICATION® SYSTEM

Factory installed option designed to control humidity.

Provides dehumidification on demand using American Society of Heating, Refrigeration and Air Conditioning Engineers (ASHRAE) 90.1 recommended method for comfort conditioning humidity control.

Unit comes equipped with one row reheat coil, solenoid valve and humidity controller.

In addition to a thermostat or room sensor used for conventional operation, a humidity sensor is required and must be located in the occupied space. Remote Mounted Humidity Sensor Kit is required for field installation.

The humidity sensor provides input to the Unit Controller which is used to control activation of the dehumidification operation.

Reheat controls are located in the compressor control section of the unit for easy access.

Benefits

Improves indoor air quality.

Helps prevent damage due to high humidity levels.

Improves comfort levels by reducing space humidity levels.

OPERATION

No Dehumidification Demand

The unit will operate conventionally whenever there is a demand for cooling or heating and no dehumidification demand.

Free cooling is only permitted when there is no demand for dehumidification.

Dehumidification Demand Only

The Unit Controller is factory set at 60% relative humidity setpoint and can be adjusted at the Unit Controller or with optional Unit Controller Software.

Reheat operation will initiate on a dehumidification demand and does not require a cooling demand.

The unit will operate in the dehumidification mode until the relative humidity of the conditioned space is below the setpoint.

The reheat coil is sized to provide

20°C to 24°C supply air during reheat operation.

This reduces sensible cooling capacity and extends compressor run time to control humidity when the cooling load is low.

A solenoid valve diverts hot gas from the compressor to the reheat coil.

The cooled and dehumidified air from the evaporator is reheated as it passes through the reheat coil.

The de-superheated and partially condensed refrigerant continues to the outdoor condenser coil where condensing is completed. The unit will continue to operate in this mode until the dehumidification demand is satisfied.

See Sequence of Operation for additional information.

Dehumidification and Cooling Demand (Thermostat/Room Sensor Application)

Two-stage compressor models (036, 048, 060, 074)

If both a dehumidification and a Y1 cooling demand occur, the system will operate in the full cooling mode at first stage indoor air flow. If a Y2 cooling demand occurs along with a dehumidification demand, the system operates in full cooling mode at full cooling airflow until the Y2 cooling demand is satisfied. Then the system will revert to the dehumidification mode if a dehumidification mode demand is present.

Single speed compressor model (072H)


If both a dehumidification and a cooling demand occur, the system will operate in cooling until the cooling demand is satisfied. Then the system will energize the dehumidification mode.

Options / Accessories

Humidity Sensor Kit

Remote Mounted Humidity sensor required with factory installed dehumidification Option or Supermarket reheat field selectable option.

TYPICAL DEHUMIDIFICATION SCHEMATIC

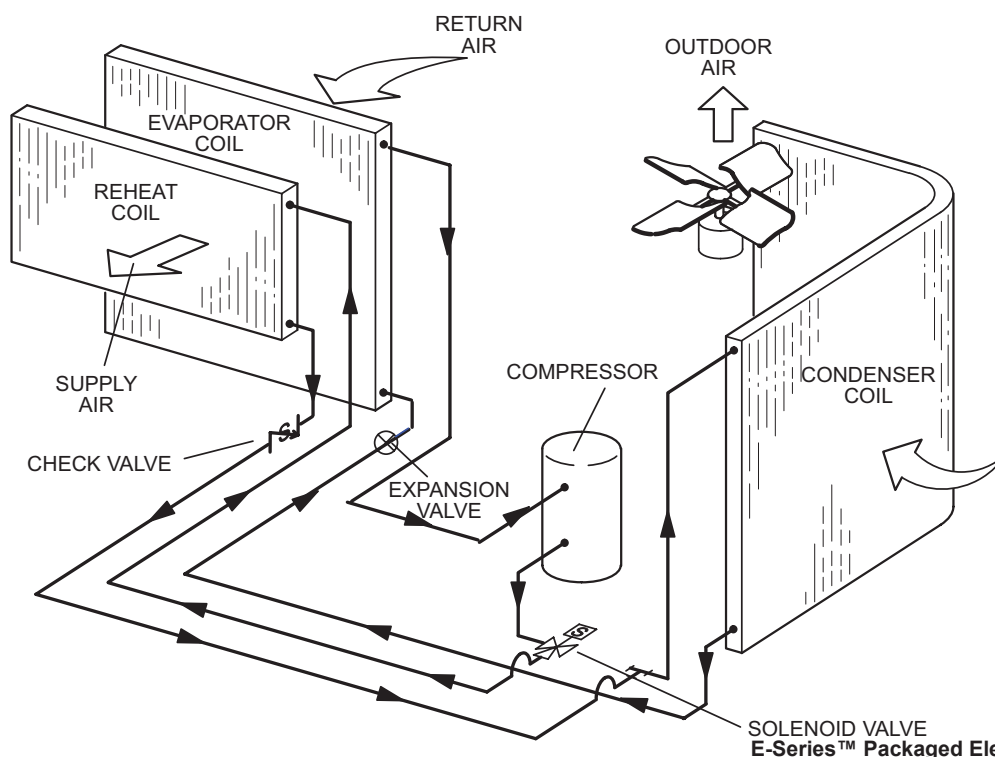

SEQUENCE OF OPERATION

Objective: Outline the unit functions as a result of room thermostat or zone sensor demands.

Given: When economizer is present, it will function as initial part of the unit cooling system. When not present, unit will function as if outdoor ambient is high and sensed as not suitable.

BELT DRIVE SYSTEM OPERATION (036 THROUGH 060 AND 074 MODELS):

Modulating Outdoor Air Damper:

Damper minimum positions #1 and 2 are adjusted during unit setup to provide minimum fresh air requirements at the indicated supply fan speeds per American Society of Heating, Refrigeration, and Air Conditioning Engineers (ASHRAE) 62.1.

- Supply fan is off and the outdoor air damper is closed
- Supply fan is on low speed and the outdoor air damper is at minimum position 1
- Supply fan is on high speed and the outdoor air damper is at minimum position 2

¹Unit Features an Economizer and Outdoor Air is Suitable

Cooling - Thermostat or Zone Sensor Mode (Up to 3 stages Y1, Y2, Y3)

Y1 demand:

1st: Compressor is off, supply fan is on low speed, economizer modulates (minimum to maximum open position) to maintain 13°C supply air temperature (default unit controller setting)

2nd: After 5 minutes (default unit controller setting), supply fan switches to high speed. Economizer continues modulating with supply fan on high speed to maintain 13°C supply air temperature

Y2 demand:

1st: Compressor is off, supply fan is on high speed, and economizer modulates to maintain 13°C supply air temperature

2nd: Economizer opens to maximum. If economizer stays at maximum open for 3 minutes (default unit controller setting) compressor is energized and operates at first stage while supply fan stays on high speed

¹ Outdoor air suitability is determined by the energy state of outdoor ambient (enthalpy or sensible) and its ability to achieve the desired free cooling effects. Outdoor air suitability can also be determined by a third party controller and provided to the rooftop unit (RTU) via a network connection.

Y3 demand:

1st: Economizer is at maximum open and compressor operates at first stage. If economizer stays at maximum open for 3 minutes (default unit controller setting) compressor switches to second stage operation while supply fan stays on high speed

Unit Does not Feature an Economizer (or Outdoor Air Is Not Suitable)

Cooling - Thermostat or Zone Sensor (Up to 2 stages Y1, Y2)

Y1 demand:

1st: Compressor operates at first stage and supply fan operates at low speed

Y2 demand:

1st: Compressor operates at second stage and supply fan operates at high speed

(Continued on Next Page)

SEQUENCE OF OPERATION

BELT DRIVE SYSTEM OPERATION (036 THROUGH 060 AND 074 MODELS) (Continued):

Dehumidification Mode (economizer free cooling is locked out):

Unit features the dehumidification system

No Y1, Y2 demand but a call for dehumidification:

1st: Compressor operates at second stage, supply fan operates at low speed, and the reheat valve is energized

Y1 demand:

1st: Compressor operates at second stage, outdoor fan operates at high speed, supply fan operates at low speed and the reheat valve is de-energized

Y2 demand:

1st: Compressor operates at second stage, supply fan operates at high speed, and the reheat valve is de-energized

Heating mode: Thermostat or Zone Sensor (1 stage W1)

W1 demand:

1st: Electric Heat is energized and the supply fan operates at high speed

SEQUENCE OF OPERATION

SINGLE STAGE UNIT OPERATION (072)

Modulating Outdoor Air Damper:

Damper minimum positions are adjusted during unit setup to provide minimum fresh air requirements at the indicated supply fan speeds per American Society of Heating, Refrigeration, and Air Conditioning Engineers (ASHRAE) 62.1.

- 1) Supply fan is off and the outdoor air damper is closed
- 2) Supply fan is on and the outdoor air damper is at minimum position

¹ Unit Features an Economizer and Outdoor Air is Suitable

Cooling - Thermostat or Zone Sensor (Up to 2 stages Y1, Y2).

Y1 demand:

1st: Compressor is off, supply fan is on, economizer modulates (minimum to maximum open position) to maintain 13°C supply air temperature (default unit controller setting)

Y2 demand:

1st: Economizer goes to maximum open position and if the damper stays open for three minutes (default unit controller setting) the compressor is energized.

Unit Does Not Feature an Economizer (or outdoor air is not suitable)

Cooling - Thermostat or Zone Sensor (Up to 1 stage Y1).

Y1 demand:

1st: Compressor is operating and supply fan is on.

Dehumidification Mode (economizer free cooling is locked out):

Unit features the dehumidification system

No Y1 demand but a call for dehumidification:

1st: Compressor is operating, supply fan is on, and the reheat valve is energized.

Y1 demand:

1st: Compressor is operating, supply fan is on, and the reheat valve is de-energized.

Y2 demand:

1st: Compressor is operating, supply fan is on, and the reheat valve is de-energized.

Heating mode: Thermostat or Zone Sensor (1 stage W1)

W1 demand:

1st: Electric Heat is energized and the supply fan operates at high speed

OPTIONS / ACCESSORIES

Item	Model Number	Catalog Number	Unit				
			036	048	060	072	074
CE MARK							
CE Marked Unit		Factory	O	O	O	O	O
COOLING SYSTEM							
Condensate Drain Trap	Polyvinyl Chloride (PVC) - C1TRAP20AD2	76W26	OX	OX	OX	OX	OX
	Copper - C1TRAP10AD2	76W27	OX	OX	OX	OX	OX
Drain Pan Overflow Switch	E1SNSR71AD1	68W88	OX	OX	OX	OX	OX
Efficiency	Standard		O	O	O		
	High		O	O	O	O	O
Service valves (not for Eco-Last™ Coil System or equipped units)		Factory	O	O	O	O	O
BLOWER - SUPPLY AIR							
Motors	Belt Drive - 0.47 kW (2 Speed)	Factory	O	O			
	Belt Drive - 0.62 kW (2 Speed)	Factory	O		O		
	Belt Drive - 1.24 kW (2 Speed)	Factory		O	O		O
	Belt Drive - 1.5 kW Standard Efficiency	Factory				O	
Drive Kits See Blower Data Tables for selection	Kit A01 - T1DRKT001-1 - 374-842 rev/min	Factory	O				
	Kit A02 - T1DRKT002-1 - 414-931 rev/min	Factory		O			
	Kit A03 - T1DRKT003-1 - 463-1042 rev/min	Factory			O		
	Kit A05 - T1DRKT005-1 - 498-1122 rev/min	Factory	O				
	Kit A06 - T1DRKT006-1 - 595-1191 rev/min	Factory		O			
	Kit A07 - T1DRKT007-1 - 673-1290 rev/min	Factory			O		
	Kit AA02 - T1DRKT002AP1 - 527-729 rev/min	Factory				O	
	Kit AA03 - T1DRKT003AP1 - 665-921 rev/min	Factory				O	O
	Kit AA04 - T1DRKT004AP1 - 768-1023 rev/min	Factory				O	O
CABINET							
Combination Coil/Hail Guards	C1GARD51A-1	13R98	X	X			
	C1GARD51AT1	13T03			X	X	X
Corrosion Protection (indoor coil / outdoor coil)		Factory	O	O	O	O	O
CONTROLS							
Blower Proving Switch	C1SNSR35FF1	53W65	OX	OX	OX	OX	OX
Commercial Controls	Novar® LSE	Factory	O	O	O	O	O
	Novar 2051 - E0CTRL30A1	64W72	OX	OX	OX	OX	OX
	Intelli-Guide™ Control System - BACnet® Module - C0CTRL60AE1L	59W51	OX	OX	OX	OX	OX
	Intelli-Guide™ Control System - LonTalk® Module - C0CTRL65FF1	54W27	OX	OX	OX	OX	OX
Dirty Filter Switch	E1SNSR55AP1	53W66	OX	OX	OX	OX	OX
General Purpose Control Kit	E1GPBK30C1	13J78	X	X	X	X	X
Fresh Air Tempering	C1SNSR75AD1	58W63	OX	OX	OX	OX	OX
Smoke Detector - Supply or Return (Power board and one sensor)	C1SNSR44AP1	53W78	OX	OX	OX	OX	OX
Smoke Detector - Supply and Return (Power board and two sensors)	C1SNSR43AP1	53W79	OX	OX	OX	OX	OX
ELECTRICAL							
Voltage 50 hz with neutral (No neutral on CE marked models)	380/420V - 3 phase	Factory	O	O	O	O	O

NOTE - Catalog and model numbers shown are for ordering field installed accessories.

OX - Configure To Order (Factory Installed) or Field Installed

O = Configure To Order (Factory Installed)

X = Field Installed

OPTIONS / ACCESSORIES

Item	Model Number	Catalog Number	Unit				
			036	048	060	072	074
1 ELECTRIC HEAT							
5.7 kW	380/420V-3ph - E1EH0057AN1M	67W88	OX	OX	OX	OX	OX
11.5 kW	380/420V-3ph - E1EH0115AN1M	67W89	OX	OX	OX	OX	OX
17.2 kW	380/420V-3ph - E1EH0172N-1M	67W90			OX	OX	OX
23 kW	380/420V-3ph - E1EH0230N-1M	67W91				OX	OX
ECONOMIZER							
High Performance Economizer With Outdoor Air Hood (Sensible Control)							
High Performance Economizer - Includes Barometric Relief Dampers and Exhaust Hood	E1ECON17A-1	10U54	OX	OX	OX	OX	OX
Economizer Accessories							
Horizontal Economizer Conversion Kit	T1HECK00AN1	17W45	X	X	X	X	X
Economizer Controls							
Differential Enthalpy	Order 2 - C1SNSR64FF1	53W64	OX	OX	OX	OX	OX
Sensible Control	Sensor is Furnished	Factory	O	O	O	O	O
Single Enthalpy	C1SNSR64FF1	53W64	OX	OX	OX	OX	OX
Global Control	Sensor Field Provided	Factory	O	O	O	O	O
Building Pressure Control	E1GPBK20C1	13J77	X	X	X	X	X
POWER EXHAUST FAN (DOWNFLOW ONLY)							
Standard Static	380/420V-3ph - C1PWRE10A-1M	79W93	OX	OX	OX	OX	OX
NOTE - Factory or Field installed Power Exhaust Fan requires “Barometric Relief Dampers for Power Exhaust Kit” for field installation. See below.							
BAROMETRIC RELIEF							
2 Barometric Relief Dampers for Power Exhaust Kit	C1DAMP50A-3-	19D42	X	X	X	X	X
3 Horizontal Barometric Relief Dampers With Exhaust Hood	LAGEDH03/15-2	19F01	X	X	X	X	X
OUTDOOR AIR							
Outdoor Air Dampers With Outdoor Air Hood							
Motorized	C1DAMP21A-1	15D17	OX	OX	OX	OX	OX
Manual	C1DAMP11A-2	15D18	OX	OX	OX	OX	OX
CONDENSER REHEAT OPTION							
Dehumidification		Factory	O	O	O	O	O
Humidity Sensor Kit, Remote mounted (required)	COSNSR31AE-1	17M50	X	X	X	X	X

¹ Nominal kW at 420V-3ph-50hz.

² Required when Economizer is factory installed with factory or field installed Power Exhaust Fan option.

³ Required when Economizer is configured for horizontal airflow.

NOTE - Catalog and model numbers shown are for ordering field installed accessories.

OX - Configure To Order (Factory Installed) or Field Installed

O = Configure To Order (Factory Installed)

X = Field Installed

OPTIONS / ACCESSORIES

Item	Model Number	Catalog Number	Unit				
			036	048	060	072	074
INDOOR AIR QUALITY							
Air Filters							
High Efficiency Air Filters Order 4 per unit	MERV 8 (406 x 508 x 51 mm) - C1FLTR15A-1-	54W20	OX	OX			
	MERV 13 (406 x 508 x 51 mm) - T1FLTR40A-1-	52W37	OX	OX			
	MERV 8 (508 x 508 x 51 mm) - C1FLTR15D-1-	54W21			OX	OX	OX
	MERV 13 (508 x 508 x 51 mm) - C1FLTR40D-1-	52W39			OX	OX	OX
Replaceable Media Filter With Metal Mesh Frame (includes non-pleated filter media)	406 x 508 x 51 mm (Order 4) - K1FLTR30A-1	39W09	X	X			
	508 x 508 x 51 mm (Order 4) - K1FLTR30A-2	44N60			X	X	X
Indoor Air Quality (CO2) Sensors							
Sensor - Wall-mount, off-white plastic cover with LCD display	C0SNSR50AE1L	77N39	X	X	X	X	X
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	87N53	X	X	X	X	X
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	87N52	X	X	X	X	X
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0SNSR53AE1L	87N54	X	X	X	X	X
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	85L43	X	X	X	X	X
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	90N43	X	X	X	X	X
UVC Germicidal Lamps							
¹ UVC Light Kit (220V-1ph)	C1UVCL10AN1-	50W90	OX	OX	OX	OX	OX
ROOF CURBS							
Hybrid Roof Curbs, Downflow							
203 mm height	C1CURB70A-1	11F50	X	X	X	X	X
356 mm height	C1CURB71A-1	11F51	X	X	X	X	X
457 mm height	C1CURB72A-1	11F52	X	X	X	X	X
610 mm height	C1CURB73A-1	11F53	X	X	X	X	X
Adjustable Pitch Curb, Downflow							
356 mm height	C1CURB55AT1	43W27	X	X	X	X	X
							X
CEILING DIFFUSERS							
Step-Down - Order one	RTD9-65S	13K60	X	X	X		
	RTD11-95S	13K61				X	X
Flush - Order one	FD9-65S	13K55	X	X	X		
	FD11-95S	13K56				X	X
Transitions (Supply and Return) - Order one	T1TRAN10AN1	17W53	X	X	X		
	T1TRAN20N-1	17W54				X	X

¹ Lamps operate on 220V single-phase power supply. Step-down transformer may be ordered separately for 380/420V primary to 220V secondary units. Alternately, 220V power supply may be used to directly power the UVC ballast(s).

NOTE - Catalog and model numbers shown are for ordering field installed accessories.

OX - Configure To Order (Factory Installed) or Field Installed

O = Configure To Order (Factory Installed)

X = Field Installed

SPECIFICATIONS

General Data		Nominal kW (Tons)	10.6 kW (3 Ton)	14 kW (4 Ton)	17.6 kW (5 Ton)	21 kW (6 Ton)	21 kW (6 Ton)
		Model Number	LCH036S4T	LCH048S4T	LCH060S4T	LCH072H4B	LCH074H4T
		Efficiency Type	Standard	Standard	Standard	High	High
		Blower Type	Two Speed Belt Drive	Two Speed Belt Drive	Two Speed Belt Drive	Single Speed Belt Drive	Two Speed Belt Drive
Cooling Performance	Gross Cooling Capacity - kW (Btuh)	9.5 (32 400)	12.6 (43 000)	16.4 (56 000)	19.6 (67 000)	18.3 (62 300)	
	Net Cooling Capacity - kW (Btuh)	¹ 9.2 (31 400)	¹ 12.2 (41 500)	¹ 15.9 (54 500)	² 19.2 (65 500)	17.5 (59 700)	
	AHRI Rated Air Flow - L/s (cfm)	565 (1200)	755 (1600)	825 (1750)	905 (1920)	991 (2100)	
	Total Unit Power - kW	2.7	3.7	4.5	5.2	4.9	
	SEER (Btuh/Watt)	¹ 15.0	¹ 15.0	¹ 15.5	---	---	
	IEER (Btuh/Watt)	---	---	---	² 13.5	² 16.2	
	¹ EER (Btuh/Watt) at 35°C (95°F)	¹ 11.5	¹ 11.8	¹ 12.0	² 12.0	² 12.2	
³ EER (Btuh/Watt) at 46°C (115°F)	8.1	8.2	8.3	8.5	8.5		
Refrigerant Charge	Refrigerant Type	R-410A	R-410A	R-410A	R-410A	R-410A	
	Eco-Last™ Coil System	1.96 kg (4 lbs. 5 oz.)	2.83 kg (6 lbs. 4 oz.)	3.63 kg (8 lbs. 0 oz.)	3.40 kg (7 lbs. 8 oz.)	3.23 kg (7 lbs 2 oz.)	
	Conventional Fin/Tube Coil	3.86 kg (8 lbs. 8 oz.)	5.05 kg (11 lbs. 2 oz.)	6.35 kg (14 lbs. 0 oz.)	6.24 kg (13 lbs. 12 oz.)	6.21 kg (13 lbs. 11 oz.)	
	Eco-Last™ Coil System With Dehumidification	2.32 kg (5 lbs. 2 oz.)	2.95 kg (6 lbs. 8 oz.)	3.63 kg (8 lbs. 0 oz.)	4.08 kg (9 lbs. 0 oz.)	4.05 kg (8 lbs. 15 oz.)	
	Conventional Fin/Tube With Dehumidification Option	4.17 kg (9 lbs. 3 oz.)	5.56 kg (12 lbs. 4 oz.)	7.26 kg (16 lbs. 0 oz.)	6.89 kg (15 lbs. 3 oz.)	7.12 kg (15 lbs. 11 oz.)	
	Electric Heat Available - See Page 10	5.7 and 11.5 kW		5.7, 11.5, and 17.2 kW	5.7, 11.5, 17.2 and 23 kW	5.7, 11.5, 17.2 and 23 kW	
	Compressor Type (number)	Scroll (1)	Scroll (1)	Scroll (1)	Scroll (1)	Scroll (1)	
Outdoor Coil (Fin/Tube)	Net face area (total) - m² (sq. ft.)	1.09 (11.70)/ 1.45 (15.60)	1.09 (11.70)/ 1.45 (15.60)	1.65 (17.80)/ 1.79 (19.30)	1.65 (17.80)/ 1.79 (19.30)	1.65 (17.80)/ 1.79 (19.30)	
	Number of rows	1 (1.5)	1 (2)	1 (2)	1 (2)	1 (2)	
	Fins per m (Fins per inch)	788 (20)	788 (20)	788 (20)	788 (20)	788 (20)	
	Motor - (No.) W (horsepower)	(1) 125 (1/6)	(1) 185 (1/4)	(1) 250 1/3	(1) 250 (1/3)	(1) 249 (1/3)	
Outdoor Coil Fans	Motor rev/min	688	688	896	896	900	
	Total Motor Input - watts	128	176	313	313	284	
	Diameter - (No.) mm (in.)	(1) 610 (24)	(1) 610 (24)	(1) 610 (24)	(1) 610 (24)	(1) 610 (24)	
	Number of blades	3	3	3	3	3	
	Total air volume - L/s (cfm)	1180 (2500)	1295 (2750)	1885 (4000)	1885 (4000)	1848 (3900)	
	Net face area (total) - m² (sq. ft.)	0.72 (7.78)	0.72 (7.78)	0.90 (9.72)	0.90 (9.72)	0.90 (9.72)	
	Tube diameter - mm (in.)	9.5 (3/8)	9.5 (3/8)	9.5 (3/8)	9.5 (3/8)	9.5 (3/8)	
Indoor Coils	Number of rows	3	4	4	4	4	
	Fins per m (Fins per inch)	551 (14)	551 (14)	551 (14)	551 (14)	551 (14)	
	Drain connection (Number) and size - in.	(1) 1 NPT	(1) 1 NPT	(1) 1 NPT	(1) 1 NPT	(1) 1 NPT	
	Expansion device type	Balance port thermal expansion valve, removable head					
	Nominal Motor kW (hp)	0.47 (0.63)	0.47 (0.63)	0.62 (0.83)	1.5 (2)	1.2 (1.66)	
	Maximum usable motor kW (hp)	0.54 (0.72)	0.54 (0.72)	0.71 (0.95)	1.72 (2.3)	1.4 (1.9)	
	Kit # (rev/min range)	A01 (low 374-561) (high 546-842)	A02 (low 414 621) (high 621-931)	A03 (low 463-694) (high 694-1042)	AA02 (527-729) AA03 (665-921) AA04 (768-1023)	AA02 (527-729) AA03 (665-921) AA04 (768-1023)	
4 Indoor Blower and Drive Selection	Nominal Motor kW (hp)	0.62 (0.83)	1.24 (1.66)	1.24 (1.66)	---	---	
	Maximum usable motor kW (hp)	0.71 (0.95)	1.42 (1.91)	1.42 (1.91)	---	---	
	Motor - Drive Kit Number (rev/min range)	A05 (low 498-748) (high 748-1122)	A06 (low 595-794) (high 893-1191)	A07 (low 673-860) (high 1010-1290)	---	---	
	Blower wheel nominal diameter x width - mm (in.)	(1) 254 x 254 (10 x 10)	(1) 254 x 254 (10 x 10)	(1) 254 x 254 (10 x 10)	(1) 381 x 229 (15 x 9)	(1) 381 x 229 (15 x 9)	
	Filters	Type of filter	disposable				
	Number and size - mm (in.)	(4) 406 x 508 x 51 (16 x 20 x 2)		(4) 508 x 508 x 51 (20 x 20 x 2)			
	Electrical characteristics		380/420V-50 hz-3 phase with neutral (No neutral on CE marked models)				

NOTE - Net capacity includes evaporator blower motor heat deduction. Gross capacity does not include evaporator blower motor heat deduction.

^{1,2} Tested at conditions which are based on AHRI Standard ¹ 210/240 or ² 340/360; 35°C (95°F) outdoor air temperature and 27°C (80°F) dry bulb/19°C (67°F) wet bulb entering evaporator air; minimum external duct static pressure while operating at rated voltage and air volumes.

³ Rated at 46°C (115°F) outdoor air temperature and 27°C (80°F) db/19°C (67°F) wb entering evaporator air (T3 Conditions).

⁴ Using total air volume and system static pressure requirements determine from blower performance tables rpm and motor hp required. Maximum usable hp of motors furnished are shown. If motors of comparable hp are used, be sure to keep within the service factor limitations outlined on the motor nameplate.

COOLING RATINGS

NOTE - For Temperatures and Capacities not shown in tables, see bulletin - Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

10.6 kW - LCH036S4 (1ST STAGE)

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																			
		18°C					24°C					29°C					35°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb		
				24°C	27°C	29°C			24°C	27°C	29°C			24°C	27°C	29°C			24°C	27°C	29°C
	L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kBtu/h	kW	24°C	27°C	29°C
17°C	300	7.1	.93	0.71	0.85	1.00	6.7	1.09	0.72	0.88	1.00	6.2	1.26	0.73	0.91	1.00	5.8	1.47	0.75	0.94	1.00
	380	7.5	.93	0.76	0.94	1.00	7.1	1.08	0.77	0.97	1.00	6.6	1.25	0.79	1.00	1.00	6.2	1.45	0.82	1.00	1.00
	455	7.9	.92	0.81	1.00	1.00	7.4	1.07	0.84	1.00	1.00	7.0	1.24	0.87	1.00	1.00	6.6	1.44	0.90	1.00	1.00
19°C	300	7.5	.93	0.56	0.68	0.81	7.1	1.08	0.57	0.70	0.83	6.7	1.25	0.57	0.71	0.86	6.2	1.45	0.57	0.73	0.89
	380	7.9	.92	0.59	0.74	0.90	7.5	1.07	0.59	0.75	0.93	7.0	1.24	0.60	0.77	0.96	6.5	1.44	0.61	0.79	1.00
	455	8.3	.92	0.62	0.79	0.98	7.8	1.07	0.62	0.81	1.00	7.3	1.24	0.65	0.84	1.00	6.8	1.44	0.66	0.87	1.00
22°C	300	8.0	.92	0.42	0.54	0.66	7.6	1.07	0.42	0.55	0.68	7.1	1.24	0.42	0.56	0.69	6.6	1.44	0.42	0.56	0.70
	380	8.4	.92	0.44	0.58	0.72	7.9	1.06	0.44	0.59	0.73	7.4	1.24	0.43	0.58	0.75	6.9	1.43	0.43	0.60	0.77
	455	8.7	.92	0.45	0.61	0.77	8.2	1.06	0.44	0.62	0.79	7.7	1.23	0.45	0.63	0.81	7.2	1.42	0.46	0.65	0.85

10.6 kW - LCH036S4 (2ND STAGE)

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																			
		26.7°C					35°C					43.3°C					46°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb		
				24°C	27°C	29°C			24°C	27°C	29°C			24°C	27°C	29°C			24°C	27°C	29°C
17.2°C	L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C
	455	9.2	1.80	0.74	0.91	1.00	8.4	2.13	0.76	0.95	1.00	7.5	2.54	0.79	1.00	1.00	7.3	2.70	0.82	1.00	1.00
	565	9.6	1.81	0.80	1.00	1.00	8.9	2.15	0.83	1.00	1.00	8.1	2.56	0.88	1.00	1.00	7.8	2.71	0.92	1.00	1.00
19.4°C	680	10.1	1.83	0.86	1.00	1.00	9.3	2.16	0.92	1.00	1.00	8.4	2.57	0.97	1.00	1.00	8.2	2.72	0.99	1.00	1.00
	455	9.7	1.82	0.58	0.72	0.87	8.9	2.15	0.59	0.74	0.91	8.0	2.56	0.60	0.77	0.96	7.7	2.71	0.61	0.81	0.98
	565	10.1	1.83	0.61	0.78	0.96	9.3	2.16	0.63	0.81	1.00	8.3	2.57	0.65	0.86	1.00	8.0	2.71	0.67	0.89	1.00
21.7°C	680	10.5	1.84	0.65	0.84	1.00	9.6	2.17	0.67	0.89	1.00	8.6	2.57	0.70	0.95	1.00	8.2	2.72	0.72	0.97	1.00
	455	10.3	1.84	0.43	0.57	0.70	9.4	2.16	0.42	0.58	0.72	8.5	2.57	0.43	0.59	0.75	8.1	2.72	0.43	0.61	0.78
	565	10.7	1.85	0.45	0.61	0.76	9.8	2.17	0.44	0.62	0.79	8.8	2.57	0.45	0.64	0.83	8.5	2.72	0.46	0.67	0.87
	680	11.0	1.86	0.46	0.64	0.83	10.1	2.18	0.47	0.66	0.87	9.1	2.58	0.47	0.69	0.93	8.7	2.73	0.48	0.72	0.96
Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																			
		48°C					50°C					51.7°C									
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)							
				Dry Bulb					Dry Bulb					Dry Bulb							
				24°C	27°C	29°C			24°C	27°C	29°C			24°C	27°C	29°C					
17.2°C	L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C					
	455	7.1	2.82	0.84	1.00	1.00	6.9	2.95	0.85	1.00	1.00	6.7	3.07	0.84	1.00	1.00					
	565	7.6	2.83	0.93	1.00	1.00	7.4	2.96	0.95	1.00	1.00	7.2	3.08	0.96	1.00	1.00					
19.4°C	680	8.0	2.84	1.00	1.00	1.00	7.7	2.97	1.00	1.00	1.00	7.5	3.09	1.00	1.00	1.00					
	455	7.4	2.82	0.62	0.81	1.00	7.2	2.95	0.63	0.83	1.00	7.0	3.07	0.62	0.82	1.00					
	565	7.7	2.83	0.68	0.91	1.00	7.5	2.96	0.69	0.92	1.00	7.2	3.08	0.68	0.93	1.00					
21.7°C	680	8.0	2.84	0.73	0.99	1.00	7.7	2.96	0.74	1.00	1.00	7.5	3.09	0.73	1.00	1.00					
	455	7.9	2.84	0.43	0.61	0.79	7.6	2.97	0.43	0.62	0.80	7.4	3.08	0.42	0.62	0.79					
	565	8.2	2.84	0.46	0.68	0.88	7.9	2.97	0.46	0.69	0.90	7.7	3.09	0.46	0.68	0.91					
	680	8.4	2.85	0.48	0.73	0.97	8.1	2.97	0.48	0.74	0.99	7.9	3.09	0.48	0.73	1.00					

COOLING RATINGS

NOTE - For Temperatures and Capacities not shown in tables, see bulletin - Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

14 kW - LCH048S4 (1ST STAGE)

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																			
		18°C					24°C					29°C					35°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb		
				L/s	kW	kW			24°C	27°C	29°C			kW	kW	24°C			27°C	29°C	kW
17°C	400	9.7	1.13	0.69	0.84	1.00	9.1	1.36	0.70	0.86	1.00	8.6	1.60	0.71	0.89	1.00	7.9	1.87	0.72	0.91	1.00
	505	10.2	1.12	0.75	0.94	1.00	9.7	1.34	0.76	0.97	1.00	9.1	1.59	0.77	1.00	1.00	8.5	1.86	0.79	1.00	1.00
	605	10.8	1.11	0.81	1.00	1.00	10.3	1.33	0.83	1.00	1.00	9.7	1.57	0.86	1.00	1.00	9.1	1.85	0.89	1.00	1.00
19°C	400	10.4	1.12	0.55	0.68	0.80	9.8	1.34	0.55	0.68	0.82	9.2	1.58	0.55	0.69	0.84	8.6	1.86	0.54	0.70	0.87
	505	11.0	1.11	0.57	0.72	0.89	10.4	1.33	0.56	0.74	0.92	9.7	1.57	0.59	0.75	0.95	9.1	1.85	0.60	0.77	0.99
	605	11.4	1.10	0.61	0.78	0.98	10.8	1.32	0.62	0.79	1.00	10.1	1.56	0.62	0.83	1.00	9.4	1.84	0.64	0.85	1.00
22°C	400	11.1	1.10	0.42	0.53	0.64	10.6	1.32	0.41	0.54	0.65	9.9	1.57	0.40	0.54	0.66	9.2	1.84	0.40	0.54	0.68
	505	11.7	1.09	0.42	0.56	0.70	11.0	1.31	0.39	0.55	0.71	10.4	1.56	0.43	0.57	0.73	9.7	1.83	0.40	0.58	0.75
	605	12.2	1.08	0.43	0.60	0.76	11.5	1.30	0.42	0.61	0.77	10.8	1.55	0.44	0.62	0.79	10.1	1.82	0.43	0.63	0.82

14 kW - LCH048S4 (2ND STAGE)

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																						
		26.7°C						35°C						43.3°C						46°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)					
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb					
L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C				
17.2°C	605	12.4	2.27	0.73	0.90	1.00	11.3	2.69	0.75	0.95	1.00	10.1	3.20	0.78	1.00	1.00	9.8	3.39	0.83	1.00	1.00			
	755	13.1	2.29	0.79	1.00	1.00	12.1	2.71	0.82	1.00	1.00	10.9	3.24	0.88	1.00	1.00	10.5	3.43	0.92	1.00	1.00			
	905	13.9	2.31	0.87	1.00	1.00	12.7	2.74	0.92	1.00	1.00	11.6	3.26	0.98	1.00	1.00	11.2	3.46	1.00	1.00	1.00			
19.4°C	605	13.3	2.29	0.57	0.71	0.86	12.1	2.71	0.56	0.72	0.90	10.9	3.23	0.59	0.76	0.96	10.4	3.42	0.60	0.80	0.99			
	755	13.9	2.31	0.61	0.77	0.97	12.7	2.74	0.61	0.80	1.00	11.3	3.25	0.63	0.85	1.00	10.8	3.44	0.66	0.89	1.00			
	905	14.3	2.33	0.64	0.84	1.00	13.1	2.75	0.66	0.89	1.00	11.7	3.27	0.69	0.96	1.00	11.2	3.45	0.72	0.98	1.00			
21.7°C	605	14.2	2.32	0.42	0.56	0.68	12.9	2.74	0.41	0.56	0.70	11.6	3.26	0.41	0.57	0.73	11.2	3.46	0.42	0.60	0.78			
	755	14.8	2.34	0.44	0.59	0.75	13.5	2.76	0.43	0.61	0.77	12.1	3.28	0.43	0.62	0.82	11.6	3.47	0.44	0.65	0.87			
	905	15.2	2.35	0.45	0.64	0.81	13.9	2.77	0.45	0.65	0.86	12.5	3.30	0.47	0.68	0.93	12.0	3.49	0.48	0.72	0.96			

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil														
		48°C						50°C					51.7°C			
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb		
L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	
17.2°C	605	9.5	3.56	0.84	1.00	1.00	9.2	3.72	0.85	1.00	1.00	9.0	3.88	0.84	1.00	1.00
	755	10.2	3.58	0.94	1.00	1.00	10.0	3.75	0.95	1.00	1.00	9.6	3.91	0.96	1.00	1.00
	905	10.8	3.61	1.00	1.00	1.00	10.5	3.78	1.00	1.00	1.00	10.2	3.93	1.00	1.00	1.00
19.4°C	605	10.1	3.58	0.61	0.81	1.00	9.7	3.74	0.61	0.82	1.00	9.4	3.90	0.60	0.80	1.00
	755	10.5	3.60	0.67	0.91	1.00	10.1	3.76	0.68	0.93	1.00	9.8	3.92	0.66	0.93	1.00
	905	10.8	3.61	0.72	0.99	1.00	10.4	3.77	0.75	1.00	1.00	10.2	3.93	0.72	1.00	1.00
21.7°C	605	10.8	3.60	0.42	0.59	0.78	10.4	3.77	0.41	0.60	0.80	10.1	3.93	0.40	0.60	0.78
	755	11.3	3.63	0.45	0.66	0.89	10.8	3.79	0.45	0.67	0.90	10.5	3.95	0.44	0.66	0.90
	905	11.6	3.64	0.48	0.72	0.97	11.2	3.81	0.50	0.73	0.99	10.8	3.97	0.45	0.72	1.00

COOLING RATINGS

NOTE - For Temperatures and Capacities not shown in tables, see bulletin - Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

17.6 kW - LCH060S4 (1ST STAGE)

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																							
		18°C						24°C						29°C						35°C					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)						
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb						
				L/s	kW	kW			24°C	27°C	29°C			kW	kW	24°C			27°C	29°C	kW	kW	24°C	27°C	29°C
17°C	505	12.0	1.33	0.72	0.86	1.00	11.3	1.60	0.72	0.88	1.00	10.6	1.89	0.73	0.90	1.00	9.8	2.21	0.73	0.92	1.00				
	630	12.7	1.31	0.77	0.93	1.00	12.0	1.58	0.77	0.96	1.00	11.3	1.88	0.78	0.99	1.00	10.6	2.19	0.82	1.00	1.00				
	755	13.3	1.29	0.82	1.00	1.00	12.7	1.56	0.84	1.00	1.00	12.0	1.86	0.87	1.00	1.00	11.3	2.18	0.90	1.00	1.00				
19°C	505	12.9	1.30	0.56	0.69	0.82	12.2	1.58	0.57	0.70	0.84	11.5	1.87	0.57	0.71	0.86	10.7	2.19	0.56	0.71	0.87				
	630	13.6	1.28	0.59	0.74	0.89	12.9	1.56	0.60	0.76	0.92	12.1	1.85	0.59	0.76	0.95	11.2	2.17	0.60	0.78	0.99				
	755	14.1	1.26	0.62	0.79	0.98	13.3	1.54	0.62	0.81	1.00	12.5	1.84	0.66	0.83	1.00	11.7	2.16	0.65	0.87	1.00				
22°C	505	13.8	1.27	0.43	0.55	0.67	13.1	1.55	0.43	0.55	0.67	12.3	1.85	0.42	0.55	0.69	11.4	2.17	0.40	0.55	0.69				
	630	14.5	1.25	0.46	0.58	0.71	13.8	1.53	0.43	0.59	0.73	12.9	1.83	0.43	0.58	0.74	12.0	2.15	0.42	0.59	0.75				
	755	15.0	1.23	0.47	0.61	0.77	14.2	1.51	0.48	0.61	0.79	13.4	1.82	0.46	0.63	0.82	12.4	2.14	0.45	0.64	0.83				

17.6 kW - LCH060S4 (2ND STAGE)

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																			
		26.7°C					35°C					43.3°C					46°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb		
		L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C
17.2°C	755	15.6	2.67	0.75	0.91	1.00	14.2	3.17	0.76	0.95	1.00	12.7	3.78	0.79	0.99	1.00	12.3	4.00	0.82	1.00	1.00
	945	16.4	2.69	0.80	1.00	1.00	15.2	3.20	0.83	1.00	1.00	13.8	3.82	0.88	1.00	1.00	13.3	4.04	0.91	1.00	1.00
	1135	17.4	2.72	0.88	1.00	1.00	16.0	3.23	0.92	1.00	1.00	14.6	3.85	0.97	1.00	1.00	14.1	4.07	0.99	1.00	1.00
19.4°C	755	16.7	2.70	0.58	0.72	0.87	15.2	3.20	0.58	0.74	0.91	13.7	3.81	0.58	0.76	0.95	13.2	4.04	0.59	0.79	0.97
	945	17.5	2.73	0.61	0.78	0.96	16.0	3.23	0.63	0.81	1.00	14.3	3.84	0.64	0.86	1.00	13.8	4.07	0.66	0.88	1.00
	1135	18.1	2.75	0.65	0.86	1.00	16.5	3.25	0.67	0.89	1.00	14.8	3.86	0.70	0.95	1.00	14.2	4.08	0.72	0.97	1.00
21.7°C	755	17.8	2.74	0.43	0.57	0.70	16.4	3.24	0.42	0.57	0.72	14.7	3.85	0.41	0.58	0.74	14.2	4.07	0.42	0.59	0.76
	945	18.6	2.76	0.44	0.60	0.76	17.1	3.27	0.45	0.62	0.79	15.4	3.88	0.44	0.64	0.83	14.8	4.10	0.45	0.65	0.86
	1135	19.3	2.78	0.46	0.65	0.82	17.6	3.29	0.46	0.66	0.87	15.9	3.91	0.46	0.69	0.92	15.3	4.13	0.47	0.71	0.94

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil														
		48°C					50°C					51.7°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb		
		L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C
17.2°C	755	11.9	4.18	0.83	1.00	1.00	11.6	4.38	0.84	1.00	1.00	11.3	4.56	0.84	1.00	1.00
	945	12.9	4.22	0.92	1.00	1.00	12.5	4.42	0.94	1.00	1.00	12.2	4.59	0.95	1.00	1.00
	1135	13.7	4.26	1.00	1.00	1.00	13.3	4.45	1.00	1.00	1.00	12.9	4.63	1.00	1.00	1.00
19.4°C	755	12.8	4.22	0.61	0.80	0.98	12.3	4.41	0.61	0.81	1.00	11.9	4.58	0.61	0.81	1.00
	945	13.4	4.24	0.67	0.90	1.00	12.9	4.43	0.68	0.91	1.00	12.5	4.61	0.67	0.92	1.00
	1135	13.8	4.26	0.72	0.98	1.00	13.3	4.44	0.73	0.99	1.00	12.9	4.62	0.72	1.00	1.00
21.7°C	755	13.7	4.25	0.42	0.60	0.77	13.3	4.45	0.41	0.60	0.78	12.9	4.62	0.42	0.60	0.78
	945	14.4	4.29	0.45	0.66	0.87	13.9	4.48	0.45	0.67	0.88	13.5	4.66	0.44	0.67	0.89
	1135	14.8	4.31	0.48	0.72	0.96	14.3	4.50	0.48	0.73	0.97	13.8	4.67	0.48	0.73	0.99

COOLING RATINGS

NOTE - For Temperatures and Capacities not shown in tables, see bulletin - Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

21 kW - LCH072H4 (FULL LOAD)

Entering Wet Bulb Temper- ature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																						
		26.7°C						35°C						43.3°C						46°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)					
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb					
				24°C	27°C	29°C			24°C	27°C	29°C			24°C	27°C	29°C			24°C	27°C	29°C			
	L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C			
17.2°C	905	19.1	3.55	0.72	0.90	1.00	17.5	4.15	0.74	0.95	1.00	15.6	4.86	0.77	1.00	1.00	15.1	5.11	0.83	1.00	1.00			
	1135	20.1	3.56	0.78	1.00	1.00	18.6	4.16	0.81	1.00	1.00	16.9	4.88	0.88	1.00	1.00	16.3	5.13	0.92	1.00	1.00			
	1360	21.2	3.58	0.86	1.00	1.00	19.6	4.17	0.91	1.00	1.00	17.9	4.89	0.98	1.00	1.00	17.2	5.15	1.00	1.00	1.00			
19.4°C	905	20.4	3.57	0.56	0.70	0.86	18.7	4.16	0.57	0.72	0.90	16.8	4.87	0.57	0.74	0.95	16.1	5.13	0.61	0.80	0.98			
	1135	21.3	3.58	0.59	0.76	0.97	19.5	4.17	0.60	0.79	1.00	17.5	4.89	0.62	0.84	1.00	16.9	5.14	0.67	0.89	1.00			
	1360	22.0	3.58	0.63	0.83	1.00	20.2	4.18	0.65	0.88	1.00	18.1	4.89	0.68	0.95	1.00	17.4	5.15	0.72	0.98	1.00			
21.7°C	905	21.7	3.58	0.41	0.55	0.68	20.0	4.17	0.41	0.56	0.70	17.9	4.89	0.41	0.57	0.72	17.2	5.15	0.41	0.59	0.77			
	1135	22.7	3.59	0.43	0.58	0.74	20.8	4.19	0.43	0.60	0.77	18.7	4.90	0.43	0.62	0.80	18.0	5.16	0.44	0.65	0.86			
	1360	23.4	3.60	0.44	0.63	0.80	21.4	4.19	0.45	0.64	0.85	19.3	4.91	0.46	0.67	0.92	18.6	5.17	0.47	0.71	0.95			

Entering Wet Bulb Temper- ature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil														
		48°C						50°C						51.7°C		
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb		
				24°C	27°C	29°C			24°C	27°C	29°C			24°C	27°C	29°C
17.2°C	905	14.7	5.32	0.83	1.00	1.00	14.3	5.55	0.85	1.00	1.00	13.9	5.75	0.84	1.00	1.00
	1135	15.8	5.34	0.93	1.00	1.00	15.4	5.56	0.95	1.00	1.00	14.9	5.77	0.96	1.00	1.00
	1360	16.8	5.36	1.00	1.00	1.00	16.2	5.58	1.00	1.00	1.00	15.7	5.79	1.00	1.00	1.00
19.4°C	905	15.6	5.34	0.61	0.81	1.00	15.0	5.55	0.62	0.82	1.00	14.5	5.75	0.60	0.79	1.00
	1135	16.4	5.35	0.67	0.91	1.00	15.8	5.57	0.68	0.93	1.00	15.2	5.78	0.66	0.93	1.00
	1360	16.8	5.36	0.73	0.99	1.00	16.2	5.58	0.74	1.00	1.00	15.7	5.78	0.71	1.00	1.00
21.7°C	905	16.7	5.35	0.42	0.60	0.78	16.2	5.58	0.42	0.61	0.80	15.6	5.78	0.41	0.59	0.77
	1135	17.4	5.37	0.45	0.67	0.88	16.9	5.59	0.45	0.68	0.90	16.3	5.80	0.44	0.65	0.89
	1360	18.0	5.38	0.48	0.72	0.97	17.3	5.60	0.48	0.74	0.99	16.7	5.81	0.47	0.71	0.99

COOLING RATINGS

NOTE - For Temperatures and Capacities not shown in tables, see bulletin - Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

21 kW - LCH074H4 (1ST STAGE)

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																			
		18°C					24°C					29°C					35°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb		
				L/s	kW	kW			24°C	27°C	29°C			kW	kW	24°C			27°C	29°C	kW
17°C	565	13.7	1.85	0.74	0.88	0.97	13.1	2.13	0.75	0.90	0.99	12.5	2.40	0.76	0.92	1.00	11.7	2.77	0.78	0.95	1.00
	755	14.8	1.84	0.81	0.98	1.00	14.1	2.12	0.82	1.00	1.00	13.5	2.39	0.84	1.00	1.00	12.8	2.76	0.86	1.00	1.00
	945	16.0	1.82	0.88	1.00	1.00	15.3	2.11	0.90	1.00	1.00	14.6	2.38	0.92	1.00	1.00	13.7	2.75	0.95	1.00	1.00
19°C	565	14.7	1.84	0.59	0.74	0.82	14.0	2.13	0.60	0.75	0.84	13.3	2.40	0.61	0.76	0.86	12.5	2.77	0.62	0.78	0.88
	755	15.8	1.83	0.65	0.82	0.92	15.0	2.11	0.66	0.82	0.94	14.3	2.39	0.64	0.84	0.96	13.3	2.76	0.67	0.87	0.99
	945	16.5	1.82	0.69	0.89	1.00	15.7	2.10	0.71	0.91	1.00	15.0	2.38	0.71	0.93	1.00	14.0	2.75	0.73	0.96	1.00
22°C	565	16.1	1.82	0.41	0.53	0.62	15.3	2.11	0.42	0.54	0.63	14.6	2.38	0.41	0.55	0.64	13.7	2.75	0.41	0.56	0.65
	755	17.2	1.81	0.43	0.59	0.69	16.4	2.09	0.43	0.60	0.70	15.6	2.37	0.42	0.60	0.71	14.7	2.74	0.43	0.61	0.73
	945	18.1	1.79	0.45	0.63	0.74	17.2	2.08	0.45	0.64	0.75	16.4	2.36	0.45	0.64	0.78	15.4	2.73	0.46	0.67	0.80

21 kW - LCH074H4 (2ND STAGE)

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																							
		26.7°C						35°C						43.3°C						46°C					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)				Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)				Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)				Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			
				Dry Bulb						Dry Bulb						Dry Bulb						Dry Bulb			
				L/s	kW	kW	24°C			27°C	29°C	kW	kW			24°C	27°C	29°C	kW			kW	24°C	27°C	29°C
17.2°C	905	18.0	3.22	0.80	0.97	1.00	16.5	3.85	0.82	1.00	1.00	15.1	4.63	0.86	1.00	1.00	14.7	4.91	0.87	1.00	1.00				
	1135	19.1	3.25	0.87	1.00	1.00	17.8	3.90	0.90	1.00	1.00	16.2	4.66	0.95	1.00	1.00	15.7	4.94	0.97	1.00	1.00				
	1360	20.2	3.28	0.94	1.00	1.00	18.6	3.92	0.98	1.00	1.00	17.1	4.70	1.00	1.00	1.00	16.6	4.98	1.00	1.00	1.00				
19.4°C	905	19.0	3.25	0.64	0.81	0.91	17.5	3.88	0.65	0.83	0.95	15.8	4.65	0.67	0.86	0.99	15.2	4.93	0.68	0.88	1.00				
	1135	19.9	3.27	0.69	0.88	0.99	18.2	3.91	0.70	0.91	1.00	16.5	4.68	0.73	0.97	1.00	15.9	4.95	0.75	0.98	1.00				
	1360	20.5	3.29	0.73	0.95	1.00	18.8	3.93	0.76	0.99	1.00	17.1	4.69	0.79	1.00	1.00	16.5	4.97	0.81	1.00	1.00				
21.7°C	905	20.6	3.30	0.43	0.59	0.68	18.9	3.93	0.43	0.60	0.70	17.1	4.70	0.42	0.61	0.72	16.6	4.98	0.43	0.62	0.74				
	1135	21.5	3.32	0.44	0.62	0.74	19.7	3.96	0.45	0.64	0.77	17.8	4.72	0.45	0.66	0.80	17.2	5.00	0.44	0.68	0.82				
	1360	22.1	3.35	0.46	0.66	0.80	20.3	3.99	0.47	0.69	0.84	18.3	4.75	0.47	0.72	0.88	17.7	5.02	0.47	0.73	0.90				

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																	
		48°C						50°C						51.7°C					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)				Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)				Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			
				Dry Bulb						Dry Bulb						Dry Bulb			
				L/s	kW	kW	24°C			27°C	29°C	kW	kW			24°C	27°C	29°C	kW
17.2°C	905	14.3	5.14	0.88	1.00	1.00	14.0	5.37	0.89	1.00	1.00	13.6	5.57	0.91	1.00	1.00			
	1135	15.3	5.16	0.98	1.00	1.00	14.9	5.40	0.99	1.00	1.00	14.5	5.60	1.00	1.00	1.00			
	1360	16.1	5.20	1.00	1.00	1.00	15.7	5.43	1.00	1.00	1.00	15.2	5.62	1.00	1.00	1.00			
19.4°C	905	14.8	5.15	0.68	0.90	1.00	14.3	5.37	0.69	0.91	1.00	13.9	5.57	0.69	0.92	1.00			
	1135	15.4	5.17	0.75	0.99	1.00	14.9	5.40	0.76	1.00	1.00	14.6	5.60	0.77	1.00	1.00			
	1360	16.0	5.19	0.82	1.00	1.00	15.6	5.42	0.82	1.00	1.00	15.3	5.63	0.83	1.00	1.00			
21.7°C	905	16.1	5.19	0.43	0.63	0.75	15.6	5.42	0.43	0.63	0.76	15.2	5.62	0.42	0.63	0.76			
	1135	16.7	5.22	0.45	0.68	0.83	16.2	5.45	0.45	0.69	0.84	15.8	5.65	0.46	0.70	0.86			
	1360	17.2	5.24	0.48	0.74	0.91	16.7	5.47	0.48	0.75	0.93	16.1	5.66	0.48	0.76	0.94			

DEHUMIDIFICATION SYSTEM RATINGS

10.6 kW - LCH036S4 with DEHUMIDIFICATION OPERATING

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																							
		18°C						24°C						29°C						35°C					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)						
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb						
	L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kBtuh	kW	24°C	27°C	29°C				
17°C	300	5.8	1.34	0.51	0.68	0.83	4.8	1.48	0.43	0.64	0.83	3.8	1.63	0.33	0.58	0.83	2.7	1.81	0.12	0.47	0.82				
	380	6.2	1.36	0.57	0.75	0.93	5.1	1.49	0.51	0.73	0.94	3.9	1.64	0.31	0.70	0.98	2.7	1.81	0.18	0.63	0.86				
	455	6.5	1.37	0.61	0.82	1.00	5.3	1.50	0.57	0.82	1.00	4.0	1.65	0.47	0.81	1.00	2.7	1.81	0.28	0.79	1.00				
19°C	300	6.6	1.36	0.37	0.51	0.65	5.6	1.50	0.28	0.45	0.62	4.5	1.66	0.15	0.36	0.57	3.4	1.83	-0.06	0.22	0.49				
	380	7.0	1.38	0.40	0.57	0.72	5.9	1.51	0.30	0.50	0.71	4.8	1.67	0.17	0.36	0.67	3.5	1.83	-0.06	0.29	0.62				
	455	7.3	1.39	0.42	0.61	0.79	6.1	1.52	0.34	0.57	0.78	4.8	1.67	0.20	0.50	0.78	3.4	1.83	-0.04	0.38	0.75				
22°C	300	7.4	1.38	0.25	0.38	0.51	6.3	1.52	0.16	0.31	0.45	5.2	1.68	0.02	0.21	0.38	4.1	1.85	-0.19	0.05	0.27				
	380	7.9	1.40	0.26	0.41	0.55	6.7	1.53	0.16	0.33	0.51	5.5	1.68	0.02	0.23	0.44	4.2	1.85	-0.22	0.08	0.31				
	455	8.2	1.41	0.27	0.44	0.60	6.9	1.54	0.17	0.37	0.56	5.6	1.69	0.02	0.26	0.51	4.2	1.85	-0.24	0.10	0.42				

14 kW - LCH048S4 with DEHUMIDIFICATION OPERATING

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																			
		18°C					24°C					29°C					35°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb		
L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kBtuh	kW	24°C	27°C	29°C	
17°C	420	7.9	1.67	0.50	0.67	0.83	6.6	1.86	0.43	0.63	0.83	5.2	2.07	0.33	0.58	0.83	3.9	2.29	0.18	0.50	0.84
	525	8.4	1.69	0.56	0.75	0.94	6.9	1.87	0.43	0.74	0.85	5.5	2.08	0.41	0.70	1.00	3.9	2.29	0.26	0.68	0.93
	630	8.8	1.70	0.60	0.85	1.00	7.2	1.88	0.57	0.84	0.99	5.6	2.08	0.47	0.84	1.00	4.0	2.30	0.35	0.76	0.81
19°C	420	9.0	1.70	0.35	0.49	0.64	7.6	1.89	0.27	0.44	0.61	6.3	2.10	0.16	0.35	0.56	4.8	2.33	-0.01	0.25	0.50
	525	9.5	1.72	0.31	0.54	0.71	8.1	1.91	0.30	0.50	0.70	6.5	2.11	0.19	0.42	0.67	4.9	2.33	0.00	0.32	0.65
	630	9.9	1.73	0.40	0.60	0.80	8.3	1.92	0.33	0.57	0.80	6.7	2.11	0.21	0.49	0.80	4.9	2.33	0.03	0.40	0.79
22°C	420	10.1	1.73	0.23	0.35	0.48	8.7	1.93	0.15	0.29	0.43	7.3	2.14	0.04	0.20	0.36	5.9	2.36	-0.14	0.07	0.28
	525	10.6	1.75	0.24	0.39	0.54	9.3	1.95	0.15	0.27	0.49	7.6	2.14	0.03	0.23	0.43	6.0	2.37	-0.16	0.10	0.36
	630	11.1	1.77	0.24	0.41	0.58	9.4	1.95	0.15	0.35	0.55	7.7	2.15	0.03	0.26	0.50	6.0	2.37	-0.18	0.13	0.34

17.6 kW - LCH060S4 with DEHUMIDIFICATION OPERATING

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																			
		18°C					24°C					29°C					35°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb		
				L/s	kW	kW			24°C	27°C	29°C			kW	kW	24°C			27°C	29°C	kW
17°C	510	9.4	2.28	0.46	0.64	0.82	7.5	2.53	0.37	0.59	0.81	5.7	2.81	0.20	0.50	0.80	3.7	3.11	-0.09	0.33	0.77
	635	9.9	2.30	0.52	0.73	0.94	7.9	2.55	0.43	0.69	0.96	5.8	2.82	0.28	0.63	0.98	3.7	3.11	-0.03	0.50	1.00
	765	10.4	2.31	0.57	0.81	1.00	8.1	2.56	0.49	0.80	1.00	5.9	2.82	0.35	0.77	1.00	3.5	3.11	0.05	0.74	1.00
19°C	510	10.8	2.32	0.31	0.46	0.62	8.9	2.58	0.21	0.38	0.56	7.0	2.85	0.05	0.28	0.50	5.0	3.16	-0.24	0.08	0.38
	635	11.5	2.34	0.34	0.52	0.69	9.4	2.60	0.25	0.44	0.62	7.3	2.87	0.02	0.34	0.62	5.1	3.17	-0.24	0.15	0.52
	765	12.0	2.36	0.36	0.56	0.77	9.7	2.61	0.26	0.51	0.75	7.4	2.88	0.08	0.40	0.73	5.0	3.17	-0.25	0.23	0.67
22°C	510	12.3	2.36	0.20	0.33	0.46	10.4	2.62	0.10	0.24	0.40	8.4	2.90	-0.06	0.13	0.31	6.4	3.22	-0.32	-0.07	0.16
	635	13.1	2.39	0.21	0.36	0.51	10.8	2.65	0.10	0.28	0.45	8.6	2.92	-0.07	0.16	0.31	6.5	3.23	-0.36	-0.06	0.23
	765	13.6	2.41	0.21	0.38	0.56	11.3	2.66	0.10	0.30	0.51	8.9	2.93	-0.08	0.18	0.43	6.5	3.23	-0.40	-0.04	0.30

21 kW - LCH072H4 with DEHUMIDIFICATION OPERATING

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																			
		18°C					24°C					29°C					35°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb		
	L/s	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kW	kW	24°C	27°C	29°C	kBtuh	kW	24°C	27°C	29°C
17°C	905	11.2	2.70	0.61	0.83	1.00	8.9	3.00	0.53	0.82	0.98	6.4	3.31	0.40	0.83	1.00	4.0	3.67	0.09	0.79	1.00
	1135	11.6	2.72	0.70	0.95	0.92	8.9	3.01	0.64	0.99	1.00	6.4	3.32	0.54	1.00	1.00	3.9	3.67	0.26	1.00	1.00
	1360	12.1	2.75	0.76	1.00	1.00	9.5	3.04	0.75	1.00	0.88	6.9	3.35	0.69	0.99	1.00	4.1	3.69	0.49	1.00	0.99
19°C	905	12.7	2.77	0.39	0.60	0.80	10.4	3.07	0.27	0.54	0.79	7.9	3.39	0.08	0.45	0.77	5.5	3.75	-0.28	0.26	0.76
	1135	13.2	2.79	0.44	0.68	0.91	10.6	3.09	0.33	0.62	0.94	7.9	3.40	0.13	0.57	0.96	5.2	3.74	-0.27	0.43	1.00
	1360	13.5	2.81	0.48	0.75	1.00	10.7	3.09	0.37	0.73	1.00	7.8	3.40	0.18	0.70	1.00	5.0	3.73	-0.25	0.57	1.00
22°C	905	14.3	2.84	0.21	0.41	0.59	11.9	3.14	0.08	0.32	0.55	9.4	3.47	-0.12	0.18	0.47	6.9	3.82	-0.49	-0.05	0.34
	1135	14.7	2.87	0.23	0.46	0.68	12.1	3.16	0.09	0.37	0.64	9.4	3.47	-0.15	0.25	0.59	6.7	3.82	-0.57	-0.02	0.49
	1360	15.1	2.89	0.24	0.50	0.75	12.3	3.17	0.10	0.42	0.73	9.3	3.48	-0.15	0.29	0.69	6.4	3.81	-0.64	0.05	0.63

DEHUMIDIFICATION SYSTEM RATINGS

21 kW - LCH074H4 with DEHUMIDIFICATION OPERATING

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																			
		18°C					24°C					29°C					35°C				
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)		
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb		
				L/s	kW	kW			24°C	27°C	29°C			kW	kW	24°C			27°C	29°C	kW
17°C	565	10.0	2.62	0.46	0.63	0.80	8.0	2.88	0.39	0.58	0.76	6.2	3.20	0.21	0.49	0.76	4.2	3.57	-0.10	0.32	0.73
	755	10.7	2.66	0.53	0.74	0.95	8.8	2.91	0.44	0.65	0.97	6.5	3.21	0.30	0.60	0.99	4.1	3.57	-0.02	0.55	1.00
	945	11.2	2.69	0.60	0.84	1.00	8.8	2.92	0.52	0.84	1.00	6.4	3.21	0.39	0.83	1.00	3.8	3.55	0.11	0.85	1.00
19°C	565	11.4	2.68	0.31	0.46	0.61	9.5	2.94	0.20	0.39	0.57	7.5	3.26	0.04	0.27	0.49	5.5	3.63	-0.25	0.07	0.37
	755	12.3	2.72	0.35	0.52	0.71	10.1	2.97	0.23	0.46	0.68	7.8	3.27	0.06	0.35	0.63	5.5	3.63	-0.27	0.15	0.55
	945	12.8	2.75	0.38	0.59	0.81	10.4	2.99	0.26	0.53	0.80	7.9	3.28	0.09	0.44	0.78	5.4	3.62	-0.26	0.26	0.76
22°C	565	12.9	2.73	0.19	0.33	0.45	10.9	3.00	0.08	0.24	0.40	9.0	3.32	-0.08	0.11	0.30	6.9	3.70	-0.35	-0.10	0.16
	755	13.8	2.78	0.20	0.37	0.52	11.6	3.03	0.08	0.28	0.47	9.3	3.34	-0.10	0.15	0.33	7.0	3.70	-0.41	-0.08	0.24
	945	14.4	2.81	0.20	0.40	0.59	12.0	3.06	0.08	0.31	0.54	9.5	3.35	-0.12	0.18	0.47	6.9	3.70	-0.48	-0.06	0.34

BLOWER DATA - BELT DRIVE - LCHO36

BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT ONLY WITH DRY INDOOR COIL AND AIR FILTERS IN PLACE.

FOR ALL UNITS ADD:

1 - Any factory installed options air resistance (heat section, economizer, etc.).

2 - Any field installed accessories air resistance (duct resistance, diffuser, etc.).

See page 32 for blower motors and drives and wet coil and options/accessory air resistance data.

DOWNFLOW

Air Volume		External Static - Pa (in.w.g.)																											
		25 (0.10)			50 (0.20)			75 (0.30)			100 (0.40)			125 (0.50)			150 (0.60)			175 (0.70)			200 (0.80)			225 (0.90)			250 (1.00)
L/s	cfm	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	
330	700	447	0.07	0.09	517	0.09	0.12	589	0.11	0.15	0.17	739	0.14	0.19	0.23	883	0.17	0.23	938	0.19	0.25	988	0.20	0.27	1039	0.22	0.29		
378	800	465	0.07	0.10	534	0.10	0.14	605	0.13	0.17	0.19	753	0.16	0.21	0.23	890	0.19	0.25	946	0.20	0.27	996	0.22	0.30	1047	0.24	0.32		
425	900	486	0.09	0.12	554	0.12	0.16	623	0.15	0.20	0.22	767	0.17	0.23	0.25	897	0.21	0.28	953	0.22	0.30	1004	0.25	0.33	1055	0.26	0.35		
472	1000	508	0.11	0.15	576	0.14	0.19	643	0.16	0.22	0.24	783	0.19	0.26	0.28	907	0.22	0.30	961	0.25	0.33	1011	0.27	0.36	1062	0.28	0.38		
519	1100	533	0.13	0.18	599	0.16	0.22	665	0.19	0.25	0.27	800	0.21	0.28	0.31	919	0.25	0.34	971	0.27	0.36	1020	0.29	0.39	1070	0.31	0.41		
566	1200	560	0.16	0.21	625	0.19	0.25	689	0.21	0.28	0.30	820	0.24	0.32	0.34	932	0.28	0.37	983	0.30	0.40	1031	0.32	0.43	1079	0.34	0.45		
613	1300	591	0.18	0.24	654	0.21	0.28	716	0.23	0.31	0.33	841	0.26	0.35	0.38	948	0.31	0.41	996	0.33	0.44	1044	0.35	0.47	1091	0.37	0.49		
661	1400	631	0.19	0.26	690	0.22	0.30	748	0.25	0.34	0.36	864	0.29	0.39	0.42	964	0.34	0.46	1011	0.37	0.49	1058	0.38	0.51	1105	0.40	0.54		

Air Volume		External Static - Pa (in.w.g.)												450 (1.80)		475 (1.90)		500 (2.00)	
		275 (1.10)		300 (1.20)		325 (1.30)		350 (1.40)		375 (1.50)		400 (1.60)		425 (1.70)		450 (1.80)		475 (1.90)	
L/s	cfm	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP
330	700	1088	0.23	0.31	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
378	800	1098	0.25	0.34	1144	0.27	0.36	1185	0.29	0.39	1224	0.31	0.42	---	---	---	---	---	---
425	900	1106	0.28	0.37	1152	0.30	0.40	1193	0.32	0.43	1232	0.34	0.46	1269	0.37	0.49	1305	0.39	0.52
472	1000	1111	0.31	0.41	1157	0.32	0.43	1199	0.35	0.47	1238	0.37	0.50	1276	0.40	0.53	1311	0.42	0.56
519	1100	1118	0.33	0.44	1163	0.35	0.47	1206	0.38	0.51	1245	0.40	0.54	1282	0.43	0.58	1318	0.46	0.61
566	1200	1127	0.36	0.48	1171	0.39	0.52	1213	0.41	0.55	1252	0.44	0.59	1289	0.46	0.62	1324	0.49	0.66
613	1300	1137	0.40	0.53	1181	0.42	0.56	1221	0.45	0.60	1259	0.48	0.64	1296	0.51	0.68	1330	0.53	0.71
661	1400	1150	0.43	0.57	1191	0.46	0.61	1231	0.48	0.65	1268	0.51	0.69	1303	0.54	0.73	1337	0.57	0.77

BLOWER DATA - BELT DRIVE - LCHO36

BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT ONLY WITH DRY INDOOR COIL AND AIR FILTERS IN PLACE.

FOR ALL UNITS ADD:

1 - Any factory installed options air resistance (heat section, economizer, etc.).

2 - Any field installed accessories air resistance (duct resistance, diffuser, etc.).

See page 32 for blower motors and drives and wet coil and options/accessory air resistance data.

HORIZONTAL

Air Volume		External Static - Pa (in.w.g.)																													
		25 (0.10)			50 (0.20)			75 (0.30)			100 (0.40)			125 (0.50)			150 (0.60)			175 (0.70)			200 (0.80)			225 (0.90)			250 (1.00)		
L/s	cfm	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP
330	700	445	0.06	0.08	516	0.08	0.11	591	0.10	0.13	670	0.11	0.15	753	0.12	0.16	820	0.14	0.19	870	0.16	0.22	918	0.18	0.24	969	0.20	0.27	1021	0.22	0.29
378	800	463	0.07	0.09	534	0.09	0.12	608	0.10	0.14	685	0.12	0.16	766	0.13	0.18	830	0.16	0.21	878	0.18	0.24	926	0.20	0.27	977	0.22	0.29	1030	0.24	0.32
425	900	485	0.08	0.11	554	0.10	0.14	627	0.12	0.16	703	0.13	0.18	780	0.16	0.21	841	0.17	0.23	888	0.20	0.27	935	0.22	0.30	986	0.24	0.32	1039	0.26	0.35
472	1000	509	0.10	0.13	578	0.12	0.16	649	0.14	0.19	722	0.16	0.21	796	0.17	0.23	854	0.19	0.26	900	0.22	0.29	947	0.25	0.33	997	0.26	0.35	1048	0.28	0.38
519	1100	537	0.12	0.16	605	0.14	0.19	674	0.16	0.21	744	0.18	0.24	813	0.19	0.26	868	0.22	0.29	913	0.25	0.33	959	0.27	0.36	1008	0.29	0.39	1059	0.31	0.41
566	1200	567	0.14	0.19	633	0.16	0.22	700	0.18	0.24	768	0.20	0.27	833	0.22	0.30	884	0.25	0.33	928	0.28	0.37	974	0.30	0.40	1022	0.32	0.43	1071	0.34	0.45
613	1300	599	0.16	0.22	664	0.19	0.25	729	0.21	0.28	793	0.22	0.30	853	0.25	0.33	902	0.28	0.37	945	0.31	0.41	990	0.33	0.44	1037	0.35	0.47	1085	0.37	0.50
661	1400	634	0.19	0.26	697	0.22	0.29	758	0.23	0.31	819	0.25	0.34	875	0.28	0.38	921	0.31	0.42	964	0.34	0.46	1008	0.37	0.49	1054	0.39	0.52	1100	0.40	0.54

Air Volume		External Static - Pa (in.w.g.)																													
		275 (1.10)			300 (1.20)			325 (1.30)			350 (1.40)			375 (1.50)			400 (1.60)			425 (1.70)			450 (1.80)			475 (1.90)			500 (2.00)		
L/s	cfm	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP
330	700	1071	0.24	0.32	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
378	800	1082	0.25	0.34	1128	0.28	0.37	1169	0.30	0.40	1205	0.31	0.42	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
425	900	1090	0.28	0.37	1137	0.30	0.40	1177	0.32	0.43	1214	0.34	0.46	1248	0.37	0.49	1280	0.38	0.51	1310	0.40	0.54	1340	0.43	0.57	---	---	---	---	---	
472	1000	1098	0.31	0.41	1143	0.33	0.44	1184	0.35	0.47	1221	0.37	0.50	1255	0.40	0.53	1287	0.42	0.56	1318	0.44	0.59	1347	0.46	0.61	1377	0.48	0.64	1406	0.50	0.67
519	1100	1107	0.33	0.44	1150	0.35	0.47	1191	0.38	0.51	1228	0.40	0.54	1263	0.43	0.57	1295	0.45	0.60	1325	0.47	0.63	1355	0.49	0.66	1384	0.51	0.69	1413	0.54	0.72
566	1200	1117	0.36	0.48	1160	0.39	0.52	1200	0.41	0.55	1237	0.44	0.59	1271	0.46	0.62	1303	0.49	0.66	1334	0.51	0.69	1363	0.54	0.72	1392	0.56	0.75	1420	0.58	0.78
613	1300	1130	0.40	0.53	1171	0.43	0.57	1210	0.45	0.60	1246	0.48	0.64	1280	0.51	0.68	1312	0.53	0.71	1342	0.55	0.74	1372	0.58	0.78	1400	0.60	0.81	1429	0.63	0.84
661	1400	1144	0.43	0.58	1183	0.46	0.62	1221	0.49	0.66	1256	0.52	0.70	1290	0.54	0.73	1321	0.57	0.77	1352	0.60	0.80	1381	0.63	0.84	1410	0.65	0.87	1439	0.67	0.90

BLOWER DATA - BELT DRIVE - LCH048

BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT ONLY WITH DRY INDOOR COIL AND AIR FILTERS IN PLACE.

FOR ALL UNITS ADD:

- 1 - Any factory installed options air resistance (heat section, economizer, etc.).
- 2 - Any field installed accessories air resistance (duct resistance, diffuser, etc.).

See page 32 for blower motors and drives and wet coil and options/accessory air resistance data.

DOWNFLOW

Air Volume		External Static - Pa (in.w.g.)																250 (1.00)													
		25 (0.10)		50 (0.20)		75 (0.30)		100 (0.40)		125 (0.50)		150 (0.60)		175 (0.70)		200 (0.80)						225 (0.90)									
L/s	cfm	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP			
425	900	496	0.10	0.13	568	0.12	0.16	640	0.13	0.18	711	0.15	0.20	779	0.16	0.22	844	0.19	0.25	905	0.21	0.28	960	0.22	0.30	1010	0.25	0.33	1061	0.26	0.35
472	1000	521	0.11	0.15	592	0.13	0.18	662	0.15	0.20	731	0.17	0.23	796	0.19	0.25	858	0.21	0.28	916	0.23	0.31	969	0.25	0.34	1019	0.27	0.36	1069	0.28	0.38
519	1100	548	0.13	0.18	618	0.16	0.21	686	0.17	0.23	752	0.19	0.25	814	0.21	0.28	873	0.23	0.31	929	0.25	0.34	980	0.28	0.37	1029	0.29	0.39	1078	0.31	0.42
566	1200	577	0.16	0.21	646	0.18	0.24	712	0.19	0.26	775	0.22	0.29	834	0.23	0.31	890	0.26	0.35	943	0.28	0.38	993	0.31	0.41	1041	0.32	0.43	1089	0.34	0.46
613	1300	611	0.18	0.24	677	0.20	0.27	740	0.22	0.30	800	0.24	0.32	856	0.26	0.35	909	0.29	0.39	959	0.31	0.42	1007	0.34	0.45	1055	0.35	0.47	1102	0.37	0.50
661	1400	654	0.19	0.26	713	0.22	0.29	771	0.25	0.33	826	0.27	0.36	878	0.29	0.39	928	0.32	0.43	976	0.35	0.47	1023	0.37	0.49	1070	0.39	0.52	1117	0.41	0.55
708	1500	698	0.21	0.28	751	0.24	0.32	802	0.27	0.36	852	0.30	0.40	901	0.33	0.44	948	0.36	0.48	995	0.38	0.51	1041	0.40	0.54	1088	0.43	0.57	1133	0.45	0.60
755	1600	738	0.24	0.32	785	0.27	0.36	831	0.31	0.41	878	0.34	0.45	923	0.37	0.49	969	0.40	0.53	1014	0.43	0.57	1061	0.44	0.59	1107	0.46	0.62	1151	0.49	0.66
802	1700	773	0.27	0.36	816	0.31	0.41	859	0.34	0.46	903	0.38	0.51	947	0.41	0.55	991	0.43	0.58	1036	0.46	0.62	1082	0.48	0.65	1128	0.51	0.68	1169	0.54	0.72
849	1800	803	0.31	0.42	844	0.35	0.47	886	0.39	0.52	929	0.43	0.57	972	0.46	0.61	1016	0.48	0.64	1060	0.51	0.68	1106	0.53	0.71	1150	0.55	0.74	1189	0.59	0.79
897	1900	831	0.36	0.48	872	0.40	0.54	915	0.44	0.59	957	0.47	0.63	1000	0.50	0.67	1043	0.53	0.71	1087	0.55	0.74	1131	0.58	0.78	1173	0.60	0.81	1208	0.64	0.86
Air Volume		External Static - Pa (in.w.g.)																500 (2.00)													
		275 (1.10)		300 (1.20)		325 (1.30)		350 (1.40)		375 (1.50)		400 (1.60)		425 (1.70)		450 (1.80)						475 (1.90)									
L/s	cfm	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP	Rev/min	kW	BHP
425	900	1112	0.28	0.38	1157	0.30	0.40	1198	0.32	0.43	1236	0.34	0.46	1273	0.37	0.49	1309	0.39	0.52	1344	0.42	0.56	1380	0.44	0.59	---	---	---	---	---	---
472	1000	1119	0.31	0.41	1164	0.33	0.44	1206	0.35	0.47	1244	0.37	0.50	1281	0.40	0.54	1317	0.43	0.57	1352	0.45	0.60	1387	0.48	0.64	1422	0.50	0.67	1458	0.53	0.71
519	1100	1126	0.34	0.45	1171	0.36	0.48	1213	0.38	0.51	1252	0.41	0.55	1288	0.43	0.58	1324	0.46	0.62	1359	0.48	0.65	1394	0.51	0.69	1429	0.54	0.72	1464	0.57	0.76
566	1200	1136	0.37	0.49	1180	0.39	0.52	1221	0.42	0.56	1259	0.45	0.60	1296	0.47	0.63	1331	0.50	0.67	1365	0.52	0.70	1400	0.55	0.74	1435	0.58	0.78	1471	0.60	0.81
613	1300	1148	0.40	0.53	1190	0.43	0.57	1230	0.46	0.61	1268	0.48	0.65	1304	0.51	0.68	1338	0.54	0.72	1372	0.57	0.76	1406	0.59	0.79	1440	0.62	0.83	1476	0.65	0.87
661	1400	1161	0.43	0.58	1202	0.46	0.62	1240	0.49	0.66	1277	0.52	0.70	1312	0.55	0.74	1346	0.58	0.78	1379	0.60	0.81	1412	0.63	0.85	1446	0.66	0.89	1482	0.69	0.92
708	1500	1175	0.48	0.64	1214	0.51	0.68	1252	0.54	0.72	1287	0.57	0.76	1321	0.60	0.80	1355	0.62	0.83	1387	0.65	0.87	1420	0.68	0.91	1454	0.71	0.95	1490	0.74	0.99
755	1600	1190	0.52	0.70	1228	0.55	0.74	1264	0.58	0.78	1298	0.61	0.82	1332	0.64	0.86	1364	0.67	0.90	1397	0.69	0.93	1430	0.72	0.97	1464	0.75	1.01	1499	0.79	1.06
802	1700	1206	0.57	0.76	1242	0.60	0.80	1277	0.63	0.84	1310	0.66	0.88	1343	0.69	0.92	1375	0.72	0.96	1407	0.75	1.00	1440	0.78	1.04	1475	0.81	1.09	1510	0.84	1.13
849	1800	1223	0.62	0.83	1257	0.65	0.87	1291	0.68	0.91	1324	0.71	0.95	1356	0.74	0.99	1388	0.77	1.03	1420	0.81	1.08	1453	0.84	1.12	1487	0.87	1.16	1523	0.90	1.21
897	1900	1240	0.68	0.91	1273	0.71	0.95	1306	0.74	0.99	1338	0.77	1.03	1369	0.80	1.07	1401	0.84	1.12	1433	0.87	1.16	1467	0.90	1.20	1501	0.93	1.25	1537	0.96	1.29

BLOWER DATA - BELT DRIVE - LCH048

BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT ONLY WITH DRY INDOOR COIL AND AIR FILTERS IN PLACE.

FOR ALL UNITS ADD:

1 - Any factory installed options air resistance (heat section, economizer, etc.).

2 - Any field installed accessories air resistance (duct resistance, diffuser, etc.).

See page 32 for blower motors and drives and wet coil and options/accessory air resistance data.

HORIZONTAL

Air Volume		External Static - Pa (in.w.g.)												External Static - Pa (in.w.g.)																							
		25 (0.10)		50 (0.20)		75 (0.30)		100 (0.40)		125 (0.50)		150 (0.60)		175 (0.70)		200 (0.80)		225 (0.9)		250 (1.0)																	
L/s	cfm	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP
425	900	493	0.09	0.12	564	0.10	0.14	0.17	712	0.14	0.19	788	0.16	0.21	847	0.18	0.24	894	0.20	0.27	942	0.22	0.30	993	0.25	0.33	1046	0.26	0.35								
472	1000	520	0.10	0.14	589	0.13	0.17	660	0.14	0.19	733	0.16	0.21	805	0.18	0.24	861	0.20	0.27	907	0.22	0.30	954	0.25	0.33	1004	0.27	0.36	1056	0.28	0.38						
519	1100	549	0.12	0.16	617	0.14	0.19	686	0.16	0.22	756	0.18	0.24	823	0.20	0.27	876	0.22	0.30	921	0.25	0.33	968	0.28	0.37	1017	0.29	0.39	1067	0.31	0.42						
566	1200	582	0.14	0.19	648	0.16	0.22	714	0.19	0.25	781	0.20	0.27	843	0.22	0.30	893	0.25	0.34	938	0.28	0.37	984	0.31	0.41	1032	0.32	0.43	1081	0.34	0.46	1130	0.37	0.50			
613	1300	624	0.16	0.22	686	0.19	0.25	747	0.21	0.28	808	0.23	0.31	865	0.25	0.34	912	0.28	0.38	956	0.31	0.42	1001	0.34	0.45	1048	0.36	0.48	1096	0.37	0.50						
661	1400	670	0.18	0.24	726	0.20	0.27	782	0.23	0.31	837	0.26	0.35	887	0.29	0.39	932	0.32	0.43	975	0.35	0.47	1020	0.37	0.50	1066	0.39	0.52	1112	0.41	0.55						
708	1500	714	0.19	0.26	765	0.23	0.31	814	0.26	0.35	863	0.29	0.39	910	0.33	0.44	953	0.36	0.48	996	0.39	0.52	1041	0.41	0.55	1086	0.43	0.58	1130	0.46	0.61						
755	1600	752	0.22	0.30	798	0.26	0.35	844	0.30	0.40	889	0.34	0.45	933	0.37	0.49	975	0.40	0.53	1018	0.43	0.57	1062	0.45	0.60	1107	0.47	0.63	1149	0.50	0.67						
802	1700	785	0.26	0.35	827	0.30	0.40	871	0.34	0.46	914	0.38	0.51	957	0.41	0.55	999	0.44	0.59	1042	0.47	0.63	1085	0.49	0.66	1129	0.51	0.69	1169	0.54	0.73						
849	1800	813	0.31	0.42	855	0.35	0.47	898	0.39	0.52	940	0.43	0.57	983	0.46	0.62	1025	0.49	0.66	1067	0.51	0.69	1110	0.54	0.72	1152	0.57	0.76	1190	0.60	0.80						
897	1900	841	0.37	0.49	883	0.40	0.54	926	0.45	0.60	969	0.48	0.65	1011	0.51	0.69	1052	0.54	0.72	1094	0.57	0.76	1136	0.59	0.79	1176	0.62	0.83	1212	0.66	0.89						
Air Volume		External Static - Pa (in.w.g.)												External Static - Pa (in.w.g.)																							
		275 (1.10)		300 (1.20)		325 (1.30)		350 (1.40)		375 (1.50)		400 (1.60)		425 (1.70)		450 (1.80)		475 (1.90)		500 (2.00)																	
L/s	cfm	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP
425	900	1097	0.28	0.38	1142	0.31	0.41	1182	0.32	0.43	1218	0.34	0.46	1252	0.37	0.49	1284	0.39	0.52	1314	0.41	0.55	1344	0.43	0.57	1374	0.45	0.61	1404	0.47	0.64	1434	0.49	0.68	1464	0.51	0.73
472	1000	1105	0.31	0.41	1149	0.33	0.44	1190	0.35	0.47	1226	0.37	0.50	1260	0.40	0.53	1292	0.42	0.56	1322	0.44	0.59	1352	0.46	0.62	1381	0.48	0.65	1410	0.51	0.68	1440	0.53	0.73	1470	0.55	0.78
519	1100	1115	0.34	0.45	1158	0.36	0.48	1198	0.38	0.51	1235	0.41	0.55	1269	0.43	0.58	1301	0.46	0.61	1331	0.48	0.64	1360	0.50	0.67	1389	0.52	0.70	1418	0.54	0.73	1447	0.56	0.78	1476	0.58	0.81
566	1200	1126	0.37	0.49	1168	0.40	0.53	1208	0.42	0.56	1244	0.45	0.60	1278	0.47	0.63	1309	0.49	0.66	1340	0.51	0.69	1369	0.54	0.72	1398	0.56	0.75	1426	0.58	0.78	1455	0.60	0.84	1484	0.62	0.88
613	1300	1140	0.40	0.54	1180	0.43	0.57	1218	0.46	0.61	1254	0.48	0.65	1287	0.51	0.68	1319	0.54	0.72	1349	0.56	0.75	1378	0.58	0.78	1407	0.60	0.81	1436	0.63	0.84	1465	0.65	0.91	1494	0.67	0.97
661	1400	1154	0.44	0.59	1193	0.47	0.63	1230	0.50	0.67	1265	0.52	0.70	1298	0.55	0.74	1330	0.58	0.78	1360	0.60	0.81	1389	0.63	0.85	1418	0.66	0.88	1447	0.68	0.93	1476	0.70	0.98	1505	0.72	1.00
708	1500	1170	0.48	0.65	1208	0.51	0.69	1244	0.54	0.73	1278	0.57	0.77	1310	0.60	0.80	1341	0.63	0.84	1371	0.66	0.88	1401	0.68	0.91	1430	0.71	0.95	1459	0.73	0.98	1488	0.75	1.03	1517	0.77	1.06
755	1600	1187	0.53	0.71	1223	0.56	0.75	1258	0.59	0.79	1291	0.62	0.83	1323	0.65	0.87	1354	0.68	0.91	1384	0.71	0.95	1414	0.74	0.99	1443	0.76	1.02	1474	0.79	1.06	1504	0.81	1.10	1534	0.83	1.14
802	1700	1204	0.58	0.78	1240	0.61	0.82	1274	0.64	0.86	1306	0.67	0.90	1338	0.71	0.95	1369	0.74	0.99	1399	0.77	1.03	1429	0.79	1.06	1458	0.82	1.10	1487	0.85	1.14	1516	0.87	1.23	1545	0.89	1.29
849	1800	1223	0.63	0.85	1258	0.67	0.90	1291	0.70	0.94	1323	0.74	0.99	1354	0.77	1.03	1385	0.80	1.07	1415	0.83	1.11	1445	0.86	1.15	1475	0.89	1.19	1507	0.92	1.23	1537	0.94	1.28	1567	0.96	1.32
897	1900	1243	0.70	0.94	1277	0.74	0.99	1309	0.77	1.03	1341	0.81	1.08	1372	0.84	1.12	1402	0.87	1.16	1433	0.90	1.20	1464	0.93	1.24	1495	0.95	1.28	1527	0.98	1.32	1558	1.00	1.36	1589	1.02	1.39

BLOWER DATA - BELT DRIVE - LCH060

BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT ONLY WITH DRY INDOOR COIL AND AIR FILTERS IN PLACE.

FOR ALL UNITS ADD:

- 1 - Any factory installed options air resistance (heat section, economizer, etc.).
- 2 - Any field installed accessories air resistance (duct resistance, diffuser, etc.).

See page 32 for blower motors and drives and wet coil and options/accessory air resistance data.

DOWNFLOW

Air Volume		External Static - Pa (in.w.g.)																															
		25 (0.10)			50 (0.20)			75 (0.30)			100 (0.40)			125 (0.50)			150 (0.60)			175 (0.70)			200 (0.80)			225 (0.90)			250 (1.00)				
Rev/	BHP	kW	min	Rev/	BHP	kW	min	Rev/	BHP	kW	min	Rev/	BHP	kW	min	Rev/	BHP	kW	min	Rev/	BHP	kW	min	Rev/	BHP	kW	min	Rev/	BHP	kW	min		
519	1100	512	0.11	0.15	0.14	0.19	0.17	0.23	0.690	0.19	0.26	0.770	0.19	0.26	0.854	0.19	0.26	0.922	0.20	0.27	0.970	0.22	0.30	1006	0.26	0.35	1045	0.29	0.39	1085	0.42	0.56	
566	1200	535	0.13	0.18	0.16	0.22	0.651	0.19	0.26	0.710	0.22	0.29	0.788	0.22	0.30	0.868	0.22	0.30	0.933	0.23	0.31	0.978	0.25	0.34	1013	0.28	0.38	1053	0.31	0.42	1093	0.46	0.61
613	1300	559	0.16	0.22	0.19	0.26	0.674	0.22	0.29	0.732	0.24	0.32	0.807	0.25	0.34	0.883	0.25	0.34	0.944	0.26	0.35	0.987	0.28	0.38	1022	0.31	0.42	1062	0.34	0.46	1102	0.49	0.66
661	1400	584	0.19	0.26	0.22	0.29	0.698	0.25	0.33	0.755	0.27	0.36	0.827	0.28	0.37	0.899	0.28	0.38	0.956	0.30	0.40	0.997	0.32	0.43	1033	0.35	0.47	1072	0.38	0.51	1112	0.52	0.70
708	1500	615	0.22	0.29	0.25	0.33	0.726	0.27	0.36	0.782	0.29	0.39	0.850	0.31	0.41	0.917	0.31	0.42	0.970	0.33	0.44	1009	0.35	0.47	1045	0.39	0.52	1085	0.42	0.56	1125	0.55	0.74
755	1600	665	0.22	0.30	0.25	0.34	0.768	0.28	0.38	0.819	0.31	0.41	0.879	0.33	0.44	0.937	0.34	0.46	0.985	0.37	0.49	1022	0.39	0.52	1059	0.43	0.57	1098	0.46	0.61	1138	0.58	0.78
802	1700	723	0.23	0.31	0.26	0.35	0.814	0.29	0.39	0.860	0.32	0.43	0.910	0.35	0.47	0.959	0.37	0.50	1001	0.40	0.54	1037	0.43	0.58	1074	0.46	0.62	1113	0.49	0.66	1153	0.61	0.81
849	1800	779	0.24	0.32	0.28	0.37	0.857	0.31	0.41	0.897	0.34	0.46	0.939	0.37	0.50	0.980	0.41	0.55	1018	0.44	0.59	1054	0.48	0.64	1091	0.51	0.68	1129	0.54	0.72	1168	0.64	0.86
897	1900	826	0.27	0.36	0.31	0.41	0.894	0.34	0.45	0.928	0.37	0.50	0.964	0.42	0.56	1000	0.46	0.61	1036	0.49	0.66	1072	0.52	0.70	1109	0.56	0.75	1146	0.59	0.79	1185	0.69	0.93
944	2000	857	0.31	0.42	0.35	0.47	0.920	0.39	0.52	0.952	0.43	0.57	0.986	0.46	0.62	1020	0.51	0.68	1055	0.54	0.73	1091	0.57	0.77	1128	0.61	0.82	1164	0.64	0.86	1203	0.75	1.01
991	2100	878	0.37	0.49	0.40	0.54	0.940	0.44	0.59	0.973	0.48	0.64	1006	0.52	0.70	1041	0.56	0.75	1076	0.60	0.80	1112	0.63	0.85	1148	0.66	0.89	1185	0.69	0.93	1223	0.81	1.09
1038	2200	897	0.41	0.55	0.46	0.61	0.961	0.49	0.66	0.994	0.54	0.72	1028	0.58	0.78	1063	0.62	0.83	1099	0.66	0.89	1134	0.69	0.93	1170	0.72	0.97	1206	0.75	1.01	1243	0.84	1.12
1085	2300	918	0.46	0.62	0.50	0.68	0.983	0.55	0.74	1017	0.60	0.80	1052	0.64	0.86	1087	0.69	0.92	1122	0.72	0.97	1157	0.76	1.02	1193	0.79	1.06	1228	0.81	1.09	1265	0.86	1.14
1133	2400	941	0.52	0.70	0.57	0.77	1008	0.62	0.83	1042	0.67	0.90	1077	0.72	0.96	1111	0.75	1.01	1146	0.79	1.06	1181	0.83	1.11	1216	0.86	1.15	1250	0.89	1.19	1287	0.91	1.23

Air		External Static - Pa (in.w.g.)																													
		275 (1.10)			300 (1.20)			325 (1.30)			350 (1.40)			375 (1.50)			400 (1.60)			425 (1.70)			450 (1.80)			475 (1.90)			500 (2.00)		
Volume	cfm	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP
519	1100	1089	0.32	0.43	1134	0.34	0.46	1186	0.40	0.53	1230	0.43	0.57	1266	0.45	0.60	1301	0.51	0.68	1334	0.53	0.71	1367	0.56	0.75	1406	0.62	0.83	1440	0.65	0.87
566	1200	1095	0.34	0.46	1139	0.37	0.50	1192	0.43	0.57	1234	0.45	0.60	1269	0.48	0.64	1305	0.54	0.72	1338	0.57	0.76	1372	0.60	0.80	1412	0.66	0.89	1446	0.69	0.92
613	1300	1104	0.37	0.50	1146	0.40	0.54	1199	0.46	0.61	1240	0.48	0.65	1275	0.51	0.68	1305	0.54	0.72	1344	0.60	0.81	1378	0.63	0.85	1418	0.71	0.95	1452	0.73	0.98
661	1400	1114	0.41	0.55	1155	0.43	0.58	1208	0.49	0.66	1248	0.51	0.69	1281	0.54	0.73	1311	0.57	0.77	1352	0.65	0.87	1385	0.68	0.91	1418	0.71	0.95	1452	0.73	0.98
708	1500	1125	0.45	0.60	1165	0.47	0.63	1218	0.53	0.71	1257	0.56	0.75	1290	0.59	0.79	1319	0.62	0.83	1360	0.69	0.93	1393	0.72	0.97	1426	0.75	1.01	1459	0.78	1.05
755	1600	1138	0.48	0.65	1177	0.51	0.68	1231	0.57	0.77	1268	0.60	0.80	1299	0.63	0.84	1328	0.66	0.89	1360	0.69	0.93	1393	0.72	0.97	1426	0.75	1.01	1459	0.78	1.05
802	1700	1152	0.52	0.70	1190	0.55	0.74	1244	0.62	0.83	1280	0.65	0.87	1310	0.68	0.91	1338	0.71	0.95	1370	0.74	0.99	1402	0.78	1.04	1434	0.81	1.08	1466	0.83	1.11
849	1800	1167	0.57	0.76	1205	0.60	0.80	1260	0.67	0.90	1294	0.70	0.94	1323	0.73	0.98	1349	0.76	1.02	1380	0.80	1.07	1412	0.83	1.11	1443	0.86	1.15	1475	0.89	1.19
897	1900	1183	0.61	0.82	1221	0.64	0.86	1276	0.72	0.97	1310	0.75	1.01	1336	0.79	1.06	1362	0.82	1.10	1392	0.86	1.15	1423	0.89	1.19	1454	0.92	1.23	1485	0.95	1.27
944	2000	1201	0.66	0.89	1239	0.69	0.93	1294	0.78	1.05	1325	0.81	1.09	1351	0.85	1.14	1376	0.89	1.19	1406	0.92	1.23	1436	0.95	1.27	1466	0.98	1.31	1497	1.01	1.35
991	2100	1221	0.72	0.97	1258	0.75	1.01	1311	0.85	1.14	1341	0.88	1.18	1365	0.92	1.23	1390	0.95	1.28	1420	0.98	1.32	1450	1.01	1.36	1480	1.05	1.41	1510	1.08	1.45
1038	2200	1242	0.78	1.05	1277	0.81	1.09	1331	0.93	1.24	1355	0.96	1.29	1380	0.99	1.33	1406	1.02	1.37	1435	1.06	1.42	1465	1.09	1.46	1494	1.12	1.50	1524	1.15	1.54
1085	2300	1262	0.85	1.14	1295	0.89	1.19	1357	1.01	1.36	1381	1.04	1.40	1406	1.07	1.44	1432	1.10	1.48	1462	1.13	1.52	1491	1.16	1.56	1520	1.19	1.60	1550	1.22	1.64
1133	2400	1282	0.93	1.24	1313	0.97	1.30	1375	1.09	1.48	1400	1.12	1.50	1425	1.15	1.53	1451	1.18	1.59	1481	1.21	1.60	1510	1.24	1.65	1540	1.27	1.70	1570	1.30	1.75

BLOWER DATA - BELT DRIVE - LCHO60

BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT ONLY WITH DRY INDOOR COIL AND AIR FILTERS IN PLACE.

FOR ALL UNITS ADD:

1 - Any factory installed options air resistance (heat section, economizer, etc.).

2 - Any field installed accessories air resistance (duct resistance, diffuser, etc.).

See page 32 for blower motors and drives and wet coil and options/accessory air resistance data.

HORIZONTAL

Air Volume		External Static - Pa (in.w.g.)																																			
		25 (0.10)		50 (0.20)		75 (0.30)		100 (0.40)		125 (0.50)		150 (0.60)		175 (0.70)		200 (0.80)		225 (0.90)		250 (1.00)																	
L/s	cfm	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP
519	1100	509	0.11	0.15	562	0.13	0.18	624	0.15	0.20	691	0.16	0.22	771	0.18	0.24	852	0.19	0.25	919	0.21	0.28	970	0.23	0.31	1010	0.26	0.35	1049	0.28	0.38						
566	1200	535	0.13	0.18	589	0.16	0.21	650	0.17	0.23	715	0.19	0.25	792	0.20	0.27	869	0.22	0.29	932	0.24	0.32	980	0.26	0.35	1019	0.28	0.38	1058	0.31	0.42						
613	1300	564	0.16	0.21	618	0.18	0.24	678	0.20	0.27	741	0.22	0.29	815	0.23	0.31	887	0.25	0.33	946	0.27	0.36	991	0.29	0.39	1030	0.32	0.43	1068	0.35	0.47						
661	1400	604	0.18	0.24	657	0.20	0.27	715	0.22	0.30	775	0.25	0.33	842	0.26	0.35	908	0.28	0.37	962	0.30	0.40	1004	0.32	0.43	1042	0.35	0.47	1080	0.38	0.51						
708	1500	656	0.19	0.26	706	0.22	0.30	760	0.25	0.33	814	0.27	0.36	874	0.29	0.39	931	0.31	0.41	979	0.34	0.45	1019	0.36	0.48	1056	0.40	0.53	1094	0.43	0.57						
755	1600	712	0.22	0.29	758	0.24	0.32	807	0.27	0.36	855	0.29	0.39	906	0.32	0.43	955	0.34	0.46	997	0.37	0.50	1035	0.40	0.54	1071	0.43	0.58	1109	0.46	0.62						
802	1700	766	0.24	0.32	808	0.27	0.36	850	0.30	0.40	892	0.33	0.44	936	0.35	0.47	978	0.38	0.51	1016	0.42	0.56	1052	0.45	0.60	1088	0.48	0.64	1126	0.51	0.68						
849	1800	814	0.27	0.36	851	0.30	0.40	888	0.33	0.44	925	0.37	0.49	963	0.40	0.53	1000	0.43	0.57	1035	0.46	0.62	1071	0.49	0.66	1107	0.52	0.70	1143	0.55	0.74						
897	1900	853	0.31	0.41	886	0.34	0.46	919	0.37	0.50	952	0.41	0.55	986	0.45	0.60	1021	0.48	0.64	1056	0.51	0.69	1091	0.54	0.73	1126	0.57	0.77	1163	0.60	0.81						
944	2000	883	0.36	0.48	913	0.40	0.53	944	0.43	0.57	976	0.46	0.62	1009	0.50	0.67	1043	0.53	0.71	1078	0.57	0.76	1112	0.60	0.80	1148	0.63	0.84	1183	0.66	0.88						
991	2100	906	0.42	0.56	936	0.45	0.60	967	0.48	0.65	999	0.52	0.70	1033	0.56	0.75	1067	0.59	0.79	1101	0.63	0.84	1135	0.66	0.88	1170	0.69	0.92	1206	0.72	0.96						
1038	2200	930	0.48	0.64	960	0.51	0.68	991	0.54	0.73	1024	0.58	0.78	1058	0.62	0.83	1092	0.66	0.88	1126	0.69	0.92	1160	0.72	0.96	1195	0.75	1.00	1230	0.78	1.04						
1085	2300	954	0.54	0.72	985	0.57	0.77	1017	0.61	0.82	1051	0.65	0.87	1085	0.69	0.92	1119	0.72	0.96	1152	0.75	1.00	1186	0.78	1.04	1220	0.81	1.08	1254	0.84	1.13						
1133	2400	981	0.60	0.81	1013	0.64	0.86	1046	0.68	0.91	1079	0.72	0.96	1113	0.75	1.00	1146	0.78	1.05	1180	0.81	1.09	1213	0.84	1.13	1245	0.88	1.18	1278	0.91	1.22						

Air Volume		External Static - Pa (in.w.g.)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
		275 (1.10)		300 (1.20)		325 (1.30)		350 (1.40)		375 (1.50)		400 (1.60)		425 (1.70)		450 (1.80)		475 (1.90)		500 (2.00)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
		Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
L/s	cfm	1091	0.31	0.42	1134	0.34	0.45	1176	0.36	0.48	1218	0.38	0.51	1258	0.40	0.54	1297	0.43	0.57	1335	0.44	0.59	1376	0.50	0.67	1410	0.52	0.70	1444	0.54	0.72	1483	0.56	0.75	1500	0.58	0.78	1538	0.60	0.84	1576	0.62	0.90	1614	0.64	0.96	1652	0.66	0.99	1690	0.68	1.03	1728	0.70	1.06	1766	0.72	1.10	1804	0.74	1.13	1842	0.76	1.16	1880	0.78	1.19	1918	0.80	1.21	1956	0.82	1.24	1994	0.84	1.27	2032	0.86	1.30	2070	0.88	1.33	2108	0.90	1.36	2146	0.92	1.39	2184	0.94	1.42	2222	0.96	1.46	2260	0.98	1.49	2298	1.00	1.53	2336	1.02	1.57	2374	1.04	1.61	2412	1.06	1.65	2450	1.08	1.69	2488	1.10	1.73	2526	1.12	1.77	2564	1.14	1.81	2602	1.16	1.85	2640	1.18	1.89	2678	1.20	1.93	2716	1.22	1.97	2754	1.24	2.01	2792	1.26	2.05	2830	1.28	2.09	2868	1.30	2.13	2906	1.32	2.17	2944	1.34	2.21	2982	1.36	2.25	3020	1.38	2.29	3058	1.40	2.33	3096	1.42	2.37	3134	1.44	2.41	3172	1.46	2.45	3210	1.48	2.49	3248	1.50	2.53	3286	1.52	2.57	3324	1.54	2.61	3362	1.56	2.65	3400	1.58	2.69	3438	1.60	2.73	3476	1.62	2.77	3514	1.64	2.81	3552	1.66	2.85	3590	1.68	2.89	3628	1.70	2.93	3666	1.72	2.97	3704	1.74	3.01	3742	1.76	3.05	3780	1.78	3.09	3818	1.80	3.13	3856	1.82	3.17	3894	1.84	3.21	3932	1.86	3.25	3970	1.88	3.29	4008	1.90	3.33	4046	1.92	3.37	4084	1.94	3.41	4122	1.96	3.45	4160	1.98	3.49	4198	2.00	3.53	4236	2.02	3.57	4274	2.04	3.61	4312	2.06	3.65	4350	2.08	3.69	4388	2.10	3.73	4426	2.12	3.77	4464	2.14	3.81	4502	2.16	3.85	4540	2.18	3.89	4578	2.20	3.93	4616	2.22	3.97	4654	2.24	4.01	4692	2.26	4.05	4730	2.28	4.09	4768	2.30	4.13	4806	2.32	4.17	4844	2.34	4.21	4882	2.36	4.25	4920	2.38	4.29	4958	2.40	4.33	4996	2.42	4.37	5034	2.44	4.41	5072	2.46	4.45	5110	2.48	4.49	5148	2.50	4.53	5186	2.52	4.57	5224	2.54	4.61	5262	2.56	4.65	5300	2.58	4.69	5338	2.60	4.73	5376	2.62	4.77	5414	2.64	4.81	5452	2.66	4.85	5490	2.68	4.89	5528	2.70	4.93	5566	2.72	4.97	5604	2.74	5.01	5642	2.76	5.05	5680	2.78	5.09	5718	2.80	5.13	5756	2.82	5.17	5794	2.84	5.21	5832	2.86	5.25	5870	2.88	5.29	5908	2.90	5.33	5946	2.92	5.37	5984	2.94	5.41	6022	2.96	5.45	6060	2.98	5.49	6098	3.00	5.53	6136	3.02	5.57	6174	3.04	5.61	6212	3.06	5.65	6250	3.08	5.69	6288	3.10	5.73	6326	3.12	5.77	6364	3.14	5.81	6402	3.16	5.85	6440	3.18	5.89	6478	3.20	5.93	6516	3.22	5.97	6554	3.24	6.01	6592	3.26	6.05	6630	3.28	6.09	6668	3.30	6.13	6706	3.32	6.17	6744	3.34	6.21	6782	3.36	6.25	6820	3.38	6.29	6858	3.40	6.33	6896	3.42	6.37	6934	3.44	6.41	6972	3.46	6.45	7010	3.48	6.49	7048	3.50	6.53	7086	3.52	6.57	7124	3.54	6.61	7162	3.56	6.65	7200	3.58	6.69	7238	3.60	6.73	7276	3.62	6.77	7314	3.64	6.81	7352	3.66	6.85	7390	3.68	6.89	7428	3.70	6.93	7466	3.72	6.97	7504	3.74	7.01	7542	3.76	7.05	7580	3.78	7.09	7618	3.80	7.13	7656	3.82	7.17	7694	3.84	7.21	7732	3.86	7.25	7770	3.88	7.29	7808	3.90	7.33	7846	3.92	7.37	7884	3.94	7.41	7922	3.96	7.45	7960	3.98	7.49	7998	4.00	7.53	8036	4.02	7.57	8074	4.04	7.61	8112	4.06	7.65	8150	4.08	7.69	8188	4.10	7.73	8226	4.12	7.77	8264	4.14	7.81	8302	4.16	7.85	8340	4.18	7.89	8378	4.20	7.93	8416	4.22	7.97	8454	4.24	8.01	8492	4.26	8.05	8530	4.28	8.09	8568	4.30	8.13	8606	4.32	8.17	8644	4.34	8.21	8682	4.36	8.25	8720	4.38	8.29	8758	4.40	8.33	8796	4.42	8.37	8834	4.44	8.41	8872	4.46	8.45	8910	4.48	8.49	8948	4.50	8.53	8986	4.52	8.57	9024	4.54	8.61	9062	4.56	8.65	9100	4.58	8.69	9138	4.60	8.73	9176	4.62	8.77	9214	4.64	8.81	9252	4.66	8.85	9290	4.68	8.89	9328	4.70	8.93	9366	4.72	8.97	9404	4.74	9.01	9442	4.76	9.05	9480	4.78	9.09	9518	4.80	9.13	9556	4.82	9.17	9594	4.84	9.21	9632	4.86	9.25	9670	4.88	9.29	9708	4.90	9.33	9746	4.92	9.37	9784	4.94	9.41	9822	4.96	9.45	9860	4.98	9.49	9898	5.00	9.53	9936	5.02	9.57	9974	5.04	9.61	10012	5.06	9.65	10050	5.08	9.69	10088	5.10	9.73	10126	5.12	9.77	10164	5.14	9.81	10202	5.16	9.85	10240	5.18	9.89	10278	5.20	9.93	10316	5.22	9.97	10354	5.24	10.01	10392	5.26	10.05	10430	5.28	10.09	10468	5.30	10.13	10506	5.32	10.17	10544	5.34	10.21	10582	5.36	10.25	10620	5.38	10.29	10658	5.40	10.33	10696	5.42	10.37	10734	5.44	10.41	10772	5.46	10.45	10810	5.48	10.49	10848	5.50	10.53	10886	5.52	10.57	10924	5.54	10.61	10962	5.56	10.65	11000	5.58	10.69	11038	5.60	10.73	11076	5.62	10.77	11114	5.64	10.81	11152	5.66	10.85	11190	5.68	10.89	11228	5.70	10.93	11266	5.72	10.97	11304	5.74	11.01	11342	5.76	11.05	11380	5.78	11.09	11418	5.80	11.13	11456	5.82	11.17	11494	5.84	11.21	11532	5.86	11.25	11570	5.88	11.29	11608	5.90	11.33	11646	5.92	11.37	11684	5.94	11.41	11722	5.96	11.45	11760	5.98	11.49	11798	6.00	11.53	11836	6.02	11.57	11874	6.04	11.61	11912	6.06	11.65	11950	6.08	11.69	11988	6.10	11.73	12026	6.12	11.77	12064	6.14	11.81	12102	6.16	11.85	12140	6.18	11.89	12178	6.20	11.93	12216	6.22	11.97	12254	6.24	12.01	12292	6.26	12.05	12330	6.28	12.09	12368	6.30	12.13	12406	6.32	12.17	12444	6.34	12.21	12482	6.36	12.25	12520	6.38	12.29	12558	6.40	12.33	12596	6.42	12.37	12634	6.44	12.41	12672	6.46	12.45	12710	6.48	12.49	12748	6.50	12.53	12786	6.52	12.57	12824	6.54	12.61	12862	6.56	12.65	12900	6.58	12.69	12938	6.60	12.73	12976	6.62	12.77	13014	6.64	12.81	13052	6.66	12.85	13090	6.68	12.89	13128	6.70	12.93	13166	6.72	12.97	13204	6.74	13.01	13242	6.76	13.05	13280	6.78	13.09	13318	6.80	13.13	13356	6.82	13.17	13394	6.84	13.21	13432	6.86	13.25	13470	6.88	13.29	13508	6.90	13.33	13546	6.92	13.37	13584	6.94	13.41	13622	6.96	13.45	13660	6.98	13.49	13698	7.00	13.53	13736	7.02	13.57	13774	7.04	13.61	13812	7.06	13.65	13850	7.08	13.69	13888	7.10	13.73	13926	7.12	13.77	13964	7.14	13.81	14002	7.16	13.85	14040	7.18	13.89	14078	7.20	13.93	14116	7.22	13.97	14154	7.24	14.01	14192	7.26	14.05	14230	7.28	14.09	14268	7.30	14.13	14306	7.32	14.17	14344	7.34	14.21	14382	7.36	14.25	14420	7.38	14.29	14458	7.40	14.33	14496	7.42	14.37	14534	7.44	14.41	14572	7.46	14.45	14610	7.48	14.49	14648	7.50	14.53	14686	7.52	14.57	14724	7.54	14.61	14762	7.56	14.65	14800	7.58	14.69	14838	7.60	14.73	14876	7.62	14.77	14914	7.64	14.81	14952	7.66	14.85	14990	7.68	14.89	15028	7.70	14.93	15066	7.72	14.97	15104	7.74	15.01	15142	7.76	15.05	15180	7.78	15.09	15218	7.80	15.13	15256	7.82	15.17	15294	7.84	15.21	15332	7.86	15.25	15370	7.88	15.29	15408	7.90	15.33	15446	7.92	15.37	15484	7.94	15.41	15522	7.96	15.45	15560	7.98	15.49	15598	8.00	15.53	15636	8.02	15.57	15674	8.04	15.61	15712	8.06	15.65	15750	8.08	15.69	15788	8.10	15.73	15826	8.12	15.77	15864	8.14	15.81	15902	8.16	15.85	15940	8.18	15.89	15978	8.20	15.93	16016	8.22	15.97	16054	8.24	16.01	16092	8.26	16.05	16130	8.28	16.09	16168	8.30	16.13	16206	8.32	16.17	16244	8.34	16.21	16282	8.36	16.25	16320	8.38	16.29	16358	8.40	16.33	16396	8.42	16.37	16434	8.44	16.41	16472	8.46	16.45	16510	8.48	16.49	16548	8.50	16.53	16586	8.52	16.57	16624	8.54	16.61	16662	8.56	16.65	16700	8.58	16.69	16738	8.60	16.73	16776	8.62	16.77	16814	8.64	16.81	16852	8.66	16.85	16890	8.68	16.89	16928	8.70	16.93	16966	8.72	16.97	17004	8.74	17.01	17042	8.76	17.05	17080	8.78	17.09	17118	8.80	17.13	17156	8.82	17.17	17194	8.84	17.21	17232	8.86	17.25	17270	8.88	17.29	17308	8.90	17.33	17346	8.92	17.37	17384	8.94	17.41	17422	8.96

BLOWER DATA - BELT DRIVE - LCH072 / LCH074**BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT ONLY WITH DRY INDOOR COIL AND AIR FILTERS IN PLACE.**

FOR ALL UNITS ADD:

- 1 - Any factory installed options air resistance (heat section, economizer, etc.).
- 2 - Any field installed accessories air resistance (duct resistance, diffuser, etc.).

See page 32 for blower motors and drives and wet coil and options/accessory air resistance data.

DOWNFLOW

Air Volume		External Static - Pa (in.w.g.)																													
		25 (0.10)		50 (0.20)		75 (0.30)		100 (0.40)		125 (0.50)		150 (0.60)		175 (0.70)		200 (0.80)		225 (0.90)		250 (1.00)											
L/s	cfm	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP
897	1900	480	0.28	0.38	512	0.33	0.44	545	0.38	0.51	579	0.43	0.57	614	0.47	0.63	648	0.52	0.70	683	0.57	0.76	719	0.62	0.83	752	0.66	0.89	781	0.71	0.95
944	2000	493	0.32	0.43	525	0.37	0.49	558	0.42	0.56	592	0.46	0.62	626	0.51	0.68	659	0.56	0.75	693	0.60	0.81	728	0.66	0.88	759	0.70	0.94	788	0.75	1.00
991	2100	507	0.36	0.48	539	0.40	0.54	572	0.46	0.61	605	0.50	0.67	639	0.55	0.74	671	0.60	0.80	704	0.64	0.86	737	0.69	0.93	768	0.74	0.99	795	0.78	1.04
1038	2200	522	0.40	0.53	554	0.45	0.60	587	0.49	0.66	619	0.54	0.73	652	0.59	0.79	684	0.64	0.86	716	0.69	0.92	747	0.73	0.98	777	0.78	1.04	803	0.82	1.10
1085	2300	537	0.44	0.59	569	0.48	0.65	602	0.54	0.72	634	0.59	0.79	666	0.63	0.85	697	0.68	0.91	728	0.73	0.98	758	0.78	1.04	786	0.82	1.10	812	0.86	1.15
1133	2400	553	0.48	0.65	585	0.53	0.71	617	0.58	0.78	649	0.63	0.85	680	0.68	0.91	711	0.73	0.98	740	0.78	1.04	769	0.82	1.10	796	0.86	1.15	821	0.90	1.21
1180	2500	570	0.53	0.71	602	0.58	0.78	633	0.63	0.84	665	0.68	0.91	695	0.72	0.97	725	0.78	1.04	753	0.82	1.10	781	0.87	1.16	807	0.91	1.22	832	0.95	1.27
1227	2600	588	0.57	0.77	619	0.63	0.84	650	0.68	0.91	680	0.72	0.97	710	0.78	1.04	739	0.82	1.10	767	0.87	1.16	793	0.91	1.22	818	0.95	1.28	842	0.99	1.33
1274	2700	607	0.63	0.84	637	0.68	0.91	667	0.72	0.97	697	0.78	1.04	726	0.83	1.11	753	0.87	1.17	780	0.92	1.23	806	0.96	1.29	830	1.01	1.35	854	1.04	1.40
1321	2800	626	0.68	0.91	655	0.72	0.97	684	0.78	1.04	713	0.83	1.11	741	0.88	1.18	768	0.93	1.24	794	0.97	1.30	819	1.01	1.36	842	1.06	1.42	866	1.10	1.47
1369	2900	646	0.73	0.98	674	0.78	1.05	702	0.83	1.11	730	0.88	1.18	757	0.93	1.25	783	0.98	1.32	808	1.03	1.38	832	1.07	1.44	855	1.11	1.49	878	1.15	1.54

External Static - Pa (in.w.g.)

Air Volume		275 (1.10)				300 (1.20)				325 (1.30)				350 (1.40)				375 (1.50)				400 (1.60)				425 (1.70)				450 (1.80)				475 (1.90)				500 (2.00)			
		Rev/ min	kW	BHP		Rev/ min	kW	BHP		Rev/ min	kW	BHP		Rev/ min	kW	BHP		Rev/ min	kW	BHP		Rev/ min	kW	BHP		Rev/ min	kW	BHP		Rev/ min	kW	BHP		Rev/ min	kW	BHP					
		807	0.75	1.00	832	0.78	1.04	857	0.80	1.07	883	0.83	1.11	912	0.85	1.14	941	0.87	1.17	968	0.90	1.21	993	0.93	1.25	1017	0.96	1.29	1039	1.00	1.34										
		813	0.78	1.04	838	0.81	1.08	862	0.84	1.12	889	0.86	1.15	917	0.89	1.19	945	0.91	1.22	972	0.94	1.26	997	0.97	1.30	1020	1.01	1.35	1042	1.04	1.40										
		820	0.81	1.09	844	0.84	1.13	869	0.87	1.17	895	0.90	1.21	923	0.93	1.24	951	0.95	1.28	977	0.98	1.32	1001	1.01	1.36	1024	1.05	1.41	1046	1.09	1.46										
		828	0.85	1.14	852	0.88	1.18	877	0.91	1.22	903	0.94	1.26	930	0.97	1.30	957	0.99	1.33	983	1.02	1.37	1006	1.06	1.42	1028	1.10	1.47	1050	1.14	1.53										
		836	0.90	1.20	861	0.93	1.24	885	0.95	1.28	911	0.98	1.31	938	1.01	1.35	964	1.04	1.39	989	1.07	1.43	1012	1.10	1.48	1033	1.15	1.54	1054	1.19	1.60										
		846	0.93	1.25	870	0.96	1.29	895	0.99	1.33	920	1.02	1.37	947	1.05	1.41	972	1.08	1.45	996	1.12	1.50	1018	1.16	1.55	1039	1.20	1.61	1059	1.25	1.67										
		856	0.98	1.31	880	1.01	1.35	905	1.04	1.39	930	1.07	1.43	956	1.10	1.47	980	1.13	1.52	1003	1.17	1.57	1024	1.22	1.63	1044	1.26	1.69	1064	1.31	1.76										
		866	1.03	1.38	891	1.06	1.42	915	1.09	1.46	940	1.12	1.50	965	1.15	1.54	988	1.19	1.59	1010	1.23	1.65	1031	1.28	1.71	1050	1.33	1.78	1069	1.37	1.84										
		878	1.07	1.44	902	1.10	1.48	926	1.13	1.52	950	1.17	1.57	974	1.20	1.61	997	1.25	1.67	1018	1.29	1.73	1037	1.34	1.80	1056	1.40	1.87	1075	1.44	1.93										
		889	1.13	1.51	913	1.16	1.55	937	1.19	1.59	961	1.22	1.64	984	1.26	1.69	1006	1.31	1.75	1026	1.36	1.82	1044	1.41	1.89	1063	1.46	1.96	1081	1.51	2.03										
		902	1.18	1.58	925	1.22	1.63	949	1.25	1.67	972	1.28	1.72	994	1.33	1.78	1015	1.37	1.84	1034	1.42	1.91	1052	1.48	1.99	1069	1.54	2.06	1087	1.59	2.13										

BLOWER DATA - BELT DRIVE - LCHO72 / LCHO74

BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT ONLY WITH DRY INDOOR COIL AND AIR FILTERS IN PLACE.

FOR ALL UNITS ADD:

1 - Any factory installed options air resistance (heat section, economizer, etc.).

2 - Any field installed accessories air resistance (duct resistance, diffuser, etc.).

See page 32 for blower motors and drives and wet coil and options/accessory air resistance data.

HORIZONTAL

Air Volume		External Static - Pa (in.w.g.)																													
		25 (0.10)			50 (0.20)			75 (0.30)			100 (0.40)			125 (0.50)			150 (0.60)			175 (0.70)			200 (0.80)			225 (0.90)			250 (1.00)		
L/s	cfm	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP
897	1900	507	0.41	0.55	538	0.43	0.58	571	0.45	0.60	604	0.47	0.63	639	0.49	0.66	673	0.52	0.70	707	0.55	0.74	740	0.58	0.78	772	0.61	0.82	802	0.64	0.86
944	2000	522	0.44	0.59	554	0.46	0.62	586	0.48	0.64	620	0.50	0.67	653	0.53	0.71	687	0.55	0.74	720	0.58	0.78	752	0.61	0.82	783	0.65	0.87	812	0.68	0.91
991	2100	539	0.47	0.63	571	0.49	0.66	603	0.51	0.69	636	0.54	0.72	669	0.56	0.75	702	0.59	0.79	734	0.62	0.83	765	0.66	0.88	795	0.69	0.92	823	0.72	0.97
1038	2200	557	0.51	0.68	588	0.53	0.71	620	0.55	0.74	652	0.57	0.77	685	0.60	0.81	717	0.63	0.84	748	0.66	0.89	778	0.69	0.93	807	0.73	0.98	834	0.77	1.03
1085	2300	576	0.54	0.73	607	0.57	0.76	638	0.59	0.79	670	0.62	0.83	701	0.64	0.86	733	0.67	0.90	763	0.71	0.95	792	0.74	0.99	820	0.78	1.04	846	0.81	1.09
1133	2400	596	0.59	0.79	626	0.61	0.82	657	0.63	0.85	688	0.66	0.89	718	0.69	0.92	749	0.72	0.96	778	0.75	1.01	806	0.79	1.06	833	0.83	1.11	858	0.87	1.16
1180	2500	616	0.63	0.85	645	0.66	0.88	676	0.68	0.91	706	0.71	0.95	736	0.74	0.99	765	0.77	1.03	794	0.81	1.08	821	0.84	1.13	847	0.88	1.18	871	0.92	1.23
1227	2600	636	0.68	0.91	665	0.70	0.94	695	0.73	0.98	724	0.76	1.02	754	0.79	1.06	782	0.82	1.10	809	0.86	1.15	836	0.90	1.20	861	0.93	1.25	885	0.97	1.30
1274	2700	657	0.72	0.97	685	0.75	1.01	714	0.78	1.04	743	0.81	1.08	771	0.84	1.13	799	0.87	1.17	826	0.91	1.22	851	0.95	1.27	875	0.98	1.32	899	1.02	1.37
1321	2800	677	0.77	1.03	706	0.80	1.07	734	0.83	1.11	762	0.87	1.16	790	0.90	1.20	816	0.93	1.25	842	0.97	1.30	867	1.01	1.35	890	1.04	1.40	913	1.08	1.45
1369	2900	698	0.82	1.10	726	0.85	1.14	754	0.89	1.19	781	0.92	1.23	808	0.95	1.28	834	0.99	1.33	859	1.03	1.38	883	1.07	1.43	906	1.10	1.48	928	1.15	1.54
Air Volume		External Static - Pa (in.w.g.)																													
		275 (1.10)			300 (1.20)			325 (1.30)			350 (1.40)			375 (1.50)			400 (1.60)			425 (1.70)			450 (1.80)			475 (1.90)			500 (2.00)		
L/s	cfm	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP	Rev/ min	kW	BHP
897	1900	830	0.68	0.91	857	0.71	0.95	883	0.74	0.99	910	0.78	1.04	937	0.81	1.09	964	0.84	1.13	991	0.88	1.18	1017	0.92	1.23	1042	0.95	1.28	1067	1.00	1.34
944	2000	839	0.72	0.96	865	0.75	1.00	891	0.78	1.05	917	0.81	1.09	944	0.85	1.14	970	0.89	1.19	996	0.93	1.24	1022	0.96	1.29	1047	1.00	1.34	1071	1.04	1.40
991	2100	849	0.76	1.02	874	0.79	1.06	900	0.83	1.11	926	0.86	1.15	952	0.90	1.20	978	0.93	1.25	1003	0.97	1.30	1028	1.01	1.35	1052	1.05	1.41	1075	1.09	1.46
1038	2200	860	0.81	1.08	885	0.84	1.12	910	0.87	1.17	935	0.90	1.21	960	0.94	1.26	986	0.98	1.31	1010	1.01	1.36	1034	1.06	1.42	1058	1.10	1.48	1081	1.14	1.53
1085	2300	871	0.85	1.14	895	0.89	1.19	920	0.92	1.23	945	0.95	1.28	969	0.99	1.33	994	1.03	1.38	1018	1.07	1.43	1042	1.11	1.49	1065	1.16	1.55	1087	1.20	1.61
1133	2400	883	0.90	1.21	907	0.93	1.25	931	0.97	1.30	955	1.01	1.35	979	1.04	1.40	1003	1.08	1.45	1027	1.13	1.51	1050	1.17	1.57	1072	1.22	1.63	1094	1.26	1.69
1180	2500	895	0.95	1.28	919	0.98	1.32	942	1.02	1.37	966	1.06	1.42	990	1.10	1.48	1013	1.14	1.53	1036	1.19	1.59	1059	1.23	1.65	1081	1.28	1.71	1102	1.33	1.78
1227	2600	908	1.01	1.35	931	1.04	1.40	955	1.08	1.45	978	1.12	1.50	1001	1.16	1.56	1024	1.21	1.62	1046	1.25	1.68	1068	1.30	1.74	1089	1.34	1.80	1110	1.40	1.87
1274	2700	922	1.07	1.43	945	1.10	1.48	967	1.14	1.53	990	1.19	1.59	1013	1.23	1.65	1035	1.28	1.71	1056	1.32	1.77	1078	1.37	1.84	1099	1.42	1.90	1119	1.46	1.96
1321	2800	936	1.13	1.51	958	1.16	1.56	980	1.21	1.62	1003	1.25	1.68	1025	1.30	1.74	1046	1.34	1.80	1067	1.40	1.87	1088	1.44	1.93	1109	1.49	2.00	1129	1.54	2.06
1369	2900	950	1.19	1.60	972	1.24	1.66	994	1.28	1.72	1016	1.33	1.78	1037	1.37	1.84	1058	1.42	1.91	1079	1.47	1.97	1099	1.52	2.04	1119	1.57	2.11	1139	1.62	2.17

BLOWER DATA

BELT DRIVE KIT SPECIFICATIONS - 036-060

Model No.	Motor kW		Motor HP		No. of Speeds	Drive Kits and rev/min Range					
	Nom.	Max.	Nom.	Max.		A01	A02	A03	A05	A06	A07
036	0.47	0.54	0.63	0.72	2	low 374-561 high 561-842	---	---	---	---	---
	0.62	0.71	0.83	0.95	2	---	---	---	low 498-748 high 748-1122	---	---
048	0.47	0.54	0.63	0.72	2	---	low 414-621 high 621-931	---	---	---	---
	1.24	1.42	1.66	1.91	2	---	---	---	---	low 595-794 high 893-1191	---
060	0.62	0.71	0.83	0.95	2	---	---	low 463-694 high 694-1042	---	---	---
	1.24	1.42	1.66	1.91	2	---	---	---	---	---	low 673-860 high 1010-1290

NOTE - Using total air volume and system static pressure requirements determine from blower performance tables rev/min and motor output required. Maximum usable output of motors furnished are shown. If motors of comparable output are used, be sure to keep within the service factor limitations outlined on the motor nameplate.

BELT DRIVE KIT SPECIFICATIONS - 072-074

Model No.	Motor kW		Motor HP		No. of Speeds	Drive Kits and rev/min Range		
	Nom.	Max.	Nom.	Max.		AA02	AA03	AA04
072	1.5	1.7	2	2.3	1	527-729	665-921	768-1023
074	1.2	1.4	1.7	1.9	2	527-729	665-921	768-1023

NOTE - Using total air volume and system static pressure requirements determine from blower performance tables rev/min and motor output required. Maximum usable output of motors furnished are shown. If motors of comparable output are used, be sure to keep within the service factor limitations outlined on the motor nameplate.

FACTORY INSTALLED OPTIONS/FIELD INSTALLED ACCESSORY AIR RESISTANCE - in. w.g.

Air Volume cfm	Wet Indoor Coil						Dehumidification Coil	Electric Heat	Economizer	Filters	
	036	048	060, 072, 074							MERV 8	MERV 13

036-048 MODELS

L/s	cfm	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.
380	800	2	0.01	2	0.01	---	---	0	0.00	2	0.01	10	0.04	10	0.04	12	0.05
470	1000	5	0.02	5	0.02	---	---	0	0.00	7	0.03	10	0.04	10	0.04	17	0.07
565	1200	7	0.03	10	0.04	---	---	2	0.01	15	0.06	10	0.04	10	0.04	17	0.07
660	1400	10	0.04	12	0.05	---	---	5	0.02	22	0.09	10	0.04	10	0.04	17	0.07
755	1600	12	0.05	15	0.06	---	---	7	0.03	30	0.12	10	0.04	10	0.04	17	0.07
850	1800	15	0.06	17	0.07	---	---	10	0.04	37	0.15	12	0.05	10	0.04	17	0.07
945	2000	20	0.08	22	0.09	---	---	10	0.04	45	0.18	12	0.05	12	0.05	20	0.08

060, 072, 074 MODELS

L/s	cfm	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.
470	1000	---	---	---	---	5	0.02	0	0.00	2	0.01	10	0.04	7	0.03	12	0.05
565	1200	---	---	---	---	10	0.04	0	0.00	7	0.03	10	0.04	7	0.03	17	0.07
660	1400	---	---	---	---	12	0.05	2	0.01	15	0.06	10	0.04	10	0.04	17	0.07
755	1600	---	---	---	---	17	0.07	5	0.02	22	0.09	10	0.04	10	0.04	17	0.07
850	1800	---	---	---	---	20	0.08	5	0.02	30	0.12	12	0.05	12	0.05	17	0.07
945	2000	---	---	---	---	24	0.10	7	0.03	37	0.15	12	0.05	12	0.05	17	0.07
1040	2200	---	---	---	---	27	0.11	10	0.04	45	0.18	12	0.05	12	0.05	20	0.08
1135	2400	---	---	---	---	32	0.13	10	0.04	50	0.20	12	0.05	12	0.05	20	0.08
1225	2600	---	---	---	---	37	0.15	12	0.05	55	0.22	15	0.06	12	0.05	20	0.08
1321	2800	---	---	---	---	40	0.16	12	0.05	60	0.24	15	0.06	12	0.05	20	0.08
1416	3000	---	---	---	---	45	0.18	15	0.06	70	0.28	15	0.06	12	0.05	20	0.08

BLOWER DATA

POWER EXHAUST FAN PERFORMANCE

Return Air System Static Pressure		Air Volume Exhausted	
Pa	in. w.g.	L/s	cfm
0	0.00	787	1665
12	0.05	783	1660
25	0.10	757	1605
37	0.15	712	1510
50	0.20	654	1385
62	0.25	593	1255
75	0.30	531	1125
87	0.35	476	1010

CEILING DIFFUSERS AIR RESISTANCE

Air Volume		RTD9-65S Step-Down Diffuser						FD9-65S Flush Diffuser		RTD11-95S Step-Down Diffuser						FD11-95S Flush Diffuser	
		2 Ends Open		1 Side & 2 Ends Open		All Ends & Sides Open				2 Ends Open		1 Side & 2 Ends Open		All Ends & Sides Open			
L/s	cfm	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.
378	800	37	0.15	32	0.13	27	0.11	27	0.11	---	---	---	---	---	---	---	---
472	1000	47	0.19	40	0.16	35	0.14	35	0.14	---	---	---	---	---	---	---	---
566	1200	62	0.25	50	0.20	42	0.17	42	0.17	---	---	---	---	---	---	---	---
661	1400	82	0.33	65	0.26	50	0.20	50	0.20	---	---	---	---	---	---	---	---
755	1600	107	0.43	80	0.32	50	0.20	60	0.24	---	---	---	---	---	---	---	---
849	1800	139	0.56	99	0.40	75	0.30	75	0.30	32	0.13	27	0.11	22	0.09	22	0.09
944	2000	182	0.73	124	0.50	90	0.36	90	0.36	37	0.15	32	0.13	27	0.11	25	0.10
1038	2200	236	0.95	157	0.63	109	0.44	109	0.44	45	0.18	37	0.15	30	0.12	30	0.12
1133	2400	---	---	---	---	---	---	---	---	52	0.21	45	0.18	37	0.15	35	0.14
1227	2600	---	---	---	---	---	---	---	---	60	0.24	52	0.21	45	0.18	42	0.17
1321	2800	---	---	---	---	---	---	---	---	67	0.27	60	0.24	52	0.21	50	0.20
1416	3000	---	---	---	---	---	---	---	---	80	0.32	72	0.29	62	0.25	62	0.25

CEILING DIFFUSER AIR THROW DATA

Air Volume		¹ Effective Throw			
L/s	cfm	m		ft.	
Model No.		RTD9-65S		FD9-65S	
378	800	3 - 5		4 - 5	
472	1000	3 - 5		4 - 6	
566	1200	3 - 5		5 - 7	
661	1400	3 - 6		5 - 7	
755	1600	3 - 6		5 - 8	
849	1800	4 - 6		6 - 9	
944	2000	4 - 7		6 - 9	
1038	2200	5 - 8		7 - 9	
Model No.		RTD11-95S		FD11-95S	
1227	2600	7 - 9		6 - 7	
1321	2800	8 - 9		6 - 9	
1416	3000	8 - 10		6 - 9	

¹ Effective throw based on terminal velocities of 23 m (75 ft.) per minute.

ELECTRICAL DATA

		LCH036S4		LCH048S4		LCH060S4		LCH072H4	LCH074H4
¹ Voltage - 50hz 3 Phase with neutral		380/420V		380/420V		380/420V		380/420V	380/420V
Compressor	Rated Load Amps	3.7		5.1		6.2		8	8.5
	Locked Rotor Amps	31		55		55		67.1	66.1
Outdoor Fan Motor	Full Load Amps	0.6		1.1		1.3		1.3	1.3
Power Exhaust (1) 0.25 kW (0.33 HP)	Full Load Amps	1.3		1.3		1.3		1.3	1.3
Indoor Blower Motor	kW	0.47	0.62	0.47	1.24	0.62	1.24	1.5	1.24
	Full Load Amps	1.4	1.9	1.4	2.6	1.9	2.6	3.6	2.6
² Maximum Overcurrent Protection	Unit Only	15	15	15	15	15	15	20	20
	With (1) 0.25 kW (0.33 HP) Power Exhaust	15	15	15	15	15	15	20	20
³ Minimum Circuit Ampacity	Unit Only	7	8	9	11	11	12	15	15
	With (1) 0.25 kW (0.33 HP) Power Exhaust	8	9	11	12	13	13	17	16

ELECTRIC HEAT DATA

Electric Heat Voltage			420V	420V	420V	420V	420V	420V	420V	420V
² Maximum Overcurrent Protection	⁴ Electric Heat	Unit+ 5.7 kW	15	15	15	15	15	15	20	20
		11.5 kW	25	25	25	25	25	25	25	25
		17.2 kW	---	---	---	---	35	35	35	35
		23 kW	---	---	---	---	---	---	45	45
³ Minimum Circuit Ampacity	⁴ Electric Heat	Unit+ 5.7 kW	12	13	12	14	13	14	15	15
		11.5 kW	22	23	22	23	23	23	25	23
		17.2 kW	---	---	---	---	32	33	35	33
		23 kW	---	---	---	---	---	---	44	43
² Maximum Overcurrent Protection	⁴ Electric Heat and (1) 0.25 kW (0.33 HP) Power Exhaust	Unit+ 5.7 kW	15	15	15	15	15	15	20	20
		11.5 kW	25	25	25	25	25	25	30	25
		17.2 kW	---	---	---	---	35	35	40	35
		23 kW	---	---	---	---	---	---	50	45
³ Minimum Circuit Ampacity	⁴ Electric Heat and (1) 0.25 kW (0.33 HP) Power Exhaust	Unit+ 5.7 kW	14	14	14	15	14	15	17	16
		11.5 kW	24	24	24	25	24	25	26	25
		17.2 kW	---	---	---	---	34	35	36	35
		23 kW	---	---	---	---	---	---	46	45

¹ Extremes of operating range are plus and minus 10% of line voltage.

² Heating/Air Conditioning/Refrigeration (HACR) type breaker or fuse.


³ Refer to local codes to determine wire, fuse and disconnect size requirements.

⁴ Nominal kW based on 420V-3ph-50hz.

ELECTRIC HEAT CAPACITIES

Volts Input	5.7 kW			11.5 kW			17.2 kW			23 kW		
	kW Input	Btuh Output	No. of Stages	kW Input	Btuh Output	No. of Stages	kW Input	Btuh Output	No. of Stages	kW Input	Btuh Output	No. of Stages
380	4.7	16 000	1	9.4	32 100	1	14.1	48 200	1	18.8	64 200	1
400	5.2	17 800	1	10.4	35 500	1	15.6	53 300	1	20.9	71 400	1
420	5.7	19 500	1	11.5	39 300	1	17.2	56 700	1	23.0	78 500	1

UNIT CLEARANCES

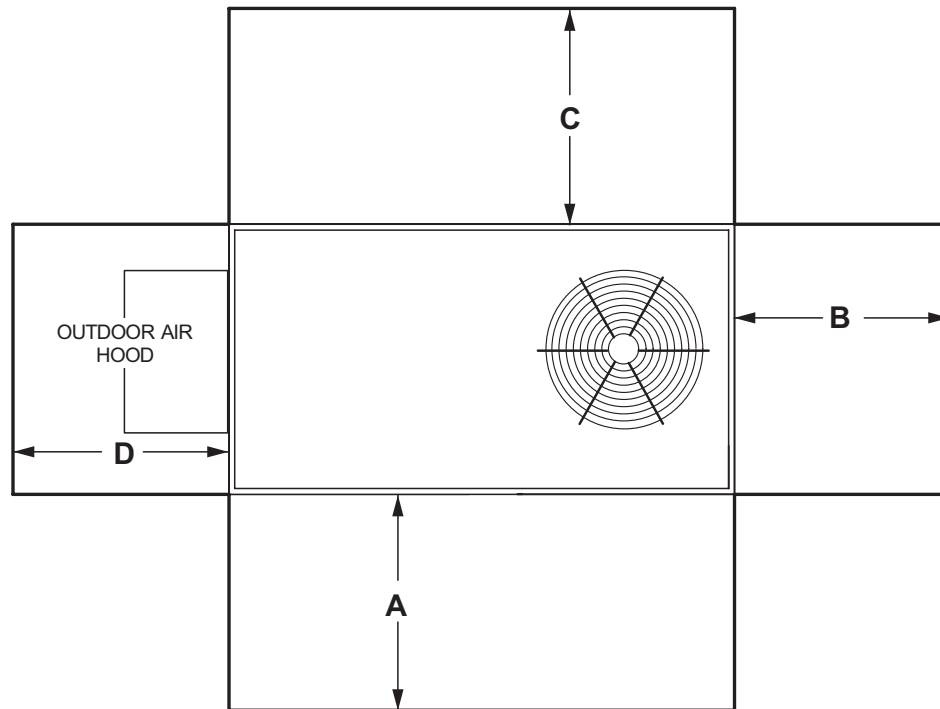

¹ Unit Clearance	A		B		C		D		Top Clearance
	mm	in.	mm	in.	mm	in.	mm	in.	
Service Clearance	914	36	914	36	914	36	914	36	Unobstructed
Minimum Operation Clearance	914	36	914	36	914	36	914	36	

NOTE - Entire perimeter of unit base requires support when elevated above the mounting surface.

¹ **Service Clearance** - Required for removal of serviceable parts.

Minimum Operation Clearance - Required clearance for proper unit operation.

OUTDOOR SOUND DATA

Unit Model No.	Octave Band Sound Power Levels dBA, re 10 ⁻¹² Watts Center Frequency - Hz							¹ Sound Rating Number (dBA)
	125	250	500	1000	2000	4000	8000	
036, 048	63	66	70	71	68	62	53	75
060, 072, 074	67	72	77	76	73	68	61	82

NOTE - The octave sound power data does not include tonal corrections.

¹ Sound Rating Number according to ARI Standard 270-95 (includes pure tone penalty). The Sound Rating Number is the overall A-Weighted Sound Power Level, (L_{wa}), dB (100 Hz to 10,000 Hz)

THIS PAGE INTENTIONALLY LEFT BLANK

THIS PAGE INTENTIONALLY LEFT BLANK

WEIGHT DATA

Model Number	Outdoor Coil	Net		Shipping		Outdoor Coil	Net		Shipping	
		kg	lbs.	kg	lbs.		kg	lbs.	kg	lbs.
036 Base Unit	Eco-Last™	233	513	260	574	Fin/Tube	241	532	269	593
036 Max. Unit	Eco-Last™	328	723	356	784	Fin/Tube	337	742	364	803
048 Base Unit	Eco-Last™	240	529	268	590	Fin/Tube	255	562	283	623
048 Max. Unit	Eco-Last™	328	723	364	803	Fin/Tube	351	775	379	836
060 Base Unit	Eco-Last™	275	607	303	668	Fin/Tube	294	649	322	710
060 Max. Unit	Eco-Last™	383	844	410	905	Fin/Tube	402	886	430	947
072 Base Unit	Eco-Last™	310	684	338	745	Fin/Tube	329	726	357	787
072 Max. Unit	Eco-Last™	404	891	432	952	Fin/Tube	423	933	451	994
074 Base Unit	Eco-Last™	310	684	338	745	Fin/Tube	329	726	357	787
074 Max. Unit	Eco-Last™	404	891	432	952	Fin/Tube	423	933	451	994

OPTIONS / ACCESSORIES

		Shipping Weight	
		kg	lbs.
ECONOMIZER / OUTDOOR AIR / EXHAUST			
Economizer			
Economizer, Includes Outdoor Air Hood and Barometric Relief Dampers with Hood		59	131
Outdoor Air Dampers			
Motorized		18	40
Manual		14	30
Power Exhaust			
Standard Static		17	35
ELECTRIC HEAT			
5.2 kW		14	31
10.4 kW		14	31
15.6 kW		16	35
20.9 kW		16	35
ROOF CURBS			
Hybrid Roof Curbs, Downflow			
203 mm height		23	50
356 mm height		32	70
457 mm height		36	80
610 mm height		45	100
Adjustable Pitch Curb, Downflow			
356 mm height		51	113
CEILING DIFFUSERS			
Step-Down	RTD9-65S	36	80
	RTD11-95S	54	118
Flush	FD9-65S	36	80
	FD11-95S	54	118
Transitions	T1TRAN10AN1	10	22
	T1TRAN20N-1	10	21
DEHUMIDIFICATION SYSTEM			
Dehumidification (net weight)	036-048	12	27
	060-072	14	30
PACKAGING			
LTL Packaging (less than truck load)	036-048	27	60
	060-072	29	65





DIMENSIONS - UNIT

CORNER WEIGHTS


Model No.	AA		BB		CC		DD		EE		FF	
	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	mm	in.	mm	in.
LCH036 Base Unit	42	92	51	112	82	180	67	148	978	38.5	457	18
LCH036 Max. Unit	61	133	69	151	110	243	98	215	1016	40	457	18
LCH048 Base Unit	44	97	54	118	87	190	71	157	978	38.5	457	18
LCH048 Max. Unit	63	139	72	158	115	254	102	224	1016	40	457	18
LCH060 Base Unit	51	112	62	136	100	219	82	181	978	38.5	457	18
LCH060 Max. Unit	72	159	82	180	132	290	117	257	1016	40	457	18
LCH072 Base Unit	57	126	69	152	112	246	92	202	978	38.5	457	18
LCH072 Max. Unit	76	168	86	190	139	306	123	270	1016	40	457	18
LCH074 Base Unit	57	126	69	152	112	246	92	202	978	38.5	457	18
LCH074 Max Unit	76	168	86	190	139	306	123	270	1016	40	457	18

Base Unit - The unit with NO INTERNAL OPTIONS.



Max. Unit - The unit with ALL INTERNAL OPTIONS Installed. (Economizer, Standard Static Power Exhaust Fans, Controls, etc.). Does not include accessories external to unit or high static power exhaust.

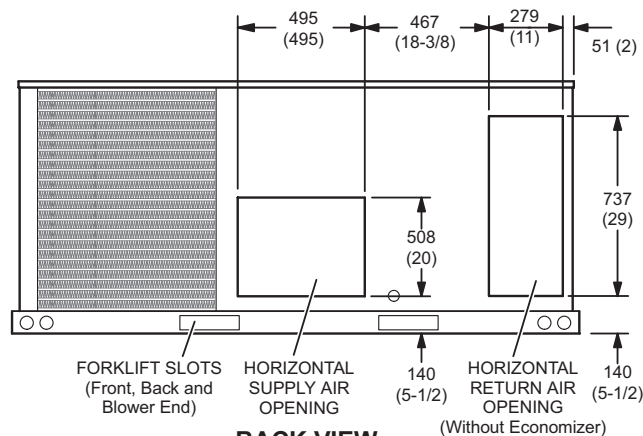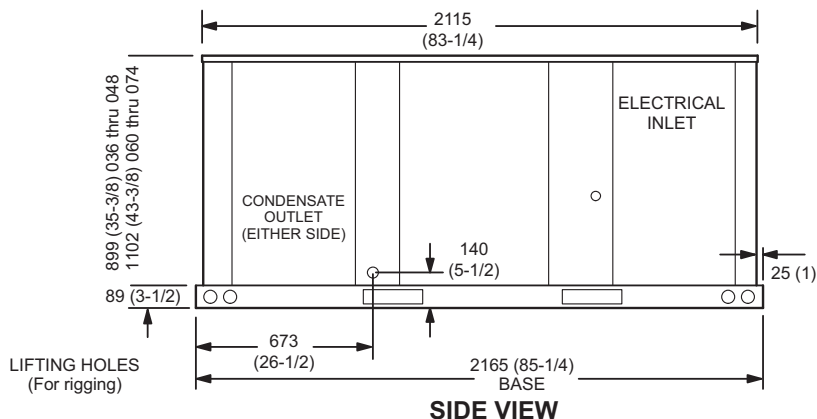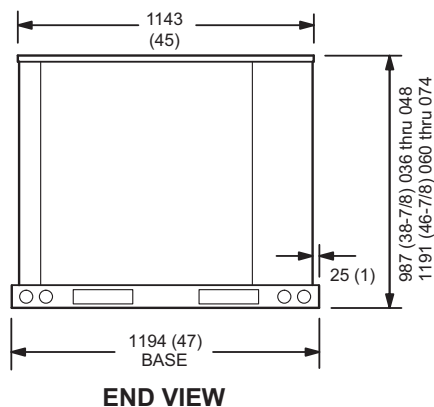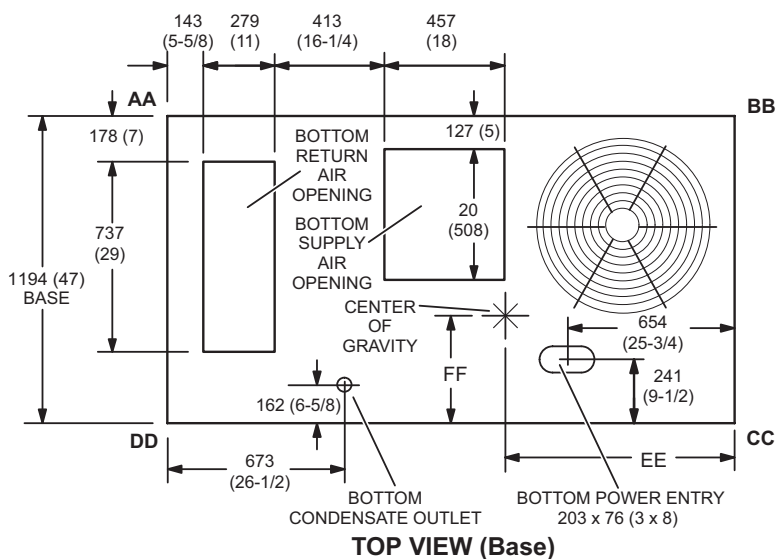

COMBINATION OUTDOOR AIR HOOD DETAIL FOR OPTIONAL ECONOMIZER AND BAROMETRIC RELIEF DAMPERS (Furnished With Economizer for Downflow Applications)

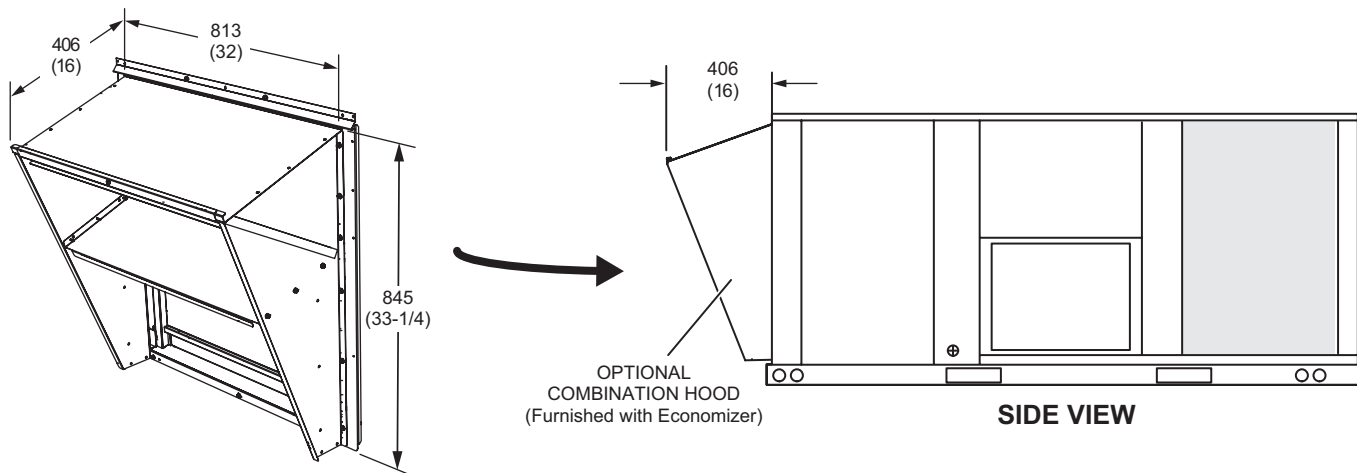


OUTDOOR AIR DAMPER HOOD DETAIL (Downflow or Horizontal Applications)

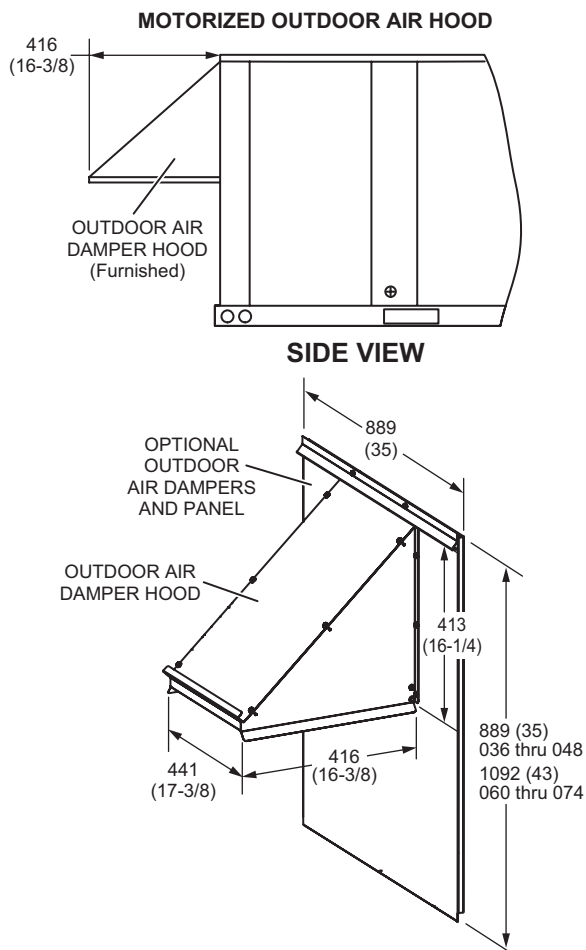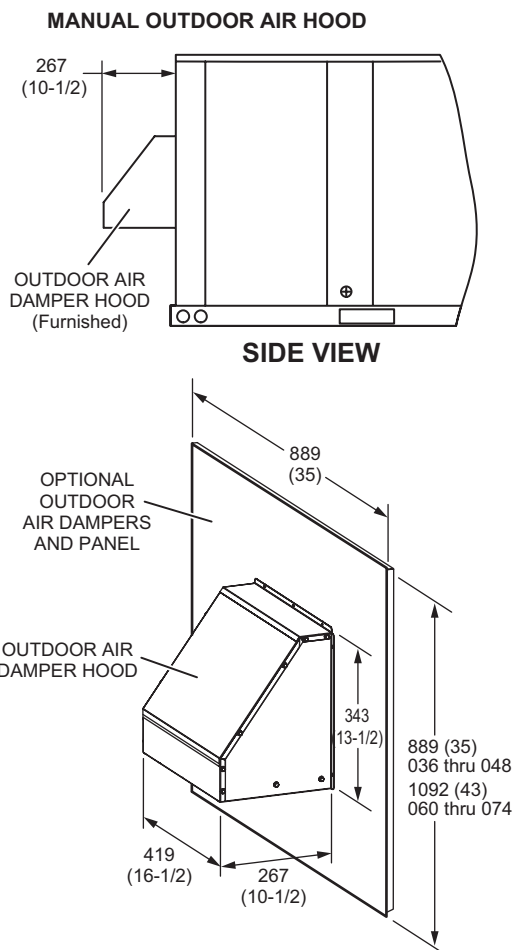

DIMENSIONS - ACCESSORIES


OUTDOOR AIR HOOD DETAIL WITH OPTIONAL ECONOMIZER AND OPTIONAL BAROMETRIC RELIEF DAMPERS WITH HOOD (Horizontal Application)

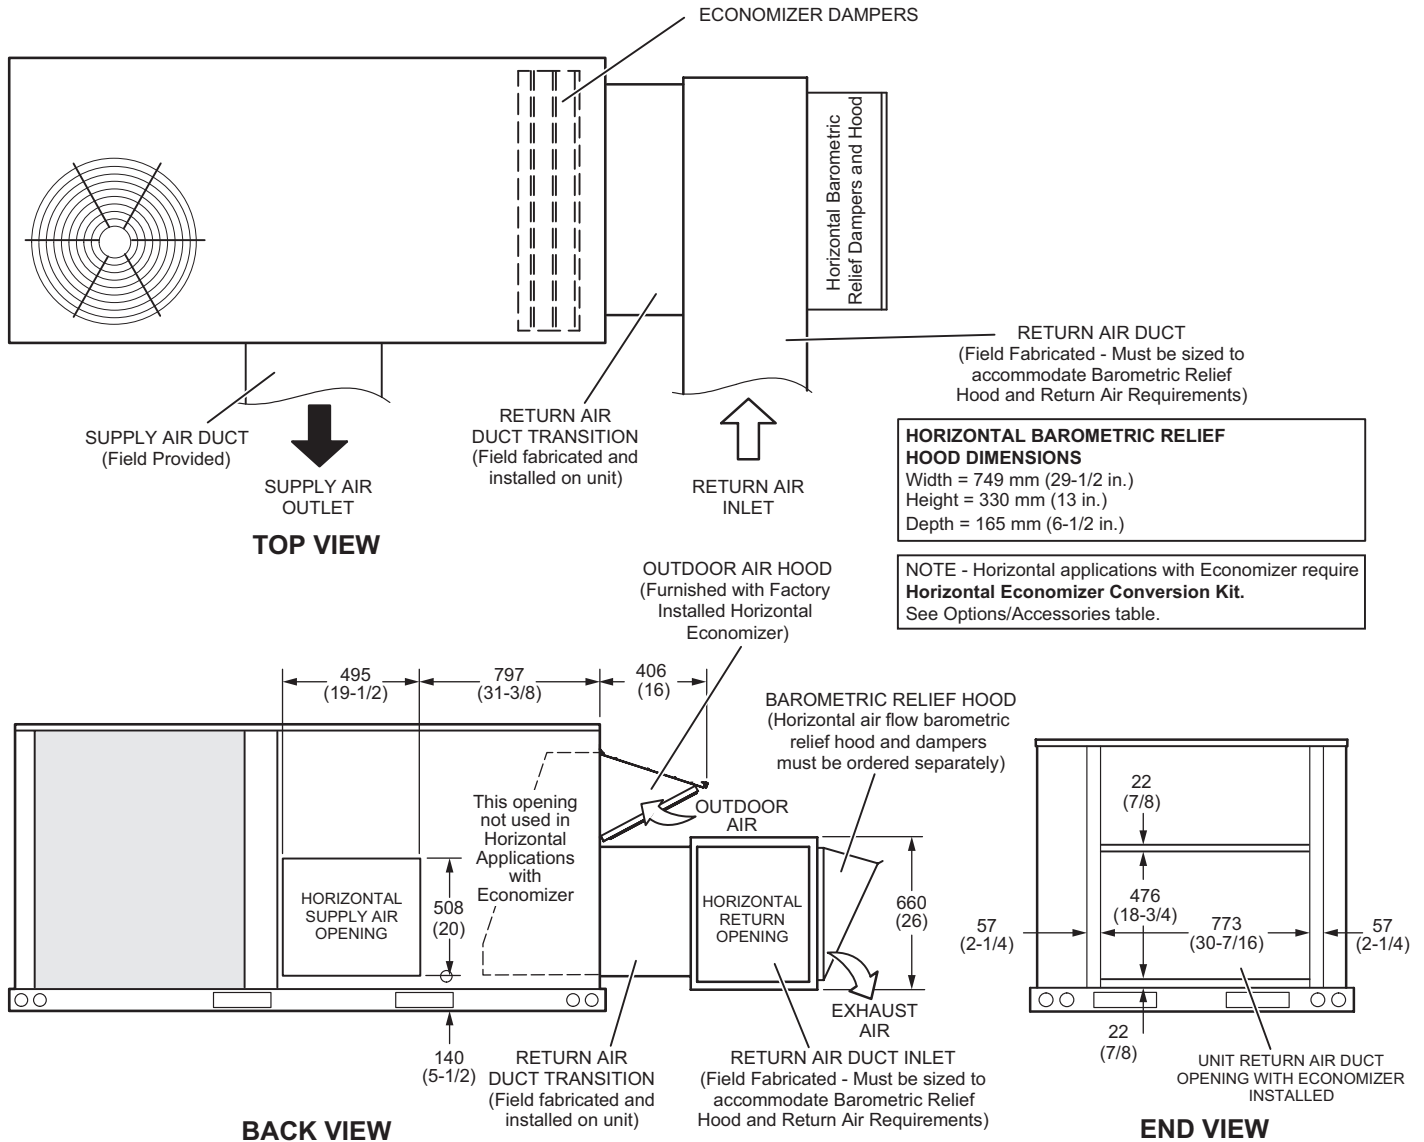


NOTE - Return Air Duct and Transition must be supported

DIMENSIONS - ACCESSORIES


HYBRID ROOF CURBS - DOUBLE DUCT OPENING

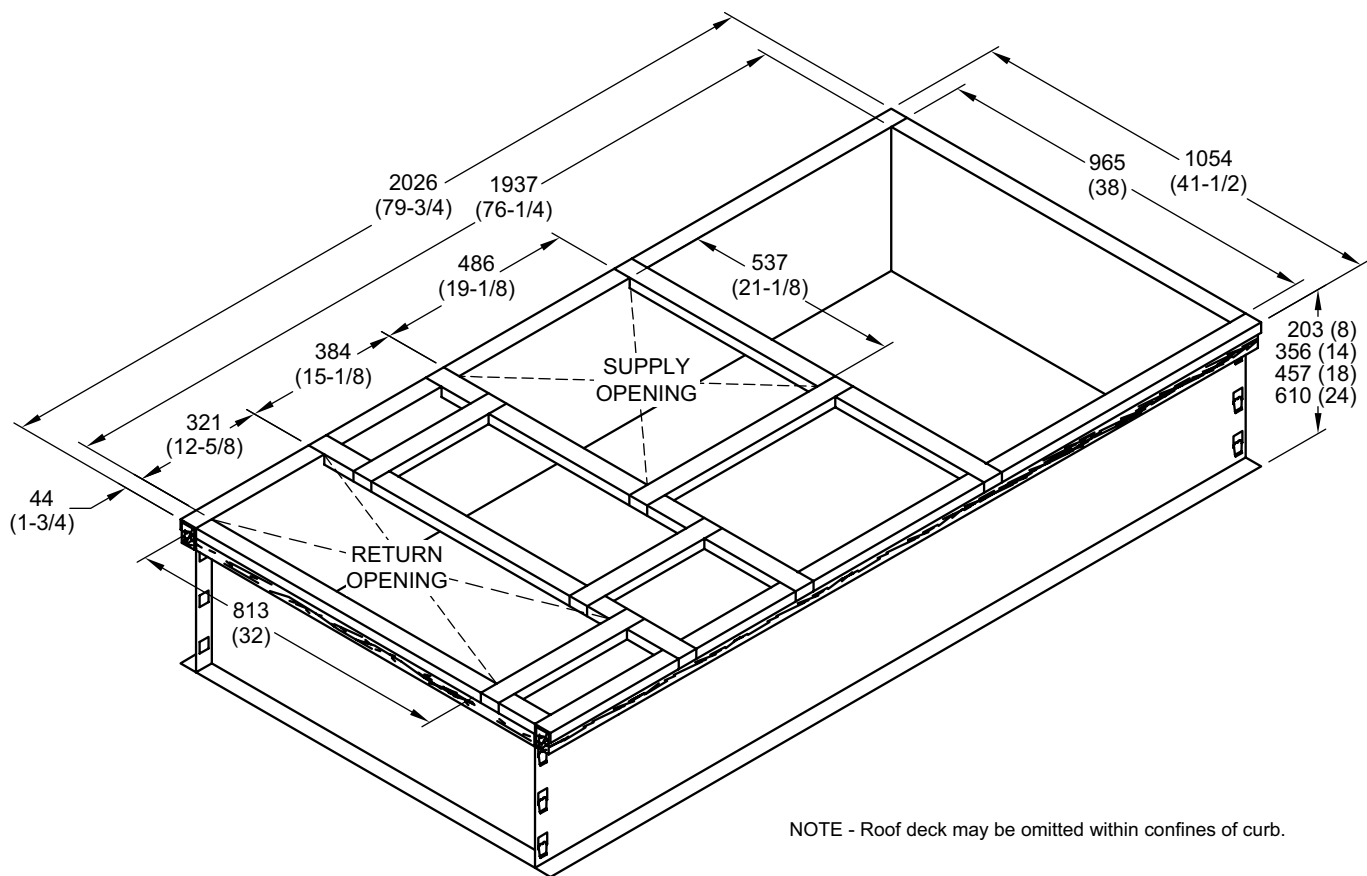

TYPICAL FLASHING DETAIL FOR ROOF CURB

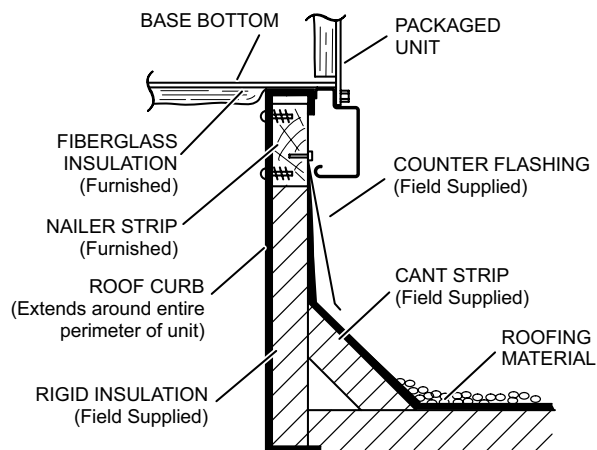


DETAIL ROOF CURB

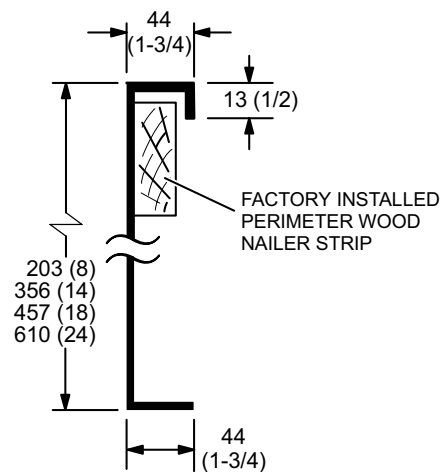


DIMENSIONS - ACCESSORIES


ADJUSTABLE PITCH CURBS - DOUBLE DUCT OPENING

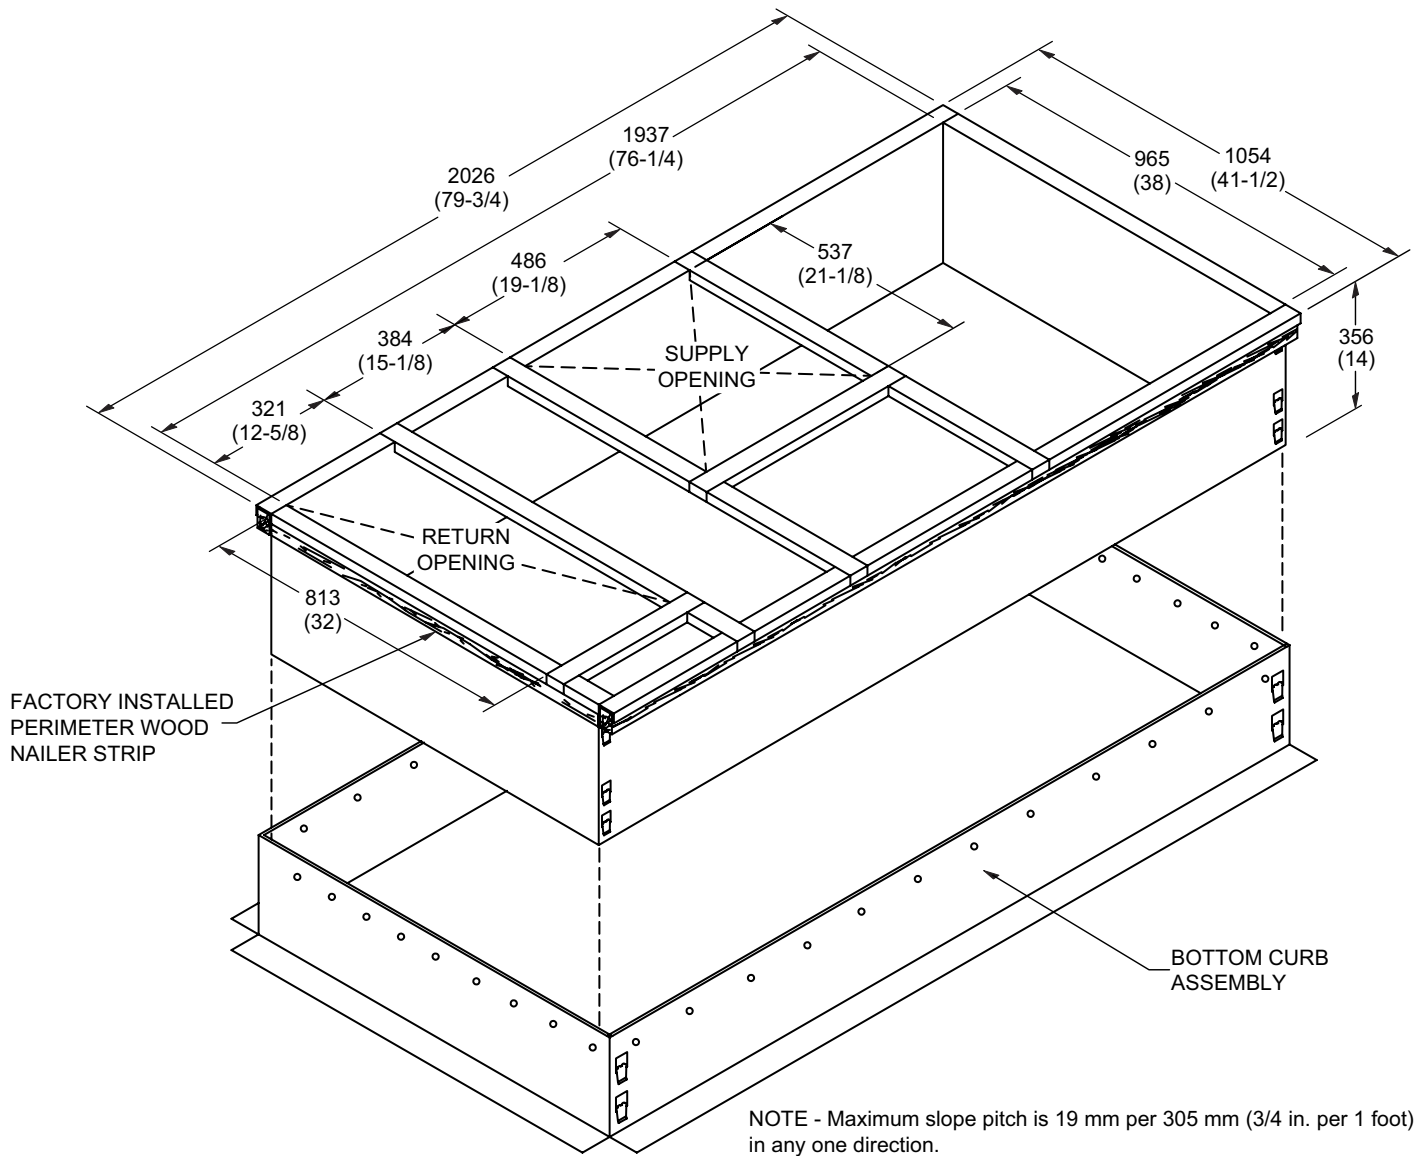

TYPICAL FLASHING DETAIL FOR ROOF CURB

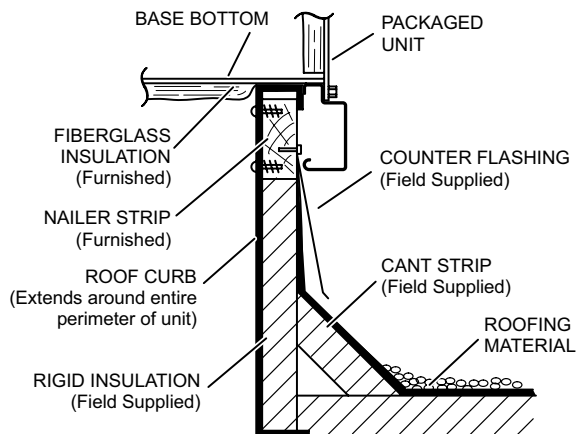


DETAIL ROOF CURB

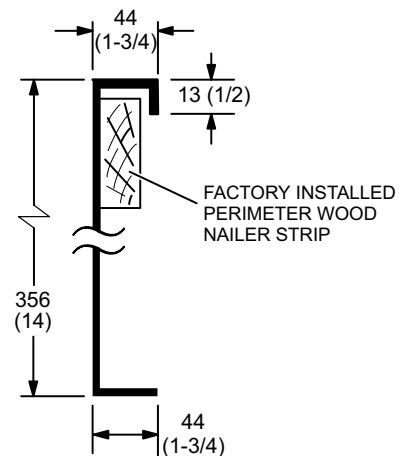


DIMENSIONS - ACCESSORIES

TRANSITIONS

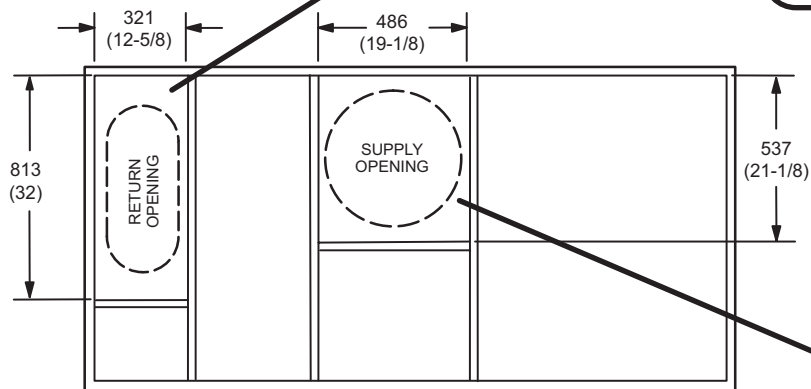


T1TRAN10AN-1 - FOR 457 mm (18 inch) DUCT
T1TRAN20N-1 - FOR 508 mm (20 inch) DUCT

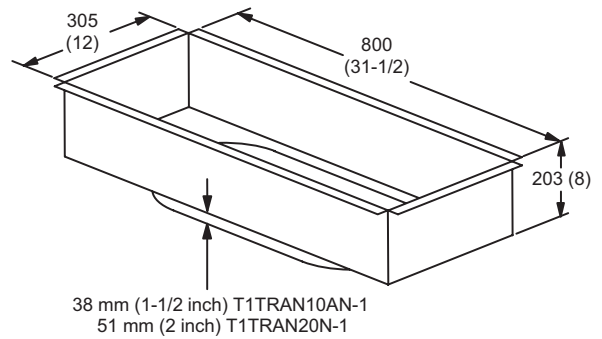

RETURN TRANSITION

T1TRAN10AN-1 - FOR 457 mm (18 inch) DUCT
T1TRAN20N-1 - FOR 508 mm (20 inch) DUCT

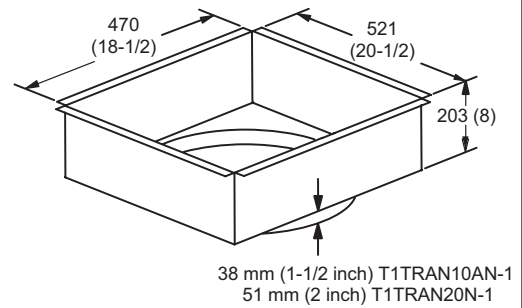


SUPPLY TRANSITION

DIMENSIONS - ACCESSORIES


COMBINATION CEILING SUPPLY AND RETURN DIFFUSERS

STEP-DOWN CEILING DIFFUSER

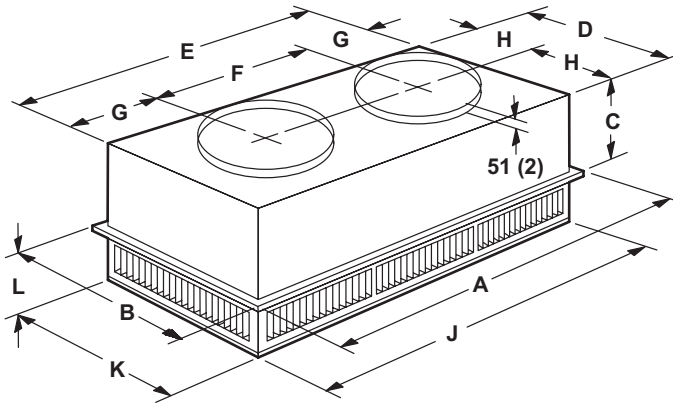

Model Number		RTD9-65S	RTD11-95S
A	mm	1159	1159
	in.	47-5/8	47-5/8
B	mm	600	752
	in.	23-5/8	29-5/8
C	mm	289	365
	in.	11-3/8	14-3/8
D	mm	546	699
	in.	21-1/2	27-1/2
E	mm	1156	1158
	in.	45-1/2	45-1/2
F	mm	572	572
	in.	22-1/2	22-1/2
G	mm	292	292
	in.	11-1/2	11-1/2
H	mm	273	349
	in.	10-3/4	13-3/4
J	mm	1156	1156
	in.	45-1/2	45-1/2
K	mm	546	699
	in.	21-1/2	27-1/2
L	mm	181	206
	in.	7-1/8	8-1/8
Duct Size	mm	457 round	508 round
	in.	18 round	20 round

FLUSH CEILING DIFFUSER

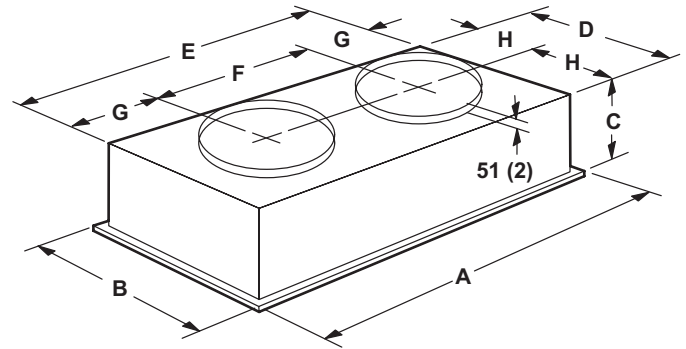

Model Number		FD9-65S	FD11-95S
A	mm	1159	1159
	in.	47-5/8	47-5/8
B	mm	600	752
	in.	23-5/8	29-5/8
C	mm	343	422
	in.	13-1/2	16-5/8
D	mm	533	686
	in.	21	27
E	mm	1143	1143
	in.	45	45
F	mm	572	572
	in.	22-1/2	22-1/2
G	mm	286	286
	in.	11-1/4	11-1/4
H	mm	267	343
	in.	10-1/2	13-1/2
Duct Size	mm	457 round	508 round
	in.	18 round	20 round

REVISIONS

Section	Description
Electrical / Electric Heat Data	Updated tables for 10.6, 14.1, and 17.6 kW standard efficiency units.



Visit us at www.allied-commercial.com

For the latest technical information, visit us at www.allied-commercial.com

Contact us at 1-800-448-5872

NOTE - Due to Allied Commercial ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2019 Allied Air Enterprises LLC, a Lennox International Inc. Company