

# Cat® Pipe and Pole Forks

SMALL WHEEL LOADERS

Cat® Pipe and Pole Forks are designed and built for use in oil and gas field drilling, pipe line construction and aboveground utilities work. Cat Pipe and Pole Forks are a special fork exclusively designed to move pipe and poles in industrial and construction industries.

### **Features:**

### **Robust and versatile structure**

- Robust and versatile carriage and top clamp ensure high levels of production.
- Wide two-piece clamp holds pipe in place against tines and carriage.
- Clamp can be positioned for desirable diameter of materials.
- Single stems or multiple pieces, of the same diameter, can be transported at the same time, increasing productivity.

### Adjustable tines

 Adjustable tines can be configured to better fit application requirements. No tools required for adjustment.

### **Protected hydraulic cylinders**

 Top clamp design allows hydraulic cylinders to stay protected, avoiding undesirable damages at the cylinder and unexpected down time.

### **Rubber pads**

Rubber pads protect pipe from damage.

## **Compatibility**


Model	Machines*
1524 mm (60 in)	924K, 930K, 938K, 926M, 930M, 938M
1829 mm (72 in)	924K, 930K, 938K, 926M, 930M, 938M


<sup>\*</sup>Machine must be equipped with 3rd valve hydraulics and Fusion™ coupler.



# **Cat® Pipe and Pole Forks**

# **Specifications**

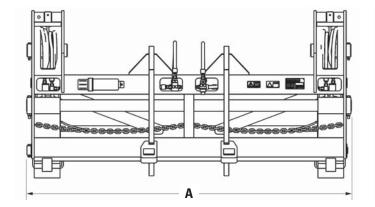

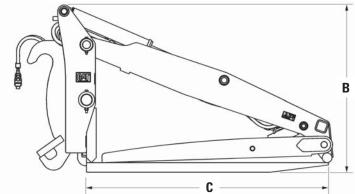

			1524 mm (60 in)		1829 mm (72 in)	
A Carriage Width	mm	(in)	2559	(100)	2743	(108)
<b>B</b> Carriage Height – Closed Clamp		(in)	1321	(52)	1321	(52)
Carriage Height – Open Clamp	mm	(in)	3234	(127)	3515	(138)
C Fork Tine Length	mm	(in)	1524	(60)	1829	(72)
Fork Tine Width	mm	(in)	152	(6)	203	(8)
Fork Tine Thickness	mm	(in)	64	(2.5)	76	(3)
Load Capacity	kg	(lb)	2340	(5,160)	3357	(7,400)
Weight		(lb)	1590	(3,505)	1951	(4,301)
Pipe Diameter – Minimum		(in)	76	(3)	76	(3)
Pipe Diameter – Maximum		(in)	762	(30)	762	(30)

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

AEHQ8152 (10-2018)

© 2018 Caterpillar All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

