



Cat[®] AP600

Asphalt Paver

The Cat[®] AP600 Asphalt Paver is a wheel paver that delivers a high-return on investment with the fast-heating screed system, low fuel consumption, durable components, and easy to use technology. A variety of screed choices offer versatility and provide high-quality results on interstates, highways, airports, and parking lots.

High Return on Investment

- Exclusive 70 kW integrated generator delivers fast, reliable screed heating and is designed for long life by the same team that developed the D7E electric drive dozer
- Fast heating screed leads to more daily production, heating time in as little as 15 minutes
- Excellent turning capability, fast travel leads to increased production
- Exclusive air flow design improves operating conditions for the crew and keeps components cooler for lasting durability

Technology That Works For You

- Pave Start Assistant (option) saves set-up profiles for repeatable use on future job sites including screed heat temperature, speed, paving width, paving depth, slope, crown, and extender height
- A hopper level sensor (option) with temperature indication keeps the operator informed of material height and delivery temperatures, indicators are located in each tractor display
- Exclusive screed heating system monitors elements for failure conditions and helps eliminate unnecessary replacement
- Cat[®] Grade Control (option) is integrated into the tractor and screed displays for optimized operator efficiency

High Quality Results, Higher Earnings

- Versatile screed designs deliver excellent ride, density, and mat texture while providing superior adjustment; available with front-mount extenders, rear-mount extenders, or tamper-bar systems
- Tow-point utilizes exclusive linkage design for optimal screed flotation
- Exclusive 2-speed proportional control on the screed extenders
- Cat Grade Control is a factory-integrated guidance system that helps remove irregularities from the surface and control mat thickness for increased production, lower operating costs, and higher profitability

Low Owning and Operating Costs

- Exclusive Eco-mode and Automatic Engine Speed Control, reduce fuel consumption and lower sound levels for better comfort and communication
- 4-pump feeder system is designed for high production in Eco-mode, leads to lower fuel consumption
- Million cycle switches provide reliability
- Conveyor bed plates and chain guards designed to minimize labor requirements and provide lower cost replacement
- Heating elements slide-out for easy replacement
- Machined screed frames simplify screed plate replacement
- Enhanced hopper flashing with increased memory and temperature resiliency offers better performance during truck exchanges



Cat® AP600 Asphalt Paver

More Comfort

- Ventilation system draws fumes from the auger chamber and redirects them away from the operator for a more comfortable working environment
- Dual operating station provide back-up capability and complete control from either side of the machine, each station can swing-out beyond the frame for good all-around visibility
- Heated seat option, pneumatic suspension, multiple adjustments, and tilting consoles provide day-long comfort
- Eco-mode provides low sound levels that supports clear communication with the crew
- High visibility 76 mm (3") seat belt helps with crew safety compliance
- USB port simplifies software updates
- Cup holders offer convenience

Easy Viewing Displays, Simple Operation

- Touch-screen displays with adjustable brightness control enable operators to fine-tune performance in various lighting conditions
- Touch-screen access simplifies activation of the generator and auxiliary power, while also providing easy adjustments to screed plate heating temperatures, tamper and vibratory speeds, Cat Grade Control (option), and stored operator preferences
- Operating displays can be tailored to specific language requirements with multiple options available

Cat Electronics

- Cat Electronic Control Modules (ECM) and Electronic Technician (ET) compatibility simplify diagnostics and trouble-shooting procedures

Product Link™ Elite

- Make timely, fact-based decisions to maximize efficiency, improve productivity, and lower owning and operating costs
- Easily track location, machine hours, fuel usage, and idle time
- Diagnostic codes are made available through online web applications

Service and Repair Kits

- Paver and screed service and repair kits include the parts necessary to complete specific repairs
- Cat genuine parts are manufactured to precise specifications and designed for optimal performance and maximum uptime
- Repair kits are identified by a single part number to make ordering easy
- Select kits are available to be packaged as a kit by the dealer for over-the-counter purchases or through the dealer service shop

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional
OPERATING ENVIRONMENT		
Air-ride seat		✓
Canopy – hard top		✓
Deceleration pedal		✓
Dual operating stations	✓	
Heated seats		✓
Side shields		✓
Steering guide	✓	
Tow-point indicator		✓
Umbrella – tractor/screed		✓
Ventilation system		✓
Visor – LCD screen		✓
Windshield – requires hard top canopy		✓
TECHNOLOGY		
Cat® Grade Control		✓
Hopper level and material temperature indication		✓
Pave Start Assistant		✓
Product Link™ Elite 631 – satellite		✓
Product Link Elite 641 – cellular	✓	
POWERTRAIN		
All-wheel drive		✓
Automatic engine speed control	✓	
Ballast – front weights		✓
Cat C4.4 – four cylinder		✓
Cat C7.1 – six cylinder		✓
Cooling fan – variable speed	✓	
Eco-mode	✓	
Front-wheel assist		✓
Radial drive tires		✓
Sand-rib drive tires		✓
ELECTRICAL SYSTEM		
1000 CCA batteries (2)	✓	
100 amp alternator	✓	
12-volt power receptacle	✓	
24-volt charging system	✓	
Automotive-type fuse system	✓	
Auxiliary power panel – 6.6 kW		✓
Cat Electronic Technician (Cat ET)	✓	
Generator – 70 kW	✓	
Machine security – wire ready	✓	
Remote jump-start receptacle	✓	

	Standard	Optional
MATERIAL DELIVERY		
Auger extensions		✓
Leveling devices		✓
Mainframe extensions – manual		✓
Mainframe extensions – power		✓
Material feed sensors – contact	✓	
Material feed sensors – sonic		✓
Power folding front hopper apron		✓
Push-roller – adjustable	✓	
Wash-down pump and reel		✓
Washdown tank		✓
Wide-width paving packages		✓
SERVICE AND MAINTENANCE		
Extended life coolant to -35° C (-37° F)	✓	
Engine coolant heater – C4.4 engine	✓	
Hydraulic oil – extended life	✓	
Remote access drains and lubrication points	✓	
Service repair kits		✓
Sampling ports for Scheduled Oil Sampling (S-O-S SM)	✓	
Sight Gauges – engine coolant, hydraulic oil	✓	
Uptime kit		✓
SAFETY		
Alarm – back-up	✓	
Horn – warning (front & rear)	✓	
Lights – working	✓	
Lights – roading		✓
Mirror package	✓	
Vandal covers	✓	
Warning – LED safety beacons		✓

Cat® AP600 Asphalt Paver

Technical Specifications

PowerTrain

Engine model	Cat C4.4	
Engine power @ 2200 rpm (ISO 14396-2002)	129 kW	173 hp
Meets U.S. EPA Tier 4 Final and EU Stage V emission standards.		
Engine model	Cat C7.1	
Engine power @ 2200 rpm (ISO 14396-2002)	151 kW	202 hp
Emissions: Emits equivalent to U.S. EPA Tier 3 and EU Stage IIIA.		
Speed – paving	76 mpm	250 fpm
Speed – paving with tamper bar screed	25 mpm	82 fpm
Speed – travel	16 km/hr	10 mph
Inside turning radius	1.5 m	4.5 ft

Machine Weight

Paver only (shipping)	14 018 kg	30,904 lb
w/SE47 FM (411) screed (operating)	17 116 kg	37,734 lb
w/SE50 V screed (operating)	17 587 kg	38,773 lb
w/SE50 VT screed (operating)	17 794 kg	39,229 lb
w/SE60 FM screed (operating)	17 842 kg	39,334 lb
w/SE60 V screed (operating)	17 729 kg	39,074 lb

Operating Weights are approximate and include coolant, lubricants, full fuel tank, and 75 kg (165 lb) operator.

Service Refill Capacities

Maximum throughput capacity	1300 Tonnes	1433 Tons
Hopper capacity (including tunnels)	7.1 m³	250 ft³
Cooling system – C4.4 engine	31 L	8 gal
Cooling system – C7.1 engine	37 L	9.8 gal
Diesel Exhaust Fluid (DEF) – C4.4 engine	19.1 L	5 gal
Engine oil – C4.4	13.5 L	3.6 gal
Engine oil – C7.1 engine	15.5 L	4.1 gal
Fuel tank	278 L	73 gal
Hydraulic tank	219 L	58 gal
Washdown spray tank	30 L	7.9 gal


Paving Range With Extensions

SE47 FM (411) screed	2.44 m - 6.2 m	8' - 20' 6"
SE50 V screed	2.55 m - 6.5 m	8' 4" - 21' 4"
SE50 VT screed	2.55 m - 8.0 m	8' 4" - 26' 4"
SE60 FM screed	3.0 m - 7.8 m	10' - 25' 6"
SE60 V screed*	3.0 m - 7.5 m	9' 10" - 24' 6"
Paving depth – maximum	305 mm	12"

* Paving range includes wide width endgate shoe

Dimensions

1	Operating length w/SE47 FM	6608 mm	21' 9"
	Shipping length w/SE47 FM	6375 mm	20' 11"
	Shipping width w/SE47 FM	2743 mm	9'
1	Operating length w/SE50 V, VT	6831 mm	22' 5"
	Shipping length w/SE50 V, VT	6666 mm	21' 10"
	Shipping width w/end gates - SE50 V, VT	2762 mm	9' 1"
	Shipping width w/folded end gates - SE50 V, VT	2550 mm	8' 4"
1	Operating length w/SE60 FM	6608 mm	21' 9"
	Shipping length w/SE60 FM	6375 mm	20' 11"
	Shipping width w/SE60 FM	3353 mm	11'
1	Operating length w/SE60 V	6608 mm	21' 9"
	Shipping length w/SE60 V	6375 mm	20' 11"
	Shipping width w/end gates - SE60 V	3211 mm	10' 6"
	Shipping width w/end gates folded - SE60 V	3000 mm	9' 10"
2	Operating width	3306 mm	10' 10"
3	Operating height	3914 mm	12' 10"
4	Shipping height	3098 mm	10' 2"
5	Operating platform height	1850 mm	6' 1"
6	Truck entry height	466 mm	18"
7	Truck entry width	3194 mm	10' 6"
8	Hopper length w/push roller extended	2414 mm	7' 11"
9	Wheelbase	2276 mm	9' 1"
	Auger diameter	406 mm	16"

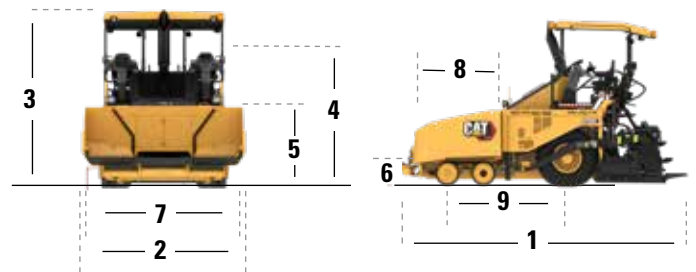

Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit www.caterpillar.com/en/company/sustainability.html.

ENGINE

- The Cat® C4.4 engine is available in configurations that meet U.S. EPA Tier 4 Final or EU Stage V emission standards.
- The Cat® C7.1 engine is available in configurations that emit equivalent to U.S. EPA Tier 3 or EU Stage IIIA.
- Cat U.S. EPA Tier 4 Final and EU Stage V diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels
- Cat engines that emit equivalent to U.S. EPA Tier 3 or EU Stage IIIA, are compatible with diesel fuel blended with the following lower-carbon intensity fuels up to:
 - ✓ 100% biodiesel FAME (fatty acid methyl ester)**
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.*

*** For use of blends higher than 20% biodiesel, consult your Cat dealer.*

PAINT

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

SOUND PERFORMANCE

With cooling fan speed at 70% of maximum value, engines meeting U.S. EPA Tier 4 Final or EU Stage V, with tamper bar screeds:

Operator Sound Pressure Level – 88 dB(A) European Directive 2000/14/EC, ISO 11201, EN 500-1, and EN 500-6:2006+A1:2008, Annex B

Exterior Sound Power Level – 104 dB(A) European Directive 2000/14/EC, European Directive 2005/88/EC, ISO 3744, EN 500-1, and EN 500-6:2006+A1:2008, Annex B

With cooling fan speed at 70% of maximum value and engines that emit equivalent to U.S. EPA Tier 3 or EU Stage IIIA, with tamper bar screeds:

Operator Sound Pressure Level – 89 dB(A) European Directive 2000/14/EC, ISO 11201, EN 500-1, and EN 500-6:2006+A1:2008, Annex B

Exterior Sound Power Level – 106 dB(A) European Directive 2000/14/EC, European Directive 2005/88/EC, ISO 3744, EN 500-1, and EN 500-6:2006+A1:2008, Annex B

- When equipped with vibratory only screeds, sound power levels are 1 dB (A) lower than the values listed above.
- Hearing protection may be needed when operating with an open operator station for extended periods or in a noisy environment.

OILS AND FLUIDS

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

FEATURES AND TECHNOLOGY

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Eco-mode operates at a lower rpm to minimize fuel consumption
 - Automatic engine speed control modifies engine speed when moved to and from neutral to enhance fuel efficiency
 - Advanced Eco-mode combines automatic engine speed control and Eco-mode to modify engine speed based on engine load, conserving fuel and increasing efficiency
 - Extended maintenance intervals reduce fluid and filter consumption

Cat® AP600 Asphalt Paver

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2022 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

QEHQ2942-03 (10-2022)
Build Number:07A
(Australia/New Zealand)

