



Image shown may not reflect actual configuration.

## Cat® Power Grid Stabilization (PGS) Heavy Duty (HD)

1000 – 1260 kW  
672 kWh  
60 Hz 480 – 600 Volt  
50 Hz 400 Volt

The Cat® PGS HD module is a scalable, rapidly deployable energy storage system with a heavy-duty battery structure. The PGS HD integrates with solar or other renewable sources to provide short duration power when the renewable source is not available or reserve power capacity to optimize generator sets efficiency. This system provides temporary backup power to facilities in the event of a power outage.

### FEATURES

#### Reliable, Modular and Mobile

The Cat PGS HD module is a robust, mobile energy storage platform. The module consists of a pre-engineered container that is easily installed on site. Multiple modules may operate in parallel to provide increased power output and/or increase the energy capacity.

#### Renewable Integration

The modules are designed to work with an array of renewable systems, including solar and wind. Seamless integration with the Cat® Microgrid Master Controller (MMC) allows for maximum renewable penetration and full asset control.

#### Transient Assist

When used with a generator set, the Cat PGS HD module will provide power to decrease the transient voltage and frequency dips resulting from the application of large loads.

#### Grid Stabilization

The Cat PGS HD protects against many typical power problems, voltage sags/surges, and under/over frequency conditions.

#### Cat® Bi-Directional Energy Storage Inverter

The Cat BDP1000 inverter is the core to the energy storage system. Based on technology developed for Cat electric drive machines. The Cat BDP provides exceptional reliability, durability and features that include:

- Controls for the charging and discharging of the energy storage equipment
- 2 per unit fault current capability
- Static VAR compensator

- Four-quadrant output power factor control
- Dual parallel control of two inverter halves
- Patented nonlinear droop for tight control of voltage and frequency
- Seamless mode transfer
- Automatic anti-islanding
- Grid forming, grid firming, and grid following modes
- Autonomous mode or Remote-Control mode
- Parallel ready – multiple modules may be used in parallel to increase total output up to 100+MW

#### Energy Storage

- Advanced lithium-ion batteries provide energy density, high discharge/recharge efficiency, and long cycle life
- Heavy Duty battery structure provides vibration isolation during transport

#### Standard Equipment

- Cat BDP1000 bi-directional energy storage inverter
- Energy storage batteries
- Color HMI touchscreen
- Remote communications via Modbus TCP
- HVAC system to maintain optimal interior temperatures
- Fire suppression system
- Transport trailer available on 60 Hz versions

#### Applications

- Renewable smoothing
- Grid firming/grid stabilization
- Generator set transient assist
- Facility backup
- Reserve power capacity
- Temporary rental

# Microgrid Power Grid Stabilization



## Technical Specifications

Model		PGS1260 HD
<b>Output Power</b>		
<b>Maximum Continuous at 1.0 PF</b>	<b>KW</b>	<b>1000</b>
<b>Overload (Only in Island Mode)</b>		
15 min Overload at 1.0 PF	kW	1170
10 min Overload at 1.0 PF	kW	1225
5 min Overload at 1.0 PF	kW	1260
1 min Overload at 1.0 PF	kW	1260
10 s Overload at 1.0 PF	kW	1260
<b>Energy (Nameplate Beginning of Life)</b>	kWh	672
Number of Battery Rack	qty	6
Battery Type		Li-Ion
Battery Chemistry		NMC
Application		High Power
<b>Inverter Model</b>		BDP1000
<b>Number of Inverters</b>		1
<b>Isolation Transformer</b>	Pri/Sec	Δ -Delta / Y-Wye
<b>Number of Transformers</b>		1
Output Voltage	(50 Hz) (60 Hz)	400 VAC 480 & 600 VAC
Output Voltage THD		<3%
<b>Ambient Temperature Capability</b>	°C	-25 to +50
<b>Altitude</b>	mASL	2000
<b>Average Parasitic Load</b>		
At 0°/40°C in Standby Operation (0% Load)	kW	2.0/4.0
At 0°/40°C in Continuous Operation	kW	33.0/36.0
Shore Power Connection	V (50 Hz) V (60 Hz)	400V 50 Hz 480V 60 Hz
<b>Features</b>		
Transient Ride Thru & Stabilization		Yes
Patented Non-Linear Droop Control		Yes
Seamless Mode Transfer		Yes
Islanding Detection		Yes
Grid Forming		Yes
Four Quadrant Power Factor Control		Yes
Static VAR Compensator		Yes
2 Per Unit Fault Current Capability		Yes
Reserve Power Capacity		Yes
Plug-and-Play Parallel Ready		Yes
Energy Storage Management		Yes
Human-Machine Interface		Yes
Fire Suppression System		Yes
Communications Protocols		Modbus TCP/IP

¥ – Ensure compatibility of all microgrid equipment by referring to A&I guides (or equivalent) for generator sets, BDP inverters, PV inverters, switchgear, and controls. Contact your local Cat dealer for assistance selecting compatible equipment.

\* – Consult factory for additional options such as additional voltages and cold weather operation.

# Microgrid Power Grid Stabilization



## Applicable Codes and Standards

- UL 1973
- UL 9540 Ed2
- CSC Certified
- 2014/35/EU LVD
- 2014/30/EU EMCD
- 2011/65/EU RohS
- UN38.3
- IEC60204-1

**Note:** Reference component spec sheets for additional codes. Codes may not be available in all model configurations. Please consult your local Cat Dealer for availability.


## Remote Monitoring (Sold Separately)

The Cat® Connect telematic device and an active subscription to Cat Connect are required for battery warranty. The internet connection provides real time monitoring of the performance and health of the battery and installation. If an issue is detected, local technicians can be dispatched to resolve the problem.

## Worldwide Product Support

- Cat dealers provide extensive post-sale support including maintenance and repair agreements.
- Cat dealers have over 1,800 dealer branch stores operating in 200 countries.

## Weights and Dimensions

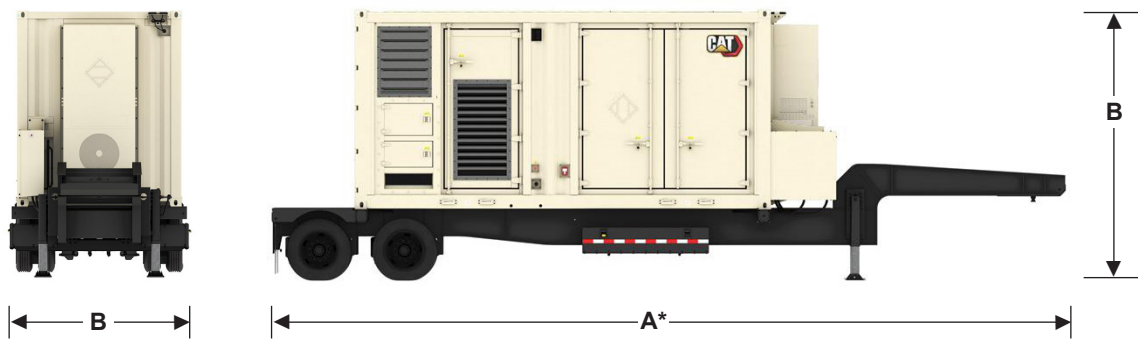

	PGS1260 HD
A – Length, m (ft)	11.56 (37.93)
B – Width, m (ft)	2.66 (8.73)
C – Height, m (ft)	3.96 (12.99)
Weight (Approximate), kg (lbs)	23,090 (50,905)

[www.cat.com/electricpower](http://www.cat.com/electricpower)

©2023 Caterpillar  
All rights reserved.

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow" the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.