



# CAT<sup>®</sup> 730 (05)

## ARTICULATED TRUCK BARE CHASSIS

Cat<sup>®</sup> chassis are the right choice for specialty truck bodies (coal, trash), water trucks, fuel and lube, service vehicles, container carriers, hook lifts, and other machine derivatives. These partial machine configurations allow industrial, waste, material handling, quarry, and mining customers to purchase specialty solutions from our global Cat dealer network — with support every step of the way.

### PROVEN CAT<sup>®</sup> TRUCK PLATFORM

Cat trucks are built for durability, reliability, and efficiency to deliver the performance you need in some of the toughest applications around the world. The 730 chassis is available in standard wheel base or long wheel base.

### PROVEN RELIABILITY

The Cat C13 engine delivers proven reliability across a variety of platforms. Terrain-based throttle control smooths throttle input over rough terrain to improve ride quality. Enhanced reliability through commonality and design simplicity with long life to overhaul. Engine compression brake retarder improves response and increases retarding power for controlled descent of grades.

### COMFORTABLE OPERATOR ENVIRONMENT

Simple, intuitive control and display layouts allow operator to focus on safe machine operation, while maintaining productivity. Redesigned cab structure increases glass area, improving rear quarter visibility. Cab-mounted mirrors for excellent visibility, reduced vibration, and easy folding. Front visibility mirror gives an improved view immediately in front of the machine.

### BOOST FUEL EFFICIENCY

Next generation machine design improves fuel economy with minimized maintenance costs and the same great power and response. Economy mode reduces fuel use without affecting productivity and can be engaged with a single button.

### BUILT-IN SAFETY FEATURES

Enter the machine safely with machine wakeup and new stairway lighting. Operator-presence detection system applies parking brake if gear is engaged and operator is not seated. Cat Detect with Stability Assist provides audible and visual alerts to the operator if the tractor and/or trailer unit is approaching an unstable angle during operation.

### REDUCED MAINTENANCE COSTS

Durable design and easier servicing mean maximized uptime and reduced service costs. Universal joints are lubricated for life, eliminating any maintenance. Coolant formula improves component life by reducing corrosion. Entire machine is designed for greater ease of maintenance with side-tilting cab, electrically raised hood, access panels, and Cat Data Link connector.

### SUPPORTED BY THE CAT DEALER NETWORK

- + Full support of Cat dealer and parts network
- + Cat dealer installation & retrofit kits available
- + Eligible for Equipment Protection Plans (EPP) & Customer Value Agreements (CVAs)



# 730 Articulated Truck Bare Chassis Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

## Engine (LRC)

Engine Model	Cat® C13A	
Gross Power (SAE J1995)	280 kW	375 hp
Net Power (SAE J1349)	274 kW	367 hp
Engine Power (ISO 14396)	276 kW	370 hp
Bore	130 mm	5.1 in
Stroke	157 mm	6.2 in
Displacement	12.5 L	763 in <sup>3</sup>
No Engine Derating Below	3810 m	12,500 ft
Peak Engine Torque Gross (SAE J1995:2014)	2141 N·m	1,579 lbf-ft
Peak Engine Torque Net (SAE J1349:2011)	2107 N·m	1,554 lbf-ft
Peak Engine Torque Speed	1,200 rpm	

## Engine (HRC)

Engine Model	Cat® C13B	
Gross Power (SAE J1995)	280 kW	375 hp
Net Power (SAE J1349)	274 kW	367 hp
Engine Power (ISO 14396)	276 kW	370 hp
Bore	130 mm	5.1 in
Stroke	157 mm	6.2 in
Displacement	12.5 L	763 in <sup>3</sup>
No Engine Derating Below	3810 m	12,500 ft
Peak Engine Torque Gross (SAE J1995:2014)	2141 N·m	1,579 lbf-ft
Peak Engine Torque Net (SAE J1349:2011)	2107 N·m	1,554 lbf-ft
Peak Engine Torque Speed	1,200 rpm	

- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Advertised power is tested at 1,800 rpm.
- Net power available at the flywheel when the engine is equipped with alternator, air cleaner, muffler, and fan at minimum speed.
- Net power when the fan is at maximum speed is 274 kW (367 hp) per the SAE reference conditions.
- Diesel exhaust fluid (DEF) used in Cat SCR systems must meet the requirements outlined in ISO 22241-1:2006. ISO 22241-1 requirements are met by many brands of DEF, including those that carry the AdBlue or API certifications.
- Equipped with the Cat C13A engine for lesser regulated countries, two engine emission options are available:
  1. Meets Brazil MAR-1 emission standards, equivalent to U.S. EPA Tier 3 and EU Stage IIIA.
  2. Noncertified configuration that is equivalent to U.S. EPA Tier 2 and EU Stage II.
- Cat C13B engine meets U.S. EPA Tier 4 Final/EU Stage V, Japan 2014, and Korea Stage V emission standards.

## Wheel Base

Standard Wheel Base	3979 mm	156.7 in
Long Wheel Base	5465 mm	215.2 in

## Operating Weights — with Hoist Cylinders (LRC)

Bare Chassis Weight	19 880 kg	43,100 lb
Payload	31 750 kg	69,997 lb
Front Axle Bare Chassis Weight	13 770 kg	30,358 lb
Front Axle Payload	3540 kg	7,804 lb
Center Bare Chassis Weight	3000 kg	6,614 lb
Center Axle Payload	14 105 kg	31,096 lb
Rear Axle Bare Chassis Weight	2780 kg	6,129 lb
Rear Axle Payload	14 105 kg	31,096 lb

## Operating Weights — without Hoist Cylinders (LRC)

Bare Chassis Weight	19 160 kg	42,241 lb
Payload	32 140 kg	70,856 lb
Front Axle Bare Chassis Weight	13 620 kg	30,027 lb
Front Axle Payload	3690 kg	8,135 lb
Center Bare Chassis Weight	2880 kg	6,349 lb
Center Axle Payload	14 225 kg	31,361 lb
Rear Axle Bare Chassis Weight	2660 kg	5,864 lb
Rear Axle Payload	14 225 kg	31,361 lb

## Operating Weights — without Hoist Cylinders (LRC) LWB

Bare Chassis Weight	19 930 kg	43,938 lb
Payload	31 370 kg	69,159 lb
Front Axle Bare Chassis Weight	13 810 kg	30,446 lb
Front Axle Payload	3500 kg	7,716 lb
Center Bare Chassis Weight	3170 kg	6,989 lb
Center Axle Payload	13 935 kg	30,721 lb
Rear Axle Bare Chassis Weight	2950 kg	6,504 lb
Rear Axle Payload	13 935 kg	30,721 lb

## Operating Weights — with Hoist Cylinders (HRC)

Bare Chassis Weight	19 760 kg	43,563 lb
Payload	31 750 kg	69,997 lb
Front Axle Bare Chassis Weight	14 070 kg	31,019 lb
Front Axle Payload	3540 kg	7,804 lb
Center Bare Chassis Weight	2960 kg	6,526 lb
Center Axle Payload	14 105 kg	31,096 lb
Rear Axle Bare Chassis Weight	2730 kg	6,019 lb
Rear Axle Payload	14 105 kg	31,096 lb

# 730 Articulated Truck Bare Chassis Specifications

## Operating Weights — without Hoist Cylinders (HRC)

Bare Chassis Weight	19 370 kg	42,703 lb
Payload	32 140 kg	70,856 lb
Front Axle Bare Chassis Weight	13 910 kg	30,666 lb
Front Axle Payload	3700 kg	8,157 lb
Center Bare Chassis Weight	2840 kg	6,261 lb
Center Axle Payload	14 225 kg	31,361 lb
Rear Axle Bare Chassis Weight	2620 kg	5,776 lb
Rear Axle Payload	14 215 kg	31,339 lb

## Operating Weights — without Hoist Cylinders (HRC) LWB

Bare Chassis Weight	20 140 kg	44,401 lb
Payload	31 370 kg	69,159 lb
Front Axle Bare Chassis Weight	13 980 kg	30,821 lb
Front Axle Payload	3630 kg	8,003 lb
Center Bare Chassis Weight	3190 kg	7,033 lb
Center Axle Payload	13 875 kg	30,589 lb
Rear Axle Bare Chassis Weight	2970 kg	6,548 lb
Rear Axle Payload	13 865 kg	30,567 lb

- LRC = Lesser Regulated Countries. HRC = Highly Regulated Countries.
- Care must be taken when designing any attachments so that the axle weights are not exceeded.

## Brakes

Brake Standards	ISO 3450:2011
-----------------	---------------

## Transmission

Forward 1	8 km/h	5 mph
Forward 2	15 km/h	9 mph
Forward 3	22 km/h	14 mph
Forward 4	34 km/h	21 mph
Forward 5	47 km/h	29 mph
Forward 6	55 km/h	34 mph
Reverse	9 km/h	6 mph

## Body Hoists

Raise Time	12 seconds
Lower Time	8 seconds

## Service Refill Capacities

Fuel Tank	400 L	106 gal
Cooling System	83 L	22 gal
Hydraulic System	123 L	32 gal
Engine Crankcase	43 L	11.4 gal
Transmission	47 L	12.4 gal
Output Transfer Gear (OTG)	25 L	7 gal
Final Drives/Differential	125 L	33 gal
Diesel Exhaust Fluid (DEF) Tank	34 L	9 gal

## Steering

Steering Standards	ISO 5010:2019	
Steer Angle	45°	
SAE Turning Radius	7470 mm	294 in
Clearance Radius	8075 mm	318 in
Inside Radius	3879 mm	153 in
Aisle Width	5332 mm	210 in
Lock to Lock	4.75 seconds at 60 rpm	

- Dimensions are for machines equipped with 23.5R25 tires.

## Cab





ROPS Certification Rating	ISO 3471:2008
FOPS Certification Rating	ISO 3449:2005 Level II
Sound Levels	70±1 dB(A)

- The declared dynamic operator sound pressure level is 70±1 dB(A) when ISO 6396:2008 is used to measure the value for an enclosed cab. The measurement was conducted at 70% of the maximum cooling fan's speed. The sound level may vary at different cooling fan speeds. The measurement was conducted with the cab doors and the cab windows closed. The cab was properly installed and maintained.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in noisy environments.
- Note: Welding on ROPS or making modifications to the ROPS may void the ROPS certification. Please contact Caterpillar OEM Solutions if the application requires welding on the machine frame.

# 730 Articulated Truck Bare Chassis Specifications

## Dimensions

All dimensions are approximate.

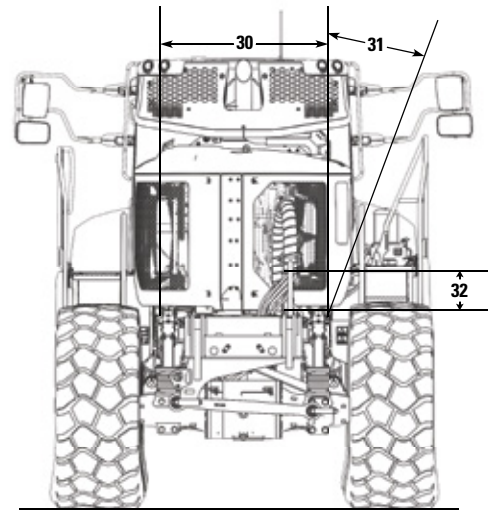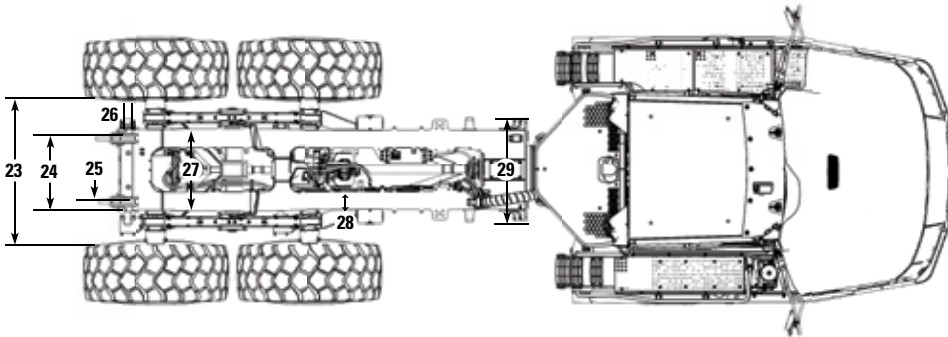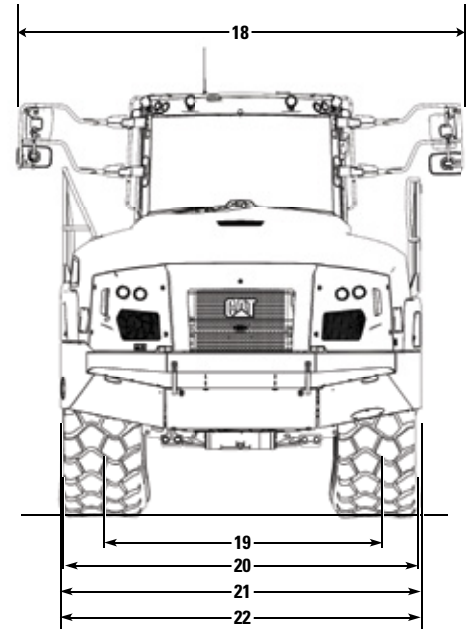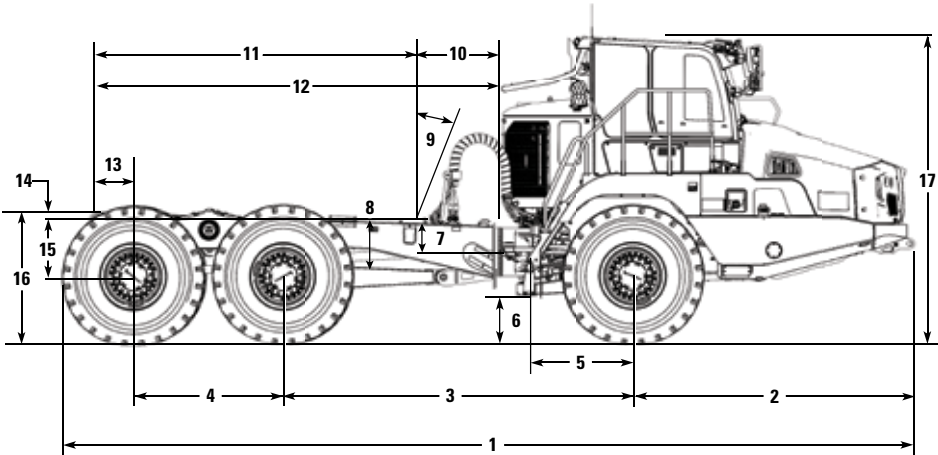

# 730 Articulated Truck Bare Chassis Specifications

Dimensions	SWB			LWB		
	mm	ft	in	mm	ft	in
1 Overall Length	9694	31	10	11 180	36	8
2 Front Axle to Bumper	3210	10	6	3210	10	6
3 Front Axle to Center Axle	3979	13	1	5465	17	11
4 Center Axle to Rear Axle	1700	5	7	1700	5	7
5 Articulation Joint to Front Axle	1210	3	11.6	1210	3	11.6
6 Clearance	537	1	9	539	1	9.2
7 Pivot Pin to Frame Bottom	363	1	2	-	-	-
8 Frame Height Rear	449	1	5	-	-	-
9 Front Body Angle		22 degrees			22 degrees	
10 Body Pivot Clearance	851	2	9	871	2	10
11 Body Clearance	3678	12	1	5144	16	11
12 Body Guides	4408	14	5	6015	19	9
13 Rear Axle to Pivot Pin (horizontal)	422	1	4.6	422	1	4.6
14 Pivot Pin to Top of Frame Rail	90	0	3.5	90	0	3.5
15 Rear Axle to Pivot Pin (vertical)	638	2	1	638	2	1
16 Top of Frame Rail	1502	4	11	1510	4	11.4
17 Top of Cab	3498	11	6	3508	11	6.1
18 Mirror Width	3676	12	1	3676	12	1
19 Track Width	2275	7	6	2275	7	6
20 Width Over Tire	2877	9	5	2877	9	5
21 Fender Width	2950	9	8	2950	9	8
22 Max Unladen Over Tire Bulge	2950	9	8	2950	9	8
23 Tire Clearance	1629	5	4	1629	5	4
24 Pivot Casting Width	833	2	9	833	2	9
25 Pivot Bearing to Rear Frame	93	0	3.7	93	0	3.7
26 Pivot Bearing Width	134	0	5.3	134	0	5.3
27 Frame Width (rear)	910	2	11.8	910	2	11.8
28 Beam Width	196	0	7.7	196	0	7.7
29 Frame Width	896	2	11	896	2	11
30 Body Width	2914	9	7	-	-	-
31 Truck Body Angle		45 degrees			45 degrees	
32 Tire Height to Chassis	98	0	4	98	0	4

\*\* These dimensions may vary based on tire size, pressure and load. All dimensions are for reference only and may change for different machine configurations.

# 730 Articulated Truck Bare Chassis Specifications

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional
<b>OPERATOR ENVIRONMENT</b>		
10-inch touchscreen with Cat® rearview camera	•	
Air conditioning	•	
Adjustable air vents	•	
Combined gear selection and hoist control lever	•	
Electronic OMM	•	
Glass windows: front, laminated and tinted; sides and rear, toughened and tinted	•	
Heater and defroster with four-speed fan	•	
Infrared glass – high ambient cab		•
Liquid Crystal Display (LCD): alert indicator, selected gear and direction, speed or auto shift, Operation and Maintenance Manual (OMM), primary steering failure (warning), seat belt warning, secondary steering failure, Diesel Particulate Filter (DPF) regeneration filter, secondary steering energy source engaged, hour meter, retarder active	•	
Mirrors: exterior	•	
Mirrors, heated motorized		•
Machine operation monitoring system: action lamp, engine oil pressure, primary steering system, left and right turn signal, high beam, coolant temperature, tachometer, parking brake, fuel level, transmission oil temperature, brake system, transmission hold, hoist control, hydraulic system, charging system, transmission fault, traction control system, check engine lamp	•	
Operator seat belt, four-point		•
Radio, Bluetooth® stereo system		•
Seats: operator – fully adjustable, air suspension, retractable lap belt; trainer – padded with retractable lap belt	•	
Seat, heated/cooled		•
Secondary steering – electro hydraulic	•	
Secondary touchscreen display		•
Storage: cup holder, flask receptacle (under the secondary seat), under seat storage, door pocket, behind seat storage, coat hook	•	
Sun visor	•	
Tilt and telescopic steering wheel	•	
Window blinds		•
Windows (tinted) opening both sides	•	
Windshield wiper and washer, two speed, intermittent (front)	•	
Window wiper and washer, two speed (rear)	•	
<b>GUARDS</b>		
Crankcase	•	
Radiator	•	
Rear window	•	

	Standard	Optional
<b>SAFETY</b>		
Dynamic Rollover Protection	•	
Machine Speed Limiting	•	
Multi-view camera with object detection		•
Reverse alarm	•	
Rearview camera	•	
Rollover protective structure/falling objects protective structure (ROPS/FOPS) cab	•	
<b>POWERTRAIN</b>		
Auto shift six-speed forward and single speed reverse transmission	•	
Cat C13A (LRC) or C13B (HRC) engine	•	
CX31 transmission	•	
Clean Emissions Module (CEM) and exhaust aftertreatment package	•	
Differentials: standard with automatic clutched inter- and cross-axle differential locks	•	
Dual circuit oil immersed, enclosed brakes – all wheels	•	
Automatic Retarder: engine compression brake	•	
Three axle, six-wheel drive	•	
<b>ELECTRICAL AND LIGHTING</b>		
Batteries (x2) maintenance free	•	
Cold weather start attachment (2 additional batteries)		•
Daylight running lights	•	
Engine block heater		•
Ether start		•
Electrical system: 24-volt, 10A 24- to 12-volt converter	•	
Flashing LED beacon		•
Horn	•	
LED Rear Step Lights	•	
LED Rear Work Lights		•
Lighting systems: cab interior, two head lamps, two width marker, two reversing, work light/cab access light, two stop/taillights, front and rear direction indicators	•	
Main disconnect switch	•	
Remote starting receptacle (cables not included)	•	
Roof mounted LED work lights		•

# 730 Articulated Truck Bare Chassis Specifications

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional
<b>OTHER EQUIPMENT</b>		
Auto lube installation for automatic greasing of bearings		•
Bare chassis (no body) standard wheel base	•	
Bare chassis (no body) long wheel base		•
Cold weather coolant -51°C (-60°F)		•
Fast fuel fill		•
Fuel additive, anti-waxing		•
Mud flaps: wheel arch and body mounted with transportation tiebacks	•	
S-O-S <sup>SM</sup> sampling valves	•	
Sound suppression (standard in some countries*)	•	
Tires, six 23.5R25	•	
Tires, six 750/65R25, radial		•
Vandalism protection: lockable caps	•	
Wheel chocks		•

\* EFTA countries are EU countries plus Iceland, Norway, Lichtenstein, Switzerland, Türkiye, and UK.

<b>CAT TECHNOLOGY</b>		
Cat Detect with Stability Assist	•	
Cat Payload monitoring system		•
Operator Coaching		•
Product Link™ Cellular PLE643	•	
Product Link Dual PLE683		•
Push to Start with Operator ID	•	

**For more information on Cat Truck Bare Chassis, contact OEM Solutions:**  
oem\_solutions@cat.com | [www.cat.com/oemsolutions](http://www.cat.com/oemsolutions)

AEXJ0174 (01-2026)  
Build Number: 05A

© 2026 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

