



CAT® DEO™

API CI-4 DIESEL ENGINE OIL FOR
CONTINENTAL SOUTH AMERICA,
AFRICA, AND MIDDLE EAST

SAE 15W-40

RECOMMENDED USE

- Tier 3 and prior engines without aftertreatment systems.
- Heavy-duty diesel engines made by other manufacturers that recommend API CI-4 and prior classification oils.
- Automotive gasoline engines that require API SL classification oils.

Always follow the fluid recommendations in your OMM. Contact your dealer for additional information.

DISCOVER THE DIFFERENCE

Cat® DEO is developed, tested, and approved by Caterpillar to meet the same high standards as all Genuine Cat Parts.

- Increased Engine Life – Resists oxidation and helps prevent buildup of deposits on pistons and rings.
- Proven Performance – Tested thoroughly in Cat diesel engines to enhance engine life and performance in all applications, including engines using high sulfur fuels.
- Long-Lasting Protection – Improved soot control and enhanced shear stability enable the oil to maintain proper viscosity for longer operating periods.
- Factory-Fill – Used as standard factory-fill for Cat engines.



CAT DEO

TYPICAL CHARACTERISTICS*

SAE viscosity grade	15W-40
Flash point, °C (ASTM D92)	223
Density, g/ml @ 15°C (ASTM D4052)	0.87
Pour point, °C (ASTM D97)	-33
Viscosity	
kinematic, cSt @ 40°C (ASTM D445)	109.3
kinematic, cSt @ 100°C (ASTM D445)	14.3
Viscosity index (ASTM D2270)	133
Sulfated ash, % wt. (ASTM D874)	1.3
TBN (ASTM D2896)	11.1
Zinc, % wt. (ASTM D4951)	0.132
Phosphorous, % wt. (ASTM D4951)	0.115


Meets or exceeds the performance requirements of:

- API CI-4/CH-4/SL
- Caterpillar ECF-2
- ACEA E7-16
- China GB 11122-2006 CI-4/CH-4, 11121-2006 SJ/SL

Can be used in engines requiring:

- Cummins CES 20077/76/72/71
- Mack EO-N/EO-M PLUS
- MAN 3275-1
- MB 228.3
- MTU Oil Category 2
- Renault RLD-2
- Volvo VDS-3

* The values shown are typical values and should not be used as quality control parameters to either accept or reject product. Specifications are subject to change without notice.

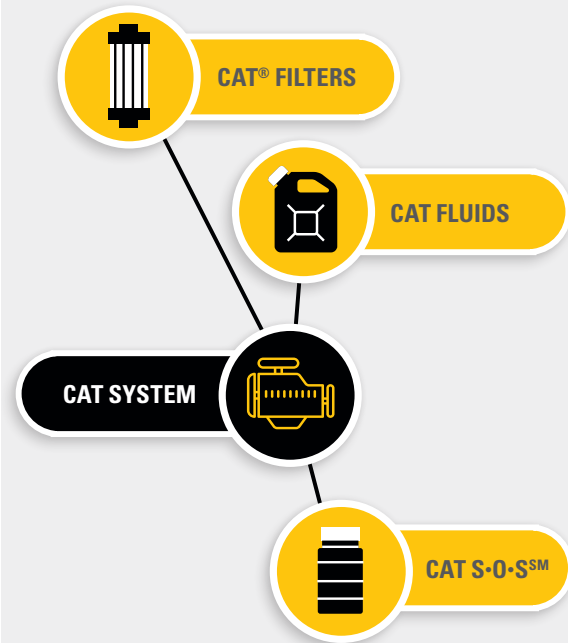

Cat filters and fluids are designed alongside Cat equipment, helping ensure optimal performance and customer value.

HEALTH AND SAFETY

Under normal conditions of intended use, this product does not pose a risk to health. Excessive exposure may result in eye, skin, or respiratory irritation. Always observe good hygiene measures. Read and understand the Safety Data Sheet (SDS) before using this product. For a copy of the SDS, visit us on the web at www.catmsds.com.

CAT DEALERS DEFINE WORLD-CLASS PRODUCT SUPPORT.



We offer you the right parts and service solutions, when and where you need them.

The Cat dealer network of highly trained experts helps keep your entire fleet up and running to maximize your equipment investment.

